



DPC: 23 / 30476551 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 23 August 2023

Origin: International

Latest date for receipt of comments: 11 October 2023

Project No. 2023/01488

Responsible committee: CPL/59 Performance of household electrical appliances

Interested committees:

Title: BS EN IEC 63510-1 Household appliances network and grid connectivity

Part 1: General requirements, generic data modelling and neutral messages (fast track)

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 11 October 2023**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Responsible Committee Secretary: Ms Nicola Young (BSI)

Direct tel:

E-mail: nicola.young@bsigroup.com

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	

COMMITTEE DRAFT FOR VOTE (CDV)

PROJECT NUMBER: IEC 63510-1 ED1	
DATE OF CIRCULATION: 2023-08-18	CLOSING DATE FOR VOTING: 2023-11-10
SUPERSEDES DOCUMENTS: Fast-track procedure	

IEC TC 59 : PERFORMANCE OF HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES	
SECRETARIAT: Germany	SECRETARY: Ms Luise Christmann
OF INTEREST TO THE FOLLOWING COMMITTEES:	PROPOSED HORIZONTAL STANDARD: ☐ Other TC/SCs are requested to indicate their interest, if any, in this CDV to the secretary.
FUNCTIONS CONCERNED: ☐ EMC ☐ ENVIRONMENT ☐ QUALITY ASSURANCE ☐ SAFETY	
☐ SUBMITTED FOR CENELEC PARALLEL VOTING	☒ NOT SUBMITTED FOR CENELEC PARALLEL VOTING

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Recipients of this document are invited to submit, with their comments, notification of any relevant "In Some Countries" clauses to be included should this proposal proceed. Recipients are reminded that the CDV stage is the final stage for submitting ISC clauses. (SEE [AC/22/2007](#) OR [NEW GUIDANCE DOC](#)).

TITLE:

Household appliances network and grid connectivity – Part 1: General requirements, generic data modelling and neutral messages

PROPOSED STABILITY DATE: 2026

NOTE FROM TC/SC OFFICERS:

EN 50631-1:2023 was offered to IEC by CENELEC in the frame of the Frankfurt agreement

Copyright © 2023 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

Contents

Page

European foreword	5
Introduction	6
1 Scope	7
2 Normative references	7
3 Terms and definitions	7
4 Process and requirements to enable interoperability	11
4.1 Introduction	11
4.2 Process	11
4.3 Architecture	13
5 Reader's guide	15
5.1 Finding the right information	15
5.2 Reading the tables	15
5.3 Reading the graphics	16
5.3.1 Flowcharts	16
5.3.2 Sequence diagram	16
6 User Stories	17
6.1 Introduction	17
6.2 User stories	17
6.2.1 General	17
6.2.2 Appliance Energy Flexibility	17
6.2.3 Remote Control of a Smart Appliance	20
6.2.4 Remote Monitoring of a Smart Appliance	20
6.2.5 Manual Operation of a Smart Appliance	21
7 Use cases	21
7.1 Introduction	21
7.2 User Stories and Use Cases	22
7.3 Flexible Start for White Goods	23
7.3.1 General	23
7.3.2 Actors	25
7.3.3 Scenario overview	26
7.3.4 Scenario support requirements	26
7.3.5 Scenario flow	27
7.3.6 Scenario details	29
7.3.7 Scenarios and Use Case Functions (UCFs)	31
7.3.8 Dependencies to other Use Cases	31
7.3.9 Assumptions and Prerequisites	31
7.4 Incentive Table-based Power Consumption Management	31
7.4.1 Actors	31
7.4.2 Scenario Overview	31
7.4.3 Scenario support requirements	32
7.4.4 Scenario Flow	32
7.4.5 Scenario Details	33
7.4.6 Scenarios and Use Case Functions (UCFs)	44
7.4.7 Dependencies to other Use Cases	44
7.4.8 Assumptions and Prerequisites	44
7.5 Install/Remove Device	44
7.5.1 General	44
7.5.2 Actors	44

7.5.3	Scenario Overview	45
7.5.4	Scenario support requirements	45
7.5.5	Scenario Flow	45
7.5.6	Scenario details	46
7.5.7	Scenarios and Use Case Functions (UCFs).....	46
7.5.8	Dependencies to other Use Cases	47
7.5.9	Assumptions and Prerequisites	47
7.6	Limitation of Power Consumption	47
7.6.1	General	47
7.6.2	Actors	49
7.6.3	Scenario Overview	49
7.6.4	Scenario support requirements	49
7.6.5	Scenario Flow	50
7.6.6	Scenario details	50
7.6.7	Scenarios and Use Case Functions (UCFs).....	53
7.6.8	Dependencies to other Use Cases	53
7.6.9	Further information and rules	54
7.6.10	Assumptions and Prerequisites	54
7.7	Limit Consumption to own Production	54
7.8	Manual Operation	54
7.8.1	General	54
7.8.2	Actors	55
7.8.3	Scenario Overview	55
7.8.4	Dependencies to other Use Cases	55
7.8.5	Assumptions and Prerequisites	55
7.9	Monitoring and Control of Smart Grid Ready Conditions.....	55
7.9.1	General	55
7.9.2	Actors	57
7.9.3	Scenario overview	57
7.9.4	Scenario support requirements	57
7.9.5	Scenario flow	58
7.9.6	Scenario details	58
7.9.7	Scenarios and Use Case Functions	59
7.9.8	Dependencies to other Use Cases	59
7.9.9	Assumptions and Prerequisites	59
7.10	Monitoring of Power Consumption	59
7.10.1	General	59
7.10.2	Actors	60
7.10.3	Scenario Overview	60
7.10.4	Scenario Support Requirements	61
7.10.5	Scenario Flow	62
7.10.6	Scenario details	62
7.10.7	Scenarios and Use Case Functions (UCFs).....	64
7.10.8	Dependencies to other Use Cases	65
7.10.9	Assumptions and Prerequisites	65
7.11	Optimization of Self Consumption by Heat Pump Compressor Flexibility	65
7.11.1	General	65
7.11.2	User Story as an example.....	66
7.11.3	Detailed background information	66
7.11.4	Actors	68
7.11.5	Scenario Overview	68
7.11.6	Scenario Support Requirements	69
7.11.7	Scenario Flow	69
7.11.8	Scenario Details.....	72
7.11.9	Scenarios and Use Case Functions (UCFs).....	74
7.11.10	Dependencies to other Use Cases	74
7.11.11	Assumptions and Prerequisites	74
8	Use Case Function (UCF) details	75
8.1	General	75

8.2	Concepts.....	75
8.3	UCF_AC_Measurement.....	76
8.3.1	Generic Description.....	76
8.3.2	Additional Information	91
8.4	UCF_Characteristics	91
8.4.1	Generic Description.....	91
8.4.2	Additional Information	93
8.5	UCF_Configure_Current_Power_Sequence	93
8.5.1	Generic Description.....	93
8.5.2	Additional Information	95
8.6	UCF_Consumption_Curve	95
8.6.1	Generic Description.....	95
8.6.2	Additional Information	100
8.7	UCF_Device_Configuration	100
8.7.1	Generic Description.....	100
8.7.2	Additional Information	106
8.8	UCF_Device_Connected	106
8.8.1	Generic Description.....	106
8.8.2	Additional Information	107
8.9	UCF_Heartbeat.....	107
8.9.1	Generic Description.....	107
8.9.2	Additional Information	108
8.10	UCF_Incentive_Table	108
8.10.1	Generic Description.....	108
8.10.2	Additional Information	131
8.11	UCF_Overrun	131
8.11.1	Generic Description.....	131
8.11.2	Additional Information	132
8.12	UCF_Plan_With_Power_Sequences	133
8.12.1	Generic Description.....	133
8.12.2	Additional Information	142
8.13	UCF_Power_Limit	142
8.13.1	Generic Description.....	142
8.13.2	Additional Information	144
8.14	UCF_Report_Status_Of_Power_Sequence	144
8.14.1	Generic Description.....	144
8.14.2	Additional Information	148
8.15	UCF_Select_Power_Sequence.....	148
8.15.1	Generic Description.....	148
8.15.2	Additional Information	151
8.16	UCF_Shift_Preferred_Power_Sequence	151
8.16.1	Generic Description.....	151
8.16.2	Additional Information	152
8.17	UCF_System_Function	152
8.17.1	Generic Description.....	152
8.17.2	Additional Information	154
9	Glossary of definitions for UCFs	154
	Bibliography	162

European foreword (to be replaced with IEC IS foreword)

This document (EN 50631-1:2023) has been prepared by WG 7 “Smart Household Appliances” of CLC/TC 59X “Performance of household and similar electrical appliances”.

The following dates are fixed:

- latest date by which this document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2024-02-07
- latest date by which the national standards conflicting with this document have to be withdrawn (dow) 2026-02-07

This document supersedes EN 50631-1:2017 and all of its amendments and corrigenda (if any).

EN 50631-1:2023 includes the following significant technical changes with respect to EN 50631-1:2017:

- Simplified adoption of the series of standards through logical partitioning of the document structure;
- Ensured interoperability through more precise, neutral definition of information and sequences to be exchanged;
- Neutralization of requirements and description of information to be exchanged on a generic level, permitting mapping to different data models and languages;
- Extension of use cases and data models to Heating, Ventilation, Cooling devices for a holistic approach regarding energy management at home / on premises;
- Definition of possible transport protocols to ensure more complete interoperability;
- Primary focus on energy management;
- Preparation for further developments.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

1 Introduction

Energy management systems will more and more become necessary due to change from fossil and nuclear to renewable production and the associated decentralization. Since an appropriate standard for a home and building management is in preparation, this document specifies how sets of products from multiple manufacturers can exchange information with Home and Building / Customer Energy Management Systems, located in a home network or in the cloud.

This document focuses on interoperability of household appliances and describes the necessary control and monitoring. It defines a set of functions of household and similar electrical appliances. The functions in this document cover next to energy-management main remote-control and – monitoring use cases.

This document does not deal with safety and security requirements. Safety requirements have been set in the EN 60335 series [2].

The EN 50631 series will provide interoperability on information exchange among various appliances in the home. The EN 50631 document series will be re-arranged regarding the further development and will be split into 6 parts:

EN 50631-1, *Household appliances network and grid connectivity — Part 1: General Requirements, Generic Data Modelling and Neutral Messages*

EN 50631-2, *Household appliances network and grid connectivity — Part 2: Product Specific mappings, details, requirements and deviations*

EN 50631-3-x, *Household appliances network and grid connectivity — Part 3: Specific Data Model Mapping*

EN 50631-4-x, *Household appliances network and grid connectivity — Part 4: Communication Protocol Specific Aspects*

EN 50631-5, *Household appliances network and grid connectivity — Part 5: General Test-Requirements and -Specification*

EN 50631-6, *Household appliances network and grid connectivity — Part 6: SPINE Data Model Toolbox*

Data communication heavily depends on the environment of appliances. Sometimes low bitrate or energy efficient communication puts strict requirements to selected communication technologies. Therefore, popular and de facto standards had been and will be developed by the industry to fulfil such requirements. To not influence common data modelling for appliances because of such restrictions, the standardized data models and neutral message structures need to be applied to communication technologies.

This standard series therefore is intended to separate data modelling and neutral message structure from the attached communication.

Part 1 defines general requirements, generic data modelling and generic neutral messages without relation to any specific communication technology or any product specific layout.

Part 2 lists and specifies product specific requirements and implementation guidance based on the generic data model and generic neutral messages.

Part 3 defines the mapping of neutral messages to examples of typical data models like SPINE, SPINE-IoT, OCF, and so forth. These data models are neither mandatory nor to be seen as complete spectrum of data models.

Part 4 defines the mapping of neutral messages to examples of typical communication protocols. These communication protocols are neither mandatory, nor do they provide an exhaustive list of communication protocols.

Part 5 defines testing requirements and testing specifications. This part will be covered in the future by a New Work Item Proposal.

Part 6 provides the technical reference specification for the SPINE data model. This part will be covered in the future by a New Work Item Proposal.

1 Scope

This document defines data models for Interoperable Connected Household Appliances. The data models are derived from a logical decomposition of use cases into functional blocks that themselves were realized by abstract actions on the data model itself.

This document is part of the EN 50631 series, which defines the information exchange between Smart Appliances and management systems in homes and buildings including energy management.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

3.1

“alternatives” group

grouping of one or more Power sequences over a specified time

3.2

appliance

electrical apparatus intended for household or similar use

EXAMPLES Refrigerators, dishwashers, clothes washers, clothes dryers, air conditioners, water heaters, circulation pumps, heat pumps, etc.

3.3

Appliance Energy Flexibility

ability of an appliance to change power consumption in response to an external stimulus

3.4

client

role that specifies that a node uses data from a “server” or can request for change

3.5

command

functional part of a Message

3.6

CCM

Customer Connectivity Manager

component or set of functions with the capability to:

1. Receive and process Grid Information, Appliance Information and User Instructions, and
2. Manage one or more Smart Appliances

Note 1 to entry: A CCM may be integrated with a Smart Appliance or may be physically separate.

Note 2 to entry: A CCM manages the energy-using behaviour as well as other aspects of device behaviour (e.g. setting of job status like starting, stopping, pausing, parameters like temperature, notifications...) of one or more Smart Appliances.

Note 3 to entry: In other documentation, CCM is often called Customer Energy Manager (CEM) with a dedicated focus on energy management or called Energy Management System (EMS) with a dedicated focus on energy management.

3.7

data model

definition of possible data (data structures, values) for the exchange of information (especially for communications systems)

[SOURCE: IEC 60050, IEV]

3.8

Demand Response

DR

action resulting from management of the electricity demand in response to supply conditions

[SOURCE: IEC 60050, IEV]

3.9

Demand Side Management

DSM

process that is intended to influence the quantity or patterns of use of electric energy consumed by end-use customers

3.10

DHW

Domestic Hot Water

3.11

grid information

information received by a CCM directly from or relating to the electricity grid

Note 1 to entry: Such information may include (but is not restricted to) the following categories:

- current and future energy prices;
- current and future network constraints;
- emissions-intensity of electricity supply;
- level of renewable energy generation;
- requests or instructions for load modification;
- directly sensed information (e.g. frequency and voltage).

3.12

interoperability

property permitting smart appliances and energy management systems in homes and buildings to exchange data together for the purpose of energy management

[SOURCE: IEC 60050, IEV]

3.13

HAN

Home Area Network

- 123 **3.14**
124 **JWG**
125 **Joint Working Group**
126 Joint working Group Use Cases & Requirements is a working group under the roof of IEC/TC 57/WG 21; it is a
127 cross functional working group and develops Smart Grid and Smart Home & Building related user stories and
128 use cases
- 129 Note 1 to entry: See IEC/TR 62746-2:2015 Use cases and requirements [1]
- 130 **3.15**
131 **manual operation**
132 operation of a Device under direct user control
- 133 Note 1 to entry: Includes operation under the influence of remote controls provided with the appliance or device.
- 134 **3.16**
135 **manual override**
136 return to Normal User Operation that terminates or prevents a period of Smart Operation, that is initiated by the
137 User
- 138 **3.17**
139 **neutral message**
140 information exchange that is independent of any specific communication solution
- 141 Note 1 to entry: EN 50631-4-1) describes the mapping of neutral messages to examples of typical communication
142 protocols.
- 143 **3.18**
144 **power sequence**
145 expected power consumption over time (i.e., represented as a “curve” of power over time) including options on
146 its flexibility
- 147 **3.19**
148 **power slot**
149 single step of a Power sequence; each power slot is modelled with at least one constant power value for its
150 duration
- 151 **3.20**
152 **RMS**
153 **rms**
154 abbreviation for “root mean square” (used for electricity measurement)
- 155 **3.21**
156 **scope**
157 **Scope Type**
158 definition of scope types to allow identification of specific functionalities unambiguously
- 159 EXAMPLE outsideAirTemperature
- 160 **3.22**
161 **server**
162 role that specifies that a node offers own data to be read or written by a node with role client
- 163 Note 1 to entry: A server can notify its data to other nodes (with role client).

3.23**smart appliance**

appliance that is capable of Smart Operation

Note 1 to entry: Notwithstanding the possibly broader concept related to the term “smart appliance”, a smart appliance under the framework of this document needs to be understood as follows:

1) It is an appliance that can respond to an external stimulus initiated by a CCM and/or Remote Agent to provide activities such as

a. Support Appliance Energy Flexibility

b. job status related functions such as starting, stopping, pausing,

c. content or level related functions such as temperature, door status;

2) The appliance will respond when the user sets conditions and its status allows for a response,

3) The response is a change of the appliance’s behaviour like electricity consumption, job status and/or level or content pattern, or a notification thereof;

4) The specific technical smart capabilities need not be activated when the product is placed on the market; the activation can be done at a later point in time by the consumer or a service provider.

Note 2 to entry: Smart appliances in this context can communicate through a Customer Connectivity Manager function processing external signals, such as price information or availability of Renewable Energy Sources (demand response), or direct control signals (demand side management), being able to consider households’ preferences or the behaviour of the other home appliances.

3.24**smart operation**

operation of an Appliance where the CCM has been set to modify operation automatically in response to Trigger Criteria

Note 1 to entry: Smart operation may be initiated by a CCM.

3.25**SPINE**

Smart Premises Interoperable Neutral-message Exchange

3.26**SPINE-IoT**

Smart Premises Interoperable Neutral-message Exchange for Internet of Things

3.27**subscription**

functionality that enables the receiving of messages of interest from another device without polling it

3.28**use case**

textual description of a re-usable functionality, consisting of one or more messages from one or more participating actors, which may be visualized with a sequence diagram

EXAMPLE “A CCM shifts the energy usage of a washing machine”

3.29**Use Case Functions**

functions which group basic functionalities that had been derived from use cases, and which provide the entire information exchange required to implement the considered use cases and user stories

3.30**user story**

complete (but specific) business case described from the perspective of a user which can be separated into several use cases

EXAMPLE "The user wants to get the laundry done by 8:00 pm"

4 Process and requirements to enable interoperability**4.1 Introduction**

Energy management systems will more and more become a requirement due to the switch from fossil and nuclear to renewable production and the associated decentralization. The success of energy management is highly dependent on interoperability of the smart appliances within the premises, which means that all devices will need a common, manufacturer-independent and brand-independent understanding of messages and data (in a broader perspective, it does not matter if it is an energy-related message, a home management message or an information message); see also [8].

This document specifies how different products from different manufacturers can exchange information with Home and Building / Customer Energy Management Systems located in a home network or in the cloud. It defines a set of functions of household and similar electrical appliances covering energy management, remote control and monitoring.

There exist different networking technologies for interoperability in Homes and Buildings. Regardless of the communication technology, they all have rules or standards (collectively known as protocols) that define the syntax, semantics and synchronization of communication and error recovery methods which have to be taken into account when defining specific protocols used for the scope. EN 50631-4 defines this process.

4.2 Process

The Smart Grid Architecture Model (SGAM) [9], published by the Smart Grid Coordination Group based on EU mandate M/490, defines five interoperability layers representing business objectives and processes, functions, information exchange and models, communication protocols and components.

Figure 1 shows the interoperability layer and the corresponding domains and zones, defined in the SGAM Model.

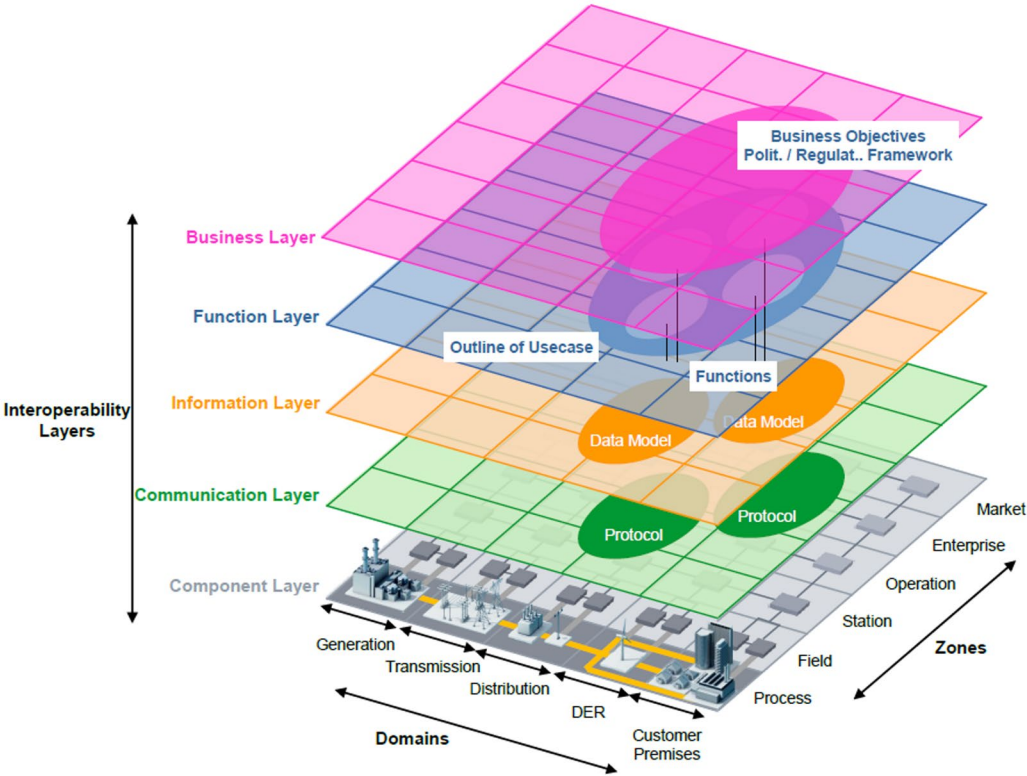


Figure 1 — SGAM Framework (from [9])

In analogy to the SGAM Framework, this series of documents uses a top-down process and sequence of steps to describe an open interface for integrating with Smart Appliances within the Customer Premises SGAM domain (see Figure 2).

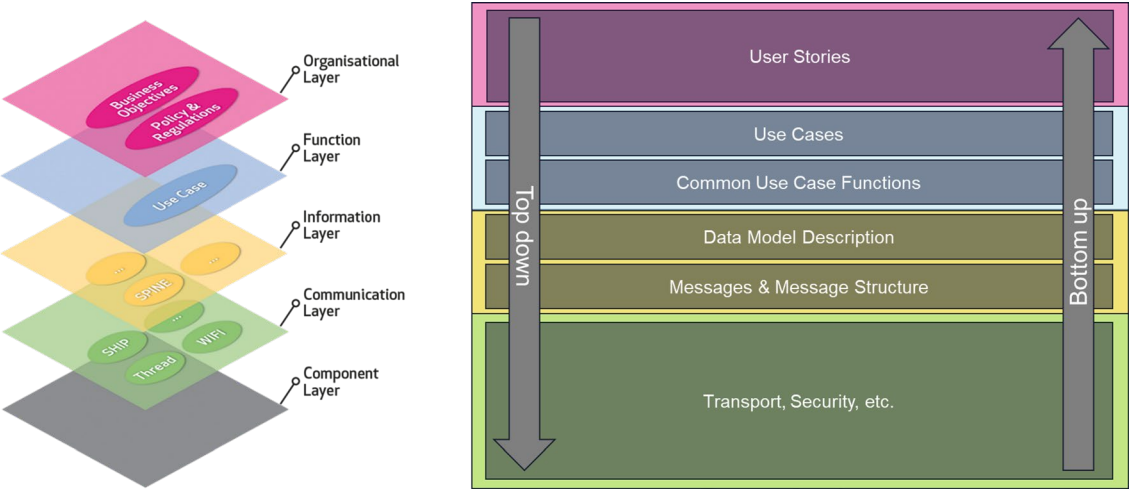


Figure 2 — Process used in this document

User stories and derived use cases are collections of ideas how to use Smart Appliances. User stories and use cases are not binding and describe one possible solution (see Clause 6 and 7). However, they can be used to deduce common Use Case Functions which can be used/referenced in certain use cases.

Use Case Functions (see Clause 8) contain a set of information and instructions to be exchanged between two peers such as CCM and Device, described as a data model.

The data model needs to be placed into a message, combined with rules like addressing scheme, capabilities of addressee and so forth. As this is specific to the protocol(s) at hand, this mapping to specific protocols has been split out of this document into EN 50631-4-x.

4.3 Architecture

In general, a Smart Appliance connects to a CCM, but has in principle three operation modes:

- Standalone: The end user directly controls the Smart Appliance and all its functionality.
- Local: The Smart Appliance is connected to a local CCM via the HAN.
- IoT/Cloud: The Smart Appliance communicates via its cloud representation or directly with an IoT/cloud based CCM.

NOTE As described in 3.6, the CCM manages the energy-using behaviour and may as well manage other aspects of device behaviour. Thus, in Figure 4, it represents a logical component that in reality may be represented by one or more physical and/or logical entities. According to EN 50491-12-x, for example, it might represent the combination of a Customer Energy Manager (CEM) and a Resource Manager. EN 50631 does not prescribe the architecture of the CCM.

This document will describe further in detail the local and IoT/Cloud operation modes. The standalone mode is not described in this document.

Figure 3 describes the application of EN 50631 series for the local and IoT/Cloud based operating modes.

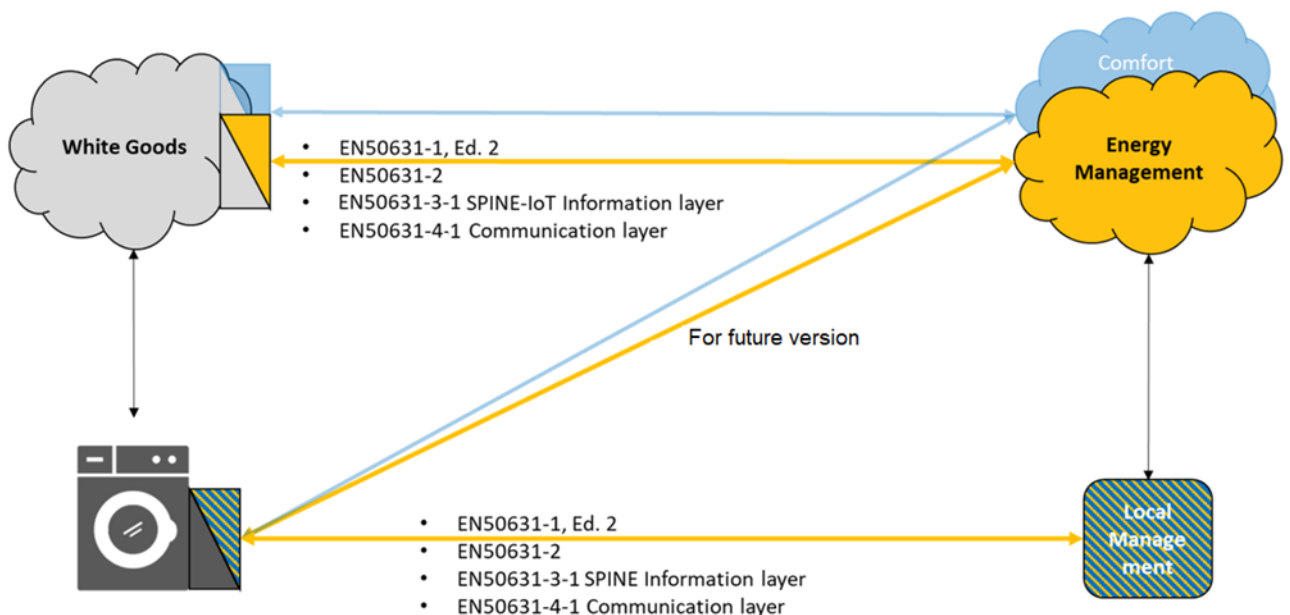


Figure 3 — Application of EN 50631 series for the local and IoT/Cloud based operating modes

As the Use Case Functions are described in a general way without detailing the mapping of the information content to specific protocols, it is possible to refer to these Use Case Functions both in a local Home Area Network (HAN) and in a cloud. While the transport layer may change, the information content shall remain the same. Figure 4 clarifies this concept showing a case of a “HAN-based protocol A” using a specific “transport protocol C” and a “web-based protocol B”.



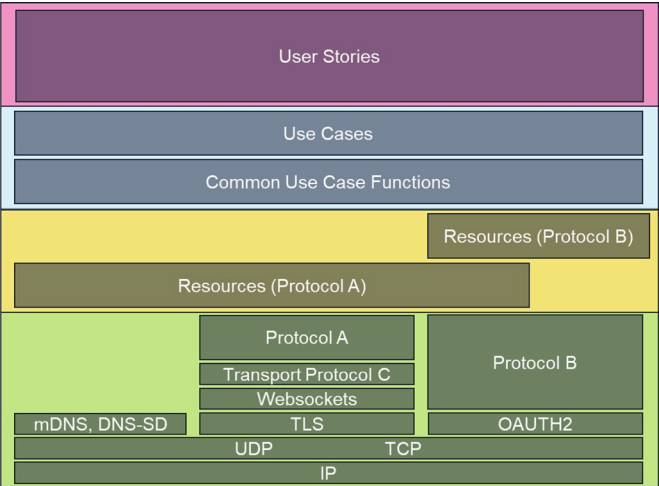


Figure 4 — Applicability of resources to different scenarios


This series of standards focuses on the interface between Smart Appliances and the CCM and describes this interface from the Smart Appliance’s point of view. Figure 5 shows the applicability of EN 50631 (orange arrows). All participating actors described in this figure are logical actors. The CCM may have other interactions with the grid or with other actors in the premises, different from smart appliances, but these interactions are not in the scope of EN 50631.

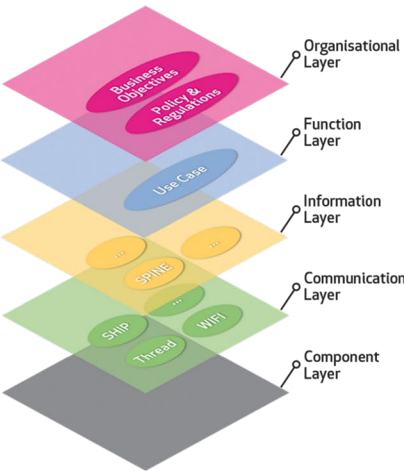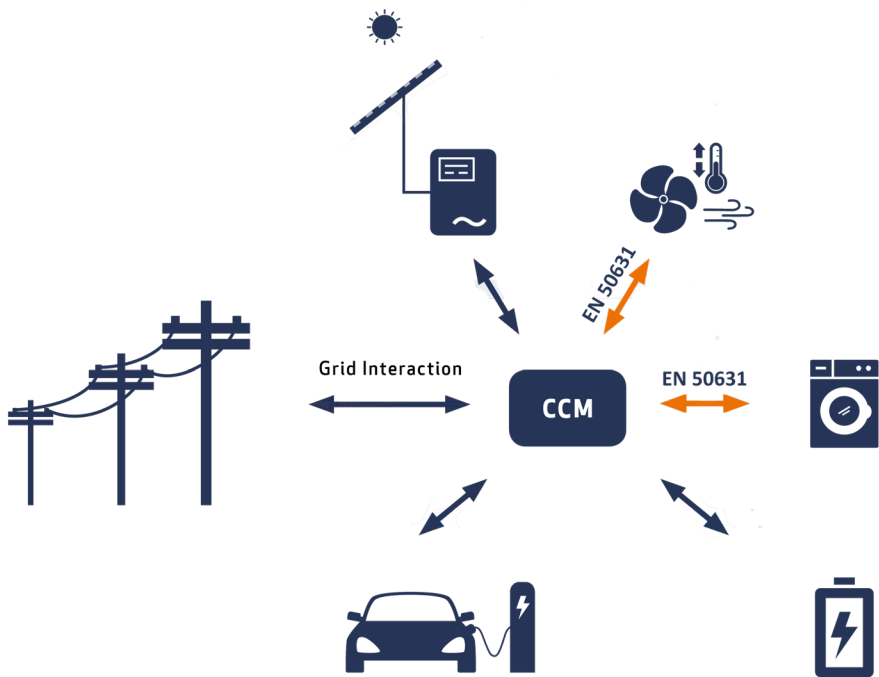

NOTE Arrows represent logical data flows. Images used with kind permission from EEBUS Initiative e.V.

Figure 5 — Applicability of EN 50631

278 Protocols covered in EN 50631 will be SPINE, SPINE-IoT, and SHIP as shown in Figure 6. Other protocols will
279 be added later.

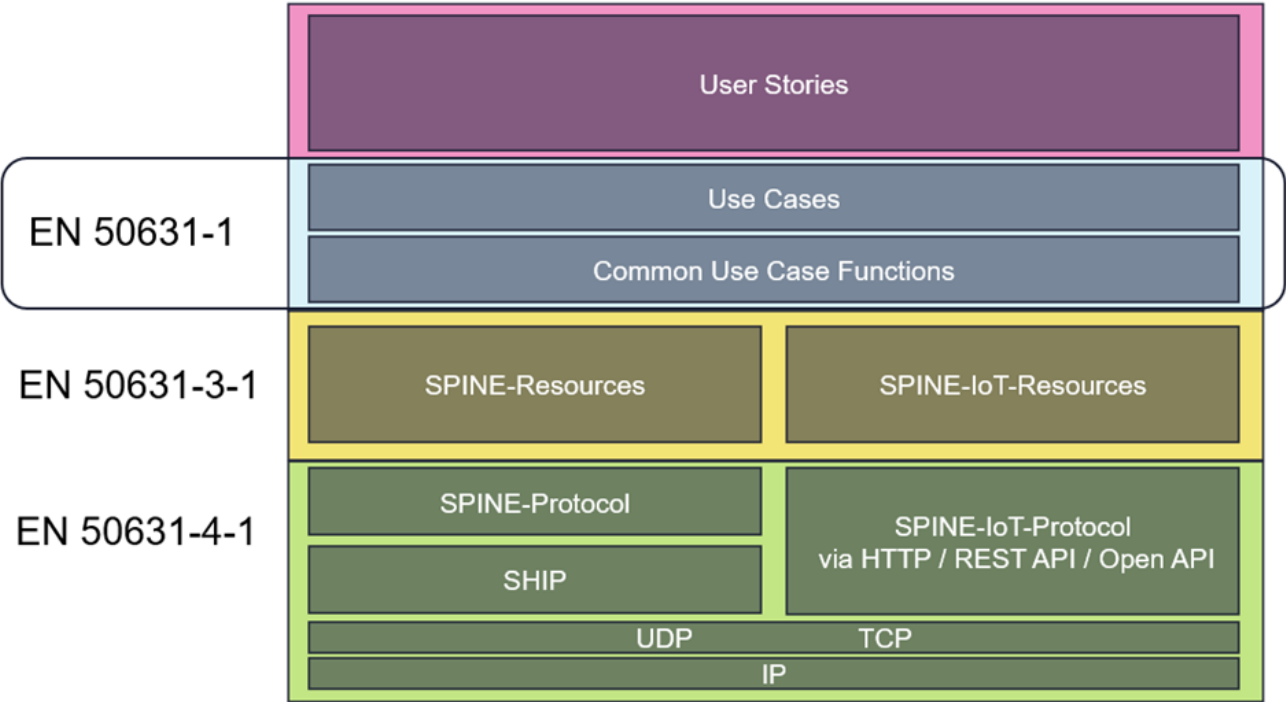

280

281

Figure 6 — Planned application of EN 50631 using SPINE and SHIP

282 **5 Reader’s guide**

283 **5.1 Finding the right information**

284 This set of documents follows a top-down approach, starting at a high level and becoming more and more
285 detailed.

286 This document provides background information on Smart Home, the Top-Down approach used, and the
287 process followed to derive a possible technical solution in Clause 4.

288 Clause 6 starts with different high-level user stories, breaking them down into more specific use cases at a
289 generic level in Clause 7. Each use case is subsequently broken up into scenarios, which can be mapped to
290 common Use Case Functions.

291 The Use Case Functions are described in Clause 8. Each Use Case Function is documented in detail in a
292 generic way.

293 Clause 9 provides a glossary of definitions for the Elements used in Clause 8.

294 The mapping of the Use Case Functions from EN 50631-1 to SPINE Resources and SPINE-IoT Resources is
295 described in EN 50631-3-1. The transport protocols for Home and Wide Area Networks as well as cloud
296 connectivity; in this case, SPINE, SPINE-IoT, and SHIP are described in EN 50631-4-1.

297 **5.2 Reading the tables**

298 Abbreviations for the presence indication of Elements listed in the tables are defined in Table 1:

299

Table 1 — Presence indication description

Abbreviation	Meaning	Link to requirement keywords
M	Mandatory	SHALL
R	Recommended	SHOULD
O	Optional	MAY
F	Forbidden	SHALL NOT

300

5.3 Reading the graphics

301


5.3.1 Flowcharts

302

Table 2 explains the use of symbols in the flowcharts.

303

Table 2 — Explanation of symbols used in flowcharts

	Solid dot	Start
	Bull's eye	Stop
	Arrow	Indicates the flow of time. Text next to the arrow may give additional information.
	Diamond	Connection
	Rounded rectangle	Scenario
	Lozenge	Condition/Decision


304

5.3.2 Sequence diagram

305

Communication sequence diagrams visualize the messages sent between actors as part of a Use Case Function or scenario, as shown in the example in Figure 7:

306

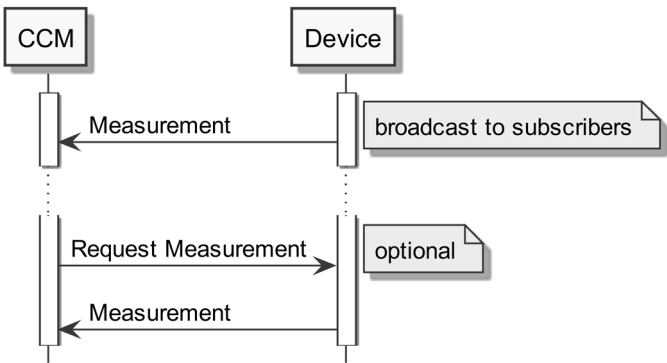

307

308

Figure 7 — Example communication sequence diagram

309

The participating actors are represented by rectangles with their names at the top of the diagram (and optionally at the bottom), as well as by a connecting vertical line.

310

Horizontal arrows indicate the types of information content sent as well as their direction. Note that time always flows from top to bottom.

6 User Stories

6.1 Introduction

There are different layers of operation classes which all exist in parallel (see Figure 8: The different layers of operation classes) and serve specific purposes or handle different types of instructions and thereby cover different use cases.

NOTE IEC/TS 62950 provides a classification of operations, instructions and related terms.

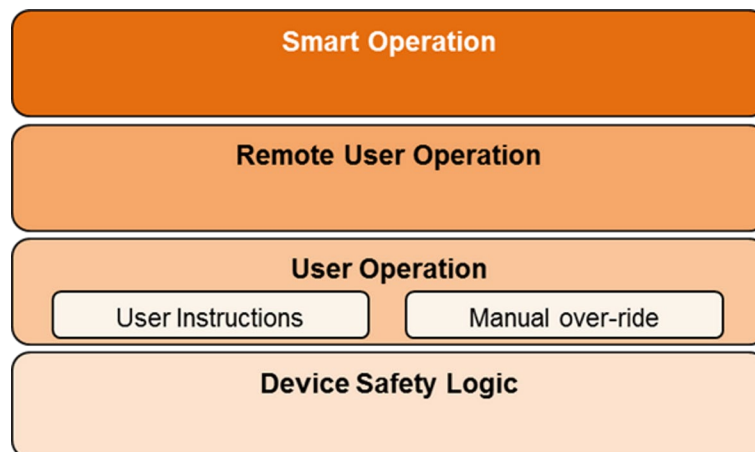


Figure 8 — The different layers of operation classes

These use cases, obviously, need to be understood in the context of the big picture of all the possible decision-making options which exist in the context of household appliances, as described above.

The following user stories and use cases have been taken as input for our use cases, data model and neutral message decomposition.

6.2 User stories

6.2.1 General

6.2.1.1 Epic 0

As a Homeowner, I want to optimize the total energy consumption in my household so that I save money.

6.2.2 Appliance Energy Flexibility

6.2.2.1 General

Smart Appliances can provide Energy Flexibility in cooperation with a CCM by changes in electric power consumption from their normal pattern in response to an external trigger.

6.2.2.2 Epic 1

As an Energy Provider, I want to distribute available energy as best as I can so that it is not wasted.

6.2.2.3 Epic 2**6.2.2.3.1 General**

As a Smart Appliance User, I want to get a process (e.g. washing laundry) completed by a given end time at the lowest possible energy cost or CO₂ footprint or percentage of renewable energy so that I can save grid energy and money or protect the environment while maintaining comfort.

6.2.2.3.2 Story 2.1

As a Smart Appliance User, I want to specify a latest end time for a process (e.g. washing laundry) so that it is done when I need it.

6.2.2.3.3 Story 2.2

As a Smart Appliance User, I want to use electricity for a process at the lowest available cost so that I save money.

6.2.2.3.4 Story 2.3

As a Smart Appliance User, I want to use as much energy from renewable sources as possible so that I have a good conscience.

6.2.2.3.5 Story 2.4

As a Smart Appliance User, I want to use as much energy from sources with a low CO₂ footprint as possible so that I have a good conscience.

6.2.2.4 Epic 3**6.2.2.4.1 General**

As a Smart Appliance User, I want to limit my power consumption to my own local production so that I do not consume grid energy.

6.2.2.4.2 Story 3.1

As a Smart Appliance User, I want to instruct my CCM to limit power consumption to the amount of my own decentralized power so that I do not consume grid energy.

6.2.2.4.3 Story 3.2

As a Smart Appliance User, I want to specify time ranges for the limitation of power to apply so that I can adjust power consumption.

6.2.2.4.4 Story 3.3

As a Smart Appliance User, I want to exclude devices from the limitation of power so that their correct operation is always ensured.

6.2.2.4.5 Story 3.4

As a Smart Appliance User, I want to receive a warning when turning on a device would exceed the limitation so that I can either postpone consumption or overrule the limit.

6.2.2.4.6 Story 3.5

As a Smart Appliance User, I want to make sure I'm injecting as little locally generated power as possible into the grid.

371 **6.2.2.5 Epic 4**

372 **6.2.2.5.1 General**

373 As a Smart Appliance User, I want to use or store excess/surplus PV energy for later use so that I can optimize
374 energy costs.

375 **6.2.2.5.2 Story 4.1**

376 As a Smart Appliance User, I want to thermally or electrically store excess/surplus PV energy for later use so
377 that I can optimize heating/cooling and energy costs.

378 Typical use case:

379 — Optimization of Self Consumption by Heat Pump Compressor Flexibility, see 7.11

380 **6.2.2.5.3 Story 4.2**

381 As a Smart Appliance User, I want to use excess/surplus PV energy so that I can optimize energy costs.

382 Typical use case:

383 — Limit Consumption to own production, see 7.4

384 **6.2.2.6 Epic 5**

385 **6.2.2.6.1 General**

386 As an Energy Supplier, I want to adjust users' load in case of grid stability issues so that grid stability is
387 restored/ensured.

388 **6.2.2.6.2 Story 5.1**

389 As an Energy Supplier, I want to reduce a user's load so that the overall load on the grid is reduced in times of
390 high demand.

391 **6.2.2.6.3 Story 5.2**

392 As an Energy Supplier, I want to increase a user's load so that the overall load on the grid is increased in times
393 of high supply.

394 **6.2.2.6.4 Story 5.3**

395 As a Homeowner, I want to offer load flexibility to my energy supplier in exchange for a compensation so that I
396 can optimize energy costs.

397 **6.2.2.7 Epic 6**

398 **6.2.2.7.1 General**

399 As a Smart Appliance User, I want to cover my energy needs with low environmental or monetary costs so that
400 I can save money and/or protect the environment.

401 **6.2.2.7.2 Story 6.1**

402 As a Smart Appliance User, I want to cover my energy needs with low monetary costs so that I can save money.

403 **6.2.2.7.3 Story 6.2**

404 As a Smart Appliance User, I want to cover my energy needs with low environmental costs so that I have a
405 good conscience.

406 Typical use cases Appliance Energy Flexibility are described below:

407 — Limitation of Power Consumption (Epic 5) – see 7.4

408 — Incentive Table-based Power Consumption Management (Epic 6) – see 7.4

409 **6.2.3 Remote Control of a Smart Appliance**

410 **6.2.3.1 General**

411 These user stories collect several typical remote initiated operations like

412 — Starting, stopping, pausing a device

413 — Setting parameters

414 — etc.

415 In this case, the CCM sends a message to the Smart Appliance, if applicable and allowed (e.g. based on safety
416 requirements).

417 An example use case for Remote Control is described below:

418 — Monitoring and Control of Smart Grid Ready Conditions – see 7.9

419 **6.2.3.2 Epic 7**

420 **6.2.3.2.1 General**

421 As a Smart Appliance User, I want to remotely control my Smart Appliances so that I can control them all from
422 a central unit (e.g. the CCM).

423 **6.2.3.2.2 Story 7.1**

424 As a Smart Appliance User, I want to change the status of a job on my device so that I can automate control of
425 the device.

426 **6.2.3.2.3 Story 7.2**

427 As a Smart Appliance User, I want to change a value or quantity on my device so that I can automate control of
428 the device.

429 **6.2.3.2.4 Story 7.3**

430 As a Smart Appliance User, I want to change a function setting on my device so that I can automate control of
431 the device.

432 **6.2.4 Remote Monitoring of a Smart Appliance**

433 **6.2.4.1 General**

434 These user stories collect several typical remotely initiated monitoring operations or Smart Appliance initiated
435 notifications. Typical Use Cases are:

436 — Monitoring and Control of Smart Grid Ready Conditions – see 7.9

437 — Monitoring of Power Consumption – see 7.10

438 In this case, either the CCM sends a message to the Smart Appliance to request the information, or the Smart
439 Appliance notifies the CCM about any changes, if applicable.

440 For maintenance purposes, the operation of a smart device shall be transparent to the CCM and the user. Most
441 likely, the user is not interested in technical logging information, but it is essential for interoperability, testing and

442 maintenance. This feature does not provide additional capabilities but is a more general feature that might
443 include a common test interface.

444 This information may occur at any time and in any circumstances, such as manual operation, remote operation,
445 user turns off remote operation back to manual operation, re-synchronization after communication drop down,
446 notification about pending or updated jobs or upon user and/or CCM requests.

447 **6.2.4.2 Epic 8**

448 **6.2.4.2.1 General**

449 As a Smart Appliance User, I want to remotely monitor my Smart Appliances so that I can monitor them all from
450 a central unit (e.g. the CCM).

451 **6.2.4.2.2 Story 8.1**

452 As a Smart Appliance User, I want to monitor manufacturer information on my device so that I can monitor it
453 from a central unit (e.g. the CCM).

454 **6.2.4.2.3 Story 8.2**

455 As a Smart Appliance User, I want to monitor my device's operating state so that I can monitor it from a central
456 unit (e.g. the CCM).

457 **6.2.4.2.4 Story 8.3**

458 As a Smart Appliance User, I want to monitor my device's power consumption so that I can monitor it from a
459 central unit (e.g. the CCM).

460 **6.2.4.2.5 Story 8.4**

461 As a Smart Appliance User, I want to monitor parameters on my device so that I can monitor it from a central
462 unit (e.g. the CCM).

463 **6.2.4.2.6 Story 8.5**

464 As a Smart Appliance User, I want to monitor the smart grid readiness condition of my device so that I can
465 monitor it from a central unit (e.g. the CCM).

466 **6.2.5 Manual Operation of a Smart Appliance**

467 **6.2.5.1 General**

468 Even if manually operated, the Smart Appliance can inform the CCM about status and other useful information
469 like power consumption and so forth to support CCM in keeping the overview up to date.

470 EXAMPLE User starts cooking, cooking plate informs CCM about power current consumption with an indefinite
471 duration.

472 The corresponding use cases are described in 7.8.

473 **6.2.5.2 Story 9.0**

474 As a Smart Appliance User, I want to provide a manually operated appliance's current power consumption to
475 the CCM so that it can be monitored and included into the CCM's calculations.

476 **7 Use cases**

477 **7.1 Introduction**

478 For each of the Epics/User Stories, this clause captures one or more derived Use Cases. The following Table 3
479 provides a mapping between the User Stories and the Use Cases in this clause.

Every Use Case will be broken down step by step to their re-usable functional blocks, called Use Case Functions, see also Table 3. This is done by means of packages and sequence diagrams with the functions identified and labelled.

Every sequence diagram consists of references to common functions. De-coupling of sequence diagrams from common functions enables re-usage of same common functions in various use cases.

NOTE Use cases describe a possible path to achieve a solution. They are not mandatory and are not treated exclusively.

7.2 User Stories and Use Cases

Table 3 — Mapping of User Stories, Use Cases, and Use Case Functions

Epic	Use cases	Use Case Functions
Appliance Energy Flexibility Epic 1, 2	Flexible Start for White Goods	UCF_Plan_With_Power_Sequences UCF_Select_Power_Sequence UCF_Shift_Preferred_Power_Sequence UCF_Configure_Current_Power_Sequence
Appliance Energy Flexibility Epic 1, 3, 4	Optimization of Self Consumption by Heat Pump Compressor Flexibility	UCF_Plan_With_Power_Sequences UCF_Select_Power_Sequence UCF_Report_Status_Of_Power_Sequence UCF_Shift_Preferred_Power_Sequence UCF_Configure_Current_Power_Sequence
Appliance Energy Flexibility Epic 4	Limit Consumption to own production	See “Incentive table-based Power Consumption Management”
Appliance Energy Flexibility Epic 4, 5	Limitation of Power Consumption	UCF_Power_Limit UCF_Device_Configuration UCF_Heartbeat (60s) UCF_Characteristics
Appliance Energy Flexibility Epic 6	Incentive table-based Power Consumption Management	UCF_Device_Configuration UCF_Incentive_Table UCF_Consumption_Curve
Remote Control Epic 7	Monitoring and Control of Smart Grid Ready Condition	UCF_System_Function UCF_Overrun
Remote Monitoring Epic 8	Monitoring and Control of Smart Grid Ready Condition	UCF_System_Function UCF_Overrun
	Monitoring of Power Consumption	UCF_AC_Measurement
Manual Operation Story 9	Manual Operation	UCF_Plan_With_Power_Sequences UCF_Report_Status_Of_Power_Sequence UCF_AC_Measurement
Network Management n/a	Install/Remove Smart Appliance	UCF_Device_Connected

7.3 Flexible Start for White Goods

7.3.1 General

A residential household includes a variety of electric consumers - such as a dishwasher, washing machine and tumble dryer – each of which can offer its flexibility or information to an energy management system. In the further description, such devices are referred to as Smart Appliances. Depending on availability of cheap or green electricity, a Customer Connectivity Manager (CCM) can let a Smart Appliance run when it is most advantageous for the customer, achieving low costs or low CO₂ emissions. Figure 9 depicts the high-level information exchange between the CCM and the Smart Appliance.

While the Smart Appliance has not yet started, its start time can be changed. To be able to find optimal start times for the Smart Appliance, the CCM needs to know its expected “power sequence” (time-dependent power consumption) with constraints such as its earliest start time, latest end time, and interrupt options. The Smart Appliance may also offer the CCM to select an alternative power sequence.

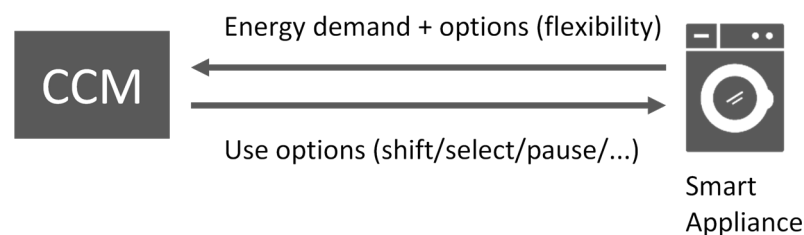


Figure 9 — Energy management with smart appliance and CCM

Added value: The CCM may run the devices at the lowest energy costs or with zero carbon dioxide emission footprint.

User Story as an example

The user wants to optimize their energy cost or CO₂ footprint, respectively, and offers flexibility by programming the washing machine to get the laundry done by 8:00 pm latest. The CCM evaluates the overall situation at home and then chooses the best start time for the washing machine.

Power sequence, basic properties

A simple power sequence with some main properties is shown in Figure 10.

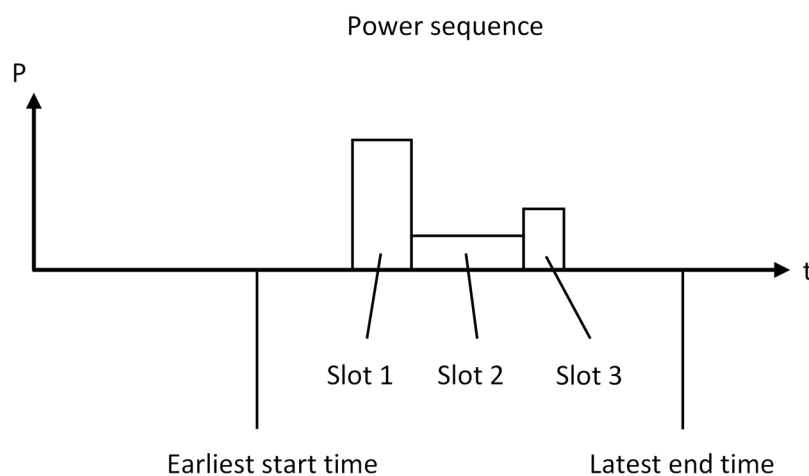


Figure 10 — Power sequence: $P(t)$ (power-over-time) modelling with slots and time constraints

A power sequence models a (usually) shiftable curve. This includes

1. Schedule constraints:

An earliest start time and latest end time between which the curve should be executed. These are given by the power plan and are not part of the power sequence.

2. Power sequence:

A power sequence is modelled by a consecutive sequence of slots: Each slot expresses a power magnitude (*1) and its duration (*2).

(*1) In general, a slot may express multiple kinds of magnitudes. Examples are minimum value, maximum value, average value.

(*2) The total duration of all slots needs to fit into the time frame of the schedule constraints. This rule holds in every case. For example, a Smart Appliance's UI should not permit a user to select a latest end time that does not permit the complete execution of all slots.

Figure 10 does not contain an explicit start time. Without explicit start time, a power sequence just models a potential $P(t)$ curve. But if a power sequence is also to be executed at a specific time, further properties like a start time are required, as shown in Figure 11.

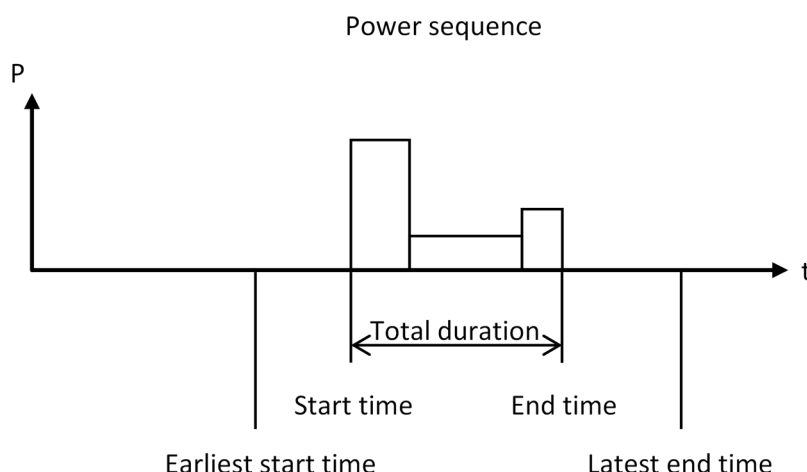


Figure 11 — Further possible properties of a scheduled power sequence

Schedule phases and states

The pre-announcement and execution of the consumption of an announced energy demand are distinct phases of a Smart Appliance:

A. Pre-announcement phase:

Before the Actor Smart Appliance begins with the energy consumption according to its announced plan, a power sequence can have one of these schedule states:

1. Preferred power sequence

A preferred power sequence has a start time. The Smart appliance will execute this power sequence at this start time (unless the Actor Smart Appliance receives a different configuration).

539 2. Optional power sequence

540 An optional power sequence has no start time. Consequently, the Smart appliance will NOT execute
541 this power sequence autonomously.

542 3. Invalid power sequence

543 A power sequence with status “invalid” will not be executed by a Smart Appliance and cannot be
544 selected by Actor CCM. In this phase, this type of power sequence is used only if a Smart Appliance
545 withdraws a formerly preferred or optional power sequence. Power sequences can become invalid in
546 this phase for a number of reasons, e.g. if they have a long runtime and can no longer be completed
547 before the latest end time due to the CCM waiting for the optimal start time.

548 During the pre-announcement phase, the Actor Smart Appliance SHALL have exactly one preferred power
549 sequence.

550 Scenario 3 (see 7.3.5.3) describes how an optional power sequence can become the (new) preferred power
551 sequence and the formerly preferred power sequence then becomes an optional or invalid power sequence.

552 B. Execution phase:

553 As soon as the start time of a preferred power sequence is reached, the schedule states change:

554 1. Current power sequence

555 The preferred power sequence is now called “current power sequence” and the Actor begins with the
556 corresponding consumption of energy. Within this schedule state, the so-called activity state expresses
557 whether the energy consumption is currently paused or not or has been stopped. Configuration options
558 are described in Scenario 4 (see 7.3.5.4).

559 NOTE The schedule state and activity state together make up the overall state of a power sequence.

560 2. Invalid power sequence

561 An optional power sequence becomes an invalid power sequence.

562 **“Alternatives” groups of power sequences and identification**

563 If the Actor Smart appliance announces a plan with a demand, it puts one or more power sequences into a
564 group called “alternatives”. Within such an alternatives group, the power sequences are meant to be alternatives
565 to each other. This means that the group contains

566 1. exactly one power sequence that will be or is executed (preferred power sequence or current power
567 sequence),

568 2. and optionally any number of optional or invalid power sequences (see above).

569 Each power sequence is identifiable.

570 This Use Case does not permit more than one “alternatives” group with power sequences.

571 **7.3.2 Actors**

572 **7.3.2.1 General**

573 The following actors participate in this use case:

574 **7.3.2.2 CCM**

575 The CCM actor performs energy management tasks. It receives demands, configurations, and schedules from
576 smart appliances. Based on the collected data the CCM adjusts the energy demand (e.g. shift a demand in
577 time) of the smart appliances.

7.3.2.3 Smart Appliance

A smart appliance can announce the energy demand of tasks it needs to execute or is currently executing. It may allow these tasks to be adjusted in ways defined by the smart appliance (e.g. pause the current task).

7.3.3 Scenario overview

The following Scenarios apply to this Use case (see Figure 12):

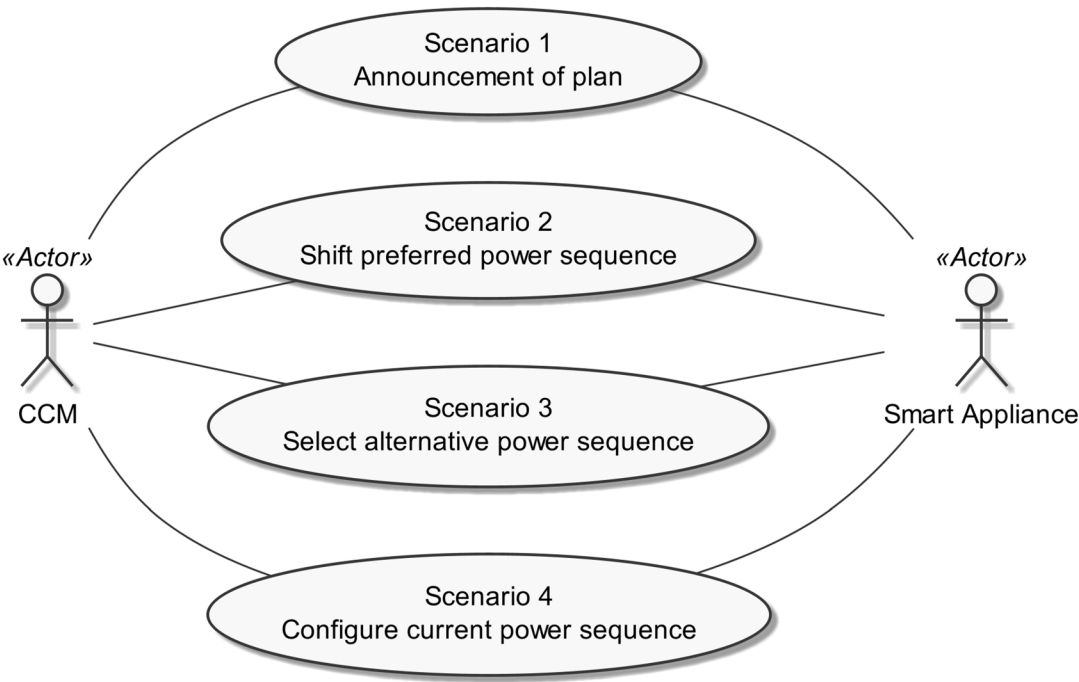


Figure 12 — Scenario overview for Flexible Start for White Goods

7.3.4 Scenario support requirements

Table 4 below lists the requirements for each actor needed to support the scenarios listed.


587 **Table 4 — Flexible Start for White Goods scenario implementation requirements for Actors**

Scenario number	Scenario name	CCM	Smart Appliance
1	Announcement of plan	M	M
2	Shift preferred power sequence	M	R
2	Select alternative power sequence	M	R
4	Configure current power sequence	R	O
In addition, at least one of the Scenarios 2 or 3 SHALL be supported by the Actor Smart Appliance.			

588 **7.3.5 Scenario flow**

589 Figure 13 shows the workflow of this Use Case. The Scenarios mentioned in the figure are explained in more
 590 detail in 7.3.5. It can be summarized as follows:

- 591 1. The Actor Smart Appliance is responsible for announcing a new (or updated) energy demand incl. its
 592 options (Scenario 1).
- 593 2. As long as the Actor Smart Appliance has not started consuming the announced energy demand, it will
 594 accept configurations to adjust the energy demand, according to its announced capabilities (Scenarios 2
 595 and 3).
- 596 3. As soon as the Actor Smart Appliance starts consuming the announced energy demand, it will accept to
 597 pause/resume/stop its energy demand, according to its announced capabilities (Scenario 4).

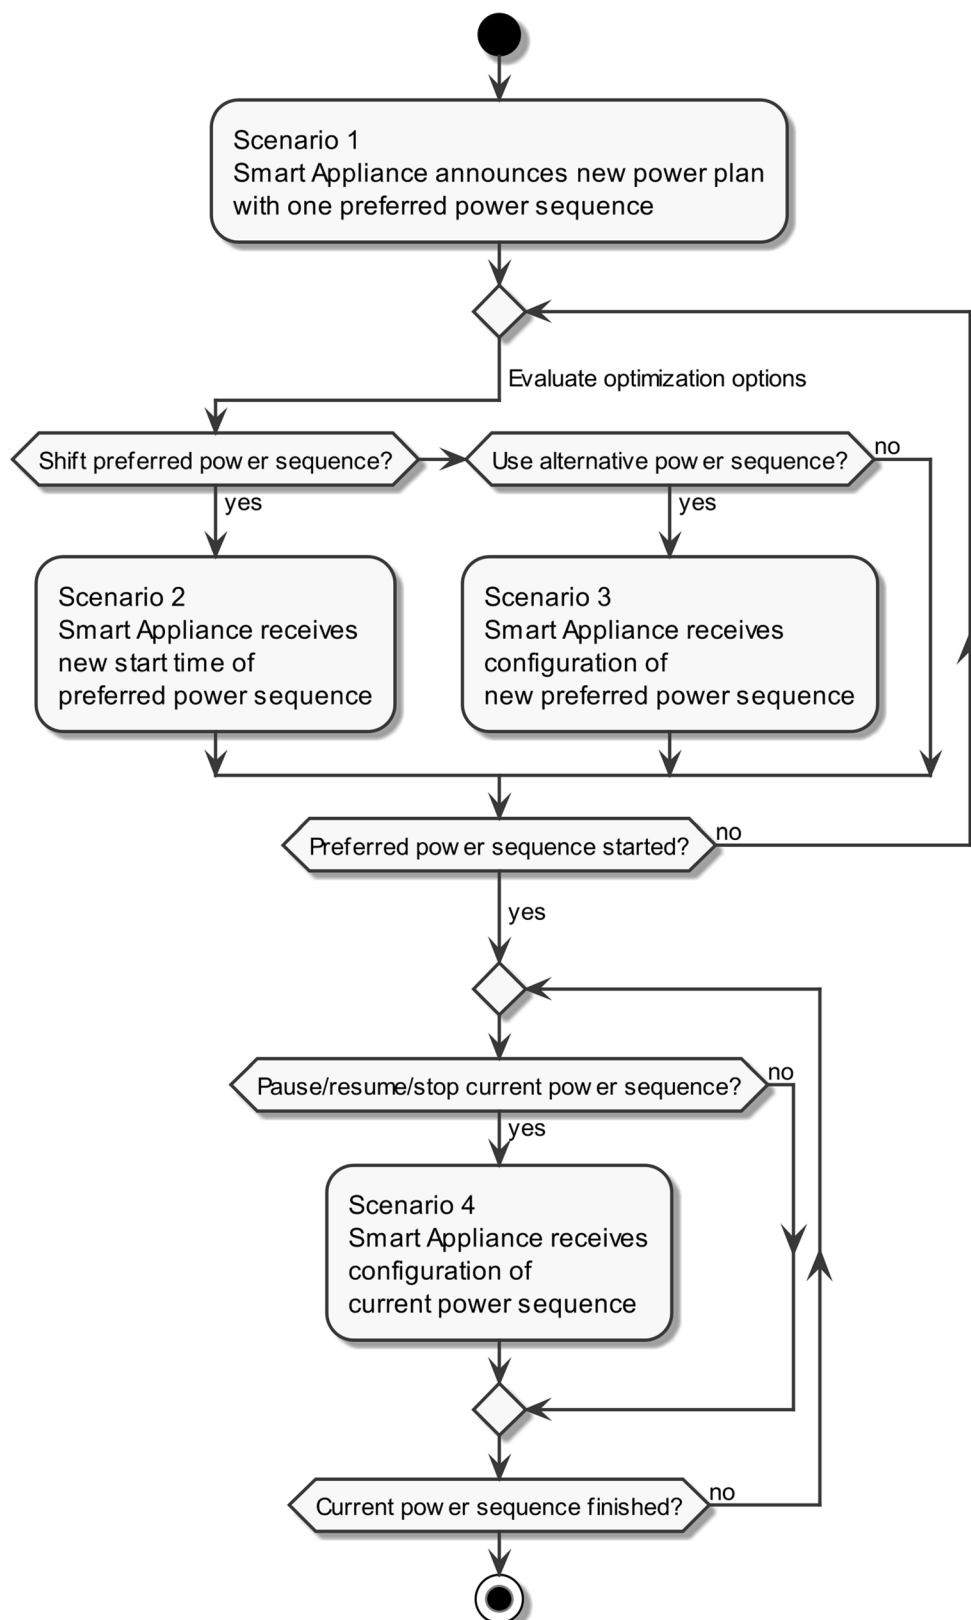

NOTE Questions in the figure above are asked from the CCM's point of view

Figure 13 — Workflow of this Use Case

601 7.3.6 Scenario details**602 7.3.6.1 Scenario 1 – Announcement of plan****603 7.3.6.1.1 Description**

604 The Actor Smart Appliance announces its current plan with one or more power sequences. This plan
605 corresponds either to the pre-announcement phase or to the execution phase.

606 7.3.6.1.2 Conditions**607 Triggering Event:**

608 The Scenario is triggered when the Actor Smart Appliance has a new or updated energy demand.

609 Pre-condition:

610 The Smart Appliance is in a state where it is remote controllable by the CCM with regards to the parameters
611 described in this Scenario.

612 Post-condition:

613 Depending on the phase, available schedule states, and time, the Actor Smart Appliance may receive
614 appropriate requests to adjust the plan or start with the energy consumption of a preferred power sequence
615 when its start time is reached.

616 7.3.6.2 Scenario 2 - Shift preferred power sequence**617 7.3.6.2.1 Description**

618 This Scenario applies only to the pre-announcement phase.

619 After receiving a plan from a Smart Appliance, a CCM estimates whether the total energy consumption within a
620 household can be optimized by shifting the start time of the currently preferred power sequence of that Smart
621 Appliance. If so (and provided there is no better option), the CCM sets a new start time for that power sequence.
622 If the new start time satisfies the schedule constraints, the Smart Appliance shall accept it and announce a new
623 plan that reflects the changes. The scheduled power sequence shall be executed by the Smart Appliance at the
624 new start time.

625 7.3.6.2.2 Conditions**626 Triggering Event:**

627 The Scenario is triggered when the CCM receives either an updated plan from the Smart Appliance or updated
628 information from any external party that affects its energy management task.

629 Pre-condition:

630 The Smart Appliance is in a state where it is remote controllable by the CCM with regards to the parameters
631 described in this Scenario.

632 Post-condition:

633 As long as no further configuration occurs afterwards, future plans of the Smart Appliance reflect all changes
634 done to the current configuration with regards to this Scenario. Additionally, if no reconfiguration occurs, the
635 Smart Appliance executes its current plan autonomously.

636 7.3.6.3 Scenario 3 - Select alternative power sequence**637 7.3.6.3.1 Description**

638 This Scenario applies only to the pre-announcement phase.

639 After receiving a plan from a Smart Appliance (see Scenario 1), a CCM estimates whether the total energy
640 consumption within a household can be optimized by selecting an optional power sequence of that Smart

Appliance over the currently preferred one. This scenario applies only if the announced plan contains one or more optional power sequences (in addition to the currently preferred power sequence). The CCM selects an optional power sequence and sets a start time to it. If the new start time satisfies the schedule constraints the Smart Appliance shall accept it and announce a new plan that reflects the changes. If no further configuration is done to the Smart Appliance, the selected power sequence will be executed at the configured start time.

The Actor Smart Appliance reports in the plan whether it supports the selection of a different optional power sequence only once or multiple times. The latter means that the CCM can select a different optional power sequence at a later point in time.

7.3.6.3.2 Conditions

Triggering Event:

The Scenario is triggered when the CCM receives either an updated plan from the Smart Appliance or updated information from any external party that affects its energy management task.

Pre-condition:

The Smart Appliance is in a state where it is remote controllable by the CCM with regards to the parameters described in this Scenario.

Post-condition:

As long as no further configuration occurs afterwards, future plans of the Smart Appliance reflect all changes done to the current configuration with regards to this Scenario. Additionally, if no reconfiguration occurs, the Smart Appliance executes its current plan autonomously.

7.3.6.4 Scenario 4 - Configure current power sequence

7.3.6.4.1 Description

This Scenario applies only to the execution phase.

The CCM changes the activity state (running, paused, e.g.) of the current power sequence. Depending on the current state of the power sequence as well as its configuration, different state transitions are allowed (e.g. a washing machine may not be paused for an extended period in the middle of a washing program, because it can lead to clothes developing an unpleasant odour). The Smart Appliance can express valid state transitions at runtime. Additionally, the Smart Appliance SHALL ensure that all constraints are satisfied during execution of the program (e.g. a paused program needs to be resumed if the remaining time would exceed the user defined latest end time).

More precisely, the following state changes are allowed:

1. If a power sequence can be paused, the CCM may pause and resume a power sequence.
2. If a power sequence can be stopped, the CCM MAY stop a power sequence. It cannot be resumed afterwards.

7.3.6.4.2 Conditions

Triggering Event:

The Scenario is triggered when the CCM receives either an updated plan from the Smart Appliance or updated information from any external party that affects its energy management task.

Pre-condition:

The Smart Appliance is in the execution phase, where it is remote controllable by the CCM with regards to the parameters described in this Scenario (see section "Schedule phases and states", B, above).

Post-condition:

As long as no further configuration occurs afterwards, future plans of the Smart Appliance reflect all changes done to the current configuration with regards to this Scenario. Additionally, if no reconfiguration occurs, the Smart Appliance executes its current plan autonomously.

7.3.7 Scenarios and Use Case Functions (UCFs)

For each scenario, the “primary” Use Case Functions are given as described in Table 5.

Table 5 — Flexible Start for White Goods: Scenarios and primary Use Case Functions (UCFs)

Scenario	Primary Use Case Functions
Scenario 1 Announcement of plan	UCF_Plan_With_Power_Sequences
Scenario 2 Shift preferred power sequence	UCF_Shift_Preferred_Power_Sequence
Scenario 3 Select alternative power sequence	UCF_Select_Power_Sequence
Scenario 4 Configure current power sequence	UCF_Configure_Current_Power_Sequence

7.3.8 Dependencies to other Use Cases

None.

7.3.9 Assumptions and Prerequisites

None.

7.4 Incentive Table-based Power Consumption Management**7.4.1 Actors****7.4.1.1 General**

The following actors participate in this use case:

7.4.1.2 Energy Consumer

The Actor Energy Consumer is the Energy Consumer that wants to cover its energy needs with low environmental or monetary costs. Within this Use Case, only one CCM SHALL be connected to an Energy Consumer, while multiple Energy Consumers MAY be connected to an CCM.

7.4.1.3 CCM

The Actor CCM delivers incentives. Multiple Energy Consumers MAY be connected to an CCM. However, only one CCM SHALL be connected to an Energy Consumer.

7.4.2 Scenario Overview

The following Scenarios apply to this Use case (see Figure 14):

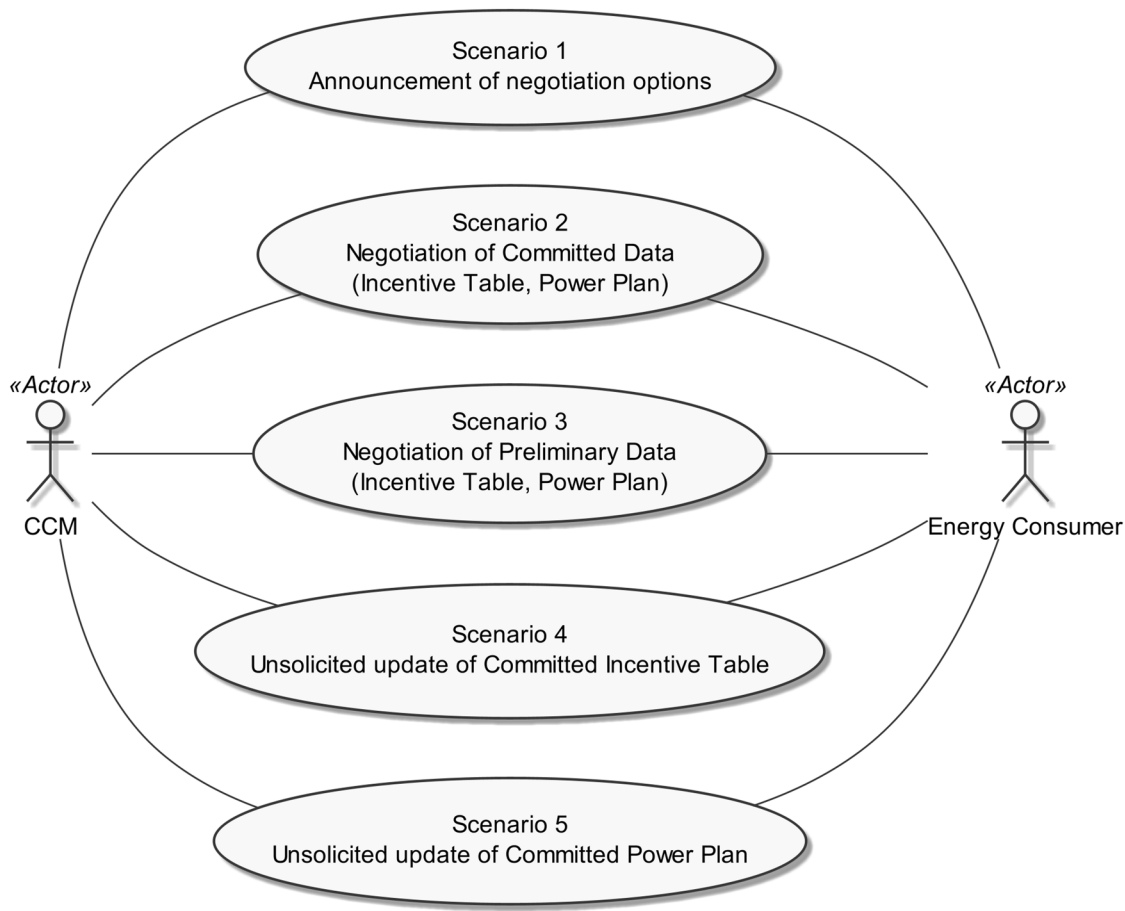


Figure 14 — Scenario Overview

7.4.3 Scenario support requirements

Table 6 below lists the requirements for each actor needed to support the scenarios listed.

Table 6 — Scenario implementation requirements for Actors

Scenario number	Scenario name	Energy Consumer (M)	CCM (M)
1	Announcement of negotiation options	M	M
2	Negotiation of Committed Data	M	M
3	Negotiation of Preliminary Data	O	O
4	Unsolicited update of Committed Incentive Table	M	O
5	Unsolicited update of Committed Power Plan	O	M

7.4.4 Scenario Flow

The order in which the scenarios occur is defined by the trigger (see Figure 15). For some scenarios data of other scenarios is relevant, while other scenarios can run in parallel.

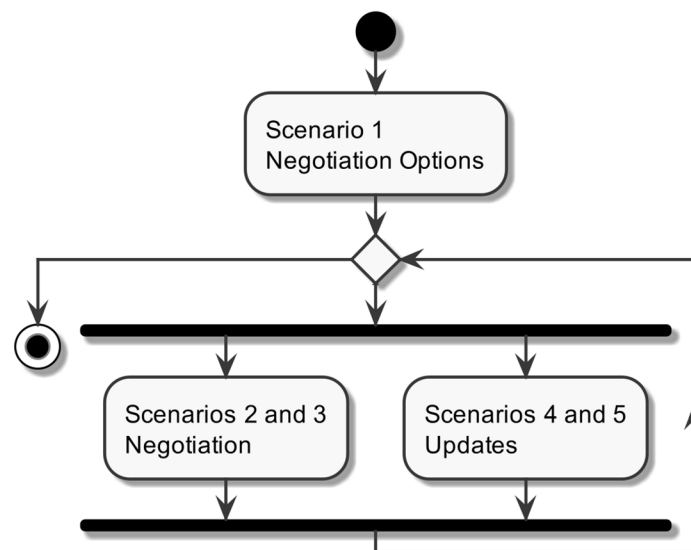


Figure 15 — Workflow of this Use Case

7.4.5 Scenario Details

7.4.5.1 Scenario 1 – Announcement of negotiation options

7.4.5.1.1 Description

The Use Case comprises several processes (Scenarios) with negotiation options of Actor Energy Consumer. These options need to be fetched and considered properly by Actor CCM. This Scenario 1 primarily summarizes the negotiation options in Table 7. Rules and further details on the negotiation options can be found in the respective Scenarios or below Table 7.

Table 7 — Scenario 1 – Negotiation options

Data point name	Data point description	Support indication
Maximum simulation cycles	Scenario 3: The maximum number of successive simulation cycles (Scenario 3) permitted by Actor Energy Consumer. Once the number of completed successive simulation cycles reaches this maximum, Actor Energy Consumer does not support further simulation cycles unless a negotiation of committed data (Scenario 2) completed successfully. A maximum number of zero denotes that Actor Energy Consumer does not support Scenario 3 at all. The value SHALL be a non-negative integer.	M
Concurrent negotiation capability	Scenario 3 (and 2): Value “true” = Actor Energy Consumer is capable of executing calculations of Scenario 3 in parallel to Scenario 2; otherwise, the value is “false”. See details below table.	M ^a
TIMEOUT_INCENTIVE_REQUEST	Scenario 2: Maximum waiting period of Actor Energy Consumer to receive a valid update of the Committed Incentive Table. See details in 7.4.5.2.	M

Data point name	Data point description	Support indication
WAIT_INCENTIVE_WRITEABLE	Scenario 2: Waiting period of Actor Energy Consumer before it permits execution of Scenario 4. See details in 7.4.5.2.	M
^a Mandatory if Scenario 3 is supported.		

On data point “Concurrent negotiation capability”:

In Scenarios 2 and 3, Actor Energy Consumer computes a Committed or Preliminary Power Plan based upon a respective Incentive Table. The CPU of Actor Energy Consumer may not have sufficient computing resources to calculate a Preliminary and a Committed Power Plan at the same time and deliver results within the required time constraints. There might be further reasons that prevent Actor Energy Consumer from parallel computations of these plans. In these cases, Actor Energy Consumer SHALL set the data point “Concurrent negotiation capability” to “false”. Otherwise, Actor Energy Consumer SHOULD set the data point “Concurrent negotiation capability” to “true”.

NOTE Scenario 3 also describes how a computation of a Preliminary Power Plan can be aborted by Actor Energy Consumer (see 7.4.5.3.1.4).

7.4.5.1.2 Conditions

Triggering Event:

This Scenario is triggered by Actor CCM to get negotiation options of Actor Energy Consumer to execute further Scenarios of this Use Case properly.

Pre-condition:

The Actor CCM has no or “old” negotiation options of Actor Energy Consumer.

Post-condition:

In case of success, the Actor CCM received updated negotiation options of Actor Energy Consumer.

7.4.5.2 Scenario 2 – Negotiation of Committed Data

7.4.5.2.1 Description

7.4.5.2.1.1 General

In this Scenario, the Actor Energy Consumer explicitly requests an update of its Committed Incentive Table. If the Actor Energy Consumer receives a valid Committed Incentive Table in time, it updates its Committed Power Plan. Otherwise, the Actor Energy Consumer operates autonomously (with regards to this Use Case). An overview is shown in Figure 16.

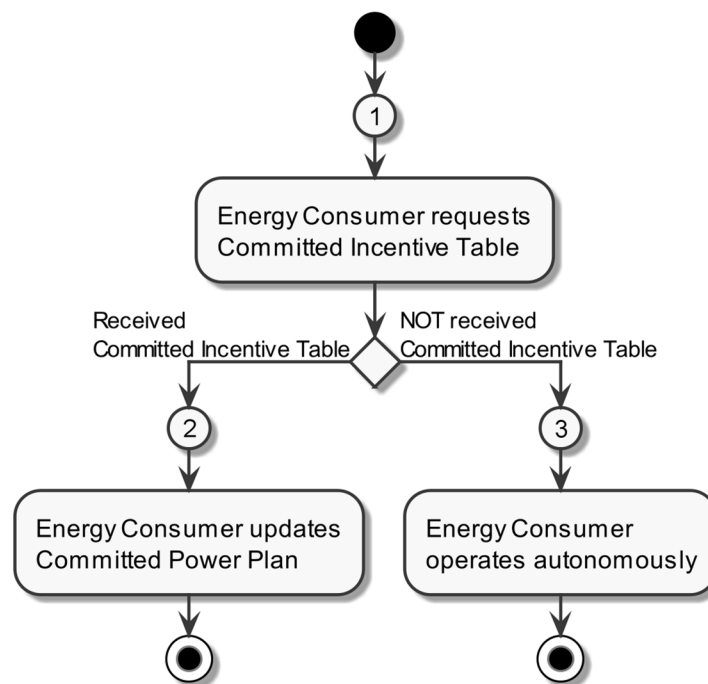


Figure 16 — Overview of Scenario 2 activity

The activity is split into several segments which begin at the circled numbers shown in Figure 16:

1. Activity begin ①
2. Activity branch “Update of Committed Power Plan” ②
3. Activity branch “Autonomous operation” ③

Details are described in the subsequent subclauses.

7.4.5.2.1.2 Activity begin ①

The Actor Energy Consumer is ready to initiate a negotiation of committed data. It requests for a (new or updated) Committed Incentive Table and waits for the receipt. This is shown in Figure 17.

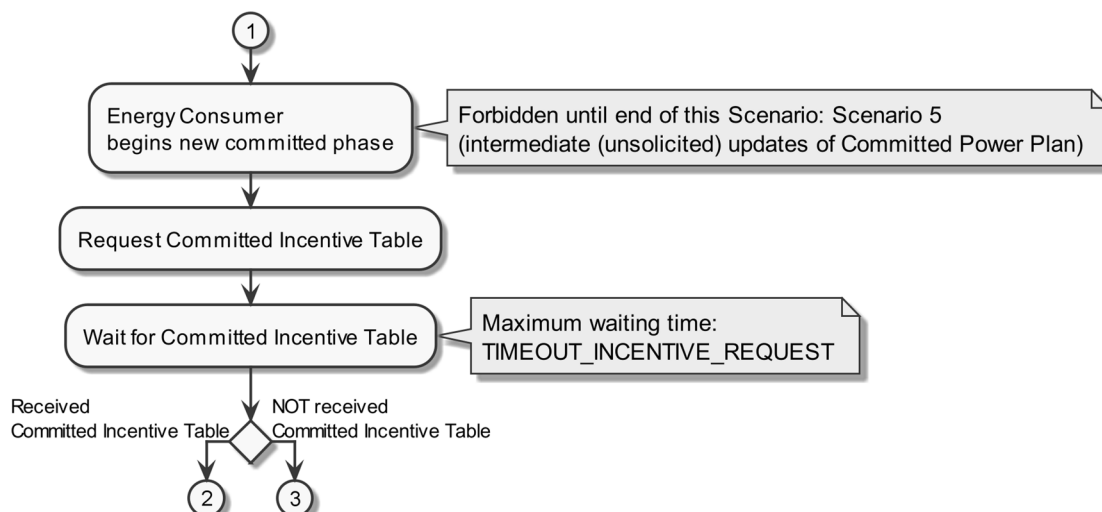


Figure 17 — Activity begin diagram of Scenario 2

Step 1 (Energy Consumer begins new committed phase):

Until the end of Scenario 2, the Actor Energy Consumer SHALL NOT execute Scenario 5. During Scenario 2, updates of the Committed Power Plan MAY occur according to 7.4.5.2.1.2 only.

Step 2 (Request Committed Incentive Table):

The Actor Energy Consumer SHALL allow Actor CCM to modify or create Actor Energy Consumer's Committed Incentive Table. The Actor Energy Consumer SHALL request towards Actor CCM to get a modified or new Committed Incentive Table.

Step 3 (Wait for Committed Incentive Table or Timeout):

The Actor Energy Consumer SHALL wait for a maximum duration of TIMEOUT_INCENTIVE_REQUEST to receive a valid update of the Committed Incentive Table. If the Actor Energy Consumer receives a valid update of the Committed Incentive Table in time, the Actor Energy Consumer SHALL continue as specified in 7.4.5.2.1.2. Otherwise, the Actor Energy Consumer SHALL continue as specified in 7.4.5.2.1.3.

7.4.5.2.1.3 Activity branch “Update of Committed Power Plan” ②

The Actor Energy Consumer is ready to update its Committed Power Plan as shown in Figure 18.

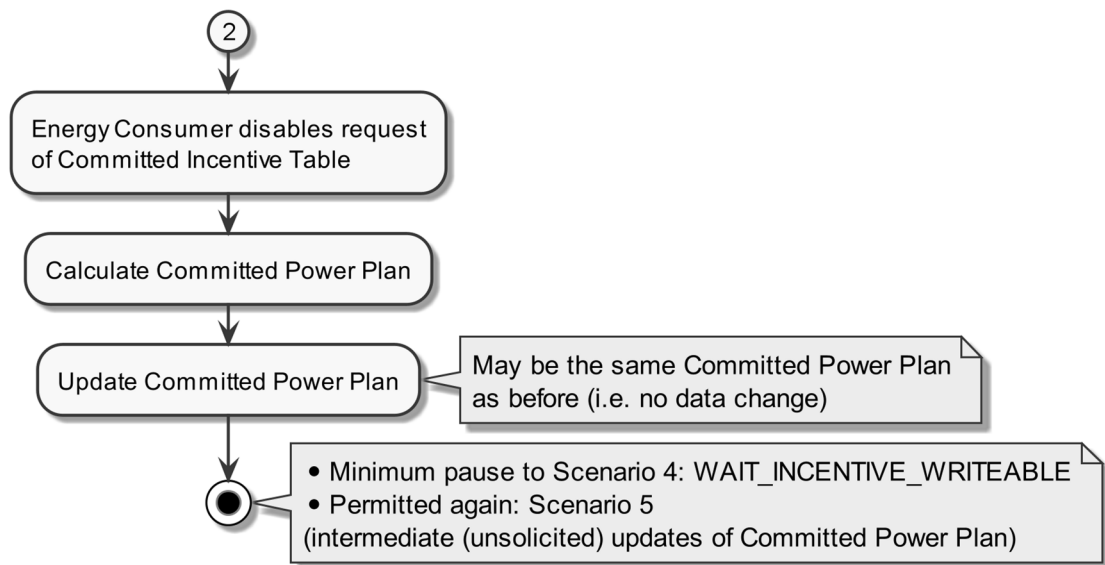


Figure 18 — Activity branch “Update of Committed Power Plan” diagram of Scenario 2

Step 1 (Energy Consumer disables request of Committed Incentive Table):

The Actor Energy Consumer SHALL NOT allow Actor CCM to modify or create Actor Energy Consumer's Committed Incentive Table. The Actor Energy Consumer SHALL disable the request towards Actor CCM to get a modified or new Committed Incentive Table.

Step 2 (Calculate Committed Power Plan, Update Committed Power Plan):

The Actor Energy Consumer SHALL calculate and update its Committed Power Plan.

Typically, the following (non-exhaustive) list should be used by the Actor Energy Consumer for the calculation:

1. The Committed Incentive Table (used for an optimization algorithm).
2. The current or anticipated energy demand (required energy incl. time frame to fulfil a task).
3. Any further constraints (imposed power limitation, for example.).

Step 3 (End of Scenario 2):

The Actor Energy Consumer SHALL wait for a duration of WAIT_INCENTIVE_WRITEABLE before it permits execution of Scenario 4.

7.4.5.2.1.4 Activity branch “Autonomous operation” ③

This is an error case where Actor CCM does not behave appropriately. The Actor Energy Consumer needs to continue its operation without update of the Committed Incentive Table as shown in Figure 19.

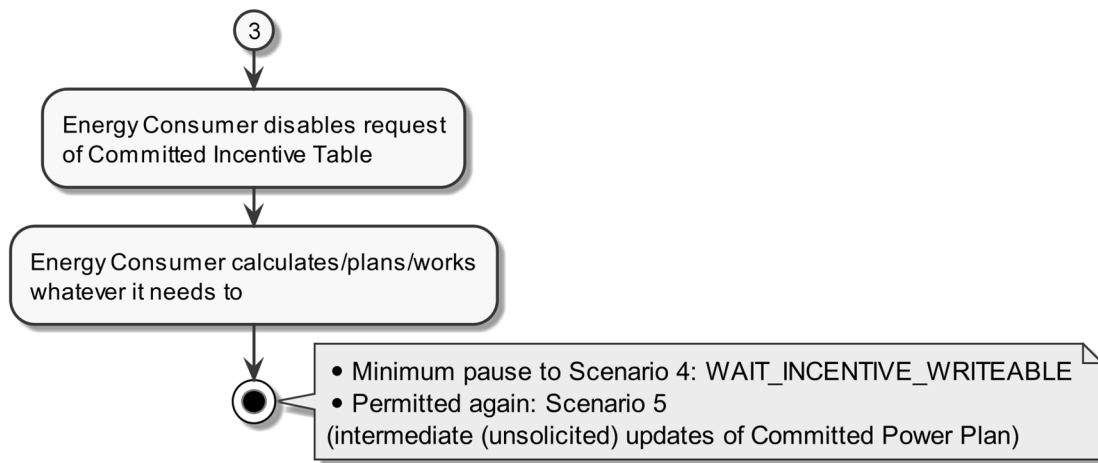


Figure 19 — Activity branch “Autonomous operation” diagram of Scenario 2

Step 1 (Energy Consumer disables request of Committed Incentive Table):

The Actor Energy Consumer SHALL NOT allow Actor CCM to modify or create Actor Energy Consumer's Committed Incentive Table. The Actor Energy Consumer SHALL disable the request towards Actor CCM to get a modified or new Committed Incentive Table.

Step 2 (Consumer calculates/plans/works whatever it needs to):

The Actor Energy Consumer SHALL operate at its own discretion (with regards to this Use Case) to fulfil its task. This means the Actor Energy Consumer is not obliged to wait for any update of the Committed Incentive Table.

An Actor Energy Consumer may apply different optimization algorithms in comparison to the case with updated and valid Committed Incentive Table.

Step 3 (End of Scenario 2):

The Actor Energy Consumer SHALL wait for a duration of WAIT_INCENTIVE_WRITEABLE before it permits execution of Scenario 4.

The Actor Energy Consumer MAY execute Scenario 5.

Even in this error case, the execution of Actor Energy Consumer's task will typically result in some kind of planning with proper power consumption. Therefore, it is recommended that the Actor Energy Consumer executes Scenario 5 to update its Committed Power Plan if possible, as this may help Actor CCM (as soon as Actor CCM behaves appropriately, again) for its overall energy management task.

The Actor Energy Consumer SHALL trigger the Scenario 2 again as soon as possible. I.e. the Actor Energy Consumer SHALL NOT remain in a mode of autonomous operation.

7.4.5.2.2 Conditions

Triggering Event:

This Scenario is triggered by Actor Energy Consumer to schedule its current or imminent energy demand based upon valid committed incentives.

Pre-condition:

The Actor CCM knows the negotiation options of Actor Energy Consumer from Scenario 1.

The Actor Energy Consumer has no or “old” incentives for the required period.

Post-condition:

In case of success, the Actor Energy Consumer received updated incentives for a certain period and did provide an appropriate Committed Power Plan.


824 For error cases, consider 7.4.5.2.1.

825 7.4.5.3 Scenario 3 – Negotiation of Preliminary Data

826 7.4.5.3.1 Description

827 7.4.5.3.1.1 General

828 In this Scenario, the Actor Energy Consumer permits Actor CCM to make use of a simulation phase. The
 829 simulation phase may be aborted by Actor Energy Consumer any time. If the Actor Energy Consumer receives
 830 a valid Preliminary Incentive Table within the simulation phase, it updates its Preliminary Power Plan. An
 831 overview is shown in Figure 20.

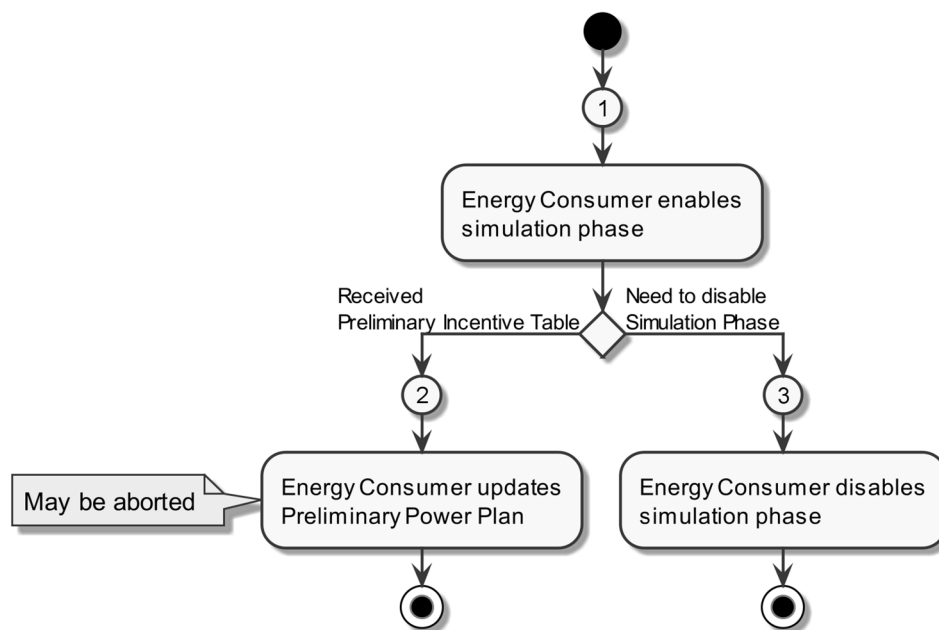

832
833 **Figure 20 — Overview of Scenario 3 activity**

834 The activity is split into several segments which begin at the circled numbers shown in Figure 20:

- 835 1. Activity begin ①
- 836 2. Activity branch “Update of Preliminary Power Plan” ②
- 837 3. Activity branch “Disable simulation phase” ③

838 Details are described in the subsequent subclauses.

839 7.4.5.3.1.2 Activity begin ①

840 The Actor Energy Consumer is ready to permit a negotiation of preliminary data. It enables Actor CCM to provide
 841 a Preliminary Incentive Table and waits for the receipt. This is shown in Figure 21.

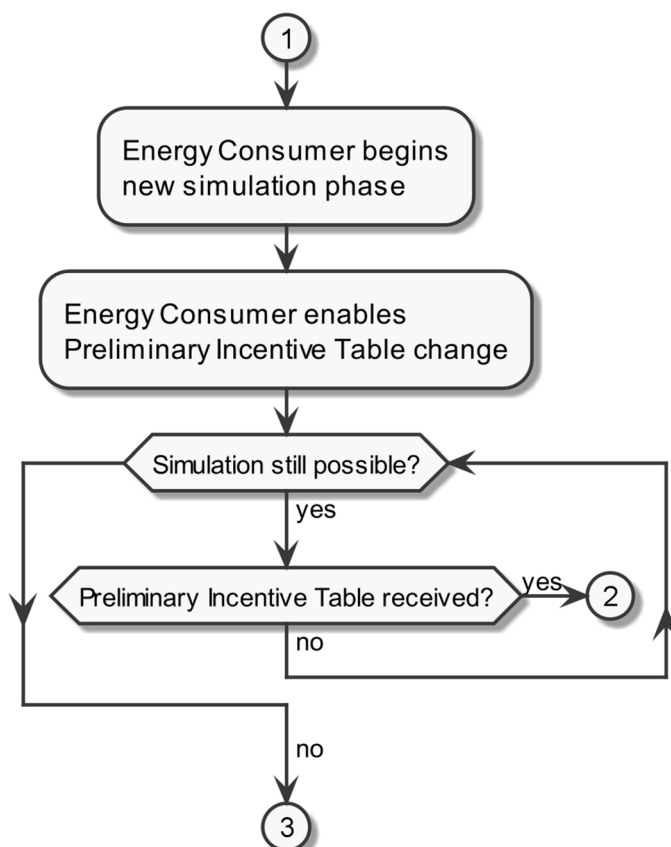


Figure 21 — Activity begin diagram of Scenario 3

Step 1 (Energy Consumer begins new simulation phase):

Actor Energy Consumer is currently able to permit a negotiation of preliminary data.

NOTE The Actor Energy Consumer's possibility to abort the simulation phase is given in subsequent steps.

Step 2 (Enable Preliminary Incentive Table change):

The Actor Energy Consumer SHALL allow Actor CCM to modify or create Actor Energy Consumer's Preliminary Incentive Table.

Step 3 (Wait for Preliminary Incentive Table or Abort):

As long as Actor Energy Consumer does not need to abort the simulation phase, it waits to receive a valid update of the Preliminary Incentive Table.

If Actor CCM submits a Preliminary Incentive Table, it waits for a minimum period of `TIMEOUT_INCENTIVE_PLAN = 60s` to get a proper Preliminary Power Plan.

If the Actor Energy Consumer receives a valid update of the Preliminary Incentive Table, the Actor Energy Consumer SHALL continue as specified in 7.4.5.3.1.2.

If the Actor Energy Consumer needs to abort the simulation phase (see 7.4.5.3.1.4) before it received a Preliminary Incentive Table, it SHALL continue as specified in 7.4.5.3.1.3.

7.4.5.3.1.3 Activity branch “Update of Preliminary Power Plan” ②

The Actor Energy Consumer is ready to update its Preliminary Power Plan as shown in Figure 22.

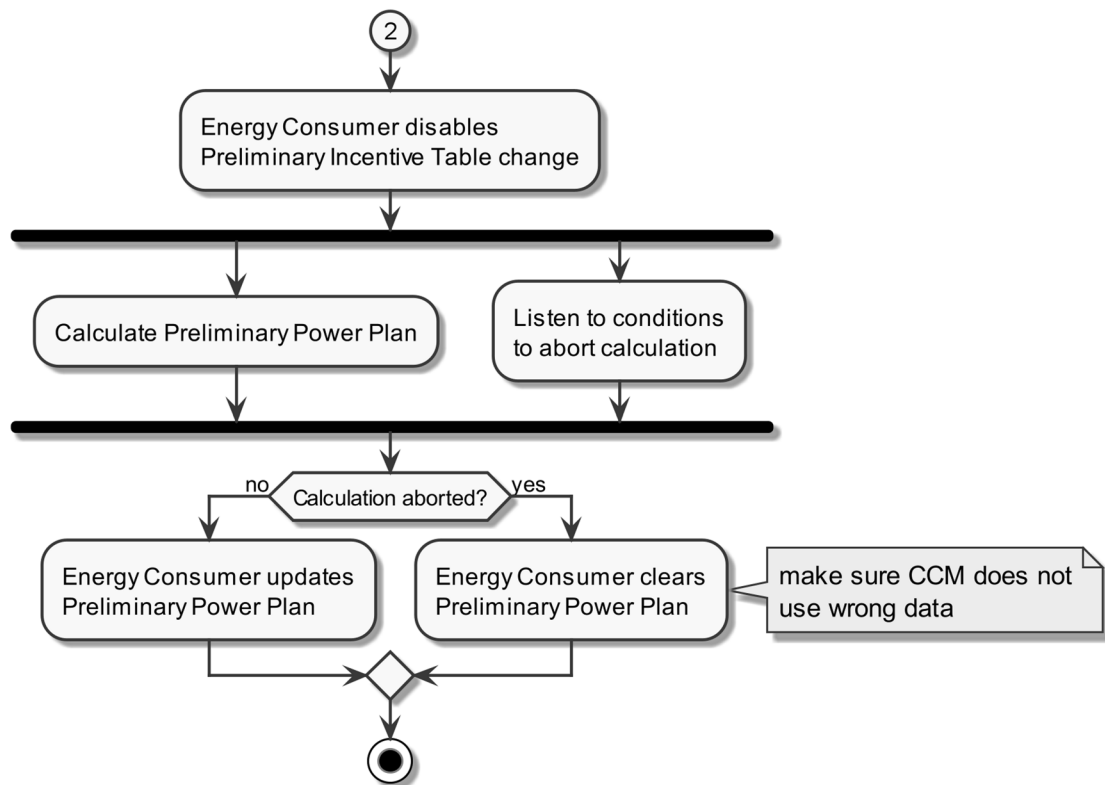


Figure 22 — Activity branch “Update of Preliminary Power Plan” diagram of Scenario 3

Step 1 (Energy Consumer disables Preliminary Incentive Table change):

The Actor Energy Consumer SHALL NOT allow Actor CCM to modify or create Actor Energy Consumer's Preliminary Incentive Table.

Step 2 (Calculate Preliminary Power Plan, Listen to conditions to abort calculation):

The Actor Energy Consumer SHALL begin to calculate its Preliminary Power Plan. The Actor Energy Consumer MAY abort the calculation if conditions require an abortion (see 7.4.5.3.1.4).

This step ends as soon as the calculation completed successfully or the calculation was aborted.

Typically, the following (non-exhaustive) list should be used by the Actor Energy Consumer for the calculation:

1. The Preliminary Incentive Table (used for an optimization algorithm).
2. The current or anticipated energy demand (required energy incl. time frame to fulfil a task).
3. Any further constraints (imposed power limitation, for example).

Step 3 (Update or clear Preliminary Power Plan):

If the calculation was aborted in step 2:

In this case, Actor Energy Consumer SHALL delete all power values from its Preliminary Power Plan. This corresponds to an “empty” Preliminary Power Plan.

If the calculation completed successfully in step 2:

In this case, Actor Energy Consumer SHALL updates its Preliminary Power Plan accordingly.

Both cases end the Scenario 3. The Actor Energy Consumer MAY trigger the Scenario 3, again.

7.4.5.3.1.4 Activity branch “Disable simulation phase” ③

This is a case where Actor Energy Consumer needs to stop the simulation phase before it received a Preliminary Incentive Table. The process to stop the simulation phase is shown in Figure 23.

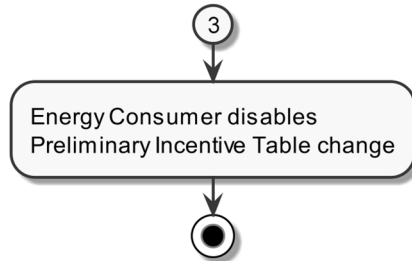


Figure 23 — Activity branch “Disable simulation phase” diagram of Scenario 3

Step 1 (Energy Consumer disables Preliminary Incentive Table change):

The Actor Energy Consumer SHALL NOT allow Actor CCM to modify or create Actor Energy Consumer's Preliminary Incentive Table.

This ends Scenario 3. The Actor Energy Consumer MAY trigger the Scenario 3, again.

7.4.5.3.1.5 Abortion of simulation phase

This is an informative subclause.

There are basically three situations where Actor Energy Consumer may need to abort a simulation phase:

1. Impossibility of concurrent calculations:

Actor Energy Consumer may enable Scenario 2 as well as 3 in parallel. However, this does not mean that Actor Energy Consumer is also capable of executing calculations of Scenario 3 in parallel to Scenario 2. If it is not capable of parallel calculations, Actor Energy Consumer SHALL set the data point “Concurrent negotiation capability” accordingly, as described in Scenario 1. As Scenario 2 has a higher priority than Scenario 3, the receipt of a Committed Incentive Table would require the abortion of the simulation phase.

2. Scenario 2 invalidates the current calculation of Scenario 3:

Actor Energy Consumer may enable Scenario 2 as well as 3 in parallel and may also be able of parallel calculations in general. However, the completion of a calculation for Scenario 2 (i.e. the Committed power Plan) may alter the device's state in a way that assumptions applied for the parallel calculation of Scenario 3 (i.e. the Preliminary Power Plan) are not valid anymore and cannot be completed in a meaningful way.

3. Other changes of internal conditions:

Actor Energy Consumer may be in a state where the execution of a simulation phase is not useful or even not possible.

7.4.5.3.2 Conditions

Triggering Event:

This Scenario is triggered by Actor Energy Consumer to permit Actor CCM making use of a simulation phase to find a potential schedule for Actor Energy Consumer's current or imminent energy demand based upon preliminary incentives.

Pre-condition:

The Actor CCM knows the negotiation options of Actor Energy Consumer from Scenario 1.

914 The Actor Energy Consumer has no or “old” preliminary incentives for the required period.

915 **Post-condition:**

916 In case of success, the Actor Energy Consumer received updated preliminary incentives for a certain period
917 and did provide an appropriate Preliminary Power Plan.

918 For error cases or the abortion of the simulation phase, consider 7.4.5.3.1.

919 **7.4.5.4 Scenario 4 – Unsolicited Update of Committed Incentive Table**

920 **7.4.5.4.1 Description**

921 Unlike Scenario 2, Scenario 4 enables Actor Energy Consumer to receive unsolicited updates of the Committed
922 Incentive Table. Such updates can help Actor Energy Consumer to decide whether it should trigger Scenario 2
923 or 3, e.g.

924 Actor Energy Consumer SHALL permit Actor CCM to update the Committed Incentive Table. But unlike
925 Scenario 2, Actor Energy Consumer SHALL NOT explicitly request to receive a valid Committed Incentive Table.

926 Actor Energy Consumer MAY disable the possibility to receive updates of the Committed Incentive Table any
927 time. This ends Scenario 4.

928 Unlike Scenario 2, the receipt of an unsolicited Committed Incentive Table SHALL NOT be used to update the
929 Committed Power Plan directly – Actor Energy Consumer needs to decide whether to trigger Scenario 2, for
930 example.

931 **7.4.5.4.2 Conditions**

932 **Triggering Event:**

933 This Scenario is triggered by Actor Energy Consumer.

934 **Pre-condition:**

935 Scenario 2 is currently NOT executed.

936 Scenario 4 is currently NOT blocked by timer WAIT_INCENTIVE_WRITEABLE from Scenario 2.

937 The Actor Energy Consumer has no or “old” incentives for the required period.

938 **Post-condition:**

939 In case of success, the Actor Energy Consumer received updated incentives for a certain period.

940 **7.4.5.5 Scenario 5 – Unsolicited Update of Committed Power Plan**

941 **7.4.5.5.1 Description**

942 Unlike Scenario 2, Scenario 5 enables Actor CCM to receive unsolicited updates of Actor Energy Consumer's
943 Committed Power Plan, but only if and only as long as the error case of Scenario 2 persists (see 7.4.5.2.1.3).
944 Such updates can help Actor CCM for its energy management task even if Scenario 2 can currently not be
945 executed.

946 If this Scenario is supported and the pre-condition (see below) is fulfilled: Actor Energy Consumer SHALL update
947 its Committed Power Plan if it anticipates substantial deviations from the already announced power values.

948 **7.4.5.5.2 Conditions**

949 **Triggering Event:**

950 This Scenario is triggered by Actor Energy Consumer.

Pre-condition:

The error case of Scenario 2 persists (see 7.4.5.2.1.3) and Scenario 2 is currently NOT executed: This means that Actor Energy Consumer SHALL NOT execute Scenario 5 if it is currently blocked by Scenario 2, but it MAY execute Scenario 5 otherwise if the error case of Scenario 2 still persists.

The Actor Energy Consumer has valid incentives for the required period.

Post-condition:

In case of success, the Actor CCM received an updated Committed Power Plan for a certain period.

7.4.6 Scenarios and Use Case Functions (UCFs)

For each scenario, the “primary” Use Case Functions are given according to Table 8.

Table 8 — Scenarios and primary Use Case Functions (UCFs)

Scenario		Primary Use Case Functions
1	Announcement of negotiation options	UCF_Device_Configuration
2	Negotiation of Committed Data	UCF_Incentive_Table UCF_Consumption_Curve
3	Negotiation of Preliminary Data	UCF_Incentive_Table UCF_Consumption_Curve
4	Unsolicited Update of Committed Incentive Table	UCF_Incentive_Table
5	Unsolicited Update of Committed Power Plan	UCF_Consumption_Curve

7.4.7 Dependencies to other Use Cases**7.4.7.1 “Monitoring of Power Consumption”**

The Use Case “Monitoring of Power Consumption” enables Actor CCM to monitor the actual power consumption or production of the Actor Energy Consumer. With regards to this Use Case, the data point “Total active power” of Use Case “Monitoring of Power Consumption” is of special interest.

The Actor CCM SHOULD support the Use Case “Monitoring of Power Consumption”. In this case, the Actor CCM of this Use Case acts as Actor Monitoring Appliance within the Use Case “Monitoring of Power Consumption”.

The Actor Energy Consumer SHOULD support the Use Case “Monitoring of Power Consumption”. In this case, the Actor Energy Consumer of this Use Case acts as Actor Monitored Unit within the Use Case “Monitoring of Power Consumption”.

7.4.8 Assumptions and Prerequisites

None.

7.5 Install/Remove Device**7.5.1 General**

Inform CCM about availability of a Device and register at the CCM. The device might provide customer data if required for individual features.

7.5.2 Actors**7.5.2.1 General**

The following actors participate in this use case:

7.5.2.2 CCM

The CCM actor performs energy management tasks. It receives demands, configurations, and schedules from smart appliances.

7.5.2.3 Device

A smart device needs to be registered with the CCM so it can be monitored and controlled.

7.5.2.4 User

A human being.

7.5.3 Scenario Overview

The following Scenarios apply to this Use case (see Figure 24):

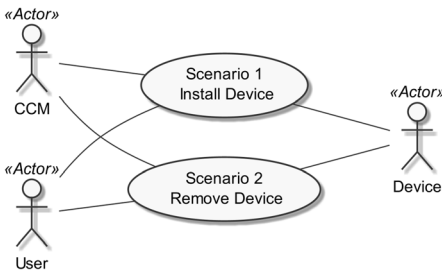


Figure 24 — Install/Remove Device Scenario overview

7.5.4 Scenario support requirements

Table 9 below lists the requirements for each actor needed to support the scenarios listed.

Table 9 — Install/Remove Device Scenario implementation requirements for Actors

Scenario number	Scenario name	CCM	Device
1	Install Device	M	M
2	Remove Device	M	M

7.5.5 Scenario Flow

The following Figure 25 shows the usual order of scenarios.

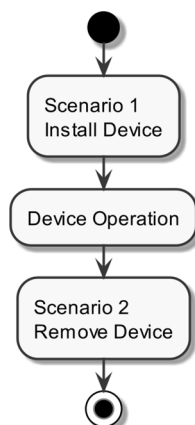


Figure 25 — Scenario Flow for Install/Remove Device

7.5.6 Scenario details

7.5.6.1 Scenario 1 – Install Smart Appliance - Registration process

7.5.6.1.1 Description

Before the Device can communicate with the CCM, the User needs to initiate its registration.

7.5.6.1.2 Conditions

Triggering Event:

The Scenario is typically triggered by the user connecting the Device to the CCM and initiating the registration process.

Pre-condition:

The CCM does not know the Device.

Post-condition:

The CCM does know the Device, allowing it to control and monitor it.

7.5.6.2 Scenario 2 – Remove Smart Appliance

7.5.6.2.1 Description

When the Device is no longer needed, the user can de-register it from the CCM.

7.5.6.2.2 Conditions

Triggering Event:

The Scenario is typically triggered by the user disconnecting the Device from the CCM and possibly initiating the de-registration process.

Pre-condition:

The CCM knows the Device.

Post-condition:

The CCM no longer knows the Device.

7.5.7 Scenarios and Use Case Functions (UCFs)

For each scenario, the “primary” Use Case Functions are given according to Table 10.

1024

Table 10 — Scenarios and primary Use Case Functions (UCFs)

Scenario	Primary Use Case Functions
Scenario 1 Install Device	UCF_Device_Connected
Scenario 2 Remove Device	UCF_Device_Connected

1025 **7.5.8 Dependencies to other Use Cases**

1026 None.

1027 **7.5.9 Assumptions and Prerequisites**

1028 None.

1029 **7.6 Limitation of Power Consumption**1030 **7.6.1 General**

1031 This Use Case describes how an Actor CCM manages the maximum power consumption or production of an
 1032 Actor Controllable System (CS) to achieve, e.g. the following goals:

- 1033 1. Grid stabilization;
- 1034 2. Prevention of overload in the low-voltage distribution network;
- 1035 3. Prevention of exceeding the maximum value of the grid connection point (technical or contractual).

1036 The following mechanisms are utilized within this Use Case:

- 1037 a) Active Power Limit: The Active Power Limit allows to set a limit for the maximum active (real) power
 1038 consumption or production of a Controllable System. The Active Power Limit is typically used to improve
 1039 grid stability by reducing the consumption or production of the Controllable System. The Active Power Limit
 1040 may have a validity-duration of the limit.
- 1041 b) Failsafe Power Limits: If the Controllable System does not receive any Heartbeats from the CCM for more
 1042 than 120 seconds (e.g. due to interrupted connectivity), the Failsafe Power Limits are used as fallback.
 1043 They are intended to prevent overloads in case of connectivity problems or during the soft start after a
 1044 (local) blackout situation. The Failsafe Power Limits are initially configured in the CS and can be read by
 1045 the CCM. The CCM MAY change the value of the Failsafe Power Limits. The Controllable System SHALL
 1046 remain in the failsafe state for at least the duration specified in the configuration value Failsafe duration
 1047 minimum. The vendor may choose a default value in the range of 2 h to 24 hours. The CCM can change
 1048 this duration as required in the range of 2 hours to 24 hours.

1049 Additional information is given within the constraints section:

- 1050 — Power consumption nominal max: The nominal maximum active power the Controllable System is able to
 1051 consume.

1052 The nominal maximum value for consumption can be used to calculate the Active Power Limit for the CS, if the
 1053 CCM receives a percentage value from outside (see below).

1054 The CS SHOULD store the values of all Scenarios persistently so they can be used after any kind of reboot.

1055 Figure 26 depicts the high-level information exchange between the CCM and the Controllable System.

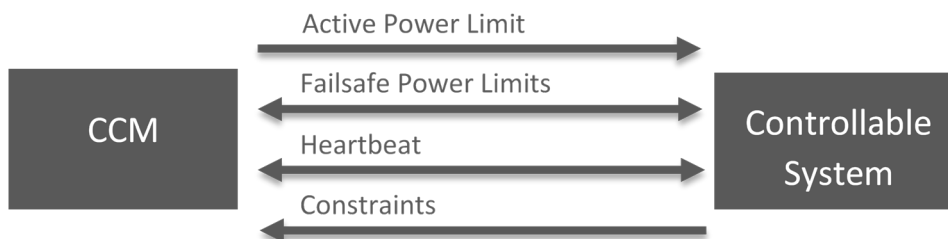


Figure 26 — High-Level Use Case functionality overview

In the context of this document, this Use Case is used in a Customer Connectivity Manager (CCM):

— The CCM itself receives the limits e.g. from a logic within the GCP.

— The CS is controlled by the CCM.

The CCM manages other devices that implemented the Actor Controllable System.

Depending on the status of the Heartbeat and the Active Power Limit the following behaviour can be expected at the CS, as shown in Table 11:

Table 11 — Controllable System power limitation behaviour

Heartbeat	Active Power Limit	CS behaviour
Received in time	Inactive	Power not limited
	Active, but duration expired	Power not limited
	Active (duration not expired / no duration defined)	Limited by Active Power Limit
Not received in time	Don't care	Limited by Failsafe Power Limits

If the Controllable System is not limited, it follows its normal operation, without the necessity to curtail the consumption or production of the CS.

After a normal reset (e.g. switched off by the user or because of a blown fuse), the CS SHOULD begin with a limited consumption or production stated in the Failsafe Power Limits. Only after the heartbeat and a first power limit (which can be deactivated or higher than the normal consumption or production of the Controllable System) are received, the CS starts with its (normal) consumption or production (if admitted by the power limit).

If upon receipt of the Active Power Limit the CS evaluates its inability to apply the limit, the CS SHALL inform the CCM that the limit is rejected. This may happen e.g. due to interrupted connectivity with managed consumers, unexpected change in the unmanaged load or a known baseload that is higher than the limit.

The CCM SHOULD monitor the actual power consumption of the CS (see “Monitoring of Power Consumption”). The Controllable System SHOULD provide its actual power consumption. The Use Case “Monitoring of Power Consumption” (see 7.10) SHALL be used by the CS.

The Controllable System can leave the failsafe state in two cases:

— Upon receipt of a Heartbeat from the CCM and a following power limit

— After expiry of the Failsafe duration minimum

After restoration of communication, the CCM SHALL send a valid power limit within 60 s to the CS after having determined that its last Heartbeat was received by the CS successfully.

For load control of devices running power sequences, refer to 7.3.