

ACI 313-16

An ACI Standard

Design Specification for Concrete Silos and Stacking Tubes for Storing Granular Materials (ACI 313-16) and Commentary

Reported by ACI Committee 313



American Concrete Institute
Always Advancing



Documents

Document Sharing Hub



Design Specification for Concrete Silos and Stacking Tubes for Storing Granular Materials (ACI 313-16) and Commentary

Copyright by the American Concrete Institute, Farmington Hills, MI. All rights reserved. This material may not be reproduced or copied, in whole or part, in any printed, mechanical, electronic, film, or other distribution and storage media, without the written consent of ACI.

The technical committees responsible for ACI committee reports and standards strive to avoid ambiguities, omissions, and errors in these documents. In spite of these efforts, the users of ACI documents occasionally find information or requirements that may be subject to more than one interpretation or may be incomplete or incorrect. Users who have suggestions for the improvement of ACI documents are requested to contact ACI via the errata website at <http://concrete.org/Publications/DocumentErrata.aspx>. Proper use of this document includes periodically checking for errata for the most up-to-date revisions.

ACI committee documents are intended for the use of individuals who are competent to evaluate the significance and limitations of its content and recommendations and who will accept responsibility for the application of the material it contains. Individuals who use this publication in any way assume all risk and accept total responsibility for the application and use of this information.

All information in this publication is provided “as is” without warranty of any kind, either express or implied, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose or non-infringement.

ACI and its members disclaim liability for damages of any kind, including any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of this publication.

It is the responsibility of the user of this document to establish health and safety practices appropriate to the specific circumstances involved with its use. ACI does not make any representations with regard to health and safety issues and the use of this document. The user must determine the applicability of all regulatory limitations before applying the document and must comply with all applicable laws and regulations, including but not limited to, United States Occupational Safety and Health Administration (OSHA) health and safety standards.

Participation by governmental representatives in the work of the American Concrete Institute and in the development of Institute standards does not constitute governmental endorsement of ACI or the standards that it develops.

Order information: ACI documents are available in print, by download, through electronic subscription, or reprint and may be obtained by contacting ACI.

Most ACI standards and committee reports are gathered together in the annually revised ACI Manual of Concrete Practice (MCP).

American Concrete Institute
38800 Country Club Drive
Farmington Hills, MI 48331
Phone: +1.248.848.3700
Fax: +1.248.848.3701

www.concrete.org

Design Specification for Concrete Silos and Stacking Tubes for Storing Granular Materials (ACI 313-16) and Commentary

An ACI Standard

Reported by ACI Committee 313

Shahriar Shahriar, Chair

William D. Arockiasamy
William H. Bokhoven
Patrick B. Ebner
Stephen G. Frankosky

Timothy A. Harvey
F. Thomas Johnston
David C. Mattes
Rodney M. Nohr

John E. Sadler
Michael D. Simpson
Bill J. Socha

Consulting Members
Donald Midgley
John M. Rotter
Jonathan G. M. Wood

This Design Specification provides material, design, and construction requirements for concrete silos, stave silos, and stacking tubes for storing granular materials, including design and construction requirements for cast-in-place or precast and conventionally reinforced or post-tensioned silos.

Silos and stacking tubes require design considerations not encountered in building structures. While this Design Specification refers to ACI 318 for several requirements, static and dynamic loading from funnel, mass, concentric, and asymmetric flow in silos; special loadings on stacking tubes; and seismic and hopper bottom design are also included.

Keywords: asymmetric flow; bins; funnel flow; granular materials; hoppers; mass flow; silos.

ACI 313-16 supersedes ACI 313-97, was adopted May 24, 2016, and was published August 2016.

Copyright © 2016, American Concrete Institute.

All rights reserved including rights of reproduction and use in any form or by any means, including the making of copies by any photo process, or by electronic or mechanical device, printed, written, or oral, or recording in any form or by any means, or for use in any knowledge or retrieval system or device, unless permission in writing is obtained from the copyright proprietors.

Documents
Document Sharing Hub

CONTENTS

Introduction, p. 3

CHAPTER 1—GENERAL , p. 4

- 1.1—Scope , p. 4
- 1.2—Documentation , p. 4
- 1.3—Regulations/inspections , p. 5

CHAPTER 2—NOTATION AND DEFINITIONS , p. 6

- 2.1—Notation , p. 6
- 2.2—Definitions , p. 9

CHAPTER 3—REFERENCE STANDARDS, p. 11

CHAPTER 4—MATERIALS , p. 12

- 4.1—General, p. 12
- 4.2—Cement and concrete , p. 12
- 4.3—Aggregates, p. 12
- 4.4—Water, p. 12
- 4.5—Admixtures , p. 12
- 4.6—Reinforcement, p. 13
- 4.7—Precast concrete staves, p. 13
- 4.8—Tests of materials , p. 13

CHAPTER 5—CONSTRUCTION REQUIREMENTS , p. 14

- 5.1—General, p. 14
- 5.2—Sampling and testing concrete, p. 14
- 5.3—Details and placement of reinforcement , p. 14
- 5.4—Forms , p. 14
- 5.5—Concrete placing and finishing , p. 14
- 5.6—Concrete protection and curing , p. 15
- 5.7—Lining and coating, p. 16
- 5.8—Tolerances for slipformed and jumpformed structures, p. 16

CHAPTER 6—DESIGN , p. 17

- 6.1—General , p. 17
- 6.2—Details and placement of reinforcement , p. 18
- 6.3—Loads , p. 22
- 6.4—Wall design , p. 32
- 6.5—Hopper design , p. 39
- 6.6—Column design , p. 40
- 6.7—Foundation design , p. 40

CHAPTER 7—CONCRETE STAVE INDUSTRIAL SILOS , p. 42

- 7.1—Scope, p. 42
- 7.2—Coatings , p. 42
- 7.3—Erection tolerances , p. 42
- 7.4—Wall design , p. 43
- 7.5—Hoops for stave silos , p. 46
- 7.6—Concrete stave and stave assembly testing , p. 46

CHAPTER 8—POST-TENSIONED CONCRETE SILOS , p. 50

- 8.1—Scope , p. 50
- 8.2—Post-tensioning systems , p. 50
- 8.3—Tendon systems , p. 50
- 8.4—Bonded tendons , p. 52
- 8.5—Unbonded tendons , p. 52
- 8.6—Post-tensioning ducts , p. 52
- 8.7—Details and location of nonprestressed reinforcement, p. 53
- 8.8—Wall openings, p. 53
- 8.9—Stressing records, p. 54
- 8.10—Design , p. 54
- 8.11—Vertical bending moment and shear due to post-tensioning , p. 55
- 8.12—Tolerances, p. 56

CHAPTER 9—CONCRETE STACKING TUBES , p. 57

- 9.1—Scope, p. 57
- 9.2—General layout , p. 57
- 9.3—Loads , p. 59
- 9.4—Load factors and strength reduction factors , p. 59
- 9.5—Tube wall design, p. 60
- 9.6—Foundation or reclaim tunnel , p. 60

CHAPTER R10—COMMENTARY REFERENCES, p. 61

- Authored documents, p. 61

SPECIFICATION**COMMENTARY****Introduction**

This commentary presents considerations and assumptions in developing provisions of the Design Specification. Initial filling (static) pressures are exerted by the stored material at rest. Flow pressures differ from initial filling pressures, and are exerted by the stored material during flow.

Comments on specific provisions of the Design Specification are made using corresponding chapter and section numbers of the Design Specification. References cited in the commentary are listed in [Chapter R10](#).

SPECIFICATION

CHAPTER 1—GENERAL

1.1—Scope

This Design Specification covers the design and construction of concrete silos, stave silos, and stacking tubes for storing granular materials.

For the design of these structures, initial filling and flow loading shall be considered. This Design Specification is supplemental to ACI 318-11 for design and ACI 301-10 for construction, where indicated.

1.1.1 Specific inclusions—Industrial stave silos for storage of granular materials are included in these specifications. The application to precast concrete is limited to industrial stave silos. Effect of hot stored material is included in this Design Specification.

1.1.2 Specific exclusions—Silos for storing silage are not included in this Design Specification. This Design Specification does not consider any chemical reaction between the silo reinforced concrete and the stored granular material. Three-dimensional dome structures are not included in this Design Specification.

1.1.3 Hierarchy of standards—Whenever the requirements of this Design Specification are more stringent than the requirements of ACI 318-11, the requirements of this Design Specification shall govern.

1.2—Documentation

1.2.1 Project drawings and specifications for silos shall be prepared under the direct supervision of and bear the seal of the licensed design professional.

1.2.2 Contract documents shall show all features of the work, naming the stored materials assumed in the design and stating their properties, including the size and position of all structural components, connections, and reinforcing steel; the specified concrete strength; and the specified strength or grade of reinforcement and structural steel.

COMMENTARY

CHAPTER R1—GENERAL

R1.1—Scope

Silo failures have alerted licensed design professionals to the inadequacy of designing silos for only static pressures due to stored material at rest. Those failures motivated researchers to study the variations of pressures and flow of materials. Research has established that pressures during withdrawal can be significantly higher (Turitzin 1963; Pieper and Wenzel 1964; Reimbert and Reimbert 1980, 1987) or significantly lower than those present when the material is at rest. The excess (above static pressure) is called overpressure, and the shortfall is called underpressure. One of the causes of overpressure is the switch from active to passive conditions that occurs during material withdrawal (Jenike et al. 1972). Underpressures can occur at a flow channel, and overpressures can occur away from the flow channel at the same level (Colijn and Peschl 1981; Homes 1972; Bernache 1968). Underpressures concurrent with overpressures cause circumferential bending in the silo wall. Impact during filling can cause the total pressure to exceed the static pressure. Whereas overpressures and underpressures are generally important in deeper silos, impact loading is usually significant for shallow bins (bunkers) in which large volumes of material are dumped suddenly. Some stored granular materials have sufficient cohesion and unconfined compressive strength to form large arches or cavities during discharge. The collapse of these arches and cavities can develop significant impact loads when the material above strikes the wall or floor. This document does not provide methods for calculation of such loads. The probability of forming arches and cavities can be reduced by using hopper and discharge equipment designs that reflect results from flowability testing of the stored material.

Overpressure, underpressure, or impact should be considered in the structural design of silos if present. Initial filling (static) pressures are exerted by the stored material at rest. Flow pressures differ from initial filling pressures, and are exerted by the stored material during flow.

R1.2—Documentation

Silos and stacking tubes are unusual structures. Many licensed design professionals are unfamiliar with computation of their design loads and with their design and detail requirements. Design computations and the preparation of project drawings and project specifications for silos, bunkers, and stacking tubes should be done under the supervision of a licensed design professional experienced in the design of such structures.

If possible, the properties of the stored materials to be used in the design should be obtained from tests of the actual materials to be stored or from records of tests of similar materials previously stored. Properties assumed in the design should be stated in the contract documents.

SPECIFICATION

1.3—Regulations/inspections

1.3.1 This Design Specification supplements legally adopted building codes in all matters pertaining to concrete silo and stacking tubes for storing granular materials.

1.3.2 Construction shall be inspected throughout the various work stages by or under the supervision of a licensed design professional or a qualified inspector.

COMMENTARY

R1.3—Regulations/inspections

Investigations of silo damage and deterioration failures frequently reveal omitted or mislocated reinforcement, inadequate or misaligned reinforcement splices, and inadequate reinforcement cover.

The quality and performance of slipformed concrete silo structures depend on construction workmanship. The best materials and design will not be effective unless the construction is in accordance with project documents. For example, during slipform operations, the proper placement of reinforcement is a critical task. In addition, horizontal lifts, buckled jackrods, and concrete delaminations can occur if the concrete sets too rapidly, the slipform is improperly battered, or jackrods are overloaded. Similar considerations are associated with the quality and performance of jumpformed concrete silos.

Continuous field inspection of construction activity helps ensure conformance with the project requirements. The committee recommends that field inspection of construction activity be performed by or under the supervision of a licensed design professional. Field inspection of construction activity does not relieve the contractor of the responsibility to conform to project requirements.

SPECIFICATION

CHAPTER 2—NOTATION AND DEFINITIONS

2.1—Notation

The terms in this list are used in the Design Specification and as needed in the commentary.

A	= effective tension area of concrete surrounding the tension reinforcement and having the same centroid as that reinforcement, divided by the number of bars; when the reinforcement consists of different bar sizes, the number of bars shall be calculated as the total area of reinforcement divided by the area of the largest bar used
$\bar{A}$	= critical ratio
A_f	= area of flow channel, ft ² (m ²)
A_s	= area of hoop or tension reinforcement, in. ² (mm ²) per unit height
A_{silo}	= cross-sectional area of silo, ft ² (m ²)
A_w	= effective cross-sectional area (horizontal projection) of an individual stave, in. ² (mm ²)
B	= constant used to compute n
C_d	= overpressure factor
D	= silo inside diameter, ft (m)
D'	= effective outlet diameter, ft (m)
d_c	= distance from bar centerline towards surface, used to calculate design crack width, in
E	= effects of earthquake or related internal moments and forces
E_c	= modulus of elasticity for concrete, psi (MPa)
E_{cc}	= distance from center of silo to center of outlet (eccentricity of outlet), ft (m)
E_p	= modulus of elasticity of post-tensioning reinforcement, psi (MPa)
E_s	= modulus of elasticity of reinforcement, psi (MPa)
e_o	= distance from center of silo to apex of eccentric hopper, ft (m)
F_u	= required hoop or horizontal tensile strength, lb (N), per unit height of wall
f'_c	= specified compressive strength of concrete, psi (MPa)
f_{ci}	= compressive strength of concrete at time of initial stressing, psi (MPa)
f_{pu}	= specified tensile strength of prestressing steel, wires, or strands, psi (MPa)
f_{py}	= specified yield strength of prestressing steel, wires, or strands, psi (MPa)
f_s	= calculated stress in reinforcement at initial (filling) pressures, psi (MPa)
f_{se}	= effective stress in post-tensioning reinforcement (after allowance for all losses), psi (MPa)
f_y	= specified yield strength of nonprestressed reinforcement, psi (MPa)
H'	= depth from the effective depth of the repose volume to the apex of the hopper, ft (m)
h	= wall thickness, in. (mm)
h'_b	= height from hopper apex to effective outlet of hopper, ft (m)

COMMENTARY

CHAPTER R2—NOTATION AND DEFINITIONS

R2.1—Commentary notation

The following additional terms are used in the Commentary, but are not used in the Design Specification.

A'_s	= compression steel area, in. ² (mm ²)
d	= effective depth of flexural member, in. (mm)
d', d''	= distances from face of wall to center of reinforcement nearest that face, in. (mm)
EI	= flexural stiffness of wall, lb-in. ² (N-mm ²)
e, e', e''	= eccentricities, in. (mm)
F	= radial force on the wall that results from the stressing (jacking) of the tendon, lb (N)
K_t	= thermal resistance of wall, °F/in. (°C/mm)
M_{max}	= maximum vertical bending moment per unit width of wall
M_u	= required flexural strength per unit height of wall, ft-lb (m-N)
M_y	= vertical bending moment per unit width caused by force F on the wall, ft-lb (m-N)
T_i	= temperature inside mass of stored material, °F (°C)
T_o	= exterior dry-bulb temperature, °F (°C)
V_{hy}	= shear per unit width caused by a force F on the wall, lb (N)
V_{max}	= maximum shear force per unit width of wall, lb (N)
$\bar{Y}_b$	= diameter of the flow channel at Level B, ft (m)
y	= distance above and below tendon location, in. (mm)
β_p	= factor relating to Poisson's ratio, silo diameter, and wall thickness
θ_c, θ_p	= angle of conical or plane flow hopper with vertical, deg
θ_f	= angle of flow channel with vertical, deg
θ_t	= angle of flow channel axis with vertical, deg

SPECIFICATION

COMMENTARY

- h_h = height of hopper from apex to top of hopper, ft (m)
 h_s = height of sloping top surface (repose volume) of stored material, ft (m)
 h_{st} = height of stave specimen for compression test, in. (mm)
 h_y = depth below top of hopper to point in question, ft (m)
 h_1 = core wall thickness, in. (mm).
 k = ratio of p to q
 L_w = length of design flow channel perimeter in contact with wall, ft (m)
 l_{stg} = amount of vertical stagger between horizontal stave joints, ft (m)
 M_{neg} = negative (tension outside face) circumferential bending moments caused by asymmetric filling or emptying under service load conditions, ft-lb (m-N) per unit height
 M_{pos} = positive (tension inside face) circumferential bending moment caused by asymmetric filling or emptying under service load conditions, ft-lb (m-N) per unit height
 M_t = thermal bending moment per unit width of height of wall (consistent units), ft-lb/ft (m-N/m)
 M_0 = circumferential bending strength for an assembled circular group of silo staves, ft-lb (m-N) per unit height; the statical moment or sum of absolute values of $M_{0,pos}$ and $M_{0,neg}$
 $M_{0,neg}$ = calculated bending strength in the negative moment zone (tension on the outside face), ft-lb (m-N) per unit height
 $M_{0,pos}$ = calculated bending strength in the positive moment zone (tension on the inside face), ft-lb (m-N) per unit height
 n = constant used to compute q_y
 P_f = perimeter of flow channel, ft (m)
 P_{nw} = nominal axial load strength of cast in place silo walls per unit area, psi (MPa), or hollow stave silo walls per unit perimeter, lb/ft (N/m)
 $P_{nw,buckling}$ = nominal axial load strength of the stave wall per unit perimeter as limited by buckling, lb/ft (N/m)
 $P_{nw,joint}$ = nominal axial load strength of the stave wall per unit perimeter as limited by the stave joint, lb/ft (N/m)
 $P_{nw,stave}$ = nominal axial load strength of the stave wall per unit perimeter as limited by the shape of the stave, lb/ft (N/m)
 p = initial (filling) horizontal pressure due to stored material, lb/ft² (N/m²)
 p_f = horizontal design pressure in a flow channel, lb/ft² (N/m²)
 p_n = pressure normal to hopper surface at a depth below top of hopper, lb/ft² (N/m²)
 p_s = horizontal pressure within static material around flow channel(s), lb/ft² (N/m²)
 q = initial (filling) vertical pressure due to stored material, lb/ft² (N/m²)

SPECIFICATION

COMMENTARY

q_f	= vertical design pressure in the nonconverging section of the flow channel, lb/ft ² (N/m ²)
q_o	= initial vertical pressure at top of hopper, lb/ft ² (N/m ²)
q_s	= vertical pressure within static material around flow channels(s), lb/ft ² (N/m ²)
q_y	= vertical pressure at a distance h_y below top of hopper, lb/ft ² (N/m ²)
R_H	= ratio of area to perimeter of horizontal cross section of storage space, ft (m)
R_f	= ratio of area to perimeter for a flow channel, ft (m)
r	= silo inside radius, ft (m)
s	= bar spacing, in. (mm)
V	= total vertical frictional force on a unit length of wall perimeter above the section in question, lb (N)
v_n	= initial friction force per unit area between stored material and hopper surface, lb (N)
W	= wind load, or related internal moments and forces, lb/ft ² (N/m ²)
W_t	= tension force per stave from wind overturning moment, lb (N)
w	= design crack width, in. (mm)
w_s	= width of stave specimen for compression test, in. (mm)
w_p	= strength level wind pressure, lb/ft ² (N/m ²)
Y	= depth from the effective depth of the repose volume to point in question, ft (m)
$\bar{Y}$	= diameter of flow channel, ft (m)
Y_{EFF}	= vertical distance from the top of the discharge opening to the effective depth of the repose volume, ft (m)
y	= depth below top surface of a flow channel, ft (m)
α	= angle of hopper from the horizontal
α_c	= thermal coefficient of expansion of concrete, in./in. per °F (mm/mm per °C)
β	= constant used to compute B
δ	= effective angle of internal friction, deg
γ	= weight per unit volume for stored material, lb/ft ³ (kg/m ³)
ϕ	= strength reduction factor or angle of internal friction, deg
ϕ'	= angle of friction between material and wall and hopper surface, deg
μ'	= coefficient of friction between stored material and wall or hopper surface
μ_f'	= coefficient of friction of flowing material
ν	= Poisson's ratio for concrete, assumed to be 0.2
θ	= angle of hopper from vertical, degrees
θ_f	= angle of flow channel with vertical, deg
ρ	= angle of repose, deg
ΔT	= temperature difference between inside face and outside face of wall, °F (°C)

SPECIFICATION

COMMENTARY

2.2—Definitions

The following terms are defined for general use in this Design Specification. Specialized definitions appear in individual chapters.

aeration pressures—air pressures caused by injection of air for mixing or homogenizing, or for initiating flow near discharge openings.

asymmetric flow—flow pattern in which the flow channel is not centrally located.

concentric flow—flow pattern in which the flow channel has a vertical axis of symmetry coinciding with that of the silo and discharge outlet.

discharging—process of emptying the material by gravity from the silo.

effective angle of internal friction (δ)—a measure of combined friction and cohesion of material; approximately equal to the angle of internal friction for free-flowing or coarse materials, but significantly higher for cohesive materials.

expanded flow—flow pattern in which a mass flow hopper is used directly over the outlet to expand the flow channel diameter beyond the maximum stable rathole diameter.

expanded flow silo—silo equipped with a self-cleaning hopper section above a mass flow hopper section.

filling—the process of loading the material by gravity into the silo.

flow channel—channel of moving material that forms above a discharge opening.

flow pressures—stored material pressures during flow.

funnel flow—flow pattern in which the flow channel forms within the material; material surrounding the flow channel remains at rest during discharge.

hopper—converging portion at the bottom of a silo making the transition from a silo to one or more outlets.

initial filling pressure—pressures during filling and settling of material, but before discharge has started.

jackrod—vertical steel pipe or solid rod embedded in a silo wall, used in slipform silo construction; slipform lifting jacks are supported by and ride up the jackrods, advancing the wall forms vertically.

jumpformed silo—silo constructed typically using three segments of fixed forms; the bottom segment is moved to the top position after the concrete at bottom level gains adequate strength.

mass flow—flow pattern in which all material is in motion whenever any of it is withdrawn.

overpressure factor—multiplier applied to the initial filling pressure to provide for pressure increases that occur during discharge.

plane flow hopper—hopper with two flat sloping sides and two vertical ends.

pressure zone—that zone within the silo subjected either directly or indirectly to pressure from stored material.

pyramidal hopper—hopper with polygonal flat sloping sides.

R2.2—Definitions

SPECIFICATION

COMMENTARY

rathole—flow channel configuration that, when formed in surrounding static material, remains stable after the contents of the flow channel have been discharged.

self-cleaning hopper—hopper that is sloped steeply enough to cause material, which has remained static during funnel flow, to slide off of it when the silo is completely discharged.

stable arch dimension—maximum dimension up to which a material arch can form and remain stable.

silo—any upright enclosed concrete structure with a bulk granular material stored against vertical walls.

slipformed silo—silo constructed using a continuously moving form.

stacking tube—relatively slender, free-standing tubular concrete structure used to lower material in a controlled fashion from a conveyor to a storage pile.

stave silo—silo assembled from small precast concrete units called staves, usually having tongue-and-groove joints, and held together by exterior adjustable steel hoops.

tilted hopper—hopper that has its axis tilted from the vertical.

transition hopper—hopper with flat and curved surfaces.

silo—the term “silo” includes both deep bins and shallow bins; the latter are sometimes called bunkers. Wherever the term “silo” is used in the Design Specification, it should be interpreted as meaning a silo, bin, or bunker of any proportion, shallow or deep.

stave silo—stave silos are used principally in agriculture for storing chopped silage, but are used for storing granular materials in other industries. The Design Specification covers industrial stave silos, but does not cover silos storing silage. The methods of computing pressures due to granular material are the same for industrial stave silos as for other silos. Design of stave silos, however, relies heavily on strength and stiffness tests; consequently, the Design Specification includes several design requirements that are peculiar to stave silos only.

SPECIFICATION

COMMENTARY

CHAPTER 3—REFERENCE STANDARDS*American Concrete Institute*

ACI 117-10(15)—Specification for Tolerances for Concrete Construction and Materials and Commentary

ACI 301-10—Specifications for Structural Concrete

ACI 318-11—Building Code Requirements for Structural Concrete and Commentary

ACI 305.1-14—Guide to Hot Weather Concreting

ACI 306.1-90(02)—Guide to Cold Weather Concreting

ACI 308.1-11—Standard Specification for Curing Concrete

American Society of Civil Engineers

ASCE/SEI 7-10—Minimum Design Loads for Buildings and Other Structures

ASTM International

ASTM A47/A47M-99(2014)—Standard Specification for Ferritic Malleable Iron Castings

ASTM A123/A123M-15—Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

ASTM A153/A153M-16—Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

ASTM C55-14—Standard Specification for Concrete Building Brick

ASTM C309-11—Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete

ASTM C426-15—Standard Test Method for Linear Drying Shrinkage of Concrete Masonry Units

Post-Tensioning Institute

PTI M55.1-12—Specification for Grouting of Post-Tensioned Structures

SPECIFICATION

CHAPTER 4—MATERIALS

4.1—General

All materials and tests of materials shall conform to the ASTM standards specified in ACI 301. For materials that are not specifically provided for, the design strength and permissible stress shall be established by tests.

4.2—Cement and concrete

4.2.1 Cement shall conform to the requirements of ACI 301-10, 4.2.

4.2.2 The minimum specified concrete compressive strength shall be 4000 psi (28 MPa) at 28 days.

4.2.3 Concrete that will be exposed to cycles of freezing and thawing shall be air entrained. Air content shall not exceed that required by ACI 301-10, 4.2.2.4.

4.3—Aggregates

The nominal maximum dimension of aggregate for slipformed silo walls shall not exceed one-eighth of the narrowest dimension between sides of wall forms, or exceed three-fourths of the minimum clear distance between individual reinforcing bars or vertical bundles of bars.

4.4—Water

Water used in mixing concrete shall conform to the requirements of ACI 301-10, 4.2.1.3.

4.5—Admixtures

Admixtures used in concrete shall conform to the requirements of ACI 301-10, 4.2.2.5, and shall be subject to prior approval by the licensed design professional.

COMMENTARY

CHAPTER R4—MATERIALS

R4.2—Cement and concrete

R4.2.1 To minimize variations in concrete color, cement for exposed parts of silos or bunkers should be of one particular type and brand of cement.

In general, the types of cement permitted by ACI 318-11, 3.2, are permitted herein, except as noted. There is some variation in the physical properties of each type of cement. Type I cement that is very finely ground (a fineness modulus greater than 2000) can act in the same manner as Type III and cause placing difficulties by accelerating the initial set during a slipform operation.

Types IS and IP are not recommended for use in slipform or jumpform concrete because of long initial setting time and low strength at an early age.

R4.2.2 Performance and design requirements for concrete mixtures should meet the requirements of ACI 301-10. Concrete mixtures should be proportioned to produce a required average compressive strength determined in accordance with ACI 301-10.

Historically, concrete mixtures with a slump of 4 in. (100 mm) have been used successfully for construction of slipformed silo walls under a variety of field conditions. High-range water-reducing admixtures have been successfully used to increase slump without adversely affecting the water-cement ratio (w/c) or strength.

R4.2.3 Concrete is considered exposed to freezing and thawing when, in a cold climate, the concrete is in almost continuous contact with moisture before freezing. Entrained air in concrete will provide some protection against damage from freezing.

R4.5—Admixtures

The use of admixtures in concrete silo walls is a common method of controlling the initial set of concrete. Therefore, the rate at which slipforms or jumpforms may be raised

SPECIFICATION

COMMENTARY

4.6—Reinforcement

4.6.1 Hoop post-tensioning rods shall be hot-dip galvanized or otherwise protected from corrosion. Post-tensioning connectors, nuts, and lugs shall either be hot-dip galvanized or made from corrosion-resistant castings or corrosion-resistant steel. Galvanizing shall conform to **ASTM A123/A123M** or **ASTM A153/A153M**.

4.6.2 Malleable iron castings shall conform to **ASTM A47/A47M**.

4.6.3 Steel reinforcement shall conform to the requirements of **ACI 301**.

4.7—Precast concrete staves

4.7.1 Materials for staves manufactured by the dry-pack vibratory method shall conform to **ASTM C55**.

4.7.2 Before a stave is used in a silo, drying shrinkage shall have caused the stave to come within 10 percent of its equilibrium weight and length as defined by **ASTM C426**.

4.8—Tests of materials

4.8.1 Tests of materials used in construction shall be specified by the licensed design professional.

4.8.2 Tests of materials shall be in accordance with the applicable ASTM standards. The complete record of such tests shall be available for inspection during the progress of the work, and a complete set of these documents shall be preserved by the licensed design professional for at least 2 years after completion of the construction.

4.8.3 All material tests shall be performed by an accredited testing agency.

4.8.4 The results of mechanical tests of silo staves and stave assemblies shall be used as criteria for structural design of stave silos. Application of the test results is given in **Chapter 7**.

During the construction operation, the amount of admixture can be adjusted in the field to suit the ambient conditions and so maintain a constant rate of rise for the forms.

Concrete that includes accelerators or retarders should be placed in uniform depths in the slipform or jumpforms to maintain a consistent time of initial set at any wall elevation.

When using admixtures, trial batches should be made and evaluated for potential problems with set and for adverse effects on the slipform operation.

Similarly, admixtures are commonly used in mortar, parge coatings, protective coatings, and grout for post-tensioning ducts. Trial batches should be made and evaluated when required to substantiate mixture designs.

R4.8—Test of materials

R4.8.2 Completion of the construction is the date at which the owner accepts the project or when the certificate of occupancy is issued, whichever date is later.

SPECIFICATION

CHAPTER 5—CONSTRUCTION REQUIREMENTS

5.1—General

Concrete quality control, methods of determining concrete strength, field tests, concrete proportions and consistency, mixing and placing, formwork, details of reinforcement, and structural members shall conform to [ACI 301](#), except as specified otherwise herein.

5.2—Sampling and testing concrete

Concrete shall be evaluated and tested in accordance with [ACI 301-10](#), 1.6.

5.3—Details and placement of reinforcement

Horizontal reinforcement shall be accurately placed and adequately supported prior to placing concrete. It shall be physically secured to vertical reinforcement or other adequate supports to prevent displacement during movement of forms or placement of concrete.

5.4—Forms

5.4.1 Calculations and drawings for the design, fabrication, and erection of a slipform or jumpform system for a silo or stacking tube wall shall bear the registration stamp of an engineer licensed to practice in the location where the silo or stacking tube wall is to be constructed.

5.5—Concrete placing and finishing

5.5.1 Construction joints in slipform silo walls shall not be permitted unless shown on the contract documents or specifically approved by the licensed design professional responsible for the wall design. Construction joints in jumpform silo walls shall be constructed as shown on the contract documents or as required by the licensed design professional responsible for the wall design. Prior to the start of silo construction, the licensed design professional and contractor shall agree on construction details to be used in case of an unplanned construction joint. In the event of an interruption in slipform wall construction, the licensed design professional shall be notified immediately.

5.5.2 Concrete shall be deposited within 5 ft (1.5 m) of its final position in a way that will prevent segregation and shall not be worked or vibrated a distance of more than 5 ft (1.5 m) from the point of initial deposit.

COMMENTARY

CHAPTER R5—CONSTRUCTION REQUIREMENTS

R5.3—Details and placement of reinforcement

Bars that are not tied can move during vibration or be mislocated. Failures have occurred because of incorrect spacing of horizontal steel; therefore, a positive means of controlling location is essential. The practice of floating hoop reinforcement in slip form construction is prohibited.

R5.4—Forms

Guidelines for the design, fabrication, erection, and operation of a slipform or jumpform system for a silo or stacking tube wall are given in [ACI 347](#).

Slipform and jumpform systems should be designed, constructed, and operated by or under the supervision of persons experienced in this type of construction. [Hurd \(2005\)](#) and [Camellerie \(1959, 1971\)](#) contain a general description of the vertical slipform process.

The advancement rate of the slipform system should be slow enough that concrete exposed below the bottom of the forms is capable of supporting itself and the concrete placed above it, but rapid enough to prevent concrete from bonding to the forms.

The advancement of the jumpform system should be scheduled or timed such that hardened concrete is capable of supporting the jumpform system, the construction loads, and the fresh concrete placed above it.

R5.5—Concrete placing and finishing

During the construction of slipformed silo or stacking tube walls, the concrete placing operation can be interrupted due to an unavoidable field condition, resulting in an unplanned construction joint.

During the construction of a jumpform wall, construction joints occur at regular intervals, as defined by the height of the jumpform lifts. The construction details of such expected construction joints are typically shown on the contract documents.

The licensed design professional should consider construction joint orientation, reinforcing bar splices, surface cleanliness, and joint preparation when preparing the contract documents.

SPECIFICATION

5.5.3 Wall surface voids shall be filled where required in accordance with **ACI 301-10**, 5.3.3.3, with mortar made from the same materials (cement, sand, and water) as used in the wall. For slipform construction, wall surface voids shall be filled within 2 hours after forms have been raised or removed. For jumpform construction, wall surface voids shall be filled when required by the contract documents, or as required by the licensed design professional responsible for the wall design.

5.5.4 Surface finish shall be specified in the contract documents.

5.5.5 Surface fins and protrusions in jumpform walls shall be removed where they exceed the Class D Formed Surface Irregularities provision, as defined by **ACI 117-10**, 4.8.3, or as required by the licensed design professional responsible for the wall design.

5.6—Concrete protection and curing

5.6.1 Cold weather concrete placement shall comply with **ACI 306.1**. The requirements of **ACI 306.1** govern over those of **ACI 301**.

5.6.2 Hot weather concrete placement shall comply with **ACI 305.1**. The requirements of **ACI 305.1** govern over those of **ACI 301**.

5.6.3 Curing methods shall comply with **ACI 308.1**.

5.6.4 For slipform construction, curing measures shall be provided before the exposed exterior wall surfaces begin to dry, but after the patching and finishing are completed. For

COMMENTARY

R5.5.4 Slipformed walls are typically finished as the bottom of the moving slipform is raised, exposing newly placed concrete. Jumpform wall surfaces are typically not exposed until several hours or days after the concrete is poured. Jumpform wall surfaces typically have an as-cast finish, as described by **ACI 117**.

R5.5.5 Small surface fins or protrusions are typically removed from jumpform walls only when they interfere with form placement or they constitute a hazard. The Class D irregularity provisions of **ACI 117-10**, 4.8.3, allow irregularities of approximately 1 in. (25 mm) size.

R5.6—Concrete protection and curing

R5.6.1 A guide to cold weather concreting is presented in **ACI 306R**.

R5.6.2 A guide to hot weather concreting is presented in **ACI 305R**.

R5.6.3 Procedures for curing of concrete are presented in **ACI 308.1-11**. Curing compounds, where required, are applied to walls after any surface voids are addressed.

In some cases, atmospheric conditions are such that excess water from bleeding of concrete as placed in the forms is sufficient to keep the surface of the newly formed walls moist for several days, and no additional provisions for curing are needed. Where deck forms or other enclosures retain the atmosphere in a highly humid condition, no additional curing measures are needed. Construction during moderate to high relative humidity and low to moderate winds will typically not require additional curing methods. These conditions are very often true of the inside face of silo wall construction.

When the aforementioned conditions cannot be met, a curing compound may be used or a water spray or mist applied to keep the wall surface continuously moist. The amount of water should be carefully regulated to avoid damage to the concrete by erosion. If a curing compound is not used, the concrete should not be allowed to have a dry surface for at least 5 days.

SPECIFICATION

COMMENTARY

jumpform construction, curing shall be provided as soon as possible after forms are advanced and any incidental patching is completed. Wall surfaces shall be protected against damage from rain, running water, or freezing.

5.6.5 Curing compound shall not be used on the inside surfaces of silos, unless required by the contract documents, or unless specified by the licensed design professional. When curing of interior surfaces is required, nontoxic compounds and ventilation or other methods of ensuring worker safety shall be used.

5.6.6 Curing compound shall be a nonstaining, resin-base type conforming to **ASTM C309** and shall be applied in accordance with the manufacturer's instructions. Wax-based curing compounds shall not be permitted. If a curing compound is used on the interior surfaces of a silo to be used for storing materials for food, the compound shall be nontoxic, nonflaking, and otherwise nondeleterious.

5.7—Lining and coating

5.7.1 Lining or coating material used to protect the structure from wear and abrasion, or used to enhance flowability, shall be noncontaminating to the stored material.

5.7.2 Lining materials installed in sheet form shall be fastened to the structure with all seams sealed to prevent entrance of stored material behind the lining.

5.8—Tolerances for slipformed and jumpformed structures

5.8.1 Translation of silo centerline or spiraling of the silo wall about the vertical axis of the silo (lateral departure from the nominal centerline):

For heights 100 ft (30 m) or less: ± 3 in. (75 mm)

For heights greater than 100 ft (30 m): 1/400 times the height, but not more than ± 4 in. (100 mm)

5.8.2 Inside diameter or distance between walls:

For each 10 ft (3 m) of diameter or distance: $\pm 1/2$ in. (12 mm) but not more than ± 3 in. (75 mm)

5.8.3 Cross-sectional dimensions of:

Walls: $+1$ in. (25 mm), $-3/8$ in. (10 mm)

5.8.4 Deviation from the specified locations of openings, embedded plates, or anchors:

Vertical: ± 3 in. (75 mm)

Horizontal: ± 1 in. (25 mm)

5.8.5 Other tolerances shall be in accordance with ACI 117. Plus (+) tolerance increases the amount or dimension to which it applies, or raises a deviation from level. Minus (−) tolerance decreases the amount or dimension to which it applies, or lowers a deviation from level. Where only one signed tolerance is specified (+ or −), there is no tolerance in the opposing direction.

R5.6.5 Curing compound may be undesirable on the interior surfaces that are in contact with the stored material. As the curing compound is abraded, it contaminates the stored material. Such compound, if present, modifies the friction between the interior wall surface and the stored material.

SPECIFICATION

CHAPTER 6—DESIGN

6.1—General

6.1.1 Silos (Fig. 6.1.1) and stacking tubes shall be designed to resist all applicable forces, including:

- (a) Dead loads: weight of the structure and attached items including equipment dead loads supported by the structure
- (b) Live loads: granular material loads including those from flow, floor, and roof live loads; equipment loads; positive and negative air pressure; and forces from earth or from materials stored against the outside of the silo or stacking tube
- (c) Wind, snow, and seismic loads
- (d) Thermal forces, including those due to temperature differences between inside and outside faces of wall
- (e) Forces due to differential settlement of foundations

COMMENTARY

CHAPTER R6—DESIGN

R6.1—General

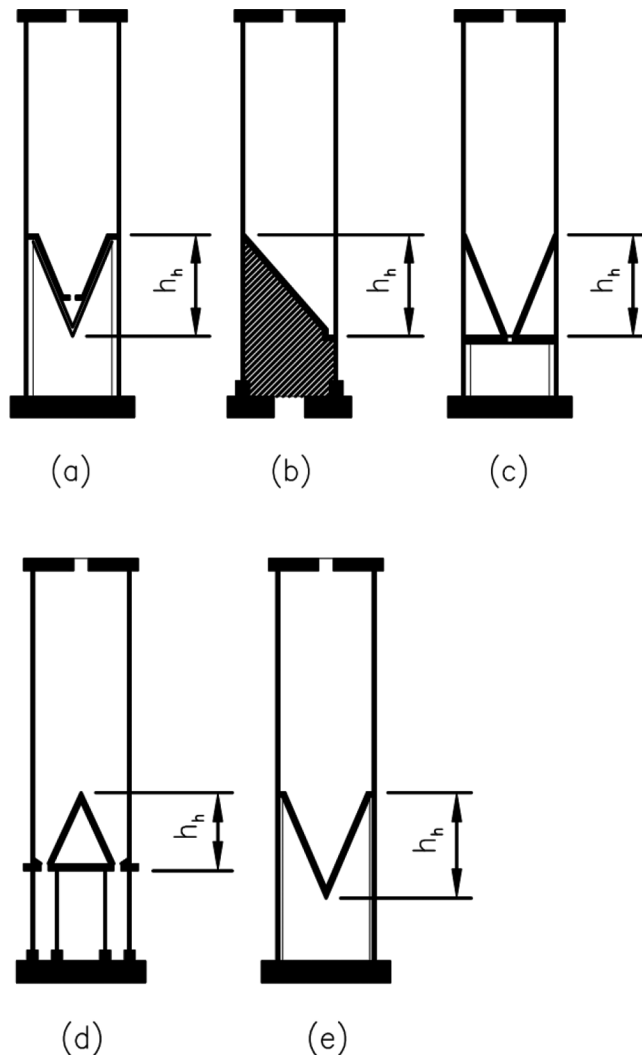


Fig. 6.1.1—Examples of vertical cross sections of silos used to determine the height of the hopper. Other configurations are possible.

SPECIFICATION

COMMENTARY

6.1.2 Structural members shall be proportioned for adequate strength and stiffness. Pressures and forces shall be calculated and combined using methods provided in Chapter 6 for silos and **Chapter 9** for stacking tubes. Design of reinforced or prestressed concrete members, such as foundations, floors, and roofs not covered herein shall be in accordance with ACI 318-11.

6.1.3 The thickness of silo or stacking tube walls shall not be less than 6 in. (150 mm) for reinforced cast-in-place and precast concrete. The thickness of precast staves used in externally reinforced stave silo walls shall not be less than 2 in. (50 mm).

6.1.4 Load factors shall conform to **ACI 318-11**, 9.2, and this section. Strength reduction factors shall conform to ACI 318-11, 9.3.

6.1.4.1 The load factor for granular material shall be:

- (a) 1.6 for load combinations with dead and live loads that do not include wind (W) or seismic (E) loads
- (b) 1.2 for load combinations that include wind (W) or seismic (E) loads, where the wind (W) or seismic (E) loads are additive to the gravity loads
- (c) 0.9 for load combinations that include seismic (E) loads, where the seismic (E) loads counteract gravity loads

6.2—Details and placement of reinforcement

6.2.1 In slipformed concrete structures, the reinforcement size, spacing, configuration, dimensions, and lap splice details shall be such that the placement of reinforcement is achieved without any omission and without any interference with the slipform operation.

R6.1.3 Experience has shown that slipformed walls thinner than 6 in. (150 mm) are difficult to construct. When slipforming thin walls, concrete can more easily be lifted by friction between the forms and the freshly-placed concrete, causing horizontal and vertical planes of weakness or actual separation.

R6.2—Details and placement of reinforcement

R6.2.1 Figures R6.2.1a and R6.2.1b illustrate typical reinforcing patterns at wall intersections, ring beams, and wall openings. The illustrated details are not mandatory, but are examples to aid the licensed design professional.

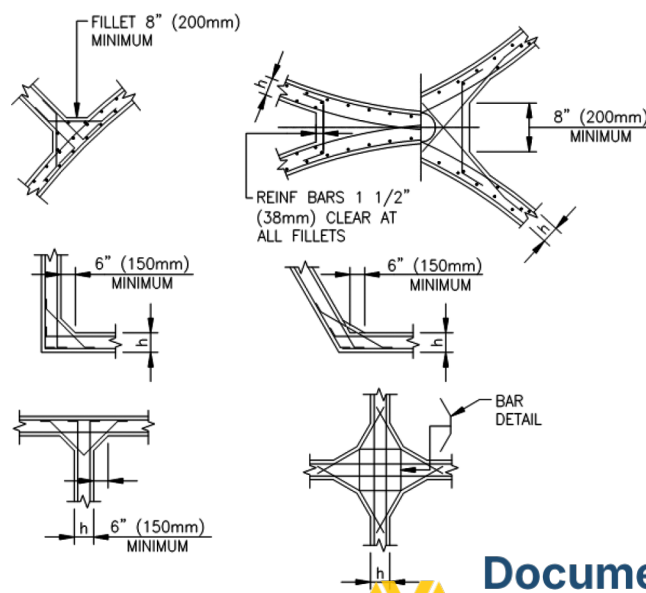


Fig. R6.2.1a—Reinforcement pattern at intersections

SPECIFICATION

COMMENTARY

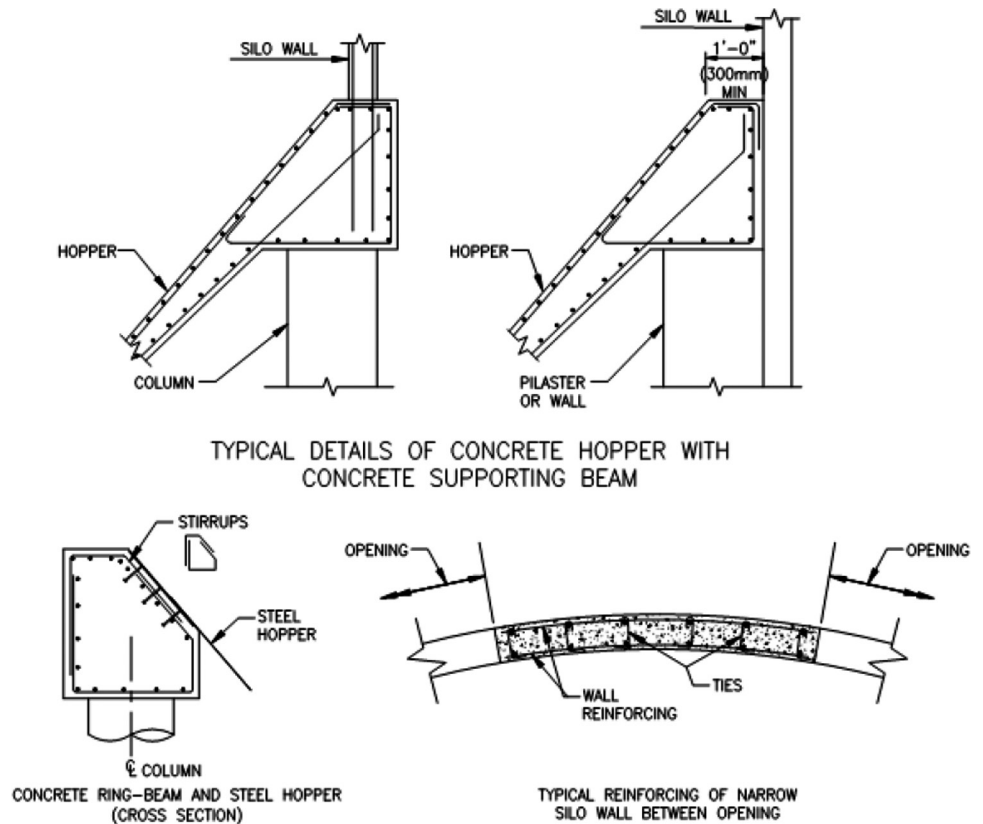


Fig. R6.2.1b—Miscellaneous details.

6.2.2 Provide reinforcement to resist axial forces, tension forces due to bending moments, and shear forces, taking into consideration the effect of the connection of the wall to the roof, silo bottom, and adjoining walls in silo groups.

R6.2.2 The licensed design professional should be aware that bending moments may occur in silos of any shape. Bending moments will be present in walls of silo groups, especially when some cells are full and some are empty (Safarian and Harris 1984; Stalnaker and Harris 1992). They may also occur when flow patterns change or when some cells are subjected to initial (filling) pressures whereas others are subjected to design (flow) pressures (Jenike 1977).

The walls of interstices and pocket bins will have axial forces, bending moments, and shear forces, and may cause axial forces, bending moments, and shear forces in the silo walls to which they are attached.

Wall bending moments in a circular silo are difficult to evaluate accurately, but do exist. They result from non-uniform pressures around the circumference during discharge, especially eccentric discharge. They can also result from temperature differential, structural continuity, and materials stored against the outside of the silo.

6.2.3 Provide horizontal ties to resist forces that tend to separate adjoining silos of monolithically constructed silo groups.

R6.2.3 Forces that tend to separate silos of monolithically constructed silo groups can occur when some cells are full and some empty (Safarian and Harris 1984), such as four empty cells with a full interstice. They can also result from non-uniform pressure around the circumference, thermal expansion, seismic loading, or differential foundation settlement.