

AS/NZS 60990:2002

IEC 60990:1999

Reconfirmed 2016

AS/NZS 60990

Australian/New Zealand Standard™

Methods of measurement of touch current and protective conductor current



Standards Australia



AS/NZS 60990:2002

This Joint Australian/New Zealand Standard was prepared by Joint Technical Committee TE-001, Safety of Electronic Equipment. It was approved on behalf of the Council of Standards Australia on 12 November 2001 and on behalf of the Council of Standards New Zealand on 16 October 2001. It was published on 4 January 2002.

The following interests are represented on Committee TE-001:

Australian Chamber of Commerce and Industry
Australian Communications Authority
Australian Electrical and Electronic Manufacturers Association
Australian Information Industry Association
Consumer Electronics Association of New Zealand
Consumer Electronics Suppliers Association
Department of Defence, Australia
Electrical Compliance Testing Association
Electrical regulatory authorities
Electricity Supply Association of Australia
Federation of Australian Commercial Television Stations
International Accreditation, New Zealand
Ministry of Economic Development, New Zealand
Telstra

Keeping Standards up-to-date

Standards are living documents which reflect progress in science, technology and systems. To maintain their currency, all Standards are periodically reviewed, and new editions are published. Between editions, amendments may be issued. Standards may also be withdrawn. It is important that readers assure themselves they are using a current Standard, which should include any amendments which may have been published since the Standard was purchased.

Detailed information about joint Australian/New Zealand Standards can be found by visiting the Standards Australia web site at www.standards.com.au or Standards New Zealand web site at www.standards.co.nz and looking up the relevant Standard in the on-line catalogue.

Alternatively, both organizations publish an annual printed Catalogue with full details of all current Standards. For more frequent listings or notification of revisions, amendments and withdrawals, Standards Australia and Standards New Zealand offer a number of update options. For information about these services, users should contact their respective national Standards organization.

We also welcome suggestions for improvement in our Standards, and especially encourage readers to notify us immediately of any apparent inaccuracies or ambiguities. Please address your comments to the Chief Executive of either Standards Australia International or Standards New Zealand at the address shown on the back cover.

This Standard was issued in draft form for comment as DR 01048.



Documents
Document Sharing Hub

STANDARDS AUSTRALIA/STANDARDS NEW ZEALAND

RECONFIRMATION

OF

AS/NZS 60990:2002

Methods of measurement of touch current and protective conductor current

RECONFIRMATION NOTICE

Technical Committee TE-001 has reviewed the content of this publication and in accordance with Standards Australia procedures for reconfirmation, it has been determined that the publication is still valid and does not require change.

Certain documents referenced in the publication may have been amended since the original date of publication. Users are advised to ensure that they are using the latest versions of such documents as appropriate, unless advised otherwise in this Reconfirmation Notice.

Approved for reconfirmation in accordance with Standards Australia procedures for reconfirmation on 19 May 2016.

Approved for reconfirmation in New Zealand on behalf of the Standards Council of New Zealand on 5 July 2016.

The following are represented on Technical Committee TE-001:

Australian Chamber of Commerce and Industry
Australian Communications and Media Authority
Australian Industry Group
Australian Information Industry Association
CHOICE
Consumer Electronics Association of New Zealand
Consumer Electronics Suppliers Association
Electrical Compliance Testing Association
Electrical Regulatory Authorities Council
Energy Efficiency & Conservation Authority of New Zealand
Engineers Australia
Free TV Australia
National Retail Association
New Zealand testing Interests
Worksafe New Zealand

NOTES

Australian/New Zealand Standard™

Methods of measurement of touch current and protective conductor current

First published as AS/NZS 60990:2002.

COPYRIGHT

© Standards Australia/Standards New Zealand

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher.

Jointly published by Standards Australia International Ltd, GPO Box 5420, Sydney, NSW 2001 and Standards New Zealand, Private Bag 2439, Wellington 6020

ISBN 0 7337 4250 5

PREFACE

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee TE-001, *Safety of Electronic Equipment*.

The objective of this Standard is to define methods for measuring electric currents flowing through the human body or through a protective conductor.

This Standard is identical with, and has been reproduced from, IEC 60990:1999, *Methods of measurement of touch current and protective conductor current*.

A reference to an International Standard identified in the Normative References Clause by strikethrough (~~example~~) is replaced by a reference to the Australian or Australian/New Zealand Standard(s) listed immediately thereafter and identified by shading (**example**). Where the struck-through referenced document and the referenced Australian or Australian/New Zealand Standard are identical, this is indicated in parenthesis after the title of the latter.

In this Standard, the following print types are used:

- requirements proper: in arial type;
- *test specifications: in italic type;*
- explanatory matter: in smaller arial type.

As this Standard is reproduced from an International Standard, the following applies:

- (a) Its number does not appear on each page of text and its identity is shown only on the cover and title page.
- (b) In the source text ‘this standard’ should read ‘this Australian/New Zealand Standard’.
- (c) A full point should be substituted for a comma when referring to a decimal marker.

The terms ‘normative’ and ‘informative’ have been used in this Standard to define the application of the annex to which they apply. A normative annex is an integral part of a Standard, whereas an informative annex is only for information and guidance.

CONTENTS

	<i>Page</i>
INTRODUCTION.....	vi
Clause	
1 Scope.....	1
2 Normative references	2
3 Definitions	3
4 Test site	3
4.1 Test site environment.....	3
4.2 Test transformer.....	3
4.3 Earthed neutral conductor	3
5 Measuring equipment.....	4
5.1 Selection of measuring network.....	4
5.1.1 Perception and reaction (a.c.).....	5
5.1.2 Let-go (a.c.)	6
5.1.3 Electric burn (a.c.).....	6
5.1.4 Ripple-free d.c.....	6
5.2 Test electrodes	6
5.2.1 Construction	6
5.2.2 Connection	6
5.3 Configuration	6
5.4 Power connections during test.....	6
5.4.1 General.....	6
5.4.2 Equipment for use only on TN or TT star power distribution systems	11
5.4.3 Equipment for use on IT power distribution systems including unearthed delta systems	11
5.4.4 Equipment for use on single-phase centre-earthed power supply systems or on centre-earthed delta power supply systems	11
5.5 Supply voltage and frequency	11
5.5.1 Supply voltage.....	11
5.5.2 Supply frequency.....	12
6 Test procedure	12
6.1 General.....	12
6.1.1 Control switches, equipment and supply conditions	12
6.1.2 Use of measuring networks	12
6.2 Normal and fault conditions of equipment.....	13
6.2.1 Normal operation of equipment.....	13
6.2.2 Equipment and supply fault conditions.....	13
7 Evaluation of results.....	15
7.1 Perception, reaction and let-go.....	15
7.2 Electric burn.....	15
8 Measurement of protective conductor current.....	15
8.1 General.....	15
8.2 Multiple equipment.....	15
8.3 Measuring method.....	15

	<i>Page</i>
Annex A (normative) Equipment.....	16
Annex B (normative) Use of a conductive plane	17
Annex C (normative) Incidentally connected parts	18
Annex D (informative) Choice of current limits.....	19
Annex E (informative) Networks for use in measurement of touch current	22
Annex F (informative) Measuring network limitations and construction	24
Annex G (informative) Construction and application of touch current measuring instruments	26
Annex H (informative) Grippable part	29
Annex J (informative) AC power distribution systems (see 5.4).....	31
Annex K (informative) Routine and periodic touch current tests, and tests after repair or modification of mains operated equipment.....	37
Annex L (normative) Performance and calibration.....	38
Annex M (informative) Bibliography	43
Figure 1 Example of earthed neutral, direct supply.....	4
Figure 2 Example of earthed neutral, with transformer for isolation	4
Figure 3 Measuring network, unweighted touch current.....	5
Figure 4 Measuring network, touch current weighted for perception or reaction.....	5
Figure 5 Measuring network, touch current weighted for let-go.....	5
Figure 6 Test configuration: single-phase equipment on star TN or TT system	7
Figure 7 Test configuration: single-phase equipment on centre-earthed TN or TT system	7
Figure 8 Test configuration: single-phase equipment connected line-to-line on star TN or TT system.....	8
Figure 9 Test configuration: single-phase equipment connected line-to-neutral on star IT system	8
Figure 10 Test configuration: single-phase equipment connected line-to-line on star IT system	9
Figure 11 Test configuration: three-phase equipment on star TN or TT system	9
Figure 12 Test configuration: three-phase equipment on star IT system	10
Figure 13 Test configuration: unearthed delta system	10
Figure 14 Test configuration: three-phase equipment on centre-earthed delta system	11
Figure A.1 Equipment.....	16
Figure B.1 Equipment platform	17
Figure F.1 Frequency factor for electric burn.....	24
Figure F.2 Frequency factor for perception or reaction	24
Figure F.3 Frequency factor for let-go	25
Figure H.1 Grippable part test device	30
Figure J.1 Examples of TN-S power system.....	32
Figure J.2 Example of TN-C-S power system	33
Figure J.3 Example of TN-C power system	33
Figure J.4 Example of single-phase, 3-wire TN-C power system	34
Figure J.5 Example of 3-line and neutral TT power system	34
Figure J.6 Example of 3-line TT power system.....	35
Figure J.7 Example of 3-line (and neutral) IT power system	35
Figure J.8 Example of 3-line IT power system.....	36

Table L.1	Calculated input impedance and transfer impedance for unweighted touch current measuring network (figure 3)	38
Table L.2	Calculated input impedance and transfer impedance for perception or reaction touch current measuring network (figure 4)	39
Table L.3	Calculated input impedance and transfer impedance for let-go current measuring network (figure 5)	39
Table L.4	Output voltage to input voltage ratios for unweighted touch current measuring network (figure 3)	41
Table L.5	Output voltage to input voltage ratios for perception or reaction measuring network (figure 4)	41
Table L.6	Output voltage to input voltage ratios for let-go measuring network (figure 5)	42

INTRODUCTION

This International Standard was developed as a response to concerns arising from the advent of electronic switching techniques being broadly applied to power systems and within EQUIPMENT*, giving rise to high-frequency harmonic voltages and currents.

This standard is intended for the guidance of EQUIPMENT committees in preparing or amending the test specifications in their standards for measurement of leakage current. However the term 'leakage current' is not used for reasons explained below.

This standard was prepared under the safety pilot function assigned to TC 74, as follows:

Methods of measuring leakage current

This includes, for various types of EQUIPMENT, all aspects of what is referred to as 'leakage current', including methods of measurement of current with regard to physiological effects and for installation purposes, under normal conditions and under certain fault conditions.

The methods of measurement of leakage current described herein result from the review of IEC 60479-1 and other publications, including descriptions of earlier methods of measurement.

The following conclusions were derived from a review of the effects of leakage current:

- the primary concern for safety involves possible flow of harmful current through the human body (this current is not necessarily equal to the current flowing through a protective conductor);
- the effect of electric current on a human body is found to be somewhat more complex than was assumed during the development of earlier standards in that there are several body responses which should be considered. The most significant responses for setting limits for continuous waveforms are
 - perception,
 - reaction,
 - let-go, and
 - ELECTRIC BURN.

Each of these four body responses has a unique threshold level. There are also significant differences in the manner in which some of these thresholds vary with frequency.

Two types of current have been identified as needing separate measuring methods: TOUCH CURRENT and PROTECTIVE CONDUCTOR CURRENT.

TOUCH CURRENT only exists when a human body or a body model is a current pathway.

It was also noted that the term 'leakage current' has already been applied to several different concerns: TOUCH CURRENT, PROTECTIVE CONDUCTOR CURRENT, insulation properties, etc. Therefore, in this standard, the term 'leakage current' is not used.

* Terms in small capitals are defined in Clause 3.

Measurement of TOUCH CURRENT

In the past, EQUIPMENT standards have used two traditional techniques for measurement of leakage current. Either the actual current in the protective conductor was measured, or a simple resistor-capacitor network (representing a simple body model) was used, the leakage current being defined as the current through the resistor.

This standard provides measuring methods for the four body responses to the electric current noted above, using a more representative body model.

This body model was chosen for most common cases of electric shock in the general sense. With respect to the path of current flow and conditions of contact, a body model approximating full hand-to-hand or hand-to-foot contact in normal conditions is used. For small areas of contact (e.g. one finger contact), a different model may be appropriate.

Of the four responses, perception, reaction and let-go are related to the peak value of TOUCH CURRENT and vary with frequency. Traditionally, concerns for electric shock have dealt with sinusoidal waveforms, for which r.m.s. measurements are most convenient. Peak measurements are more appropriate for non-sinusoidal waveforms where significant values of TOUCH CURRENT are expected, but are equally suitable for sinusoidal waveforms. The networks specified for the measurement of perception, reaction and let-go currents are frequency-responsive and are so weighted that single limit power-frequency values can be specified and referenced.

ELECTRIC BURNS, however, are related to the r.m.s. value of TOUCH CURRENT, and are relatively independent of frequency. For EQUIPMENT where ELECTRIC BURNS may be of concern (see 7.2), two separate measurements are required, one in peak value for electric shock and a second in r.m.s. value for ELECTRIC BURNS.

EQUIPMENT committees should decide which physiological effects are acceptable and which are not, and then decide on limit values of current. Committees for certain types of EQUIPMENT may adopt simplified procedures based upon this standard. A discussion of limit values, based upon earlier work by various IEC EQUIPMENT committees, is provided in annex D.

Measurement of protective conductor current

In certain cases, measurement of the PROTECTIVE CONDUCTOR CURRENT of EQUIPMENT under normal operating conditions is required. Such cases include:

- selection of a residual current protection device,
- compliance with 471.3.3 of IEC 60364-7-707.

The PROTECTIVE CONDUCTOR CURRENT is measured by inserting an ammeter of negligible impedance in series with the EQUIPMENT protective earthing conductor.

A bibliography of related documents is given in annex M.

This second edition has been prepared on the basis of comments provided by users of the first edition.

Principal changes include the following:

- provision of an earthing alternative for testing, in order to accommodate some test situations;
- provision of a more detailed description of the design and calibration of the measurement network, thus allowing deletion of component tolerances from the network diagrams;

- a minor inaccuracy in one measurement method has been corrected by the inclusion of an additional calculation;
- the discussion of the physiological effects has been clarified.

STANDARDS AUSTRALIA/STANDARDS NEW ZEALAND

Australian/New Zealand Standard**Methods of measurement of touch current and protective conductor current**

1 Scope

This International Standard defines measurement methods for

- d.c. or a.c. of sinusoidal or non-sinusoidal waveform, which could flow through the human body, and
- current flowing through a protective conductor.

The measuring methods recommended for TOUCH CURRENT are based upon the possible effects of current flowing through a human body. In this standard, measurements of current through networks representing the impedance of the human body are referred to as measurements of TOUCH CURRENT. These networks are not necessarily valid for the bodies of animals.

The specification or implication of specific limit values is not within the scope of this standard. IEC 60479-1 provides information regarding the effects of current passing through the human body from which limit values may be derived.

This standard is applicable to all classes of EQUIPMENT, according to IEC 60536.

The methods of measurement in this standard are not intended to be used for

- TOUCH CURRENTS having less than 1 s duration,
- patient currents as defined in IEC 60601-1,
- a.c. at frequencies below 15 Hz,
- a.c. in combination with d.c. The use of a single network for a composite indication of the effects of combined a.c. and d.c. has not been investigated,
- currents above those chosen for ELECTRIC BURN limits.

This basic safety publication is primarily intended for use by technical committees in the preparation of standards in accordance with the principles laid down in IEC Guide 104 and ISO/IEC Guide 51. It is not intended for use by manufacturers or certification bodies.

One of the responsibilities of a technical committee is, wherever applicable, to make use of basic safety publications in the preparation of its publications. The requirements, test methods or test conditions of this basic safety publication will not apply, unless specifically referred to or included in the relevant publications.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of IEC and ISO maintain registers of currently valid International Standards.

References to International Standards that are struck through in this Clause are replaced by references to equivalent Australian or Australian/New Zealand Standards that are listed immediately thereafter and identified by shading. Any Australian or Australian/New Zealand Standard that is identical to the International Standard it replaces is appropriately identified.

IEC 60050(195):1998, *International Electrotechnical Vocabulary (IEV) – Chapter 195: Earthing and protection against electric shock*

~~IEC 60050(604):1987, *International Electrotechnical Vocabulary (IEV) – Chapter 604: Generation, transmission and distribution of electricity – Operation*~~

AS 1852.604:1988, *International electrotechnical vocabulary—Generation, transmission and distribution of electricity—Operation* (identical to IEC 60050(604):1987)

~~IEC 60309-1:1997, *Plugs, socket-outlets and couplers for industrial purposes – Part 1: General requirements*~~

AS/NZS 3123, *Approval and test specification—Plugs, socket-outlets and couplers for general industrial application*

IEC 60364-4-41:1992, *Electrical installations of buildings – Part 4: Protection for safety – Chapter 41: Protection against electric shock*

IEC 60364-7-707:1984, *Electrical installations of buildings – Part 7: Requirements for special installations or locations – Section 707: Earthing requirements for the installation of data processing equipment*

~~IEC 60479-1:1994, *Effects of current on human beings and livestock – Part 1: General aspects*~~

AS 3859, *Effects of current passing through the human body*

IEC 60536:1976, *Classification of electrical and electronic equipment with regard to protection against electric shock*

IEC 60536-2:1992, *Classification of electrical and electronic equipment with regard to protection against electric shock – Part 2: Guidelines to requirements for protection against electric shock*

IEC 61140:1997, *Protection against electric shock – Common aspects for installation and equipment*

ISO/IEC Guide 51:1990, *Guideline for the inclusion of safety aspects in standards*

IEC Guide 104:1997, *Guide to the drafting of safety standards and the role of committees with safety pilot functions and safety group functions*

3 Definitions

For the purpose of this International Standard, the following definitions apply:

3.1

touch current

electric current through a human body or through an animal body when it touches one or more accessible parts of an installation or of equipment [IEV 195-05-21]

3.2

protective conductor current

current which flows in a protective conductor

3.3

equipment

as defined in the relevant equipment standard. If not defined in the relevant equipment standard, see annex A

3.4

grippable part

part of the equipment which could supply current through the human hand to cause muscular contraction round the part and an inability to let go. Parts which are intended to be gripped with the entire hand are assumed to be grippable without further investigation (see annex H)

3.5

electric burn

burning of the skin or of an organ, caused by passing an electric current across or through the surface [IEV 604-04-18]

4 Test site

4.1 Test site environment

Test site environmental requirements shall be as specified in the EQUIPMENT standard. If limit values of less than 70 μA r.m.s. or 100 μA peak are specified, or if the EQUIPMENT contains large shields which may be driven by high-frequency signals, product committees shall refer to annex B.

4.2 Test transformer

The use of a test transformer for isolation is optional. For maximum safety, a test transformer for isolation (T2 in figure 2, T in figures 6 to 14) shall be used and the main protective earthing terminal of the EQUIPMENT under test (EUT) earthed. Any capacitive leakage in the transformer must then be taken into account. As an alternative to earthing the EUT, the test transformer secondary and the EUT shall be left floating (not earthed), in which case the capacitive leakage in the test transformer need not be taken into account.

If transformer T is not used, the EUT shall be mounted on an insulating stand and appropriate safety precautions taken, in view of the possibility of the body of the EUT being at hazardous voltage.

4.3 Earthed neutral conductor

EQUIPMENT intended for connection to a TT or TN power distribution system shall be tested with minimum voltage between neutral and earth.

NOTE – Descriptions of various power distribution systems are given in annex J.

The protective conductor and the earthed neutral conductor for the EUT should have a voltage difference of less than 1% of line-to-line voltage (see example in figure 1).

A local transformer, see 4.2, will achieve this requirement.

Alternatively, if the voltage difference is 1% or more, the following are examples of methods which, in some cases, will avoid measurement errors due to this voltage:

- connecting the terminal B electrode of the measuring instrument to the neutral terminal of the EUT instead of the protective earthing conductor (see 6.1.2) of the supply;
- connecting the earthing terminal of the EUT to the neutral conductor, instead of the protective earthing conductor, of the supply.

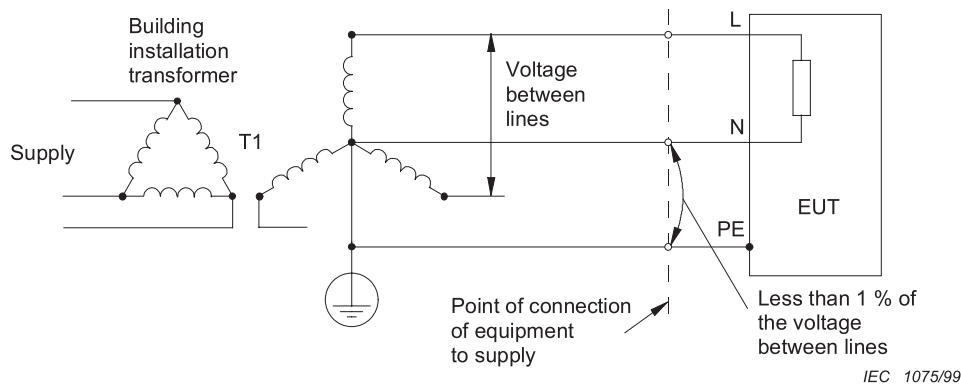


Figure 1 – Example of earthed neutral, direct supply

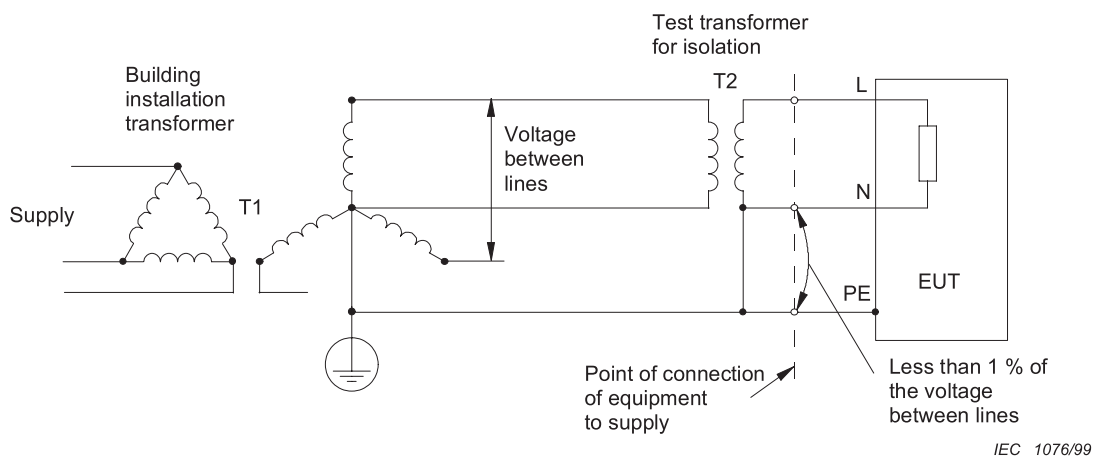


Figure 2 – Example of earthed neutral, with transformer for isolation

5 Measuring equipment

5.1 Selection of measuring network

Measurements shall be made with one of the networks of figures 3, 4 and 5.

NOTE – See annexes E, F and G for further explanation of the three networks.

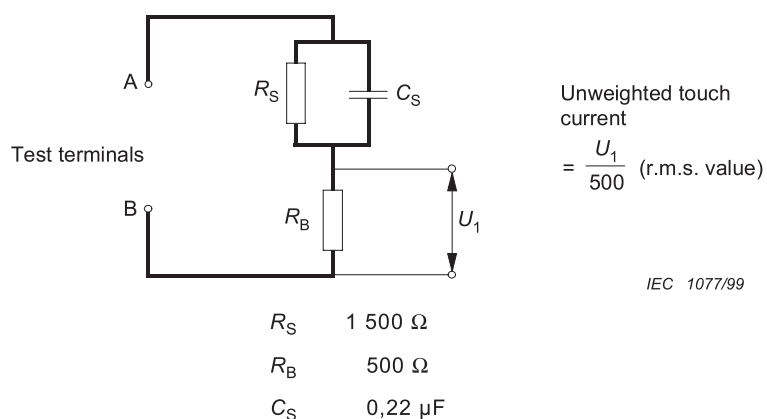


Figure 3 – Measuring network, unweighted touch current


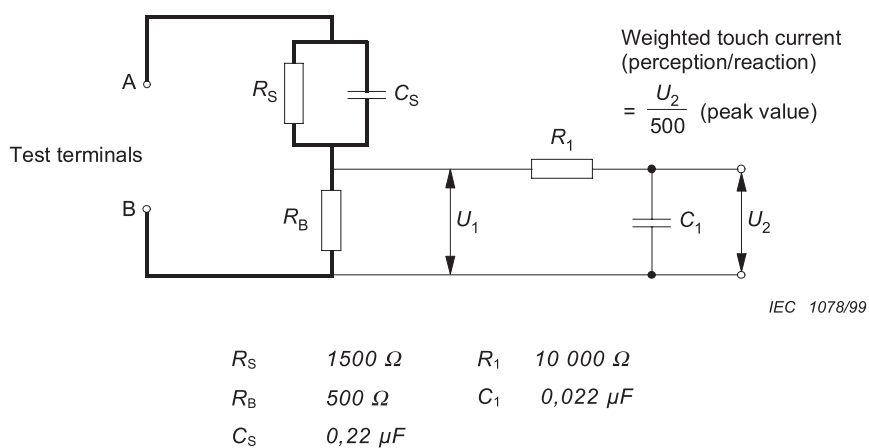


Figure 4 – Measuring network, touch current weighted for perception or reaction

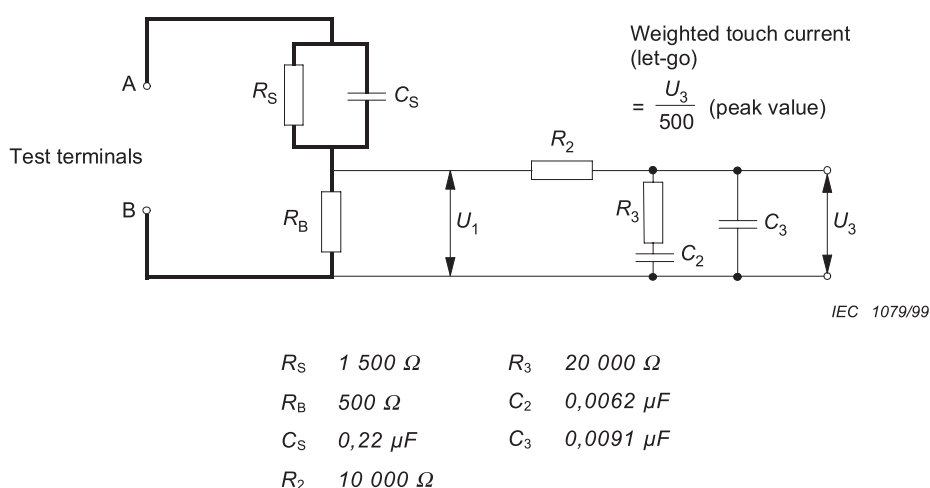

NOTE – Use of this network is subject to special conditions (see 5.1.2).

Figure 5 – Measuring network, touch current weighted for let-go

5.1.1 Perception and reaction (a.c.)

The network of figure 4 shall be used.

5.1.2 Let-go (a.c.)

The network of figure 5 shall be used, but only if inability to let go is a significant consideration, i.e. if all of the following conditions are met:

- the available current is a.c. and the limit value in the product standard is more than 2,0 mA r.m.s. or 2,8 mA peak;
- the EQUIPMENT has a GRIPPABLE PART;
- it is anticipated that it would be difficult to let go of the GRIPPABLE PART due to current flow through the hand and the arm (see E.3 and annex H for further information).

Otherwise, the network of figure 4 shall be used.

5.1.3 Electric burn (a.c.)

The unweighted TOUCH CURRENT network of figure 3 shall be used.

5.1.4 Ripple-free d.c.

Any one of the three networks shall be used. Unless otherwise specified in the EQUIPMENT standard, ripple-free d.c. means less than 10% peak-to-peak ripple.

5.2 Test electrodes

5.2.1 Construction

Unless otherwise specified in the EQUIPMENT standard, the test electrodes shall be

- a test clip, or
- a 10 cm × 20 cm metal foil to represent the human hand. Where adhesive metal foil is used, the adhesive shall be conductive.

5.2.2 Connection

Test electrodes shall be connected to test terminals A and B of the measuring network.

5.3 Configuration

The EQUIPMENT under test (EUT) shall be fully assembled and ready for use in the maximum configuration; it shall be connected to external signal voltages where applicable, as specified by the manufacturer for a single EQUIPMENT.

EQUIPMENT which is designed for multiple power sources, only one of which is required at a time (e.g. for backup), shall be tested with only one source connected.

EQUIPMENT requiring power simultaneously from two or more power sources shall be tested with all power sources connected but with not more than one connection to protective earth.

5.4 Power connections during test

NOTE – Examples of power distribution systems are given in annex J.

5.4.1 General

EQUIPMENT shall be connected as shown in figures 6 to 14, according to 5.4.2, 5.4.3 or 5.4.4, as appropriate.

EQUIPMENT committees should consider the possible need for the manufacturer to identify the power distribution system (TN, TT, IT) to which an EQUIPMENT is intended to be connected in its final application.

If the EUT is specified by the manufacturer for use only on certain power distribution systems, the EUT shall be tested only when connected to those systems.

EQUIPMENT to be connected only to TN or TT systems shall comply with 5.4.2. EQUIPMENT to be connected to IT systems shall comply with 5.4.3 and may also be connected to TN or TT systems.

For Class 0 and Class II EQUIPMENT (see IEC 60536-2), the protective conductors in figures 6 through 14 are ignored.


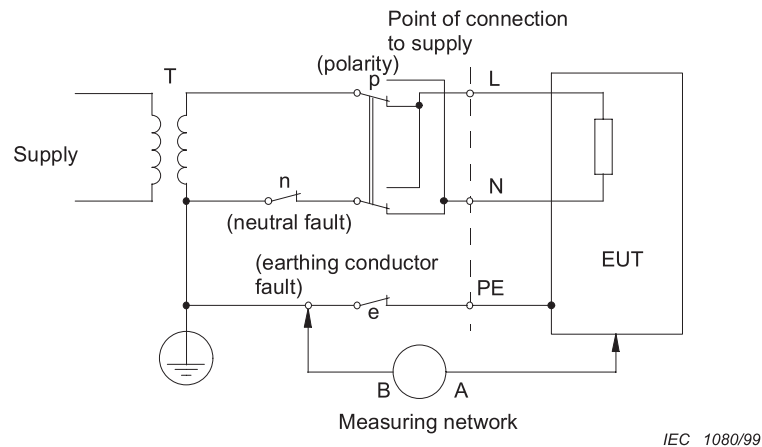


Figure 6 – Test configuration: single-phase equipment on star TN or TT system

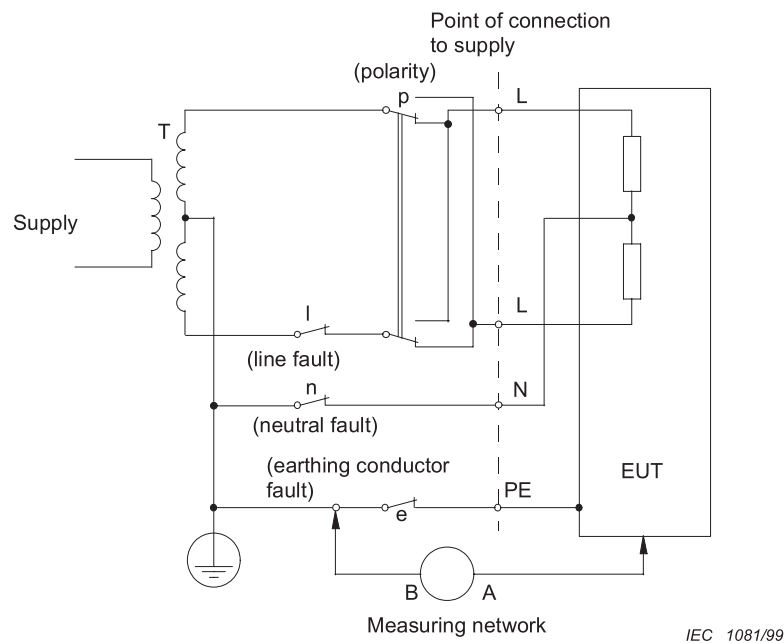

NOTE – The centre-tapped winding may be one leg of a delta supply.

Figure 7 – Test configuration: single-phase equipment on centre-earthed TN or TT system