

BRITISH STANDARD**BS 7224 : 1990
ISO 8878 : 1987***(including Addenda 1 and 2
and Technical Corrigenda 1
and 2)***Specification for**

Use of X.25 to provide the OSI connection-mode network service

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Information Systems Technology Standards Policy Committee (IST/-) to Technical Committee IST/6, upon which the following bodies were represented:

Association for Payment Clearing Services
 British Computer Society
 British Telecommunications plc
 Business Equipment and Information Technology Association
 Department of Trade and Industry (Information Technology Division)
 Department of Trade and Industry (National Physical Laboratory)
 Electricity Supply Industry in England and Wales
 Electronic Engineering Association
 HM Treasury (Central Computer and Telecommunications Agency)
 Information Technology Users' Standards Association
 Inter-Universities Computing Committee
 Joint Network Team
 LAMSAC
 National Computing Centre Ltd.
 National Health Service
 OFTEL (Office of Telecommunications)
 Post Office
 Telecommunication Engineering and Manufacturing Association
 Telecommunications Managers' Association
 User Standards Forum for Information Technology (Institute of Data Processing Management)

This British Standard, having been prepared under the direction of the Information Systems Technology Standards Policy Committee, was published under the authority of the Board of BSI and comes into effect on 31 December 1990

© BSI 1990

The following BSI references relate to the work on this standard:
 Committee reference IST/6
 Draft for comment DD 122

ISBN 0 580 18144 8

Amendments issued since publication

Amd. No.	Date	Text affected

Contents

	Page
Committees responsible	Inside front cover
National foreword	iii
Specification	
0 Introduction	1
1 Scope and field of application	2
2 References	3
Section one. General	
3 Definitions	3
4 Abbreviations	4
5 Overview	5
Section two. Mapping of OSI CONS to/from X.25/PLP-1984	
6 Network connection establishment phase	8
7 Network connection release phase	14
8 Data transfer phase-data transfer service	16
9 Data transfer phase-receipt confirmation service	17
10 Data transfer phase-expedited data transfer service	18
11 Data transfer phase-reset service	18
Annexes	
A X.25 (1980) Subnetwork dependent convergence protocol	21
B Conformance	53
C Additional considerations of CONS primitives	57
D Use of X.25/PLP NPAI	59
E Transit delay calculations	62
Tables	
1 Packets and fields of the X.25/PLP-1984 used to support the OSI CONS	6
2 CONS:X.25/PLP-1984 mapping for the network connection establishment phase	9
3 Mapping of throughput QOS subparameters to X.25/PLP-1984 facilities	11
4 CONS:X.25/PLP-1984 mapping for the network connection release phase	15
5 CONS:X.25/PLP-1984 mapping for the data transfer service	17
6 CONS:X.25/PLP-1984 mapping for the expedited data transfer service	18
7 CONS:X.25/PLP-1984 mapping for the reset service	19
8 Mapping for NC establishment phase	25
9 Mapping for NC release phase	26
10 Mapping of NS disconnect reason to X.25 diagnostic code	28

	Page
11 Mapping of X.25 clearing/restarting cause to NS reason	29
12 Mapping for data transfer phase	31
13 Mapping of NS reset reason to X.25 diagnostic code	32
14 Mapping of X.25 reset cause to NS reason	32
15 Mapping of throughput QOS subparameters to X.25 (1980) facility and Sndcp parameter	33
16 State/event table for NC establishment phase	38
17 State/event table for data transfer phase	40

Figures

1 Relationship of the X.25 packet level protocol to the OSI connection-mode network service	2
2 Operation of OSI connection-mode network service and X.25 packet level protocol (1984)	7
3 State transition diagram	37
4 Message sequence charts	42
5 Procedure for selecting class of operation	55
6 Operation of a relay system mapping between the X.25/PLP-1984 and the X.25/PLP-1980 with Sndcp	56

Addenda

1 Priority	65
2 Use of an X.25 PVC to provide the OSI CONS	71

Technical corrigenda

1	77
2	79

National foreword

This British Standard, prepared under the direction of the Information Systems Technology Standards Policy Committee, is identical with ISO 8878 : 1987 'Information processing systems — Data communications — Use of X.25 to provide the OSI connection-mode network service', published by the International Organization for Standardization (ISO). It supersedes DD122 which is withdrawn.

Cross-references

International standard	Corresponding British Standard
ISO 7498 : 1984	BS 6568 Reference model of open systems interconnection Part 1 : 1988 Basic reference model (incorporating connectionless-mode transmission) (Identical)
ISO 8208 : 1987	BS 7219 : 1989 Specification for X.25 packet level protocol for data terminal equipment for information processing systems (Identical)
ISO 8348 : 1987	BS 7220 : 1990 Information processing systems – Data communications – network service definition (Identical)
ISO/TR 8509 : 1987	DD 108 : 1988 Open Systems Interconnection service conventions (Identical)

The Technical Committee has reviewed the provisions of CCITT Recommendations X.25¹⁾ and X.96¹⁾ to which reference is made in the text, and has decided that they are acceptable for use in conjunction with this standard.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

¹⁾ Copies are available from BSI Sales, Linford Wood, Milton Keynes MK14 6LP.

Information processing systems — Data communications — Use of X.25 to provide the OSI connection-mode network service

0 Introduction

2 AD This International Standard defines methods for providing the OSI Connection-Mode Network Service (CONS) through the use of the Circuit (PVC) services of the Virtual Call (VC) and Permanent Virtual X.25 Packet Level Protocol (X.25/PLP). For VCs, one method which is presented in the main body of this International Standard, specifies a mapping between elements of the 1984 or later versions of the X.25/PLP (referred to as X.25/PLP-1984) and elements of the OSI CONS. Features associated with versions of X.25 later than 1984 are identified as to which version they relate. A second method for VCs which is presented in Annex A of this International Standard, defines a Subnetwork Dependent Convergence Protocol (SNDCP) that shall be used to provide the OSI CONS over subnetworks or with equipment using the 1980 or earlier versions of the X.25/PLP (referred to as X.25/PLP-1980). This SNDCP should only be used if the elements of the X.25/PLP-1984, as defined in 5.1 of this International Standard, are not available to support the OSI CONS.

Annex B gives the conformance requirements for equipment providing the OSI CONS by one or more of the methods in this International Standard and defines the possibilities and rules for interworking between such equipment.

Annexes A and B are integral parts of this International Standard. They are intended to provide a migration strategy towards the use of the 1984 version of X.25 in both subnetworks and DTEs. Their status will be reviewed periodically.

Annex C provides additional considerations on the relationship between the X.25 protocol procedures and the CONS primitives.

Annex D illustrates the use of X.25 Network Protocol Address Information (NPAI), i.e., the Address Field and the Address Extension Facilities.

Annex E illustrates the use of X.25 transit delay facilities.

2 AD Annex F defines the method for providing the OSI CONS in conjunction with the PVC service of X.25. Annex F is a normative part of this International Standard.

The above three annexes are not integral parts of this International Standard.

The relationship between the X.25/PLP-1984 and the OSI CONS is shown in Figure 1. This relationship is described only in terms of the Network Layer entities that provide the CONS. No discussion is given here to describe the actions of a Network Layer entity that only provides a relay function for a given network connection.

The OSI Network Service is defined in terms of:

- a. the primitive actions and events of the Service;
- b. the parameters associated with each primitive action and event, and the form which they take; and
- c. the interrelationship between, and the valid sequences of, these actions and events.

The OSI Network Service does not specify individual implementations or products nor does it constrain the implementation of entities and interfaces within a computer system.

The X.25/PLP-1984 is defined in terms of:

- a. procedures for Virtual Calls and Permanent Virtual Circuits;
- b. formats of packets associated with these procedures; and
- c. procedures and formats for optional user facilities and CCITT-Specified DTE facilities.

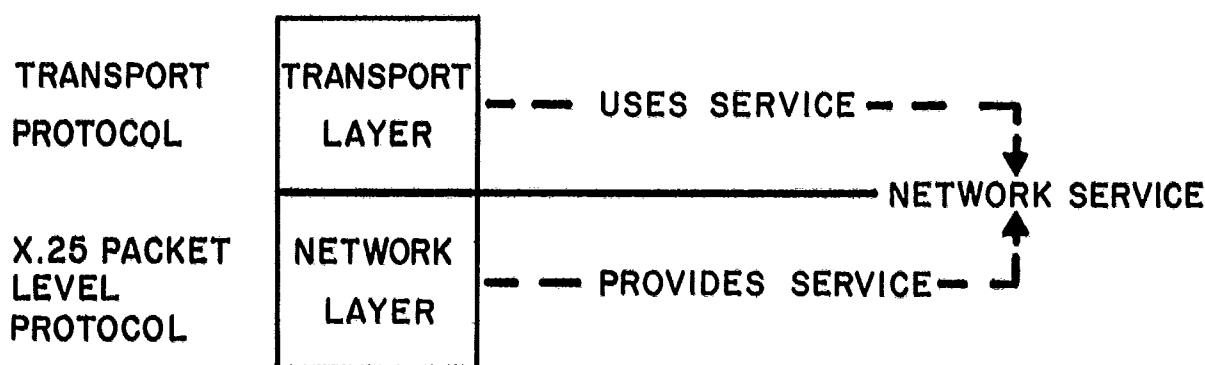


FIGURE 1

Relationship of the X.25 Packet Level Protocol
to the OSI Connection-Mode Network Service

The use of the word "Network" to name the "Network" Layer of the OSI Reference Model should be distinguished from the use of the word "network" to denote a communications network as conventionally understood. To facilitate this distinction, the term "subnetwork" is used for a collection of physical equipment, commonly called a "network" (reference ISO 7498). Subnetworks may be either public or private networks. In the case of public networks, their properties may be determined by separate CCITT Recommendations such as X.21 for a circuit-switched network or X.25 for a packet-switched network.

Throughout the set of OSI Standards, the term "Service" refers to the abstract capability provided by one layer of the OSI Reference Model to the layer above it. Thus, the Network Service is a conceptual architectural Service, independent of administrative divisions.

NOTE — It is important to distinguish the specialized use of the term "Service" within the set of OSI standards from its use elsewhere to describe the provision of a service by an organization (such as the provision of a service, as defined in CCITT Recommendations, by an Administration).

1 Scope and field of application

The OSI CONS, as stated above, is defined in terms of a set of primitive actions and events and associated parameters. For a protocol to support this service, there must be a mapping between the abstract primitives and parameters of the CONS and the real elements of the protocol. This International Standard provides such a mapping for the X.25/PLP-1984. It also provides a mapping of the CONS primitives and parameters to the X.25/PLP-1980 plus an SndCP (Annex A). These mappings apply to the X.25 VC service. In addition, the method of selecting the appropriate mapping, if any, for different combinations of end systems and Network Layer relay systems implementing one or more of the mappings is defined (Annex B).

For the PVC service for both the X.25/PLP-1984 and the X.25/PLP-1980, a mapping of CONS primitives and parameters to the X.25/PLP is given in Annex F.

This International Standard specifies the conformance requirements for three classes of implementation. These requirements are applicable both to end system operation and to half the operation of a Network Layer relay. Where relay operation is concerned, the two halves of the relay may be the same or different classes of implementation.

This International Standard specifies the requirements to be met by a *Conforming-1984* implementation. Implementations in this class are designed to operate directly and efficiently with other Conforming-1984 implementations, including cases of operation across an X.25(1984) subnetwork.

This International Standard also specifies the requirements to be met by a *Conforming-1980* implementation. Implementations in this class are designed to operate directly with other Conforming-1980 implementations, including cases of operation across any form of X.25 subnetwork, but will operate less efficiently than Conforming-1984 implementations.

This International Standard also specifies the requirements to be met by a *Compatible* implementation. Implementations in this class are designed to operate directly with all other implementation classes, including cases of operation across any type of X.25 subnetwork. They make efficient use of X.25(1984) when placed in this environment.

The X.25/PLP-1984 or X.25/PLP-1980 with the Sndcp is usually regarded as operating between an end system (i.e., a "Data Terminal Equipment" in X.25 terminology) and a packet-switched public data subnetwork. However, the X.25/PLP-1984 or X.25/PLP-1980 with the Sndcp can also be used in other environments to provide the OSI CONS. Examples of such other uses include:

- a. an end system connected to an X.25 packet-switched private data subnetwork;
- b. an end system connected to a local area network;
- c. direct connection or circuit-switched connection (including connection across a circuit-switched data subnetwork) of two end systems without an intervening packet-switched public data subnetwork; and
- d. an end system connected to an Integrated Services Digital Network.

2 References

ISO 7498, *Information processing systems — Open Systems Interconnection — Basic Reference Model*.

ISO 8208, *Information processing systems — Data communications — X.25 Packet Level Protocol for Data Terminal Equipment*.

ISO 8348, *Information processing systems — Data communications — Network service definition*.


ISO 8348/Add. 2, *Information processing systems — Data communications — Network service definition — Addendum 2: Network layer addressing*.

ISO/TR 8509, *Information processing systems — Open Systems Interconnection — Service conventions*.

CCITT Recommendation X.25, *Interface Between Data Terminal Equipment (DTE) and Data Circuit Terminating Equipment (DCE) for Terminals Operating in the Packet Mode and Connected to Public Data Networks by Dedicated Circuit*, 1984 (Red Book).

CCITT Recommendation X.96, *Call Progress Signals in Public Data Networks*, 1984 (Red Book).

ISO 8348/Add. 3, *Information processing systems — Data communications — Network Service Definition — Addendum 3: Additional features of the network service*



SECTION ONE: GENERAL

3 Definitions

3.1 Reference Model definitions

The following concepts, developed and defined in the OSI Reference Model (ISO 7498), are used:

- a. Network connection
- b. Network Layer
- c. Network Service
- d. Network Service Access Point
- e. Network Service Access Point address
- f. Subnetwork

3.2 Service Conventions definitions

The following terms, as they apply to the Network Layer and as defined in the Service Conventions Standard (ISO/TR 8509), are used:

- a. Network Service user
- b. Network Service provider
- c. primitive
- d. request
- e. indication
- f. response
- g. confirm

3.3 Network Service definitions

The following terms, as defined in the Network Service (ISO 8348), are used:

- a. Calling Network Service user

ISO 8878 : 1987 (E)

- b. Called Network Service user

3.4 Addressing definitions

The following concepts, as defined in ISO 8348/Add. 2, are used:

- a. Subnetwork Point of Attachment address
- b. Network Protocol Address Information
- c. Initial Domain Part
- d. Authority and Format Identifier
- e. Initial Domain Identifier
- f. Domain Specific Part

3.5 X.25 definitions

The following concepts, as developed in the X.25 Packet Level Protocol for DTEs (ISO 8208) and in CCITT Recommendation X.25, are used:

- a. virtual circuit
- b. Virtual Call
- c. logical channel
- d. Packet Level
- e. Data Terminal Equipment
- f. Data Circuit-terminating Equipment
- g. DXE (either a DTE or a DCE)

3.6 X.96 definitions

The following terms, as defined in CCITT Recommendation X.96, are used:

- a. Category C call progress signal
- b. Category D call progress signal

4 Abbreviations**4.1 Network Service abbreviations**

CONS	Connection-Mode Network Service
N	Network
NC	Network-connection
NL	Network Layer
NS	Network Service
NSAP	Network Service Access Point
OSI	Open Systems Interconnection
QOS	Quality of Service

4.2 Addressing abbreviations

AFI	Authority and Format Identifier
DSP	Domain Specific Part
IDI	Initial Domain Identifier
IDP	Initial Domain Part
NPAI	Network Protocol Address Information
SNPA	Subnetwork Point of Attachment

4.3 X.25 abbreviations

AEF	Address Extension Facility
AF	Address Field
D-bit	Delivery Confirmation bit

DCE	Data Circuit-terminating Equipment
DTE	Data Terminal Equipment
EDN	Expedited Data Negotiation (Facility)
EETDN	End-to-End Transit Delay Negotiation (Facility)
FPF	Facility Parameter Field
GFI	General Format Identifier
LC	Logical channel
M-bit	More Data bit
MBS	M-bit Sequence
MTCN	Minimum Throughput Class Negotiation (Facility)
PLP	Packet level protocol
P(R)	Packet receive sequence number
P(S)	Packet send sequence number
TCN	Throughput Class Negotiation (Facility)
TDSAI	Transit Delay Selection And Indication (Facility)
VC	Virtual Call

PVC Permanent Virtual Circuit

4.4 Abbreviations applying to Annex A

AE	Address Extension (parameter)
ID	Identifier
LI	Length Indicator
MTC	Minimum Throughput Class (parameter)
N-CC	Network Connection confirm
N-CR	Network Connection request
N-DR	Network Disconnect request
NPDU	Network Protocol Data Unit
NSDU	Network Service Data Unit
PT	Parameter Type
PV	Parameter Value
Q-bit	Qualifier Bit
SNDCP	Subnetwork Dependent Convergence Protocol

5 Overview

The Network Service provides for the transparent transfer of data between NS users. It makes invisible to these NS users the way in which supporting communications resources are utilized to achieve this transfer.

5.1 Elements of the X.25/PLP-1984 used to support the OSI CONS

The X.25/PLP-1984, as defined by ISO 8208, provides a specific realization for the transparent transfer of data between NS users of the CONS. The elements of this protocol to be considered are:

- the virtual-circuit types;
- the packet types and fields to be mapped to the primitives and parameters of the OSI CONS; and
- the optional user facilities and CCITT-Specified DTE facilities.

Of the two types of virtual circuits defined in ISO 8208, the use of Virtual Calls (VCs) is mapped to the NC Establishment and Release Phases of the OSI CONS in Clauses 6 and 7 (the corresponding mapping for PVCs is given in Annex F).

Table 1 below lists the X.25/PLP-1984 packets and associated fields that shall be used when supporting the OSI CONS.

TABLE 1
PACKETS AND FIELDS OF THE X.25/PLP-1984
USED TO SUPPORT THE OSI CONS

Packet Types ¹	Fields ²
CALL REQUEST INCOMING CALL CALL ACCEPTED CALL CONNECTED	General Format Identifier ³ , Address Field, Facility Field, Call and Called User Data Field ⁴
CLEAR REQUEST CLEAR INDICATION	Clearing Cause Field, Diagnostic Code Field, Address Field, Facility Field, Clear User Data Field ⁴
DATA	D-bit, M-bit, P(S) ⁵ , P(R) ⁵ , User Data Field ⁴
INTERRUPT	Interrupt User Data Field ⁴
RECEIVE READY ⁶ RECEIVE NOT READY ⁶ REJECT ⁶ (if agreed to)	P(R) ⁵
RESET REQUEST RESET INDICATION	Resetting Cause Field, Diagnostic Code Field
RESTART INDICATION	Restarting Cause Field, Diagnostic Code Field

NOTES

1. The packets shown in the table are used in support of the primitives of the OSI CONS. Other packets not shown in the table (i.e., CLEAR CONFIRMATION, INTERRUPT CONFIRMATION, RESET CONFIRMATION, and RESTART CONFIRMATION packets) are essential to the use of the packets shown. Yet other packets (i.e., RESTART REQUEST, DIAGNOSTIC, REGISTRATION REQUEST, and REGISTRATION CONFIRMATION packets) have no relationship to the provision of the OSI CONS.
2. The information in the fields shown in the table have a direct relationship to the parameters associated with the primitives of the OSI CONS. Other fields not shown in the table (e.g., the Logical Channel Identifier, the Packet Type Identifier, the Address Length Fields, and the Facility Length Field) are essential to the use of the appropriate packets.
3. Bit 7 of octet 1 of the GFI in these packets is used to negotiate the overall availability of the D-bit in support of the Receipt Confirmation Service. As such, this bit has no specific field-name as defined in the X.25/PLP-1984.
4. All user data fields are octet aligned.
5. The P(S) and P(R) fields are essential to the operation of the X.25/PLP-1984 in providing the Receipt Confirmation Service.
6. The action implied by these packets has no relationship to the primitives of the OSI CONS. However, the P(R) field is essential to the operation of the X.25/PLP-1984 in providing the Receipt Confirmation Service.

In addition, the following optional user facilities and CCITT-Specified DTE facilities shall be used and/or agreed to:

a. optional user facilities —

- Fast Select (facility used; when operating in a DTE-to-DTE environment without an intervening packet-switched network, the use of the Fast Select Facility shall also be agreed to by the two DTEs),
- Fast Select Acceptance (facility agreed to if operating in a packet-switched network environment),
- Throughput Class Negotiation (facility agreed to and used), and

- Transit Delay Selection And Indication (facility used);

b. CCITT-Specified DTE facilities —

- Called Address Extension (facility used),
- Calling Address Extension (facility used),
- End-to-End Transit Delay Negotiation (facility used),
- Expedited Data Negotiation (facility used),
- Minimum Throughput Class Negotiation (facility used), and
- Priority (facility used, with 1988 or later versions of the X.25/PLP).




5.2 General operation of the X.25/PLP-1984 for supporting the OSI CONS

The X.25/PLP-1984 can be used to provide the OSI CONS in an end system connected to a public or private X.25 packet-switched subnetwork. It can also be used in environments where the end system is connected to a Local Area Network or where end systems are connected by a dedicated path or by a circuit-switched connection.

As shown in Figure 2, the NS provider (more particularly, the NL entity in an end system) must provide a translation between

- the primitives and parameters of the OSI CONS; and
- the packets and associated fields of the X.25/PLP-1984.

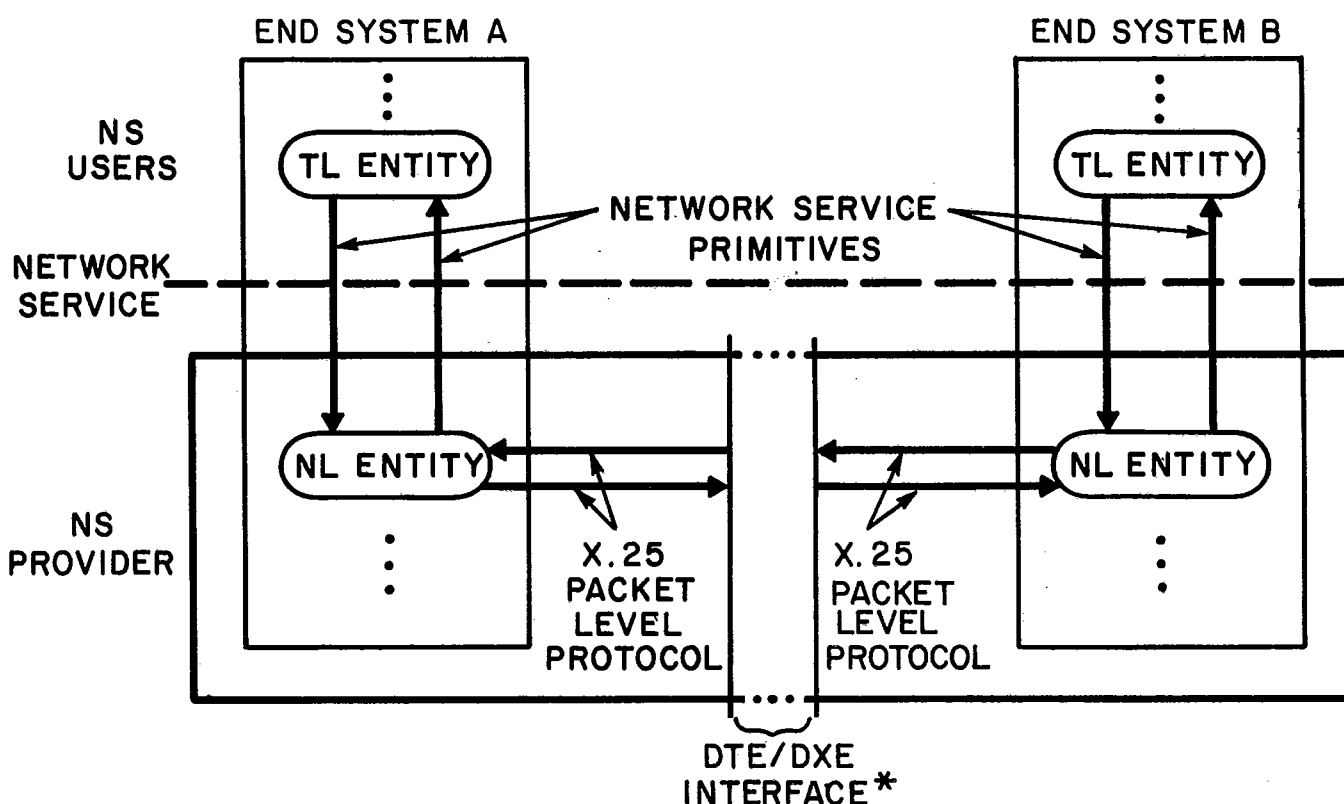

- * This interface consists of zero or more Network Layer entities providing a Network Layer relay function.

FIGURE 2
Operation of OSI Connection-Mode Network Service
and X.25 Packet Level Protocol (1984)

Request and response primitives are translated into packets to be transmitted across the DTE/DXE interface by the NL entity. Received packets, where appropriate, are translated by the NL entity into indication and confirm primitives.

Annex C provides additional considerations on the relationship between the X.25 protocol procedures and the CONS primitives.

NOTE — The Network Service Definition specifies valid sequences of primitives at an NC endpoint and valid parameter responses at the called NC endpoint to Receipt Confirmation negotiation, Expedited Data negotiation, and QOS parameter negotiation. The necessity for the NL entity to monitor compliance and the actions to be taken on non-compliance are a local matter, and not subject to standardization.

There is also a relationship between some local mechanism used to identify a particular NC and a LC number used to identify a particular virtual circuit. This relationship is a local matter and is not discussed here.

SECTION TWO: MAPPING THE OSI CONS TO/FROM THE X.25/PLP-1984

6 Network connection establishment phase

6.1 Primitive/Parameter and Packet/Field relationships

Table 2 shows the relationships between the primitives/parameters used during the Network Connection Establishment Phase and the packets/fields associated with the Call Setup Procedures.

6.2 Procedures

6.2.1 Primitive/Packet mapping

When an NL entity receives an N-CONNECT request or an N-CONNECT response primitive from an NS user, it transmits a CALL REQUEST or a CALL ACCEPTED packet, respectively, across the DTE/DXE interface.

When an NL entity receives an INCOMING CALL or a CALL CONNECTED packet, it signals an N-CONNECT indication or an N-CONNECT confirm primitive, respectively, to the NS user.

6.2.2 NSAP addresses

Local operation determines the contents of the NPAI and whether NSAP Addresses, where explicitly supplied, are mapped to and from the Address Field (AF) or the Address Extension Facilities (AEF) of X.25/PLP-1984 call setup packets. Annex D describes guidelines for the methods by which the required AF contents may be derived from the NSAP Address. The permitted techniques for the placement of NSAP Addresses in either the AF or AEF are given in this clause. The encoding techniques to be employed are those specified in ISO 8208 for the AF and AEF. The content of these fields shall be in the preferred binary encoding defined in ISO 8348/Add. 2. Examples of encoding NSAP Addresses in the NPAI of the X.25/PLP-1984 are also given in Annex D.

6.2.2.1 Encoding of NSAP addresses

6.2.2.1.1 Use of the AF

Under certain conditions, the NSAP Address, as defined in ISO 8348/Add. 2, may be conveyed entirely in the AF. These conditions are:

- a. the NSAP Address consists solely of the IDP (i.e., the DSP is null);
- b. the AFI can be deduced from the contents of the AF (e.g., with knowledge of the subnetwork to which the DTE is attached); and
- c. the IDI is the same as the SNPA Address.

When all of the above conditions are satisfied, the AF may be used to convey the semantics of the entire NSAP Address (the AFI is implied and the contents of the AF are equivalent to the IDI). In these cases, the AEF may also be used (see 6.2.2.1.2).

NOTE — The use of the preferred binary encoding results in binary-coded decimal digits in the AF, as required by ISO 8208.

6.2.2.1.2 Use of the AEF

When the conditions in 6.2.2.1.1 are not satisfied, the AEF shall be used. The NSAP Address, complete with AFI, is placed in the AEF (bits 8 and 7 of the first octet of the FPF of the AEF are both set to zero). In this case,

TABLE 2
CONS:X.25/PLP-1984 MAPPING
FOR THE NETWORK CONNECTION ESTABLISHMENT PHASE

CONS	X.25/PLP-1984
PRIMITIVES: N-CONNECT request N-CONNECT indication N-CONNECT response N-CONNECT confirm	PACKETS: CALL REQUEST INCOMING CALL CALL ACCEPTED CALL CONNECTED
PARAMETERS: Called Address Calling Address Responding Address Receipt Confirmation Selection Expedited Data Selection QOS-Parameter Set NS-User-Data	FIELDS (INCLUDING FACILITIES): Called DTE Address Field Called Address Extension Facility Calling DTE Address Field Calling Address Extension Facility Called DTE Address Field Called Address Extension Facility General Format Identifier ¹ Expedited Data Negotiation Facility Throughput Class Negotiation Facility ² Minimum Throughput Class Negotiation Facility Transit Delay Selection And Indication Facility End-to-End Transit Delay Negotiation Facility Priority Facility Call and Called User Data Field Fast Select Facility ³



NOTES

1. Bit 7 of octet 1 of the GFI in call setup packets is used to negotiate the overall availability of the D-bit in support of the Receipt Confirmation Service. As such, this bit has no specific field-name as defined in the X.25/PLP-1984.
2. For proper operation, this optional user facility shall also be agreed to for use on the interface.
3. For proper operation, the Fast Select Acceptance Facility shall also be agreed to on the interface when accessing a packet-switched network.

the contents of the AF are not defined by this International Standard. Guidelines for their derivation are given in Annex D.

6.2.2.2 Decoding of NSAP addresses

6.2.2.2.1 Absent AEF case

If the AEF is not present, then local knowledge is required by the receiving NL entity to determine whether an OSI NSAP Address is to be deduced from the content of the AF. If this local knowledge indicates that an NSAP Address is present, its abstract syntax is as follows:

- a. the AFI is deduced from knowledge of the subnetwork from which the packet was received;

- b. the IDI is the same as the contents of the AF; and
- c. the DSP is absent.

6.2.2.2 AEF case

If the AEF is present and bits 8 and 7 of the leading octet of the FPF are both set to zero, then the NSAP Address is contained entirely within the AEF. The abstract syntax is as follows:

- a. the AFI is contained within the first two digits of the AEF;
- b. the IDI is the remainder of the IDP after any leading and trailing padding digits are discarded; and
- c. the DSP, if present, constitutes the remainder of the AEF content after any trailing padding digits are discarded.

6.2.3 Receipt Confirmation selection

Bit 7 of octet 1 in the GFI of X.25/PLP-1984 call setup packets is mapped to/from the Receipt Confirmation Selection parameter of N-CONNECT primitives.

If the Receipt Confirmation Selection parameter of the N-CONNECT request primitive indicates "use of Receipt Confirmation," then the NL entity, if it can support the D-bit Procedure as defined in 8.2.3 and 9.2.1, sets bit 7 of the GFI to 1 to indicate use of receipt confirmation during the Data Transfer Phase. If "no use of Receipt Confirmation" is indicated or the NL entity cannot support the D-bit Procedure, then bit 7 is set to 0.

When an NL entity receives an INCOMING CALL packet with bit 7 of the GFI set to 1 but it cannot support the D-bit Procedure, it indicates "no use of Receipt Confirmation" in the Receipt Confirmation Selection parameter of the N-CONNECT indication primitive signaled to the Called NS user. Otherwise, if bit 7 of the GFI is set to 1 (respectively, 0), then the NL entity indicates "use (respectively, no use) of Receipt Confirmation" in the Receipt Confirmation Selection parameter of the N-CONNECT indication primitive signaled to the Called NS user.

When an NL entity receives an N-CONNECT response primitive with the Receipt Confirmation Selection parameter indicating "use (respectively, no use) of Receipt Confirmation," it sets bit 7 of the GFI in the CALL ACCEPTED packet to 1 (respectively, 0).

When an NL entity receives a CALL CONNECTED packet with bit 7 of the GFI set to 1 (respectively, 0), it indicates "use (respectively, no use) of Receipt Confirmation" in the Receipt Confirmation Selection parameter of the N-CONNECT confirm primitive signaled to the Calling NS user.

6.2.4 Expedited Data selection

The Expedited Data Negotiation (EDN) Facility of the X.25/PLP-1984 is mapped to/from the Expedited Data Selection parameter of N-CONNECT primitives.

If the Expedited Data Selection parameter of the N-CONNECT request primitive indicates "use of Expedited Data," then the NL entity, if it can support the Interrupt Procedure using 32-octet INTERRUPT packets, encodes the EDN Facility to indicate use of expedited data during the Data Transfer Phase. If "no use of Expedited Data" is indicated or the NL entity cannot support 32-octet INTERRUPT packets, then the EDN Facility is encoded to indicate no use of expedited data; alternatively, the EDN Facility may be omitted.

When an NL entity receives an INCOMING CALL packet with no EDN Facility or with the EDN Facility indicating use of expedited data but it cannot support 32-octet INTERRUPT packets, it indicates "no use of Expedited Data" in the Expedited Data Selection parameter of the N-CONNECT indication primitive signaled to the Called NS user. Otherwise, if the EDN Facility indicates use (respectively, no use) of expedited data, then the NL entity indicates "use (respectively, no use) of Expedited Data" in the Expedited Data Selection parameter of the N-CONNECT indication primitive signaled to the Called NS user.

When an NL entity receives an N-CONNECT response primitive with the Expedited Data Selection parameter indicating "use (respectively, no use) of Expedited Data," it encodes the EDN Facility in the CALL ACCEPTED packet to indicate use (respectively, no use) of expedited data. If the Expedited Data Selection parameter indicates "no use of Expedited Data," the NL entity may omit the EDN Facility from the CALL ACCEPTED packet.

When an NL entity receives a CALL CONNECTED packet with the EDN Facility indicating use (respectively, no use) of expedited data, it indicates "use (respectively, no use) of Expedited Data" in the Expedited Data Selection parameter of the N-CONNECT confirm primitive signaled to the Calling NS user. If the CALL

CONNECTED packet has no EDN Facility, then the NL entity indicates "no use of Expedited Data" to the Calling NS user.

6.2.5 QOS parameter set

 The set of QOS parameters that are conveyed during the NC Establishment Phase consists of the following parameters:

- a. the throughput for the direction of data transfer from the Calling NS user to the Called NS user;
- b. the throughput for the direction of data transfer from the Called NS user to the Calling NS user;
- c. the transit delay that applies to both directions of data transfer;
- d. the priority of the data transferred on the NC (with respect to data transferred on other NCs);
- e. the priority of gaining an NC; and
- f. the priority of keeping this NC.

For each of these three parameters, a set of "subparameters" is defined as follows:

- a. a "Target" value, which is the QOS value desired by the Calling NS user;
- b. a "Lowest Quality Acceptable" value, which is the lowest QOS value agreeable to the Calling NS user;
- c. an "Available" value, which is the QOS value the NS provider is willing to provide; and
- d. a "Selected" value, which is the QOS value to which the Called NS user agrees.

The set of values that can be specified for each subparameter is defined in every Network Service. This set includes the value "unspecified." It may also include a value defined to be a "default value" that is mutually understood by the NS provider and an NS user as applying in the absence of particular values.

6.2.5.1 Throughput QOS parameters

The Throughput Class Negotiation (TCN) Facility and the Minimum Throughput Class Negotiation (MTCN) Facility of the X.25/PLP-1984 are mapped to/from both Throughput QOS parameters of N-CONNECT primitives. The specific mapping of these X.25/PLP-1984 facilities to/from both sets of Throughput subparameters is given in Table 3.

TABLE 3
MAPPING OF THROUGHPUT QOS SUBPARAMETERS
TO X.25/PLP-1984 FACILITIES

Subparameter	CONS Primitive	X.25/PLP-1984	
		Facility	Packet
Target	N-CONNECT request	TCN	CALL REQUEST
Lowest Quality Acceptable	N-CONNECT request	MTCN	CALL REQUEST
Available	N-CONNECT indication	TCN	INCOMING CALL
Lowest Quality Acceptable	N-CONNECT indication	MTCN	INCOMING CALL
Selected	N-CONNECT response	TCN	CALL ACCEPTED
Selected	N-CONNECT confirm	TCN	CALL CONNECTED

The set of values that can be specified for each Throughput subparameter ranges from 75 bits per second through 64000 bits per second, inclusive. This set consists of the following discrete values: 75, 150, 300, 600, 1200, 2400, 4800, 9600, 19200, 48000, and 64000 bits per second. An NL entity supports either all of these values or a contiguous subset of them. The value "unspecified" is also allowed.

6.2.5.1.1 Processing an N-CONNECT Request primitive

If an NL entity, when receiving an N-CONNECT request primitive, cannot support the Lowest Quality Acceptable throughput (i.e., the minimum throughput) when specified for either direction of data transfer, then it rejects the request. In this case, the NL entity does not transmit any X.25/PLP-1984 packet but it does signal an N-DISCONNECT indication primitive to the Calling NS user. The Originator parameter is "NS Provider." The Reason parameter is "Connection Rejection — QOS Not Available/Transient Condition," or "Connection Rejection — QOS Not Available/Permanent Condition" if the NL entity could never support the Lowest Quality Acceptable for either direction of data transfer.

1. A throughput of 64000 bits per second is available only for 1988 or later versions of the X.25/PLP. For earlier versions, the highest throughput available is 48000 bits per second.

If an NL entity, when receiving an N-CONNECT request primitive, can support the Lowest Quality Acceptable throughput (i.e., the minimum throughput) when specified for both directions of data transfer, then it encodes the Target and Lowest Quality Acceptable values in the TCN and MTCN Facilities, respectively (as shown in Table 3). If the Target subparameter (of either or both of the Throughput QOS parameters) is "unspecified," then the NL entity encodes the TCN Facility for the corresponding direction(s) of data transfer as the highest throughput rate supported by the NL entity. If the Lowest Quality Acceptable subparameter (of either or both of the Throughput QOS parameters) is "unspecified," then the NL entity encodes the MTCN Facility for the corresponding direction(s) of data transfer as 75 bits per second. The TCN and MTCN Facilities are transmitted across the DTE/DXE interface in a CALL REQUEST packet.

6.2.5.1.2 Processing an INCOMING CALL packet

When receiving an INCOMING CALL packet, an NL entity compares the minimum throughput value specified in the MTCN Facility for each direction of data transfer to the available throughput value specified in the TCN Facility. If, for either direction, the available throughput value is less than the minimum throughput value or if the NL entity cannot support the minimum throughput value, then the NL entity clears the call (i.e., transmits a CLEAR REQUEST packet). The cause is "DTE Originated" and the diagnostic is "Connection Rejection — QOS Not Available/Transient Condition," or "Connection Rejection — QOS Not Available/Permanent Condition" if the NL entity could never support the lowest throughput value (these diagnostics have values 229 and 230, respectively). Otherwise, the NL entity indicates, for both directions of data transfer, the Available and Lowest Quality Acceptable throughput values in the Throughput QOS parameters of the N-CONNECT indication primitive signaled to the Called NS user. The Available and Lowest Quality Acceptable subparameters are mapped from the TCN and MTCN Facilities, respectively, as shown in Table 3.

6.2.5.1.3 Processing an N-CONNECT Response primitive

When an NL entity receives an N-CONNECT response primitive, it encodes the Selected throughput values for both directions of data transfer, as given in the Throughput QOS parameters, in the TCN Facility returned in the CALL ACCEPTED packet.

6.2.5.1.4 Processing a CALL CONNECTED packet

When an NL entity receives a CALL CONNECTED packet, it indicates the Selected throughput values for both directions of data transfer, as given in the TCN Facility, in the Throughput QOS parameters of the N-CONNECT confirm primitive signaled to the Calling NS user.

6.2.5.2 Transit Delay QOS parameter

The Transit Delay Selection And Indication (TDSAI) Facility and the End-to-End Transit Delay Negotiation (EETDN) Facility of the X.25/PLP-1984 are mapped to/from the Transit Delay QOS parameter of N-CONNECT primitives.

The set of values that can be specified for each Transit Delay subparameter ranges from 1 millisecond through 65 534 milliseconds, inclusive, in increments of 1 millisecond. An NL entity supports either all of these values or a contiguous subset of them. The value "unspecified" is also allowed.

An NL entity in an end system shall be able to determine the cumulative transit delay attributable to the NS provider in that end system. This is the transit delay of the NL entity itself, all lower-layer entities, and the effects of the access line transmission rate.

Annex E illustrates the use of the X.25 TDSAI and EETDN Facilities in support of the end-to-end negotiation of the Transit Delay QOS parameter.

6.2.5.2.1 Processing an N-CONNECT Request primitive

If an NL entity, when receiving an N-CONNECT request primitive, cannot support the Lowest Quality Acceptable transit delay (i.e., the maximum transit delay) when specified, then it rejects the request. In this case, the NL entity does not transmit any X.25/PLP-1984 packet but it does signal an N-DISCONNECT indication primitive to the Calling NS user. The originator parameter is "NS Provider." The Reason parameter is "Connection Rejection — QOS Not Available/Transient Condition," or "Connection Rejection — QOS Not Available/Permanent Condition" if the NL entity could never support the Lowest Quality Acceptable transit delay.

If an NL entity, when receiving an N-CONNECT request primitive, can support the Lowest Quality Acceptable transit delay (i.e., the maximum transit delay) when specified, or when the Target transit delay is specified and

the Lowest Quality Acceptable delay is unspecified, then:

- a. the NL entity encodes the cumulative transit delay attributable to the NS provider in the calling end system in the "cumulative-transit-delay subfield" (i.e., octets 1 and 2) of the EETDN Facility;
- b. if a Target transit delay is specified, then the NL entity encodes this value in the "target-transit-delay subfield" (i.e., octets 3 and 4) of the EETDN Facility (otherwise, this subfield is not used);

NOTE — According to ISO 8348, the case where the Target transit delay is unspecified and the Lowest Quality Acceptable transit delay has a value other than unspecified is not permitted; logically, this case can be represented by the permitted assignment where an identical value is specified for both the Target and Lowest Quality Acceptable transit delays (but see Note 2 to item (d) below).

- c. if a Lowest Quality Acceptable transit delay is specified, then the NL entity encodes this value in the "maximum-acceptable-transit-delay subfield" (i.e., octets 5 and 6) of the EETDN Facility (otherwise, this subfield is not used); and
- d. if the Target transit delay is specified, then the NL entity encodes the value of the TDSAI Facility as being less than the Target transit delay minus the cumulative transit delay for the calling end system; otherwise, the TDSAI Facility is encoded with any value (i.e., it is not constrained by this International Standard).

NOTES

1. Given a "routing management information base," the NL entity can refine the value encoded in the TDSAI Facility. For example, the value of the TDSAI Facility could take into account whether networks other than packet-switched networks are traversed in reaching the called end system or whether the called end system is reachable directly in a point-to-point configuration.



The TDSAI and EETDN Facilities are transmitted across the DTE/DXE interface in a CALL REQUEST packet.

NOTE — The value of the TDSAI Facility in a CALL REQUEST packet in a DTE/DCE environment provides a guideline to the DCE for allocating resources. The final transit-delay value applicable to the Virtual Call may be less than, equal to, or greater than the value in the CALL REQUEST packet.

6.2.5.2.2 Processing an INCOMING CALL packet

When receiving an INCOMING CALL packet, an NL entity computes the total NC transit delay by summing the values of:

- a. the TDSAI Facility;
- b. the "cumulative-transit-delay subfield" (i.e., octets 1 and 2) of the EETDN Facility; and
- c. the transit delay attributable to the NS provider in the called end system.

NOTE — The procedure suggested here for computing the value of the total NC transit delay is the best an NL entity can do in the absence of any "external information." However, given a "routing management information base," the NL entity can refine this value. For example, the transit delay attributable to the effects of the access line transmission rate is not included when the called end system is connected to the calling end system in a point-to-point configuration (these effects have been accounted for by the calling end system).

If the "maximum-acceptable-transit-delay subfield" (i.e., octets 5 and 6) of the EETDN Facility is present, then the NL entity compares the value in this "subfield" to the total NC transit delay computed above. If the total NC transit delay is greater than the maximum-acceptable transit delay, then the NL entity clears the call (i.e., transmits a CLEAR REQUEST packet). The cause is "DTE Originated" and the diagnostic is "Connection Rejection — QOS Not Available/Transient Condition," or "Connection Rejection — QOS Not Available/Permanent Condition" if the NL entity could never support the maximum-acceptable transit delay (these diagnostics have values 229 and 230, respectively). Otherwise, if either

1. the total NC transit delay is less than or equal to the maximum-acceptable transit delay, or

2. the "maximum-acceptable-transit-delay subfield" of the EETDN Facility is not present,

then the NL entity indicates the Available transit-delay value (as given by the total NC transit delay computed above) in the Transit Delay QOS parameter of the N-CONNECT indication primitive signaled to the Called NS user.

6.2.5.2.3 Processing an N-CONNECT Response primitive

When an NL entity receives an N-CONNECT response primitive, it encodes the total NC transit-delay value (as computed above) in the "cumulative-transit-delay subfield" (octets 1 and 2) of the EETDN Facility returned in the CALL ACCEPTED packet.

NOTES

1. There is no Transit Delay QOS Parameter in an N-CONNECT response primitive.
2. The EETDN Facility returned in a CALL ACCEPTED packet only contains the "cumulative-transit-delay subfield."

6.2.5.2.4 Processing a CALL CONNECTED packet

When an NL entity receives a CALL CONNECTED packet, it indicates the selected transit-delay value, as given by the "cumulative-transit-delay subfield" of the EETDN Facility, in the Transit Delay QOS parameter of the N-CONNECT confirm primitive signaled to the Calling NS user.

6.2.5.3 Priority QOS parameters

The Priority Facility of the X.25/PLP is mapped to/from the three Priority QOS parameters of N-CONNECT primitives.

The set of values that can be specified for each Priority subparameter ranges from 0 (lowest priority) to 14 (highest priority). An NL entity supports all of these values. The value "unspecified" is also allowed (encoded as 255 in the X.25/PLP).

6.2.5.3.1 Processing an N-CONNECT Request primitive

An NL entity that supports a choice of priority levels shall proceed as specified in 6.2.5.4.1.1. An NL entity that does not support a choice of levels shall proceed as specified in 6.2.5.4.1.2.

6.2.5.3.1.1 Processing with choice of levels supported

If an NL entity, when receiving an N-CONNECT request primitive, cannot support the Lowest Quality Acceptable priority for any of the three Priority QOS parameters, when specified, then it rejects the request. In this case, the NL entity does not transmit any X.25/PLP packet but it does signal an N-DISCONNECT indication primitive to the Calling NS user. The originator parameter is "NS Provider." The Reason parameter is "Connection Rejection — QOS Not Available/Transient Condition," or "Connection Rejection — QOS Not Available/Permanent Condition" if the NL entity could never support the Lowest Quality Acceptable priority for one or more of the Priority QOS parameters.

If an NL entity, when receiving an N-CONNECT request primitive, can support the Lowest Quality Acceptable priority for all three Priority QOS parameters, when specified, or any of the Lowest Quality Acceptable Priority QOS parameters is unspecified, then the NL entity encodes the Priority Facility as follows:

- a) If the Lowest Quality Acceptable priority of a Priority parameter is specified, its value is encoded in the subfield of the X.25/PLP Priority Facility designated to contain this subparameter; otherwise, this subfield of the facility is encoded as 255 (unspecified); and
- b) If the Target of a Priority parameter is specified, its value is encoded in the subfield of the X.25/PLP Priority Facility designated to contain this subparameter; otherwise, this subfield of the facility is encoded as 255 (unspecified).

If either the Target or the Lowest Quality Acceptable priority is specified for any of the Priority QOS parameters, then the resulting Priority Facility is transmitted across the DTE/DXE interface in a CALL REQUEST packet. Any subfield of the Priority Facility that contains the "unspecified" value (i.e., 255) may be omitted if, and only if, it is not followed by a subfield containing a value other than "unspecified." If both the Target and Lowest Quality Acceptable priority are unspecified for all Priority QOS parameters, then no Priority Facility is transmitted.



When an NL entity receives an N-CONNECT request primitive, it shall encode the Lowest Quality Acceptable and Target priority level for each Priority QOS parameter in the X.25/PLP Priority Facility for transmission across the DTE/DXE interface in a CALL REQUEST packet, unless both values of all parameters are unspecified, in which case it shall not transmit a Priority Facility.

6.2.5.3.2 Processing an INCOMING CALL packet

An NL entity that supports a choice of priority levels shall proceed as specified in 6.2.5.4.2.1. An NL entity that does not support a choice of levels shall proceed as specified in 6.2.5.4.2.2.

6.2.5.3.2.1 Processing with choice of levels supported

When receiving an INCOMING CALL packet, an NL entity determines the Available and Lowest Quality Acceptable subparameters to be used in the N-CONNECT indication primitive for each Priority QOS parameter as follows:

- a) if the packet contains no Priority Facility, then both subparameters for each Priority QOS parameter are unspecified;
- b) if the subfield of the Priority Facility designated to contain the Available subparameter for a Priority QOS parameter is present, then the value of this subparameter is as given in the subfield; otherwise, the value is unspecified;
- c) if the subfield of the Priority Facility designated to contain the Lowest Quality Acceptable subparameter for a Priority QOS parameter is present, then the value of this subparameter is as given in the subfield; otherwise, the value is unspecified.

If, for any of the three Priority QOS parameters, the NL entity cannot support the Lowest Quality Acceptable priority, then the NL entity clears the call (i.e., transmits a CLEAR REQUEST packet). The cause is "DTE Originated" and the diagnostic is "Connection Rejection — QOS Not Available/Transient Condition," or "Connection Rejection — QOS Not Available/Permanent Condition" if the NL entity could never support the Lowest Quality Acceptable priority (these diagnostics have values 229 and 230, respectively). Otherwise, the NL entity indicates, for each Priority QOS parameter, the Available and Lowest Quality Acceptable priority values in the Priority QOS parameters of the N-CONNECT indication primitive signaled to the Called NS user.

6.2.5.3.2.2 Processing with choice of levels not supported

When an NL entity receives an INCOMING CALL packet, the values of the Available and Lowest Quality Acceptable priority-level subparameters for use in the N-CONNECT indication primitive for each Priority QOS parameter shall be the values signified by the Priority Facility in the packet, unless there is no Priority Facility, in which case the values of both subparameters shall be "unspecified."

6.2.5.3.3 Processing an N-CONNECT Response primitive

When an NL entity receives an N-CONNECT response primitive, it encodes the Selected priority value, if specified, as given for each Priority QOS parameter, in the Priority Facility returned in the CALL ACCEPTED packet. Any subfield of the Priority Facility that contains the "unspecified" value (i.e., 255) may be omitted if, and only if, it is not followed by a subfield containing a value other than "unspecified." If the Selected priority value is unspecified for all Priority QOS parameters, then no Priority Facility is returned in the CALL ACCEPTED packet.

6.2.5.3.4 Processing a CALL CONNECTED packet

When an NL entity receives a CALL CONNECTED packet, it indicates the Selected priority value, as given in the Priority Facility (if present), for each Priority QOS parameter of the N-CONNECT confirm primitive signaled to the Calling NS user. The absence of a subfield in the Priority Facility corresponds to the value "unspecified." If the Priority Facility is not present in the CALL CONNECTED packet, then the Selected value of each Priority QOS parameter is "unspecified."

6.2.6 NS-User-Data

The Call User Data Field of X.25/PLP-1984 CALL REQUEST and INCOMING CALL packets is used to transfer the NS-user-data of N-CONNECT request and indication primitives, respectively. The Called User Data Field of X.25/PLP-1984 CALL ACCEPTED and CALL CONNECTED packets is used to transfer the NS-user-data of N-CONNECT response and confirm primitives, respectively. In addition, the Fast Select Facility shall be indicated in the CALL REQUEST packet sent by the Calling NL entity.

7 Network connection release phase

7.1 Primitive/Parameter and Packet/Field relationships

Table 4 shows the relationships between the primitives/parameters used during the NC Release Phase and the packets/fields associated with the Call Clearing Procedures.

7.2 Procedures

7.2.1 Primitive/Package mapping

When an NL entity receives an N-DISCONNECT request primitive from an NS user, it transmits a CLEAR REQUEST packet across the DTE/DXE interface. If, however, the NL entity had previously transmitted a CLEAR REQUEST packet and signaled an N-DISCONNECT indication primitive to the NS user (because of a protocol error; see below), then it does not transmit another CLEAR REQUEST packet.

If an NL entity detects an error in the operation of the X.25/PLP-1984 for which its action is to clear the VC (e.g., a format error in an INCOMING CALL packet or a timeout condition), then it transmits a CLEAR REQUEST packet across the DTE/DXE interface. If the virtual circuit is associated with an NC, then it also signals an N-DISCONNECT indication primitive to the NS user.

When an NL entity receives a CLEAR INDICATION packet (or a RESTART INDICATION packet), it signals an N-DISCONNECT indication primitive to the NS user. It also transmits a CLEAR CONFIRMATION packet (or a RESTART CONFIRMATION packet) across the DTE/DXE interface. If, however, the NL entity had previously transmitted a CLEAR REQUEST packet for the NC (i.e., a clear collision), then it does not signal an N-DISCONNECT indication primitive to the NS user nor transmit a CLEAR CONFIRMATION packet.

NOTE — If the received CLEAR INDICATION packet is in response to a previously-transmitted CALL REQUEST packet, the NL entity may retry the call if the Network Connection Establishment Delay has not been exceeded rather than immediately signaling an N-DISCONNECT indication primitive to its NS user. The NL entity may also use the clearing cause code (see 7.2.2) in the CLEAR INDICATION packet to determine whether to retry the call. That is, the reattempt may be successful if the clearing cause code is classified as Category C (see CCITT Recommendation X.96); on the other hand, a Category D code indicates a problem of a more permanent nature.

TABLE 4
CONS:X.25/PLP-1984 MAPPING
FOR THE NETWORK CONNECTION RELEASE PHASE

CONS	X.25/PLP-1984
PRIMITIVES N-DISCONNECT request N-DISCONNECT indication	PACKETS: CLEAR REQUEST CLEAR INDICATION, RESTART INDICATION ¹ , CLEAR REQUEST ²
PARAMETERS: Originator and Reason NS-User-Data Responding Address	FIELDS (INCLUDING FACILITIES): Cause and Diagnostic Code Fields ³ Clear User Data Called DTE Address Field Called Address Extension Facility

NOTES

1. Receipt of a RESTART INDICATION packet should be treated as receipt of a CLEAR INDICATION packet for every logical channel and then mapped to an N-DISCONNECT indication primitive for every active NC associated with the Packet Level Protocol being restarted. The Restarting Cause and Diagnostic Code Fields are then treated in the same manner as the Clearing Cause and Diagnostic Code Fields.
2. See 7.2.1, Paragraph 2.
3. The combination of Cause and Diagnostic Code Fields is mapped to/from the combination of Originator and Reason parameters.

The time interval between and number of reattempted calls is a local matter. If multiple attempts at establishing the NC are all unsuccessful, then the Originator-parameter and Reason-parameter values finally signaled in the N-DISCONNECT indication primitive are a local matter.

If either NL entity wishes to disconnect an NC, it signals an N-DISCONNECT indication primitive to its NS user and transmits a CLEAR REQUEST packet across the DTE/DXE interface. If, however, the NL entity in the calling DTE cannot, for example, support the QOS parameters specified in an N-CONNECT request primitive or does not have an LC available to set up a VC, then it signals an N-DISCONNECT indication primitive to the Calling NS user but does not transmit a CLEAR REQUEST packet across the DTE/DXE interface.

7.2.2 Originator/Reason

The combination of Originator and Reason parameters of the N-DISCONNECT primitives is mapped to/from the combination of Clearing Cause (or Restarting Cause) and Diagnostic Code Fields.

The combination of the cause code "DTE Originated" (coded as all zeros) with a diagnostic in the set 241, 242, and 244-248 corresponds to an Originator-parameter value of "NS User." In this case, there is a one-to-one relationship between the values of the Reason parameter and these diagnostic codes.

The cause code "DTE Originated" (coded as all zeros) used in combination with diagnostic codes other than those listed above corresponds to an Originator-parameter value of "NS Provider." There is a one-to-one relationship between the values of the Reason parameter and diagnostic codes 225-232 and 235.

In other cases, the Originator-parameter and Reason-parameter values depend on:

- a. the cause and/or diagnostic codes; and
- b. whether the NC is in the NC Establishment Phase or in the Data Transfer Phase.

The values of the Originator and Reason parameters are derived as follows:

- a. the Originator-parameter value is "NS Provider" and the Reason-parameter value is "disconnection — permanent condition" when the NC is in the Data Transfer Phase and any of the following applies:
 - cause codes "Out Of Order," "Local Procedure Error," "Remote Procedure Error," or "RPOA Out Of Order;"
 - diagnostic code 122;
- b. the Originator-parameter value is "NS Provider" and the Reason-parameter value is "disconnection — transient condition" when the NC is in the Data Transfer Phase and any of the following applies:
 - cause code "Network Congestion;"
 - diagnostic codes 113 or 115;
 - cause code "DTE Originated" (coded as all zeros) with diagnostic codes 162 or 163;
- c. the Originator-parameter value is "NS Provider" and the Reason-parameter value is "connection rejection — NSAP address unknown (permanent condition)" when the NC is in the NC Establishment Phase and any of the following applies:
 - cause codes "Not Obtainable" or "Ship Absent;"
- d. the Originator-parameter value is "NS Provider" and the Reason-parameter value is "connection rejection — reason unspecified/permanent condition" when the NC is in the NC Establishment Phase and any of the following applies:
 - cause codes "Access Barred," "Fast Select Acceptance Not Subscribed," "Incompatible Destination," "Invalid Facility Request," "Out Of Order," "Local Procedure Error," "Remote Procedure Error," "Reverse Charging Acceptance Not Subscribed," or "RPOA Out Of Order;"
 - diagnostic codes 121 or 122;
 - cause code "DTE Originated" (coded as all zeros) with diagnostic code 164;
- e. the Originator-parameter value is "NS Provider" and the Reason-parameter value is "connection rejection — reason unspecified/transient condition" when the NC is in the NC Establishment Phase and any of the following applies:
 - cause codes "Network Congestion" or "Number Busy;"
 - diagnostic codes 112-120;
 - cause code "DTE Originated" (coded as all zeros) with a diagnostic code other than 162-164, 225-232, 235, 241, 242, and 244-248;
- f. the Originator-parameter and Reason-parameter values are both "Undefined" for any other combination of cause and diagnostic codes.



7.2.3 NS-User-Data

The Clear User Data Field of X.25/PLP-1984 CLEAR REQUEST and CLEAR INDICATION packets is used to transfer the NS-user-data between NS users.

7.2.4 Responding address

Local operation determines the contents of the Called Address Field and whether the responding NSAP Address, where explicitly supplied, is mapped to/from the AF or the AEF in X.25/PLP-1984 call clearing packets. Rules for encoding and decoding the responding NSAP Address are given in 6.2.2.

8 Data transfer phase — Data transfer service

8.1 Primitive/Parameter and Packet/Field relationships

Table 5 shows the relationships between the primitives/parameters used for the Data Transfer Service and

TABLE 5
CONS:X.25/PLP-1984 MAPPING
FOR THE DATA TRANSFER SERVICE

CONS	X.25/PLP-1984
PRIMITIVES: N-DATA request N-DATA indication	PACKETS: DATA DATA
PARAMETERS: NS-User-Data Confirmation Request	FIELDS: User Data, M-bit D-bit, P(S)

the packets/fields associated with the Data Transfer Procedures.

8.2 Procedures

8.2.1 Primitive/Package mapping

When an NL entity receives an N-DATA request primitive from an NS user, it transmits a sequence of one or more DATA packets, known as an M-bit Sequence (MBS), across the DTE/DXE interface. The number of DATA packets needed in an MBS depends on the amount of NS-user-data and on the maximum "packet size" (i.e., the maximum User Data Field Length of DATA packets) permitted on the DTE/DXE interface. All DATA packets but the last one of an MBS contain the maximum number of octets, have their M-bit set to 1, and have their D-bit set to 0. The last DATA packet has its M-bit set to 0. The D-bit setting of the last DATA packet is dependent on the Confirmation Request parameter (see 8.2.3 below).

When an NL entity receives an MBS, it signals an N-DATA indication primitive to the NS user.

8.2.2 NS-User-Data

The User Data Fields of X.25/PLP-1984 DATA packets are used to transfer NS-user-data between NS users.

8.2.3 Confirmation Request

The D-bit of the last DATA packet in an MBS is mapped to/from the Confirmation Request parameter.

If an N-DATA request primitive indicates in the Confirmation Request parameter that confirmation of receipt is requested (respectively, not requested), then the D-bit of the last DATA packet in an MBS is set to 1 (respectively, 0). In the case of confirmation of receipt being requested, the NL entity shall use a locally-defined mechanism to associate the P(S) of the last DATA packet in the MBS with the N-DATA request primitive. (This mechanism shall also provide for an association of an N-DATA request primitive with an N-DATA ACKNOWLEDGE indication primitive; see 9.2.1.)

When an NL entity signals an N-DATA indication primitive to the NS user, it indicates in the Confirmation Request parameter that confirmation of receipt is requested (respectively, not requested) if the D-bit of the last DATA packet in an MBS is set to 1 (respectively, 0). When the last DATA packet in an MBS has its D-bit set to 1, the NL entity may not transmit a P(R) corresponding to that DATA packet across the DTE/DXE interface until it receives an N-DATA ACKNOWLEDGE request primitive from its NS user (see Clause 9). In the case of the D-bit of the last DATA packet in an MBS being set to 1, the NL entity shall use a locally-defined mechanism to associate the P(S) of this packet with the N-DATA indication primitive. (This mechanism shall also provide for an association of an N-DATA indication primitive with an N-DATA ACKNOWLEDGE request primitive; see 9.2.1.)

9 Data transfer phase — Receipt confirmation service

9.1 Primitive and Packet/Field relationships

There is no distinct X.25/PLP-1984 packet associated with the N-DATA ACKNOWLEDGE request and N-DATA ACKNOWLEDGE indication primitives. The P(R) field of DATA, RECEIVE READY, RECEIVE NOT READY, and

REJECT (if agreed to) packets is used to support the Receipt Confirmation Service.

9.2 Procedures

9.2.1 Primitive/Package mapping

When an NL entity receives an N-DATA ACKNOWLEDGE request primitive from an NS user, it uses its locally-defined mechanism mentioned in 8.2.3 for associating an N-DATA ACKNOWLEDGE request primitive with a previously-issued N-DATA indication primitive (and, hence, a P(S)) to determine a P(R) to be transferred in the appropriate packet across the DTE/DXE interface. (Note that such acknowledgements shall be issued in the same order that the corresponding N-DATA indications were issued.)

When an NL entity receives a P(R), it shall determine whether this P(R) is inclusive of a P(S) associated with a previously-received N-DATA request primitive that requested confirmation of receipt. If such an association is made, then the NL entity signals an N-DATA ACKNOWLEDGE indication primitive to the NS user. This N-DATA ACKNOWLEDGE indication primitive is associated, by the locally-defined mechanism mentioned in 8.2.3, to the previously-received N-DATA request primitive that had requested confirmation of receipt.

10 Data transfer phase — Expedited data transfer service

10.1 Primitive/Parameter and Packet/Field relationships

Table 6 shows the relationships between the primitives/parameters used for the Expedited Data Transfer Service and the packets/fields associated with the Interrupt Transfer Procedures.

TABLE 6
CONS:X.25/PLP-1984 MAPPING
FOR THE EXPEDITED DATA TRANSFER SERVICE

CONS	X.25/PLP-1984
PRIMITIVES: N-EXPEDITED DATA request N-EXPEDITED DATA indication	PACKETS: INTERRUPT INTERRUPT
PARAMETERS: NS-User Data	FIELDS: Interrupt User Data

10.2 Procedures

10.2.1 Primitive/Package mapping

When an NL entity receives an N-EXPEDITED DATA request primitive from an NS user, it transmits an INTERRUPT packet across the DTE/DXE interface. An NL entity shall not transmit a second INTERRUPT packet before an outstanding INTERRUPT packet has been confirmed by an INTERRUPT CONFIRMATION packet.

When an NL entity receives an INTERRUPT packet, it signals an N-EXPEDITED DATA indication primitive to the NS user. It also transmits an INTERRUPT CONFIRMATION packet across the DTE/DXE interface.

10.2.2 NS-User-Data

The Interrupt User Data Field of X.25/PLP-1984 INTERRUPT packets is used to transfer expedited NS-user-data between NS users.

11 Data transfer phase — Reset service

11.1 Primitive/Parameter and Packet/Field relationships

Table 7 shows the relationships between the primitives/parameters used for the Reset Service and the

TABLE 7
CONS:X.25/PLP-1984 MAPPING
FOR THE RESET SERVICE

CONS	X.25/PLP-1984
PRIMITIVES: N-RESET request N-RESET indication N-RESET response N-RESET confirm	PACKETS: RESET REQUEST RESET INDICATION, RESET REQUEST ¹ none none
PARAMETERS: Originator and Reason	FIELDS: Cause and Diagnostic Code Fields ²

NOTES

1. See 11.2.1, Paragraph 2.
2. The combination of Cause and Diagnostic Code Fields is mapped to/from the combination of Originator and Reason parameters.

packets/fields associated with the Reset Procedures.

11.2 Procedures

11.2.1 Primitive/Packet mapping

When an NL entity receives an N-RESET request primitive from an NS user, it transmits a RESET REQUEST packet across the DTE/DXE interface. When the NL entity is ready to accept subsequent data, expedited data, and confirmations of receipt from the NS user, it signals an N-RESET confirm primitive. The issuing of this primitive may or may not be related to the completion of the X.25/PLP-1984 Reset Procedure. Any data or expedited data received from the NS user following the N-RESET confirm primitive is transmitted after completion of the X.25/PLP-1984 Reset Procedure.

If an NL entity detects an error in the operation of the X.25/PLP-1984 for which its action is to reset the virtual circuit (e.g., a sequence error or a timeout condition), then it transmits a RESET REQUEST packet across the DTE/DXE interface. When the NL entity is ready to accept subsequent data, expedited data, and confirmations of receipt from the NS user, it signals an N-RESET indication primitive. The issuing of this primitive may or may not be related to the completion of the X.25/PLP-1984 Reset Procedure. Any data or expedited data received from the NS user following the N-RESET response primitive is transmitted after completion of the X.25/PLP-1984 Reset Procedure.

When an NL entity receives a RESET INDICATION packet, it signals an N-RESET indication primitive to the NS user.

When an N-RESET response primitive is received from the NS user, the NL entity shall be willing to accept subsequent data, expedited data, and confirmations of receipt received from the NS user for transmission upon completion of the X.25/PLP-1984 Reset Procedure.

During the reset process, the following actions are taken by the NL entity with respect to the operation of the X.25/PLP-1984:

a. For DATA packets:

- those awaiting transmission may either be transmitted prior to transmitting a reset packet or flushed from the queue of DATA packets awaiting transmission,
- those remaining in the transmit window when the Reset Procedure is completed are flushed, and

ISO 8878 : 1987 (E)

- those that have been received prior to receiving a reset packet but which do not constitute an entire MBS are flushed from the "MBS reassembly area").
- b. The lower window edge for each direction of data transmission is set to 0 and subsequently transmitted DATA packets are numbered starting from 0.
- c. Any busy condition that had existed prior to the reset is considered not to exist any longer.
- d. Any outstanding INTERRUPT packet remains unconfirmed.
- e. All timer and retransmission parameters relating to data and interrupt transfer are set back to their initial value.

No action is required with respect to the provision of the Network Service by an NL entity when it receives a RESET CONFIRMATION packet or a RESET INDICATION packet in response to a RESET REQUEST packet (i.e., a reset collision). However, it shall then be capable of receiving subsequent DATA and INTERRUPT packets and P(R) information.

11.2.2 Originator/Reason

The combination of Originator and Reason parameters of the N-RESET primitives is mapped to/from the combination of Resetting Cause and Diagnostic Code Fields.

The combination of the cause code "DTE Originated" (coded as all zeros) with the diagnostic "Reset — User Resynchronization" (diagnostic code 250) corresponds to an Originator-parameter value of "NS User" and a Reason-parameter value identical to the diagnostic.

All other combinations of cause codes, except "DTE Originated" coded as "10000000," and diagnostic codes specified in ISO 8208 correspond to an Originator-parameter value of "NS Provider." The value of the Reason parameter is derived as follows:

- a. "congestion" if any of the following applies:
 - cause code "Network Congestion;"
 - cause code "DTE Originated" (coded as all zeros) and diagnostic 234;
- b. "reason unspecified" for any other combination of cause and diagnostic codes.

The cause code "DTE Originated" coded as "10000000" with any diagnostic code, as well as cause codes not specified in ISO 8208 with any diagnostic code, corresponds to values of both the Originator parameter and the Reason parameter of "Undefined."

ANNEX A

X.25 (1980) Subnetwork Dependent Convergence Protocol

This annex is an integral part of this International Standard. The Subnetwork Dependent Convergence Protocol (SNDP) defined in this annex should only be used if the elements of X.25/PLP-1984, as defined in 5.1 of this International Standard, are not available to support provision of the OSI CONS.



A.0 Introduction

The 1984 version of CCITT Recommendation X.25 contains adequate mechanisms to enable the provision of the OSI CONS over X.25 subnetworks. Until such time as all public and private packet-switched X.25 data subnetworks conform to the 1984 version and all existing X.25 DTEs are upgraded, there is a need for a method of providing the CONS over the X.25 (1980) subnetwork access protocol.

This annex specifies a procedure that supplies the OSI CONS, principally by the use of SNDP parameters conveyed within X.25 user data fields. The parameter encodings have been aligned to the facility codes of X.25 (1984).

This procedure is intended to form part of a migration strategy towards the use of X.25 (1984) in both subnetworks and DTEs.

A.1 Scope

A.1.1 Scope of this annex

This annex specifies an SNDP to offer the OSI CONS over an X.25 subnetwork service. The SNDP is applicable in the following cases:

- a. when the X.25 service does not support the full CONS (that is, when the X.25 service conforms to the 1980 CCITT Recommendation or earlier);
- b. when the resulting service for a concatenation of X.25 subnetworks only conforms to the 1980 CCITT Recommendations, even when one or more of the subnetworks conform to later X.25 CCITT Recommendations; and
- c. when the X.25 subnetwork conforms to a CCITT Recommendation later than 1980, but when the calling or called DTE only implements the 1980 CCITT Recommendation.

There are two major elements of this specification: firstly, additional parameters carried as data within existing X.25 packets to provide mechanisms needed for provision of the OSI CONS; secondly, procedures specifying the use of the X.25 packets, as well as the existing and new parameters, to provide the OSI CONS.

A.1.2 Scope of the underlying X.25 subnetwork

The underlying subnetwork supports the 1980 CCITT X.25 Recommendation (the "Yellow Book") subnetwork access protocol.

Over older subnetworks not conforming to the 1980 CCITT X.25 Recommendation, the full CONS may not be achieved. In particular, delivery confirmation may not be supported.

The majority of the CONS requirements are directly supported by the X.25 protocol; the use of the SNDP in other cases is minimal.

The X.25 (1980) datagram packets are not used. X.25 Fast Select is used if available, but it is not essential.

The use of this protocol is indicated by using a reserved ISO value for the protocol identification subfield of the Call User Data Field in a CALL REQUEST packet. This subfield is only used to identify the X.25 (1980)