

STANDARDS AUSTRALIA

Amendment No. 1
to
AS 1926.3—2010
Swimming pool safety
Part 3: Water recirculation systems

REVISED TEXT

The 2010 edition of AS 1926.3 is amended as follows; the amendment(s) should be inserted in the appropriate place(s).

SUMMARY: This Amendment applies to the inside front cover, Clauses 2, 3.1, 4.1, 4.2, 5.2, 5.5, 6.1.3, 6.1.4, 6.2, 6.3 and Figure 1.

Published on 16 December 2011.

AMDT
No. 1
DEC
2011

Inside front cover

Add the following organizations to the list of representatives:

Australian Competition and Consumer Commission

Building Codes Queensland

Bureau of Steel Manufacturers of Australia

Department of Health (New South Wales)

AMDT
No. 1
DEC
2011

Clause 2

Add the following to the list:

ANSI/APSP

16 Standard Suction Fittings for use in Swimming Pools, Wading Pools, Spas, and Hot Tubs

AMDT
No. 1
DEC
2011

Clause 3.1

Delete term and definition and *replace* with the following:

3.1 Independent testing laboratory

A testing laboratory or facility independent of the manufacturer.

AMDT
No. 1
DEC
2011

Clause 4.1

Insert the following note:

NOTE: The materials for components should be such that the operational strength of the entire assembly should not be adversely affected by exposure to rain, snow, ice, sunlight, normal local temperature extremes, normal local wind variations, expected local air pollution products, and the mechanical, electrical and chemical environment in and around pools.

AMDT
No. 1
DEC
2011

Clause 4.2

Delete Clause 4.2

AMDT
No. 1
DEC
2011

Clause 5.2


Add the following item:

- (d) Where a child resistant lid is required, which uses a dress ring in order to comply with Clause 3.5, the dress ring shall be affixed in place in a manner so that it cannot be loosened or removed by the application of a force of 130 N.

AMDT
No. 1
DEC
2011

Figure 1

Delete the Figure and replace with the following:

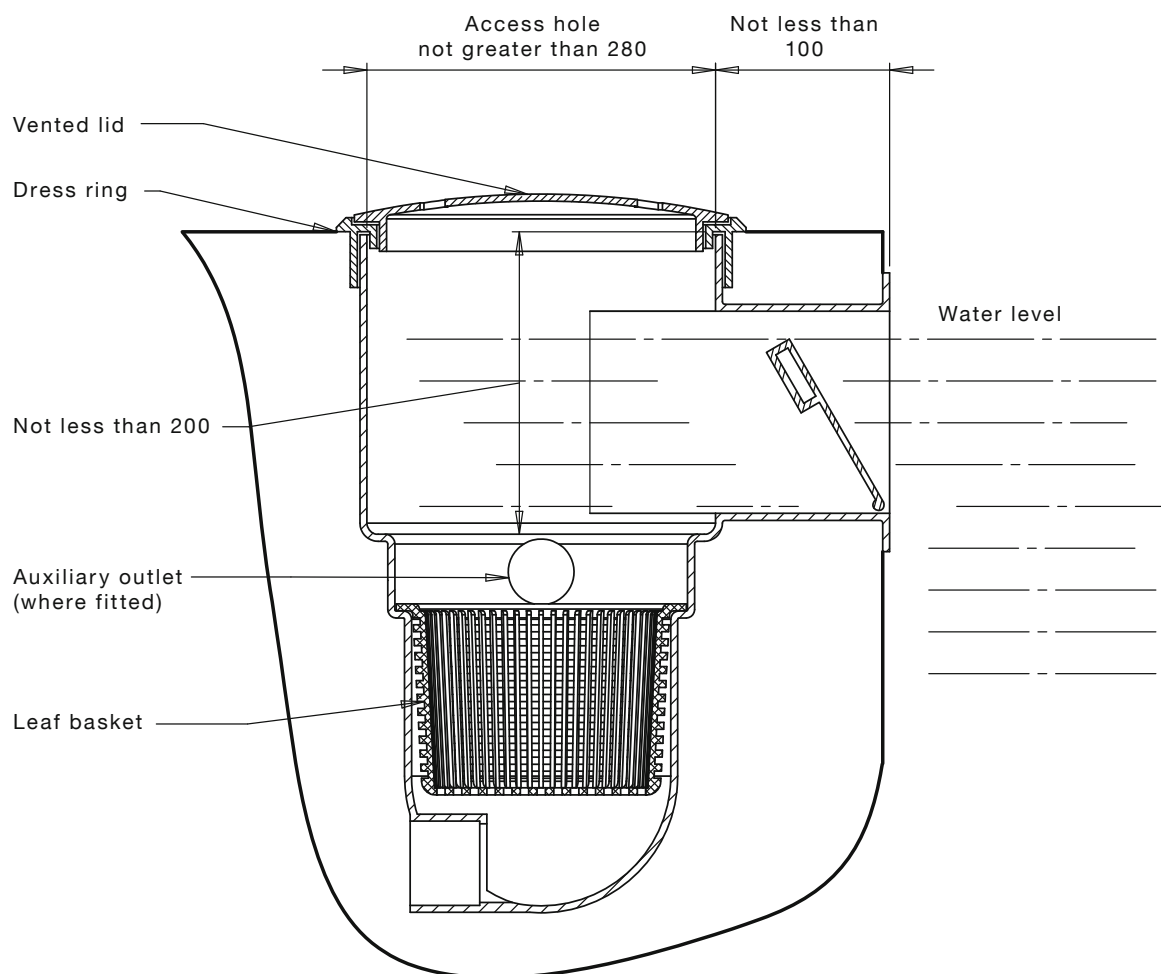

AMDT
No. 1
DEC
2011

Clause 5.5

Delete Item (d) and replace with the following:

- (d) Vents shall have a clear opening area of not less than 315 mm^2 . Where more than one vent is used the clear opening area shall be an aggregate of not less than 315 mm^2 .

AMDT
No. 1
DEC
2011

Clause 6.1.3

Delete Item (c) and replace with the following:

- (c) Branch lines shall not incorporate any devices that may restrict their diameter. The fitting of an outlet cover to the inside of a branch pipe shall not constitute such a device provided it is designed and tested in the manner of its installation.