

Cabinetry in the built-in environment — Commercial and domestic

Amendment No. 1

Revised text amendment

Publishing and Approval Dates

Council of Standards Australia Approval: 4 April 2023

Published: 05 May 2023

Summary


This amendment applies to the following elements:

- Clauses 6.3.5, 11.2, A10, A11, A12
- Figure A2

Amendment Details

AS 4386:2018 is amended as follows. The amendments should be inserted in the locations as instructed.

Element	Instruction/New text
Cl 6.3.5	1 <i>Delete</i> Item (b) and <i>replace</i> with the following: (b) The minimum vertical distance (overhead clearance) between cooktop elements or the highest burner of a gas cooking appliance and combustible material shall be 600 mm and not less than any vertical clearance recommended by the cooktop manufacturer. 2 Item (c), first line, <i>delete</i> “vertical” and <i>replace</i> with “horizontal”.
Cl 11.2	1 Item (a), <i>delete</i> “2%” and <i>replace</i> with “0.2%”. 2 Item (b), <i>delete</i> “1%” and <i>replace</i> with “0.1%”.
Cl A10	<i>Delete</i> text and note and <i>replace</i> with the following: Kitchen worktops with a depth outside of the range 600 mm to 620 mm should be negotiated between the supplier and the purchaser.
Cl A11	<i>Delete</i> text and note and <i>replace</i> with the following: Floor cabinets incorporating appliances that require housing deeper than 600 mm should be negotiated between the supplier and purchaser.
Cl A12	<i>Delete</i> text and <i>replace</i> with the following: Wall cabinets incorporating appliances that require housing deeper than 600 mm should be negotiated between the supplier and purchaser. NOTE: Clause of 11.3 outlines requirements for the safe installation of wall cabinets.
Figure A2	<i>Delete</i> figure and <i>replace</i> with the following:

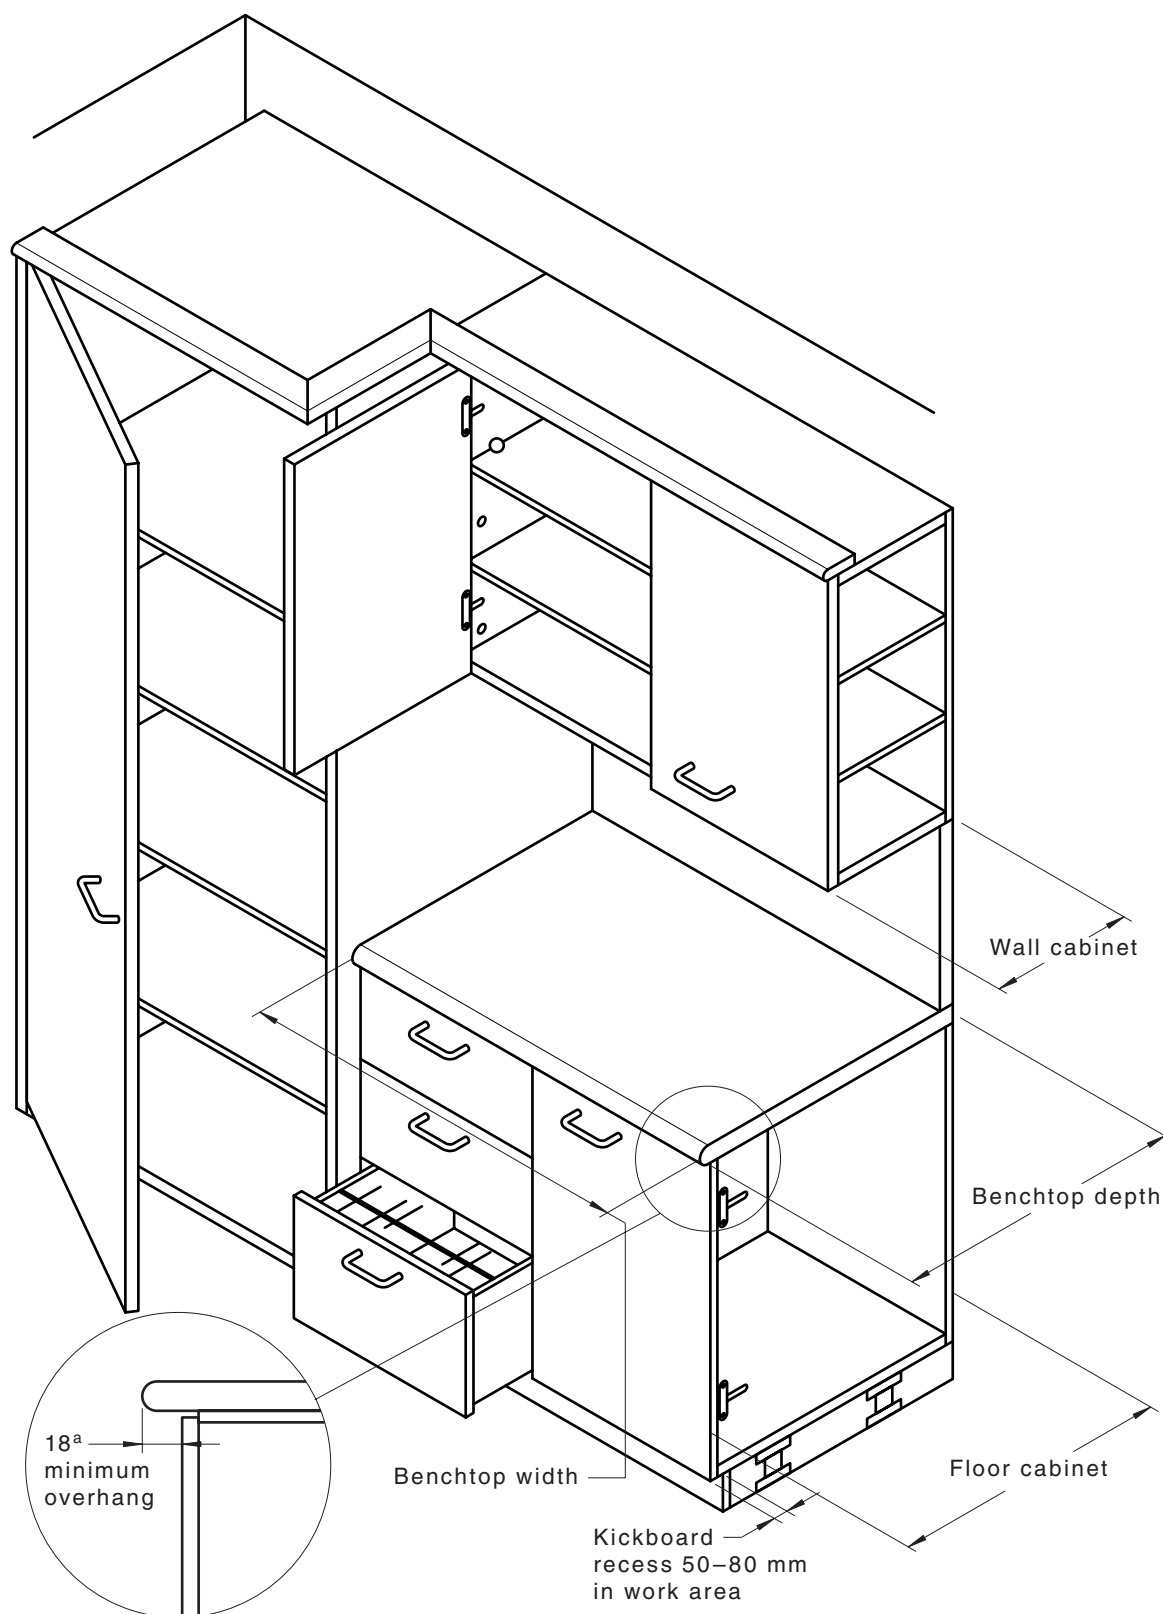

^a These are preferred dimensions

NOTE For information on wall cabinets, benchtops and floor cabinets, see Clauses A10 to A11.