

Australian/New Zealand Standard™

Low-voltage switchgear and controlgear

Part 5.2: Control circuit devices and switching elements—Proximity switches



Standards Australia



AS/NZS 3947.5.2:2000

This Joint Australian/New Zealand Standard was prepared by Joint Technical Committee EL/6, Industrial Switchgear and Controlgear. It was approved on behalf of the Council of Standards Australia on 28 March 2000 and on behalf of the Council of Standards New Zealand on 20 March 2000. It was published on 30 May 2000.

The following interests are represented on Committee EL/6:

Australasian Railway Association
Australian Chamber of Commerce and Industry
Australian Electrical and Electronic Manufacturers Association
Bureau of Steel Manufacturers of Australia
Electrical Contractors Association of New Zealand
Electricity Supply Association of Australia
Independent Electrical Switchboard Manufacturers Association
Institution of Engineers Australia
Ministry of Economic Development New Zealand
National Electrical and Communications Association
Testing Interests (Australia)
Workcover New South Wales

Keeping Standards up-to-date

Standards are living documents which reflect progress in science, technology and systems. To maintain their currency, all Standards are periodically reviewed, and new editions are published. Between editions, amendments may be issued. Standards may also be withdrawn. It is important that readers assure themselves they are using a current Standard, which should include any amendments which may have been published since the Standard was purchased.

Detailed information about joint Australian/New Zealand Standards can be found by visiting the Standards Australia web site at www.standards.com.au or Standards New Zealand web site at www.standard.co.nz and looking up the relevant Standard in the on-line catalogue.

Alternatively, both organizations publish an annual printed Catalogue with full details of all current Standards. For more frequent listings or notification of revisions, amendments and withdrawals, Standards Australia and Standards New Zealand offer a number of update options. For information about these services, users should contact their respective national Standards organization.

We also welcome suggestions for improvement in our Standards, and especially encourage readers to notify us immediately of any apparent inaccuracies or ambiguities. Please address your comments to the Chief Executive of either Standards Australia International or Standards New Zealand at the address shown on the back cover.

This Standard was issued in draft form for comment as DR 99429.

Australian/New Zealand Standard™

Low-voltage switchgear and controlgear

Part 5.2: Control circuit devices and switching elements—Proximity switches

Originated as AS 3947.5.2—1995.
Revised and redesignated AS/NZS 3947.5.2:2000.

COPYRIGHT

© Standards Australia/Standards New Zealand

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher.

Jointly published by Standards Australia International Ltd, PO Box 1055, Strathfield, NSW 2135 and Standards New Zealand, Private Bag 2439, Wellington 6020.

ISBN 0 7337 3369 7

PREFACE

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee EL/6, Industrial Switchgear and Controlgear to supersede AS 3947.5.2—1995.

The objective of this Standard is to provide constructional and performance requirements and tests to verify performance for proximity switches for rated voltage up to 250 V a.c. or 300 V d.c.

This Standard is Part 5.2 of a series which, when complete, will consist of the following:

AS/(NZS) 3947	Low-voltage switchgear and controlgear
AS/NZS 3947.1	Part 1: General rules
AS 3947.2	Part 2: Circuit-breakers
AS/NZS 3947.3	Part 3: Switches, disconnectors, switch-disconnectors and fuse-combination units
AS/NZS 3947.3 Suppl	Part 3: Switches, disconnectors, switch-disconnectors and fuse-combination units Supplement 1: Fuse-switch-disconnectors and switch-disconnectors for use with low voltage aerial bundled cables
AS 3947.4.1	Part 4.1: Contactors and motor-starters—Electromechanical contactors and motor-starters
AS 3947.4.2	Part 4.2: Contactors and motor-starters—A.C. semiconductor motor controllers and starters
AS/NZS 3947.4.3	Part 4.3: Contactors and motor-starters—A.C. semiconductor controllers and contactors for non-motor loads
AS/NZS 3947.5.1	Part 5.1: Control circuit devices and switching elements—Electromechanical control circuit devices
AS/NZS 3947.5.2	Part 5.2: Control circuit devices and switching elements—Proximity switches
AS/NZS 3947.5.3	Part 5.3: Control circuit devices and switching elements—Requirements for proximity devices with defined behaviour under fault conditions
AS/NZS 3947.5.4	Part 5.4: Control circuit devices and switching elements—Methods of assessing the performance of low-energy contacts—Special tests
AS/NZS 3947.5.5	Part 5.5: Control circuit devices and switching elements—Electrical emergency stop devices with mechanical latching function
AS/NZS 3947.5.6	Part 5.6: Control circuit devices and switching elements—D.C. interface for proximity sensors and switching amplifiers (NAMUR)
AS 3947.6.1	Part 6.1: Multiple function equipment—Automatic transfer switching equipment
AS 3947.6.2	Part 6.2: Multiple function equipment—Control and protective switching devices (or equipment) (CPS)
AS 3947.7.1	Part 7.1: Ancillary equipment—Terminal blocks for copper conductors

AS 3947.7.2	Part 7.2:	Ancillary equipment—Protective conductor terminal blocks for copper conductors
AS/NZS 3947.7.3	Part 7.3:	Ancillary equipment—Safety requirements for terminal blocks for the reception of cartridge fuse-links

This Standard is identical with and has been reproduced from IEC 60947-5-2:1997, *Low-voltage switchgear and controlgear—Part 5-2: Control circuit devices and switching elements—Proximity switches*, and incorporates its Amendment 1:1999.

Changes required by Amendment 1 have been indicated by a marginal bar against each clause, figure, table or annex affected.

A reference to an International Standard identified in the Normative References Clause by strikethrough (~~example~~) is replaced by a reference to the Australian or Australian/New Zealand Standard(s) listed immediately thereafter and identified by shading (**example**). Where the struck-through referenced document and the referenced Australian or Australian/New Zealand Standard are identical, this is indicated in parenthesis after the title of the latter.

In January 1997, the IEC commenced numbering its Standards from 60000 by adding 60000 to the number of each existing Standard. This coordinates IEC numbering with ISO numbering. During the transition period an IEC Standard might be identified by its new number or its old number (for example IEC 60050 or IEC 50).

As this Standard is reproduced from an International Standard, the following applies:

- (a) Its number does not appear on each page of text and its identity is shown only on the cover and title page.
- (b) In the source text ‘this standard’ should read ‘this Australian/New Zealand Standard’.
- (c) A full point should be substituted for a comma when referring to a decimal marker.

The terms ‘normative’ and ‘informative’ have been used in this Standard to define the application of the annex to which they apply. A normative annex is an integral part of a Standard, whereas an informative annex is only for information and guidance.

CONTENTS

	<i>Page</i>
Clause	
1 General	1
1.1 Scope and object	1
1.2 Normative references	2
2 Definitions	3
2.1 Basic definitions	5
2.2 Parts of a proximity switch	5
2.3 Operation of a proximity switch	7
2.4 Switching element characteristics	9
3 Classification	12
3.1 Classification according to sensing means	12
3.2 Classification according to the mechanical installation	12
3.3 Classification according to the construction form and size	12
3.4 Classification according to switching element function	12
3.5 Classification according to type of output	12
3.6 Classification according to method of connection	12
4 Characteristics	12
4.1 Summary of characteristics	12
4.2 Operating conditions	13
4.3 Rated and limiting values for the proximity switch and switching element(s) ...	15
4.4 Utilization categories for the switching element	16
5 Product information	17
5.1 Nature of information	17
5.2 Marking	18
5.3 Instruction for installation, operation and maintenance	18
6 Normal service, mounting and transport conditions	18
6.1 Normal service conditions	18
6.2 Conditions during transport and storage	19
6.3 Mounting	19
7 Constructional and performance requirements	19
7.1 Constructional requirements	19
7.2 Performance requirements	22
7.3 Physical dimensions	30
7.4 Shock and vibration	30

Clause	Page
8 Tests	30
8.1 Kinds of tests	30
8.2 Compliance with constructional requirements	31
8.3 Performances.....	31
8.4 Testing of operating distances	40
8.5 Testing for the frequency of operating cycles.....	44
8.6 Verification of the electromagnetic compatibility	48
8.7 Test results and test report.....	49
Annex A (normative) Specification sheets	50
Annex B (normative) Class II proximity switches insulated by encapsulation – Requirements and tests	75
Annex C (normative) Additional requirements for proximity switches with integrally connected cables	79
Annex D (normative) Integral connectors for plug-in proximity switches	81
Annex E (normative) Additional requirements for proximity switches suitable for use in strong magnetic fields	87
Annex F (informative) Symbols for proximity switches.....	92

NOTES

STANDARDS AUSTRALIA/STANDARDS NEW ZEALAND

Australian/New Zealand Standard**Low-voltage switchgear and controlgear**
Part 5.2: Control circuit devices and switching elements
—Proximity switches

Any IEC table, figure or passage of text that is struckthrough is not part of this Standard.
Any Australian/New Zealand table, figure or passage of text that is added (and identified by shading) is part of this Standard.

1 General

The provisions of the General Rules in part 1 (IEC 60947-1) are applicable to this standard, where specifically called for. General Rules clauses and subclauses thus applicable, as well as tables, figures and appendices, are identified by references to part 1, e.g. subclause 7.1.9.3 of part 1 or annex C of part 1.

Clauses 1 to 8 contain the general requirements. Specific requirements for the various types of proximity switches are given in annex A.

1.1 Scope and object

This part of IEC 60947 applies to inductive and capacitive proximity switches that sense the presence of metallic and/or non-metallic objects, ultrasonic proximity switches that sense the presence of sound reflecting objects, photoelectric proximity switches that sense the presence of objects and non-mechanical magnetic proximity switches that sense the presence of objects with a magnetic field.

These proximity switches are self-contained, have semiconductor switching elements(s) and are intended to be connected to circuits, the rated voltage of which does not exceed 250 V 50 Hz/60 Hz a.c. or 300 V d.c. This Standard is not intended to cover proximity switches with analogue outputs.

The object of this standard is to state for proximity switches:

- definitions;
- classification;
- characteristics;
- product information;
- normal service, mounting and transport conditions;
- constructional and performance requirements;
- tests to verify rated characteristics.

1.2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of IEC 60947. At the time of publication, the editions indicated were valid. All normative documents are subject to revision, and parties to agreements based on this part of IEC 60947 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

~~IEC 60050(441):1984, *International Electrotechnical Vocabulary (IEV) — Chapter 441: Switchgear, controlgear, fuses*~~

AS 1852, *International Electrotechnical Vocabulary*
AS 1852 (441) *Part 441: Switchgear, controlgear and fuses* (Identical to IEC 60050(441):1984)

IEC 60068-2-6:1995, *Environmental testing – Part 2: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-14:1984, *Environmental testing – Part 2: Tests – Test N: Change of temperature*

~~IEC 60068-2-27:1987, *Environmental testing – Part 2: Tests – Test Ea and guidance: Shock*~~

AS 1099, *Basic environmental testing procedures for electrotechnology*
AS 1099.2.27 *Part 2.27: Tests – Test Ea – Shock* (Identical to IEC 60068-2-27:1987)

IEC 60068-2-30:1980, *Environmental testing – Part 2: Tests – Test Db and guidance: Damp heat, cyclic (12 + 12 hour cycle)*

~~IEC 60364 (all parts), *Electrical installations of buildings*~~

AS/NZS 3000, *Electrical installations (known as the Australian/New Zealand Wiring Rules)*

IEC 60446:1989, *Identification of conductors by colours or numerals*

IEC 60536:1976, *Classification of electrical and electronic equipment with regard to protection against electric shock*

~~IEC 60947-1:1996, *Low-voltage switchgear and controlgear – Part 1: General rules*~~

AS/(NZS) 3947, *Low-voltage switchgear and controlgear*
AS/NZS 3947.1 *Part 1: General rules* (Identical to IEC 60947-1:1996)

~~IEC 60947-5-1:1997, *Low-voltage switchgear and controlgear – Part 5-1: Control circuit devices and switching elements – Electromechanical control circuit devices*~~

AS/(NZS) 3947, *Low-voltage switchgear and controlgear*
AS/NZS 3947.5.1 *Part 5.1: Control circuit devices and switching elements – Electromechanical control circuit devices* (Identical to IEC 60947-5-1:1997)

IEC 61000-4-2:1995, *Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – Section 2: Electrostatic discharge immunity test – Basic EMC publication*

~~IEC 61000-4-3:1995, Electromagnetic compatibility (EMC) — Part 4: Testing and measurement techniques — Section 3: Radiated, radio-frequency, electromagnetic field immunity test~~

AS/NZS 61000, *Electromagnetic compatibility (EMC)*

AS/NZS 61000.4.3 Part 4.3: *Testing and measurement techniques—Radiated, radio-frequency, electromagnetic field immunity test* (Identical to IEC 61000-4-3:1995)

IEC 61000-4-4:1995, *Electromagnetic compatibility (EMC) — Part 4: Testing and measurement techniques — Section 4: Electrical fast transient/burst immunity test — Basic EMC publication*

IEC 61020-5-1:1991, *Electromechanical switches for use in electronic equipment — Part 5: Sectional specification for pushbutton switches — Section 1: Blank detail specification*

ISO 630: 1995, *Structural steels — Plates, wide flats, bars, sections and profiles*

2 Definitions

Clause 2 of part 1 applies with the following additions:

Alphabetical index of definitions

References

A	
Adjuster	2.2.15
Adjuster of a capacitive proximity switch.....	2.2.15.1
Adjuster of an ultrasonic proximity switch	2.2.15.2
Ambient light for a photoelectric proximity switch	2.4.7
Assured operating distance (s_a).....	2.3.1.7
Axial approach.....	2.3.3
B	
Blind zone	2.3.1.3
Break function.....	2.4.1.2
C	
Capacitive proximity switch.....	2.1.1.2
Currents (I)	2.4.5
D	
Damping material.....	2.2.5
Differential travel (H).....	2.3.5
E	
Effective operating distance (s_r).....	2.3.1.5
Embeddable proximity switch	2.2.9
Emitter	2.2.12
Excess gain for a photoelectric proximity switch	2.4.6
F	
Free zone	2.2.4
Frequency of operating cycles (f)	2.4.3
I	
Independent (snap) action.....	2.4.2
Inductive proximity switch.....	2.1.1.1

4	
L	
Lateral approach	2.3.2
M	
Make function	2.4.1.1
Make-break, of changeover function	2.4.1.3
Maximum operating distance	2.3.1.2.2
Minimum operating distance	2.3.1.2.1
Minimum operational current (I_m)	2.4.5.2
N	
No-load supply current (I_o)	2.4.5.3
Non-damping material	2.2.6
Non-embeddable proximity switch	2.2.10
Non-mechanical magnetic proximity switch	2.1.1.5
O	
OFF-state current (I_r)	2.4.5.1
Operating distances (s)	2.3.1
Operation of a proximity switch	2.3
P	
Parts of a proximity switch	2.2
Photoelectric proximity switch	2.1.1.4
Proximity switch (IEV 441-14-51)	2.1.1
R	
Rated operating distance (s_n)	2.3.1.1
Receiver	2.2.13
Reference axis	2.2.2
Reflector	2.2.14
Repeat accuracy (R)	2.3.4
Response time for a proximity switch	2.4.1.4
S	
Semiconductor switching element	2.2.1
Sensing face	2.2.11
Sensing range (s_d)	2.3.1.2
Sound-absorbing material	2.2.8
Sound-reflecting material	2.2.7
Standard target	2.2.3
Switching element characteristics	2.4
Switching element function	2.4.1
T	
Time delay before availability (t_v)	2.4.4
Total beam angle	2.3.1.4
Turn off time for a photoelectric proximity switch	2.4.1.6
Turn on time for a photoelectric proximity switch	2.4.1.5
U	
Ultrasonic proximity switch	2.1.1.3
Usable operating distance (s_u)	2.3.1.6

2.1 Basic definitions

2.1.1

proximity switch

a position switch which is operated without mechanical contact with the moving part [IEV 441-14-51]¹⁾

2.1.1.1

inductive proximity switch

a proximity switch producing an electromagnetic field within a sensing zone and having a semiconductor switching element

2.1.1.2

capacitive proximity switch

a proximity switch producing an electric field within a sensing zone and having a semiconductor switching element

2.1.1.3

ultrasonic proximity switch (see figure 2)

a proximity switch transmitting and receiving ultrasound waves within a sensing zone and having a semiconductor switching element

2.1.1.4

photoelectric proximity switch (see figure 1)

a proximity switch which senses objects that either reflect or interrupt visible or invisible light and having a semiconductor switching element

2.1.1.5

non-mechanical magnetic proximity switch

proximity switch which senses the presence of a magnetic field and has a semiconductor switching element and no moving parts in the sensing element

2.2 Parts of a proximity switch

2.2.1

semiconductor switching element

an element designed to switch the current of an electric circuit by controlling conductivity of a semiconductor

2.2.2

reference axis

2.2.2.1

reference axis for inductive, capacitive, non-mechanical magnetic and ultrasonic proximity switches

an axis perpendicular to the sensing face and passing through its centre

2.2.2.2

reference axis for types R and D photoelectric proximity switches

an axis located midway between the optical axis of the emitter and this of receiver elements or lenses (see figure 1)

2.2.2.3

reference axis for type T photoelectric proximity switches

an axis perpendicular to the centre of the emitter

¹⁾ See IEC 60050(441).

2.2.3**standard target**

a specified object used for making comparative measurements of the operating distances and sensing distances

2.2.4**free zone**

a volume around the proximity switch which is kept free from any material capable of affecting the characteristics of the proximity switch

2.2.5**damping material**

a material which has an influence on the characteristics of a proximity switch

2.2.6**non-damping material**

a material which has negligible influence on the characteristics of a proximity switch

2.2.7**sound-reflecting material**

a material which reflects the ultrasound waves and gives detectable echoes

2.2.8**sound-absorbing material**

a material with negligible reflecting characteristics for ultrasound waves which gives no detectable echo

2.2.9**embeddable proximity switch**

a proximity switch is "embeddable" when any damping material can be placed around the sensing face plane without influencing its characteristics

2.2.10**non-embeddable proximity switch**

a proximity switch is "non-embeddable" when a specified free zone around its sensing face is necessary in order to maintain its characteristics

2.2.11**sensing face****2.2.11.1****sensing face of an inductive proximity switch**

a surface of the proximity switch through which the electromagnetic field emerges

2.2.11.2**sensing face of a capacitive proximity switch**

a surface of the proximity switch through which the electric field emerges

2.2.11.3**sensing face of an ultrasonic proximity switch**

a surface of the proximity switch where ultrasound is transmitted and received

2.2.11.4**sensing face of a non-mechanical magnetic proximity switch**

a surface of the proximity switch through which the change in a magnetic field is detected

2.2.12**emitter**

the light source, lens and necessary circuitry which provide the light beam

2.2.13**receiver**

the detector, lens and necessary circuitry to monitor the presence of the light beam from the emitter

2.2.14**reflector**

a specified device used to reflect light back to the receiver for type R photoelectric proximity switches

2.2.15**adjuster****2.2.15.1****adjuster of a capacitive proximity switch**

a part of capacitive proximity switch used to set the operating distance. Its use compensates for influence due to target material, transmission medium and installation (mounting) conditions

2.2.15.2**adjuster of an ultrasonic or a photoelectric proximity switch**

a part of an ultrasonic or a photoelectric proximity switch used to set the operating distance within the sensing range

2.3 Operation of a proximity switch**2.3.1****operating distances (s)**

a distance at which the target approaching the sensing face along the reference axis causes the output signal to change

2.3.1.1**rated operating distance (s_n)**

the rated operating distance is a conventional quantity used to designate the operating distances. It does not take into account either manufacturing tolerances or variations due to external conditions such as voltage and temperature

2.3.1.2**sensing range (s_d)**

the range within which the operating distance may be adjusted

2.3.1.2.1**minimum operating distance**

the lower limit of the specified sensing range of an ultrasonic or photoelectric proximity switch

2.3.1.2.2**maximum operating distance**

the upper limit of the specified sensing range of an ultrasonic or photoelectric proximity switch

2.3.1.3**blind zone**

the zone between the sensing face and the minimum operating distance, where no object can be detected

2.3.1.4

total beam angle

the solid angle around the reference axis of an ultrasonic proximity switch, where the sound level drops by 3 dB

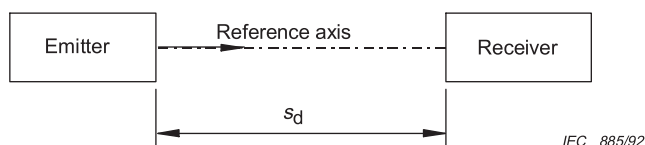


Figure 1a - Type T, emitter and receiver - Trough beam photoelectric

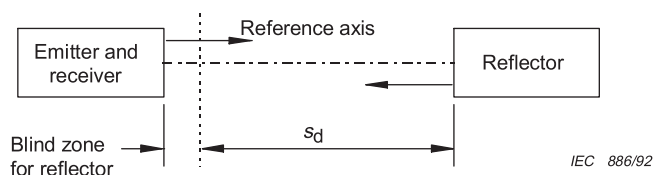


Figure 1b - Type R, emitter-receiver and reflector - Retroreflective photoelectric

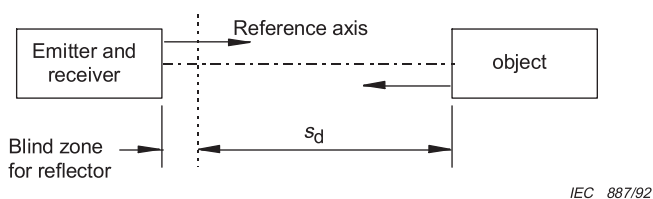


Figure 1c - Type D, emitter-receiver and object - Diffuse reflective photoelectric

Figure 1 – Sensing range (s_d) photoelectric proximity switches (see 7.2.1.3 and 8.4)

2.3.1.5

effective operating distance (s_r)

the operating distance of an individual proximity switch, measured at stated temperature, voltage and mounting conditions

2.3.1.6

usable operating distance (s_u)

the operating distance of an individual proximity switch, measured under specified conditions

2.3.1.7

assured operating distance (s_a)

the distance from the sensing face within which the correct operation of the proximity switch under specified conditions is assured

2.3.2

lateral approach

the approach of the target perpendicular to the reference axis

2.3.3

axial approach

the approach of the target with its centre maintained on the reference axis

2.3.4**repeat accuracy (R)**

the value of variation of the effective operating distance (s_r) under specified conditions

2.3.5**differential travel (H)**

the distance between the operating point when the target approaches the proximity switch and the release point when the target moves away

2.4 Switching element characteristics**2.4.1****switching element function****2.4.1.1****make function**

a make function causes load current to flow when a target is detected and load current not to flow when a target is not detected

2.4.1.2**break function**

a break function causes load current not to flow when a target is detected and load current to flow when a target is not detected

2.4.1.3**make-break, of changeover function**

a switching element combination which contains one make function and one break function

2.4.1.4**response time for a proximity switch**

the time required for the device switching element to respond after the target enters or exits the sensing zone

2.4.1.5**turn on time for a photoelectric proximity switch**

the time required for the switching element to respond after the target enters the sensing range with excess gain of 2 (see 2.4.6)

2.4.1.6**turn off time for a photoelectric proximity switch**

the time required for the switching element to respond after the target exits the sensing range with excess gain of 0,5 (see 2.4.6)

2.4.2**independent (snap) action**

a switching element function substantially independent from the velocity of the target

2.4.3**frequency of operating cycles (f)**

number of operating cycles performed by a proximity switch during a specified period of time

2.4.4**time delay before availability (t_v)**

the time delay before availability is the time between the switching on of the supply voltage and the instant at which the proximity switch becomes ready to operate correctly

2.4.5

Currents (I)

2.4.5.1

OFF-state current (I_r)

the current which flows through the load circuit of the proximity switch in the OFF-state

2.4.5.2

minimum operational current (I_m)

the current which is necessary to maintain ON-state conduction of the switching element

2.4.5.3

no-load supply current (I_o)

the current drawn by a three or four-terminal proximity switch from its supply when not connected to a load

2.4.6


excess gain for a photoelectric proximity switch

the ratio of the light received by the photoelectric proximity switch to the light required to operate the photoelectric proximity switch

2.4.7

ambient light for a photoelectric proximity switch

for the purpose of this standard, ambient light is the light received by the receiver other than that originating from the emitter

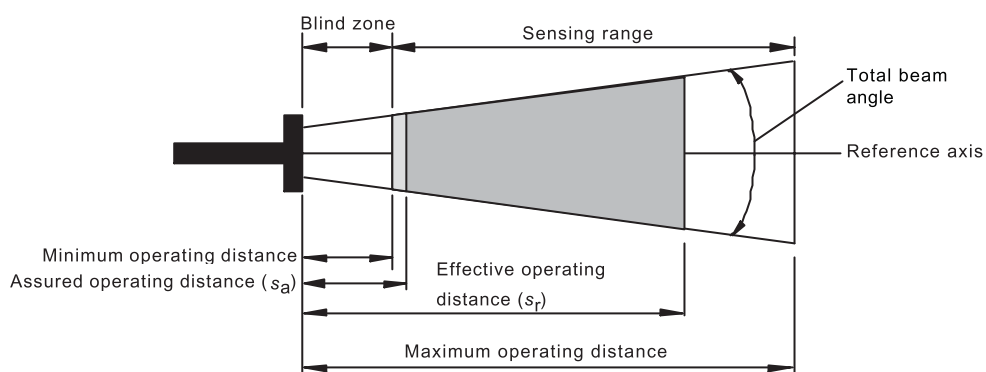

IEC 888/92

Figure 2 – Ultrasonic proximity switch operating distances

Table 1 – Classification of proximity switches

1st pos./1 digit	2nd pos./1 digit	3rd pos./3 digits	4th pos./1 digit	5th pos./1 digit	6th pos./1 digit
SENSING MEANS 3.1	MECHANICAL INSTALLATION 3.2	CONSTRUCTION FORM AND SIZE 3.3	SWITCHING ELEMENT FUNCTION (OUTPUT) 3.4	TYPE OF OUTPUT 3.5	METHOD OF CONNECTION 3.6
I = inductive C = capacitive U = ultrasonic D = diffuse reflective photoelectric M = non-mechanical magnetic R = retroreflective photoelectric T = through beam photoelectric	1 = embeddable 2 = non-embeddable 3 = either	FORM (1 capital letter) A = cylindrical threaded barrel B = cylindrical smooth barrel C = rectangular with square cross-section D = rectangular with rectangular cross-section DIMENSION (2 numbers) for diameter or side length	A = NO (make) B = NF (break) C = changeover (make-break) P = programmable by user S = other	P = PNP-output 3 or 4 terminal d.c. N = NPN-output 3 or 4 terminal d.c. D = 2 terminal d.c. F = 2 terminal a.c. U = 2 terminal a.c. or d.c. S = other	1 = integral leads 2 = plug-in 3 = screw 9 = other
Ultrasonic proximity switch example:					
U Ultrasonic	3 Either	A30 Cylindrical threaded Ø 30 mm	A NO (make) function	D 2 terminal d.c.	2 Plug in

3 Classification

Proximity switches are classified according to various general characteristics as shown in table 1.

3.1 Classification according to sensing means

In this standard the sensing means is designated by a capital letter in the first position.

3.2 Classification according to the mechanical installation

The mechanical installation is designated by one digit in the second position.

3.3 Classification according to the construction form and size

The construction form and the size are designated by three digits, one capital letter and two numbers. This three-digit designation is placed in the third position.

The capital letter designates the construction form, e.g. cylindrical or rectangular.

The two numbers designate the size, e.g. the diameter of cylindrical types or a length of one side for rectangular types.

3.4 Classification according to switching element function

The switching element function is designated by a capital letter placed in the fourth position.

3.5 Classification according to type of output

The type of output is designated by a capital letter and placed in the fifth position.

3.6 Classification according to method of connection

The method of connection is designated by a one-digit number placed in the sixth position.

4 Characteristics

4.1 Summary of characteristics

The characteristics of a proximity switch shall be stated in the following terms.

- Operating conditions (4.2)
- Rated and limiting values (4.3)
 - Rated voltages (4.3.1)
 - Currents (4.3.2)
 - Rated supply frequency (4.3.3)
 - Frequency of operating cycles (4.3.4)
 - Normal load and abnormal load characteristics (4.3.5)
 - Short-circuit characteristics (4.3.6)
- Utilization categories for the switching element (4.4).

4.1.1 Operation of an inductive or capacitive proximity switch

The output signal is determined by the presence or absence of a designated object in the electromagnetic or electric field which absorbs or alters energy radiated from the sensing face.

4.1.2 Operation of an ultrasonic proximity switch

The output signal is determined by the presence or absence of a designated object in the sensing zone which reflects ultrasound energy radiated from the sensing face.

4.1.3 Operation of a photoelectric proximity switch

The output signal is determined by the presence or absence of a designated object that either reflects or interrupts visible or invisible light radiated from the emitter.

4.2 Operating conditions

4.2.1 Operating distance(s) of inductive and capacitive proximity switches

The relationship between the operating distances is shown in figure 3.

4.2.1.1 Rated operating distance (s_n)

Rated operating distances are specified in the relevant annexes.

4.2.2 Operating distance(s) of an ultrasonic proximity switch

The relationship between the operating distances is shown in figure 4.

4.2.2.1 Sensing range (s_d)

Sensing range values are given in the relevant annexes.

4.2.3 Operating distance(s) of a photoelectric proximity switch

4.2.3.1 Sensing range (s_d)

For photoelectric proximity switches the operating distances are given as the sensing range (s_d).

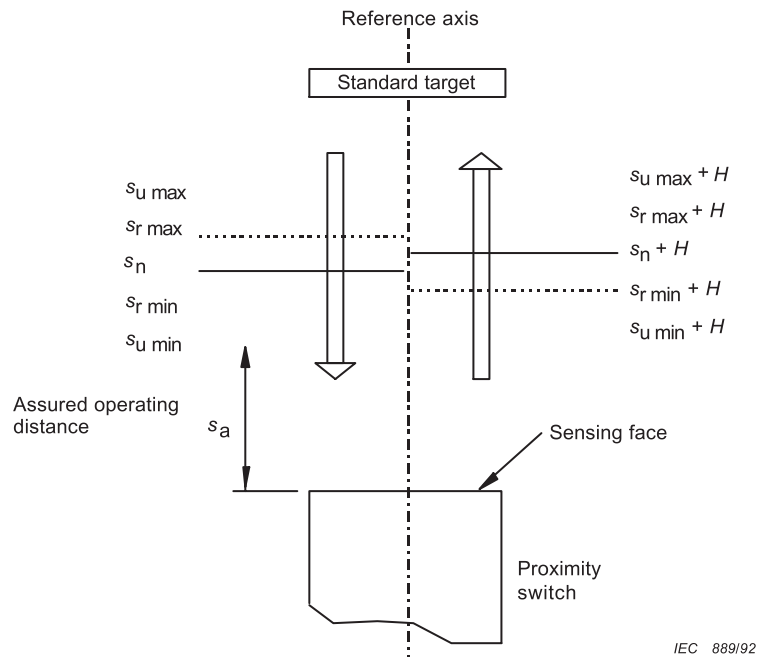


Figure 3 – Relationship between operating distances of inductive and capacitive proximity switches (see 4.2.1, 7.2.1.3 and 8.4.1)

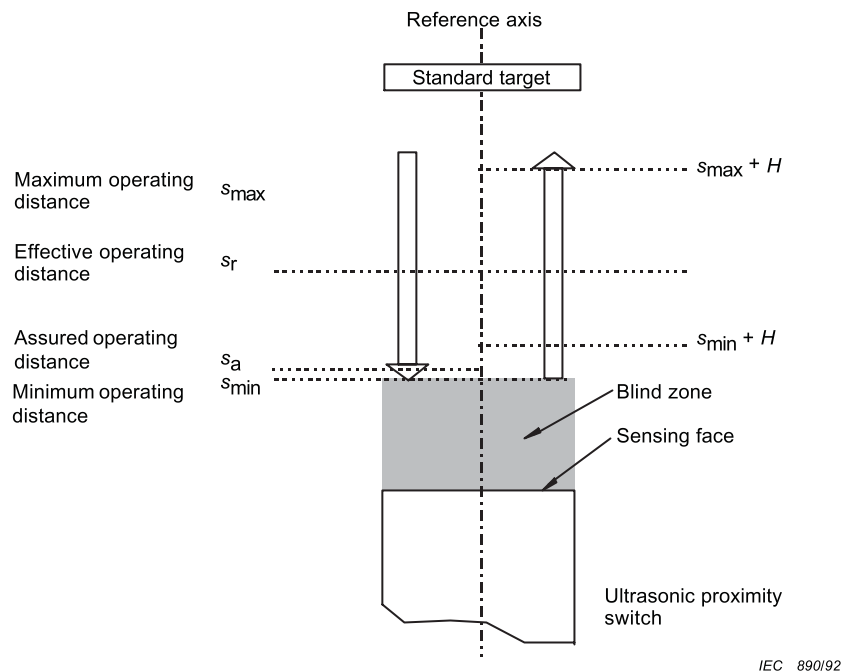


Figure 4 – Relationship between operating distances of ultrasonic proximity switches (see 4.2.2, 7.2.1.3 and 8.4.1)

4.3 Rated and limiting values for the proximity switch and switching element(s)

4.3.1 Voltages


The proximity switch and its switching element(s) are defined by the following rated voltages:

4.3.1.1 Rated operational voltage (U_e)

The rated operational voltage (U_e) (or range) shall not exceed 250 V a.c. or 300 V d.c.

NOTE The manufacturer may state a range between the limiting values which include all the tolerances of U_e , this range shall be designated U_B .

The relationship between U_e and U_B is shown below:

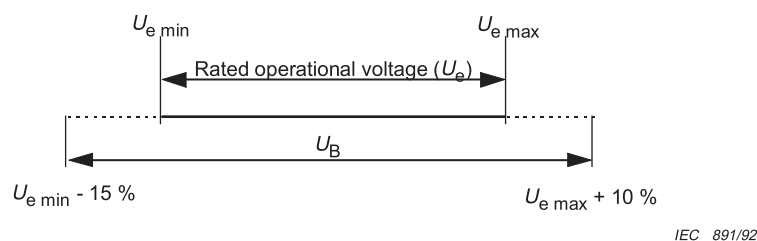

4.3.1.2 Rated insulation voltage (U_i)

The rated insulation voltage of a proximity switch is the value of voltage to which the dielectric voltage tests and creepage distances are referred.

For proximity switches the highest rated operational voltage shall be considered to be the rated insulation voltage.

4.3.1.3 Rated impulse withstand voltage (U_{imp})

When the rated impulse withstand voltage is declared by the manufacturer, 4.3.1.3 of part 1 applies.

4.3.1.4 Voltage drop (U_d)

The voltage drop is the voltage measured across the active output of the proximity switch when carrying the operational current flows under specified conditions. The values are specified in 7.2.1.15.

4.3.2 Currents

The proximity switch and its switching element are defined by the following currents.

4.3.2.1 Rated operational current (I_e)

See 7.2.1.11.

4.3.2.2 Minimum operational current (I_m)

See 7.2.1.12.

4.3.2.3 OFF-state current (I_r)

See 7.2.1.13.

4.3.2.4 No-load supply current (I_o)

The no-load supply current of a three- or four-terminal proximity switch shall be stated by the manufacturer.

4.3.3 Rated supply frequency

The rated supply frequency shall be 50 Hz and/or 60 Hz.

4.3.4 Frequency of operating cycles (f)

The frequency of operating cycles shall be in accordance with the relevant annexes or stated by the manufacturer.

4.3.5 Normal load and abnormal load characteristics

4.3.5.1 Rated making and breaking capacities and behaviour of switching element under normal conditions

A switching element shall comply with the requirements given in table 4.

NOTE For a switching element to which a utilization category is assigned, it is not necessary to specify separately a making and breaking capacity.

4.3.5.2 Making and breaking capacities under abnormal conditions

A switching element shall comply with the requirements given in table 5.

NOTE For a switching element to which a utilization category is assigned, it is not necessary to specify separately a making and breaking capacity.

4.3.6 Short-circuit characteristics

4.3.6.1 Rated conditional short-circuit current

The rated conditional short-circuit current of a proximity switch is 100 A prospective. The proximity switch shall withstand satisfactorily the test specified in 8.3.4.

4.4 Utilization categories for the switching element

The utilization categories as given in table 2 are considered standard. Any other type of application shall be based on agreement, between manufacturer and user, but information given in manufacturer's catalogue or tender may constitute such an agreement.

Table 2 – Utilization categories for switching elements

Kind of current	Category	Typical applications
Alternating current	AC-12	Control of resistive loads and solid state loads with optical isolation
	AC-140	Control of small electromagnetic loads with holding (closed) current $\leq 0,2$ A: e.g. contactor relays
Direct current	DC-12	Control of resistive loads and solid state loads with optical isolation
	DC-13	Control of electromagnets

5 Product information

5.1 Nature of information

The following information shall be given by the manufacturer.

5.1.1 Identification

- The manufacturer's name or trade mark.
- A type designation or other marking which makes it possible to identify the proximity switch and get the relevant information from the manufacturer or his catalogue (see table 1).
- Reference to this standard if the manufacturer claims compliance.

Basic rated values and utilization

- Rated operational voltage(s) (see 4.3.1.1).
- Utilization category and rated operational currents at the rated operational voltages and rated frequency/frequencies or at direct current, d.c.
- Rated insulation voltage (see 4.3.1.2).
- Rated impulse withstand voltage (see 4.3.1.3).
- IP code (see 7.1.10).
- Pollution degree (see 6.1.3.2).
- Type and maximum ratings of short-circuit protective device (see 7.2.5).
- Rated conditional short-circuit current (see 4.3.6.1).
- Electromagnetic compatibility (EMC) (see 7.2.6).
- Operating distances (see 7.2.1.3).
- Repeat accuracy (see 7.2.1.4).
- Differential travel (see 7.2.1.5).
- Frequency of operating cycles (see 7.2.1.6).
- Minimum operational current (see 7.2.1.12).
- OFF-state current (see 7.2.1.13).
- No-load supply current (see 4.3.2.4).
- Voltage drop (see 7.2.1.15).
- Switching element function (see 2.4.1).
- Mounting application, embeddable or non-embeddable (see 2.2.9 and 2.2.10).
- Physical dimensions (see 7.3).
- Excess gain (see 7.2.1.10).

5.2 Marking

5.2.1 General

Marking of data under a) and b) of 5.1.1 is mandatory on the nameplate or marked on the body of the proximity switch in order to permit the complete information to be obtained from the manufacturer.

Cylindrical proximity switches of 12 mm or smaller body diameter may provide this marking on the cord or on a tag permanently attached to the cord, located no further than 100 mm from the body of the device.

Marking shall be indelible and easily legible, and shall not be placed on parts normally removable in service.

Data under c) to y) when not included on the proximity switch, shall be included in the manufacturer's literature.

5.2.2 Terminal identification and marking

Subclause 7.1.7.4 applies.

5.2.3 Functional markings

The sensing face shall be marked where this is not apparent by the construction of the proximity switch.

5.3 Instruction for installation, operation and maintenance

The manufacturer shall specify in his documents or catalogues the conditions for installation, operation and maintenance of the proximity switch.

The above documents shall indicate the recommended extent and frequency of maintenance, if any.

6 Normal service, mounting and transport conditions

6.1 Normal service conditions

Proximity switches complying with this standard shall be capable of operating under the following standard conditions.

NOTE If the conditions for operation differ from those given in this standard, the user shall state the deviations from the standard conditions and consult the manufacturer on the suitability for use under such conditions.

6.1.1 Ambient air temperature

6.1.1.1 Inductive, capacitive, non-mechanical magnetic and ultrasonic proximity switches

These proximity switches shall operate between the ambient temperatures of $-25\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$. The operating characteristics shall be maintained over the permissible range of ambient temperature.

NOTE For ultrasonic proximity switches, due to the fact that the speed of sound is dependent upon air temperature, the operating distance may change by 0,17 % per kelvin.

6.1.1.2 Photoelectric proximity switch

Photoelectric proximity switches shall operate between the ambient temperatures of -5°C to $+55^{\circ}\text{C}$. The operating characteristics shall be maintained over the permissible range of ambient temperature.

6.1.2 Altitude

Subclause 6.1.2 of part 1 applies.

6.1.3 Climatic conditions

6.1.3.1 Humidity

The relative humidity (RH) of the air shall not exceed 50 % at 70°C . Higher relative humidities are permitted at lower temperatures, e.g. 90 % at $+20^{\circ}\text{C}$.

NOTE Condensation on the sensing face and the change of humidity may influence the operating distances. Care should be taken of condensation which may occur due to variations in temperature. (50 % RH at 70°C equivalent to 100 % RH at 54°C).

6.1.3.2 Pollution degree

Unless otherwise stated by the manufacturer, a proximity switch is intended for installation under environmental conditions of pollution degree 3 as defined in 6.1.3.2 of part 1. However, other pollution degrees may apply depending upon the micro-environment.

6.2 Conditions during transport and storage

A special agreement shall be made between the user and the manufacturer if the conditions during transport and storage, e.g. temperature and humidity conditions, differ from those defined in 6.1.

6.3 Mounting

Mounting dimensions and conditions shall be according to the relevant specification sheet of annex A.

7 Constructional and performance requirements

7.1 Constructional requirements

7.1.1 Materials

Materials shall be suitable for the particular application and shall enable the equipment to comply with the relevant test requirements.

Special attention shall be called to flame and humidity resisting qualities, and to the necessity to protect certain insulating materials against humidity.

NOTE Requirements are under consideration.

7.1.2 Current-carrying parts and their connections

Current-carrying parts shall have the necessary mechanical strength and current-carrying capacity for their intended use.

For electrical connections, no contact pressure shall be transmitted through insulating material other than ceramic or other material with characteristics not less suitable, unless there is sufficient resiliency in the metallic parts to compensate for any possible shrinkage or yielding of the insulation material.

7.1.3 Clearances and creepage distances

When the manufacturer declares a rated impulse withstand voltage, U_{imp} , tables 13 and 15 of part 1 apply. If no value for U_{imp} has been declared, the requirements of 7.2.3 apply.

7.1.4 Actuation

Proximity switches are tested for operation by the presence or absence of the standard target, the characteristics of which are specified in 8.3.2.1.

7.1.5 Vacant

7.1.6 Vacant

7.1.7 Terminals

7.1.7.1 Constructional requirements

Subclause 7.1.7.1 of part 1 applies.

7.1.7.2 Connecting capacity

Subclause 7.1.7.2 of part 1 applies.

7.1.7.3 Connection means

Subclause 7.1.7.3 of part 1 applies with the following additions.

Proximity switches may have integral connecting leads; in this case the outer sheath of the connecting leads shall be $2^{+0,1}_0$ m long.

7.1.7.4 Connection identification and marking

Subclause 7.1.7.4 of part 1 applies with the following additions.

Proximity switches with integral connecting leads shall have wires identified with colours according to table 3.

Proximity switches with terminal connections shall be identified according to table 3.

Table 3 – Connection and wiring identification

Type	Function	Wire	Wire colour	Terminal number ²⁾
2 terminals a.c. and 2 terminals d.c. unpolarized	NO (make)		Any colour ¹⁾ except Yellow, Green or Green and yellow	3 4
	NC (break)			1 2
	NO/NC programmable			1 4
2 terminals d.c. polarized	NO (make)	+ –	Brown Blue	1 4
	NC (break)	+ –	Brown Blue	1 2
3 terminals d.c. polarized	NO (make)	+ – Output	Brown Blue Black	1 3 4
	NC (break)	+ – Output	Brown Blue Black	1 3 2
3 terminals a.c. and 3 terminals a.c./d.c. polarized	NO (make)	L Output	Brown Blue Black	1 3 4
	NC (break)	L Output	Brown Blue Black	1 3 2
4 terminals d.c. polarized	Change over (make/break)	+ – NO output NC output	Brown Blue Black White	1 3 4 2
¹⁾ It is recommended that both wires are of the same colour. ²⁾ Terminal numbers (except for a.c. proximity switches and proximity switches using 3 terminals 8 mm connector) shall be the same as integral connector pin numbers.				

The bi-colour of green-and-yellow (green/yellow) shall be used only to identify the protective conductor (IEC 60446). To maintain historic integrity of earth security, the colour green shall not be used for any other purpose than to identify the protective earth conductor.

7.1.8 Vacant

7.1.9 Provisions for protective earthing

7.1.9.1 Constructional requirements

Subclause 7.1.9.1 of part 1 applies with the following addition.

NOTE 1 For proximity switches having class II insulation, the outside metal enclosure is not required to be connected to the protective earth terminal (see IEC 60536).

NOTE 2 Proximity switches with maximum rated voltages not exceeding either 50 V a.c. or 120 V d.c. need no provision for protective earthing.

Consideration must be given to the safety insulation of the supply and its transformer (if any) in accordance with the installation rules (see IEC 60364).

7.1.9.2 Protective earth terminal

Subclause 7.1.9.2 of part 1 applies.

7.1.9.3 Protective earth terminal marking and identification

Subclause 7.1.9.3 of part 1 applies.

7.1.10 Degree of protection

Proximity switches, when installed in accordance with the manufacturer's instruction shall have minimum IP65 protection, except for photoelectric switches which shall have minimum IP54 protection and shall be verified according to 8.2.

NOTE During the test for the degree of protection the operation of the proximity switch is not required.

7.1.11 Requirements for proximity switches with integrally connected cables

See annex C.

7.1.12 Class II proximity switches

These devices shall not be provided with means for protective earthing (see IEC 60536).

For class II proximity switches insulated by encapsulation, see annex B.

7.2 Performance requirements

The following requirements apply to clean new equipment.

7.2.1 Operating conditions

7.2.1.1 General

The equipment shall be mounted in accordance with the instructions given in the relevant specification sheet (annex A) or by the manufacturer.

For the tests of 7.2.1.3 through 7.2.1.6 the load shall be adjusted to provide $0,2 I_e$.

7.2.1.2 Operating limits

The proximity switch shall operate satisfactorily

- a) between 85 % and 110 % of U_e , or
- b) between 85 % $U_{e \min}$ and 110 % of $U_{e \max}$, or
- c) over the range U_B .

For d.c., the value of the ripple voltage (peak to peak) shall not exceed $0,1 U_e$ (see 4.3.1.1).

7.2.1.3 Operating distances

The operating distances are measured according to 8.4. The operating distances are stated when the target is moving towards the proximity switch in an axial approach.

For inductive and capacitive proximity switches, the relationship between the operating distances is shown in figure 3.

For ultrasonic proximity switches, the relationship between the operating distances is shown in figure 4.

For photoelectric proximity switches, the relationship between the operating distances is shown in figure 1.

7.2.1.3.1 Effective operating distance (s_r)

The effective operating distance is measured at the rated voltage and at an ambient temperature of $23\text{ °C} \pm 5\text{ °C}$.

- For inductive and capacitive proximity switches it shall be between 90 % and 110 % of the rated operating distance (s_n):

$$0,9\ s_n \leq s_r \leq 1,1\ s_n$$

- For ultrasonic proximity switches it shall be any distance between the minimum and maximum operating distances:

$$s_{\min} \leq s_r \leq s_{\max}$$

7.2.1.3.2 Usable operating distance (s_u)

Usable operating distance is measured over the ambient temperature range and the supply voltage at 85 % and 110 % of their rated value.

- For inductive and ultrasonic proximity switches, it shall be between 90 % and 110 % of the effective operating distance (s_r):

$$0,9\ s_r \leq s_u \leq 1,1\ s_r$$

- For capacitive proximity switches, it shall be between 80 % and 120 % of the effective operating distance (s_r):

$$0,8\ s_r \leq s_u \leq 1,2\ s_r$$

7.2.1.3.3 Assured operating distance (s_a)

- For inductive proximity switches, the assured operating distance is between 0 % and 81 % of the rated operating distance s_n :

$$0 \leq s_a \leq 0,9 \times 0,9\ s_n$$

- For capacitive proximity switches, the assured operating distance is between 0 % and 72 % of the rated operating distance s_n :

$$0 \leq s_a \leq 0,9 \times 0,8\ s_n$$

7.2.1.3.4 Sensing range (s_d) for photoelectric proximity switches

The sensing range is measured according to 8.4.

The sensing range is shown:

- in figure 11a for type T: emitter and receiver,
- in figure 11b for type R: emitter, receiver and reflector,
- in figure 11c for type D: emitter, receiver and object.

The sensing range is stated by the manufacturer for 0 lx and 5 000 lx of ambient light according to the test method specified in 8.4.2.