



DPC: 23 / 30475452 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 12 June 2023

Origin: International

Latest date for receipt of comments: 5 July 2023

Project No. 2023/01304

Responsible committee: EPL/47 Semiconductors

Interested committees:

Title: BS EN IEC 62341-6-1 Organic light emitting diode (OLED) displays

Part 6-1: Measuring methods of optical and electro-optical parameters

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 5 July 2023**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



110/1535/CD

COMMITTEE DRAFT (CD)

PROJECT NUMBER:

IEC 62341-6-1 ED4

DATE OF CIRCULATION:

2023-06-09

CLOSING DATE FOR COMMENTS:

2023-08-04

SUPERSEDES DOCUMENTS:

110/1531/RR

IEC TC 110 : ELECTRONIC DISPLAYS

SECRETARIAT:

Japan

SECRETARY:

Mr Yoshi SHIBAHARA

OF INTEREST TO THE FOLLOWING COMMITTEES:

PROPOSED HORIZONTAL STANDARD:



Other TC/SCs are requested to indicate their interest, if any, in this CD to the secretary.

FUNCTIONS CONCERNED:

☐ EMC

☐ ENVIRONMENT

☐ QUALITY ASSURANCE

☐ SAFETY

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Recipients of this document are invited to submit, with their comments, notification of any local regulations or technical reasons that may exist and should be considered should this proposal proceed, recognizing that failure to address such requirements could result in the need for new or existing "In Some Countries" clauses. (SEE [AC/22/2007](#) OR [NEW GUIDANCE DOC](#)).

TITLE:

Organic light emitting diode (OLED) displays - Part 6-1: Measuring methods of optical and electro-optical parameters

NOTE FROM TC/SC OFFICERS:

Copyright © 2023 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

Documents
AVA Document Sharing Hub

CONTENTS

1		
2	CONTENTS.....	2
3	FOREWORD	6
4	1 Scope	8
5	2 Normative references	8
6	3 Terms, definitions, and abbreviated terms	8
7	3.1 Terms and definitions	8
8	3.2 Abbreviated terms	9
9	4 Structure of measuring equipment	9
10	5 Standard measuring conditions	10
11	5.1 Standard measuring environmental conditions	10
12	5.2 Standard measuring dark room conditions	10
13	5.3 Standard setup conditions	10
14	5.3.1 General	10
15	5.3.2 Adjustment of OLED display modules	10
16	5.3.3 Starting conditions of measurements	10
17	5.3.4 Measuring equipment requirements	10
18	5.4 Standard locations of measurement field	12
19	5.5 Standard test patterns	13
20	6 Measuring methods for optical parameters	17
21	6.1 Primary luminance, colour, and uniformity of full-colour high-resolution modules..	17
22	6.1.1 Purpose	17
23	6.1.2 Measuring conditions	18
24	6.1.3 Measuring methods for high-resolution full-colour modules	18
25	6.1.4 Maximum luminance of white and RGB primaries	20
26	6.1.5 Average colour of maximum white and RGB primaries	20
27	6.1.6 Luminance uniformity of white and RGB primaries	21
28	6.1.7 Chromaticity non-uniformity of maximum white and RGB primaries	21
29	6.1.8 Colour additivity of maximum white and RGB primaries	22
30	6.1.9 White correlated colour temperature	22
31	6.2 Primary luminance, chromaticity, and uniformity of low-resolution modules	22
32	6.2.1 Purpose	22
33	6.2.2 Measuring conditions	22
34	6.2.3 Measuring methods for low-resolution modules and segmented displays	23
35	6.3 Signal loading	23
36	6.3.1 Purpose	23
37	6.3.2 Measuring conditions	23
38	6.3.3 Measuring methods.....	23
39	6.4 Dark room contrast ratio	24
40	6.4.1 Purpose	24
41	6.4.2 Measuring conditions	24
42	6.4.3 Measuring method	24
43	6.5 Display chromaticity gamut area	25

44	6.5.1	Purpose	25
45	6.5.2	Measuring conditions	25
46	6.5.3	Measuring methods	25
47	6.5.4	Display colour gamut area in CIE 1931 and CIE 1976 chromaticity diagram ..	26
48	6.6	Colour gamut volume	27
49	6.6.1	Purpose	27
50	6.6.2	Measuring conditions	27
51	6.6.3	Measuring methods	27
52	7	Measuring methods for power consumption	30
53	7.1	Purpose	30
54	7.2	Measuring conditions	30
55	7.3	Measuring methods	30
56	7.3.1	Measuring the power consumption relevant to luminance of the OLED display module without signal decoding process	30
57			
58	7.3.2	Measuring the power consumption of the OLED display module's embedded video connection terminal with a signal decoding process	31
59			
60	Annex A (normative)	Response time of passive matrix display panels	34
61	A.1	Purpose	34
62	A.2	Measuring conditions	34
63	A.3	Measuring methods	34
64	Annex B (normative)	Luminance current efficiency	36
65	B.1	Purpose	36
66	B.2	Measuring conditions	36
67	B.3	Measuring methods	36
68	Annex C (informative)	Veiling glare frustum	38
69	Annex D (informative)	Methods to obtain the correlated colour temperature (CCT) from chromaticity coordinates	39
70			
71	D.1	Method 1: Use of McCamy's approximate formula	39
72	D.2	Method 2: Use of Javier Hernandez-Andres's approximate formula	39
73	D.3	Method 3: Graphical determination of correlated colour temperature	40
74	Annex E (informative)	Measuring performance of modern colour-managed displays and panels	43
75			
76	E.1	Legacy displays	43
77	E.2	Modern displays	43
78	E.3	Results	45
79	E.4	Conclusion	48
80	Annex F (informative)	Simple window luminance and colour measurements	49
81	F.1	Background	49
82	F.2	Measuring conditions	49
83	F.3	Maximum full screen luminance	49
84	F.4	4 % window luminance	49
85	F.5	Sampled luminance non-uniformity	49
86	F.6	4 % window centre colour	50
87	F.7	Sampled colour non-uniformity	50
88	Bibliography		52
89			

90	Figure 1 – Layout diagram of measurement setup	11
91	Figure 2 – Standard measurement positions in the display active area	13
92	Figure 3 – Test pattern scaling used to define the area size of the coloured rectangles in the	
93	active area of the display	13
94	Figure 4 – Low APL loading series of red, green, blue, and white test patterns used for basic	
95	luminance, colour, and uniformity measurements	14
96	Figure 5 – Medium (top) and high (bottom) APL loading versions of CTR pattern	15
97	Figure 6 – Standard medium APL RGBCMY test pattern used for centre luminance and colour	
98	measurements with 25% APL	16
99	Figure 7 – Examples of variable signal loading RGBCMY test pattern used for centre luminance	
100	and colour measurements	17
101	Figure 8 – Sequence for measuring luminance and colour at the nine standard display positions	
102	for all coloured tile patterns	19
103	Figure 9 – Chromaticity of blackbody source at various temperatures as represented on the	
104	CIE 1931 chromaticity diagram	22
105	Figure 10 – Example representation of the same primary colours in the CIE 1931 (left) and	
106	CIE 1976 (right) chromaticity diagrams	26
107	Figure 11 – Example of range in colours produced by an sRGB display as represented by the	
108	CIELAB colour space (top) and by visualization using gamut rings (bottom)	29
109	Figure 12 – Example of measurement setup of power consumption	31
110	Figure 13 – Example of measurement setup of power consumption with embedded video	
111	terminal	32
112	Figure A.1 – Relationship between driving signal and optical response times	35
113	Figure B.1 – Example of a measurement configuration for measuring luminance current	
114	efficiency	37
115	Figure C.1 – Pattern for veiling glare frustum	38
116	Figure D.1 – CIE 1931 XYZ chromaticity diagram	41
117	Figure D.2 – Blackbody locus (Planckian locus) and isothermperature lines in CIE 1931	
118	chromaticity diagram	42
119	Figure E.1 – Legacy model where the independent drive electronics provide a direct correlation	
120	between the input RGB signals and the display's colour primaries	43
121	Figure E.2 – Examples of modern drive models using multi-dimensional LUTs for RGB (top)	
122	and multi-primary (bottom) displays	44
123	Figure E.3 – Example of signal loading behaviour for an RGBW display (top) and RGB (bottom)	
124	OLED display	46
125	Figure E.4 – Low APL loading test pattern with small box size (1/9 of the screen size	
126	dimensions)	47
127	Figure E.5 – Signal loading profiles for several input colours measured at the centre of the test	
128	pattern using Figure 8	48
129	Figure F.1 – Example of simple 4 % white window pattern at the centre of the screen	50
130		
131	Table 1 – Standard digital-equivalent input signals for rendering the white, primary and	
132	secondary colours in test patterns	17
133	Table 2 – Example of luminance measured for the same colour patch at the standard nine	
134	screen positions and the resulting luminance non-uniformity	19

135 Table 3 – Example of the chromaticity measured for the same colour patch at the nine standard
136 screen positions and the resulting chromaticity non-uniformity 20

137 Table 4 – Scaling the size of the colour boxes in the APL loading pattern relative to the screen
138 dimensions 24

139 Table 5 – Example of report format for CIELAB gamut volume 30

140 Table 6 – Example of a module power consumption measurements summary sheet 31

141 Table 7 – Example of module power consumption measurements with contents 33

142 Table 8 – Example of module power consumption measurements with images 33

143 Table D.1 – x_e , y_e , A_i and t_i for Formula(D.3) and Formula (D.4) 40

144 Table E.1 – Example of luminance data for an RGB display and an RGBW OLED display 45

145

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ORGANIC LIGHT EMITTING DIODE (OLED) DISPLAYS –

Part 6-1: Measuring methods of optical and electro-optical parameters

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
 - 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
 - 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
 - 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
 - 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
 - 6) All users should ensure that they have the latest edition of this publication.
 - 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
 - 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
 - 9) IEC draws attention to the possibility that the implementation of this document may involve the use of a patent. IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of a patent, which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch> shall not be held responsible for identifying any or all such patent rights.
- IEC 62341-6-1 has been prepared by IEC technical committee 110: Electronic displays. It is an International Standard.
- This fourth edition cancels and replaces the third edition published in 2022. This edition constitutes a technical revision.
- This edition includes the following significant technical changes with respect to the previous edition:
- a) standard test patterns are modified;
 - b) measuring methods for display chromaticity gamut area and colour gamut volume are modified.

194 The text of this International Standard is based on the following documents:

Draft	Report on voting
110/1xxx/FDIS	110/1xxx/RVD

195

196 Full information on the voting for its approval can be found in the report on voting indicated in the above
197 table.

198 The language used for the development of this International Standard is English.

199 This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance
200 with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at
201 www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in
202 greater detail at www.iec.ch/standardsdev/publications.

203 A list of all the parts in the IEC 62341 series, under the general title *Organic light emitting diode (OLED)*
204 *displays*, can be found on the IEC website.

205 The committee has decided that the contents of this document will remain unchanged until the stability
206 date indicated on the IEC website under webstore.iec.ch in the data related to the specific document.
207 At this date, the document will be

- 208 • reconfirmed,
- 209 • withdrawn,
- 210 • replaced by a revised edition, or
- 211 • amended.

212

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

213

214 The National Committees are requested to note that for this document the stability date is 20xx.

215 THIS TEXT IS INCLUDED FOR THE INFORMATION OF THE NATIONAL COMMITTEES AND WILL BE DELETED AT THE
216 PUBLICATION STAGE.

217

218

ORGANIC LIGHT EMITTING DIODE (OLED) DISPLAYS –

Part 6-1: Measuring methods of optical and electro-optical parameters

1 Scope

This part of IEC 62341 specifies the standard measurement conditions and measuring methods for determining the optical and electro-optical parameters of organic light emitting diode (OLED) displays with unbounded input signals measured in a dark room.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-845, *International Electrotechnical Vocabulary – Part 850: Lighting* (available at www.electropedia.org)

IEC 61966-2-1, *Multimedia systems and equipment – Colour measurement and management – Part 2-1: Colour management – Default RGB colour space – sRGB*

IEC 62341-1-2, *Organic light emitting diode (OLED) displays – Part 1-2: Terminology and letter symbols*

IEC 62341-6-2:2015, *Organic light emitting diode (OLED) displays – Part 6-2: Measuring methods of visual quality and ambient performance*

IEC 62087-3, *Audio, video, and related equipment – Determination of power consumption – Part 3: Television sets*

CIE 15:2004, *Colorimetry*, 3rd edition

CIE S 014-1, *Colorimetry – Part 1: CIE Standard Colorimetric Observers*

CIE 168:2005, *Criteria for the evaluation of extended-gamut colour encodings*

IEC 62977-2-1:2021, *Electronic displays – Part 2-1: Measurements of optical characteristics – Fundamental measurements*

IEC 62977-3-5:2023, *Electronic displays – Part 3-5: Evaluation of optical performance – Colour capabilities*

ITU-R BT.2020, *Parameters values for ultra-high definition television systems for production*

3 Terms, definitions, and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-845, IEC 62341-1-2, and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1.1**signal pixel**

smallest encoded picture element in the input image

3.1.2**pre-gamma average picture level**

average input level of all signal pixels relative to an equivalent white pixel driven by a digital RGB input

Note 1 to entry: Unless otherwise stated, the pre-gamma average picture level (APL) will simply be referred to as average picture level in this document.

Note 2 to entry: The APL will normally be expressed as a percentage, where a full white screen at maximum drive level would be 100 % APL.

Note 3 to entry: It is noted that the tone rendering curve may not have a power law function with a well-defined exponent (gamma).

3.1.3**average light level****ALL**

average light of the input signal on all pixels

Note 1 to entry: ALL, which is calculated by averaging of post-EOTF signal pixels, is also called as the post-EOTF APL.

3.2 Abbreviated terms

ALL average light level

APL average picture level

CCT correlated colour temperature

CIE Commission Internationale de L'Eclairage (International Commission on Illumination)

CIELAB CIE 1976 ($L^*a^*b^*$) colour space

CMY cyan, magenta, and yellow

DRCR dark room contrast ratio

DUT device under test

eDP embedded display port

LMD light measuring device

LUT look-up table

MIPI mobile industry processor interface

PMOLED passive matrix organic light-emitting diode

RGB red, green, and blue

RGBCMY red, green, blue, cyan, magenta, and yellow

SPD spectral power distribution

sRGB standard RGB colour space as defined in IEC 61966-2-1

TCON timing controller

UCS uniform chromaticity scale

WRGB white, red, green, and blue

4 Structure of measuring equipment

The system diagrams and/or operating conditions of the measuring equipment shall comply with the structure specified in each item.

5 Standard measuring conditions

5.1 Standard measuring environmental conditions

Measurements shall be carried out under the standard environmental conditions as follows:

- temperature: 25 °C ± 3 °C
- relative humidity: 25 % RH to 85 % RH
- atmospheric pressure: 86 kPa to 106 kPa

When different environmental conditions are used, they shall be noted in the report.

5.2 Standard measuring dark room conditions

The luminance contribution from unwanted background illumination reflected off the test display shall be less than 1/20 of the display's black state luminance. If these conditions are not satisfied, then background subtraction is required, and it shall be noted in the test report. In addition, if the sensitivity of the LMD is inadequate to measure 1/20 of the black level, then the lower limit of the LMD shall be noted in the test report.

5.3 Standard setup conditions

5.3.1 General

Standard setup conditions are given below in 5.3.2, 5.3.3 and 5.3.4. Any deviations from these conditions shall be reported.

5.3.2 Adjustment of OLED display modules

The display shall be measured at its factory default settings. If other settings are used, they shall be noted in the test report. These settings shall be held constant for all measurements, unless stated otherwise. It is important, however, to make sure that not only the adjustments are kept constant, but also that the resulting physical quantities remain constant during the measurement. This is not automatically the case because of, for example, warm-up effects.

5.3.3 Starting conditions of measurements

Measurements shall be started after the OLED displays and measuring instruments achieve stability. It is recommended that, when the display is first turned on, it be operated for at least 30 min with a loop of colour patterns rendered on the screen. Sufficient warm-up time has been achieved when the luminance of the test feature to be measured varies by less than ±3 % over the entire measurement method for a given display image.

5.3.4 Measuring equipment requirements

5.3.4.1 General conditions

Light measurements shall generally be made in terms of photometric or colorimetric units for a CIE 1931 standard colorimetric observer as defined in CIE S 014-1. Luminance can be measured by a photometer, and CIE tristimulus values (X , Y , Z) or CIE chromaticity coordinates by a colorimeter. A spectroradiometer can also obtain photometric and colorimetric values through a numerical conversion of the measured spectral radiance data (see for example [1]¹). A telescopic LMD, where the LMD is not in direct contact with the screen, shall be used without an illumination source. The following requirements are given for these instruments:

- a) The LMD shall be a luminance meter, colorimeter, or a spectroradiometer. The spectroradiometer shall be capable of measuring spectral radiance over at least the 380 nm to 780 nm wavelength range, with a maximum bandwidth of 10 nm for smooth broadband spectra. For OLED primaries with a bandwidth ≤ 25 nm, the maximum bandwidth shall be ≤ 5 nm. The spectral bandwidth of the

¹ Numbers in square brackets refer to the Bibliography.

spectroradiometer shall be an integer multiple of the sampling interval. For example, a 5 nm sampling interval can be used for a 5 nm or 10 nm bandwidth.


Ensure that the LMD has enough sensitivity and dynamic range to perform the required task. The measured LMD signal shall be at least ten times greater than the dark level (noise floor) of the LMD, and no greater than 85 % of the saturation level.

- b) The LMD shall be focused on the image plane of the display and generally aligned perpendicularly to the display surface at the centre of the measurement field, unless stated otherwise.
- c) The relative uncertainty and repeatability of all the measuring devices shall be maintained by following the instrument supplier's recommended calibration schedule.
- d) The LMD integration time shall be an integer number of frame periods, synchronized to the frame rate, or the integration time shall be greater than one hundred frame periods.
- e) If LMD measurements are taken for displays with impulse driving or duty driving, the high peak luminance of these displays can cause detector saturation errors. The accuracy of these measurements can be checked by attenuating the light with a neutral-density filter. If the change in signal amplitude of the detector is proportional to the transmittance of the neutral-density filter, then there are no detector saturation errors. This method is for measuring the maximum time-averaged full-screen luminance.

When using LMDs, stray light within the LMD (e.g. lens flare, veiling glare), and non-uniformities of sensitivity across detector area should be considered. Also, when measuring black regions, stray light from adjacent bright regions of the displays can introduce significant errors. The stray light can be significantly reduced by using a frustum (see Annex C).

In addition to LMDs that form an average value for the measured quantity over the measurement field under consideration (i.e. spot photometers, see Figure 1), there are imaging LMDs which give a value (or an array of values, e.g. R, G and B) for each individual area-element on the DUT. Such LMDs can replace a sequential mechanical scan of the surface of a display by an image of the entire active area of the DUT, and a subsequent evaluation of the data.

When imaging LMDs are used, a flat-field correction shall be applied to the LMD at the measuring distance.

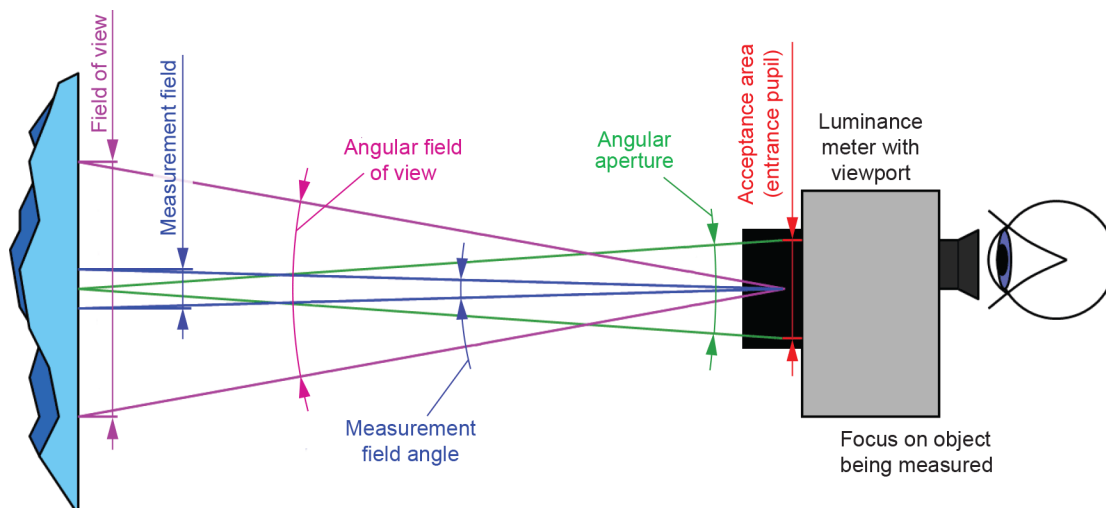

IEC

Figure 1 – Layout diagram of measurement setup

5.3.4.2 High pixel count matrix displays ($\geq 320 \text{ pixels} \times 240 \text{ pixels}$)

The following applies for high pixel count matrix displays:

- a) When measuring matrix displays, the light-measuring devices should be set to a measurement field that includes more than 500 pixels. For LMDs with a circular measurement field, this would be equivalent to a disk with a diameter greater than 25 display pixels. If smaller measurement areas are necessary, photometric and colorimetric equivalence to 500 pixels shall be confirmed and noted in the test report.
- b) For small displays, the recommended measuring distance is between 20 cm to 50 cm. For larger displays, the measurement area shall contain at least 500 pixels. The measurement area contains at least 500 pixels. The measuring distance shall be noted in the report.
- c) The angular aperture shall be less than or equal to 5° , and the measurement field angle shall be less than or equal to 2° (see Figure 1).
- d) The display shall be operated at its design field frequency. When using separate driving signal equipment to operate a panel, the drive conditions shall be noted in the report.

5.3.4.3 Low pixel count matrix displays (< 320 pixels × 240 pixels) and segmented displays

The following applies for low pixel count matrix displays:

- a) Low pixel count displays can contain fewer than 500 pixels. When the number of pixels in the measurement field is less than 500, it shall be noted in the report. The angular aperture shall be less than or equal to 5° , and the measurement field angle shall be less than or equal to 2° . The measurement conditions used shall be recorded.
- b) For segment displays, the angular aperture shall be less than or equal to 5° , and the measurement field angle shall be less than or equal to 2° . All measurements shall be performed at the centre of a segment with the measurement field completely contained within the segment.
- c) For small displays, the recommended measuring distance is between 20 cm to 50 cm. For larger displays, follow the manufacturer's recommended viewing distance. For larger displays, the measurement area shall contain at least 500 pixels. The measuring distance shall be noted in the report.

5.4 Standard locations of measurement field

Luminance, spectral distribution and/or tristimulus measurements may be taken at several specified positions on the display surface. The standard measurement locations are identified by positions P_1 to P_9 in the active area, as illustrated in Figure 2. The active screen area is divided into nine equal-sized boxes, with the measurement area centred within each box and identified by the corresponding numbering shown in Figure 2. Each box is $1/3$ of the width (W) and height (H) of the active area. Centre screen measurements are taken at position P_5 . The display or detector shall be translated in the horizontal and vertical directions to perform measurements at the desired display positions, with all measurements taken normal to the screen. Any deviation from the standard positions above shall be recorded.

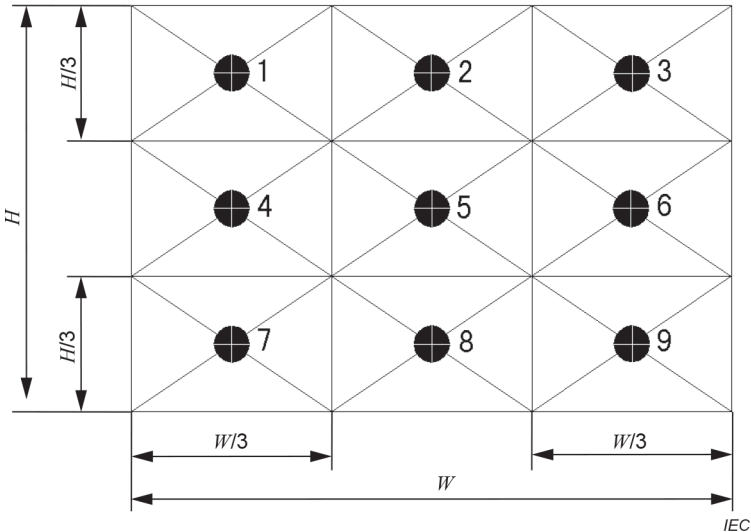


Figure 2 – Standard measurement positions in the display active area

5.5 Standard test patterns

The characterization of display luminance and colour can depend on the display test pattern. Therefore, several standard test patterns are given to help make the measurements more realistic to actual use cases (see Annex E). Additional test patterns may also be used (see Annex F). The standard test patterns use the scaling illustrated in Figure 3. The display is divided into a 3 × 3 array of rectangular areas, each of which has sides that are 1/3 of the dimension of the height and width of the screen active area. Each of these nine rectangular areas can then be further subdivided into smaller rectangles, as demonstrated in the upper left-hand corner of Figure 3 . The smallest subdivision would yield a rectangular box that has dimensions of 1/9 of those of the active area of each region of the 3 × 3 array.


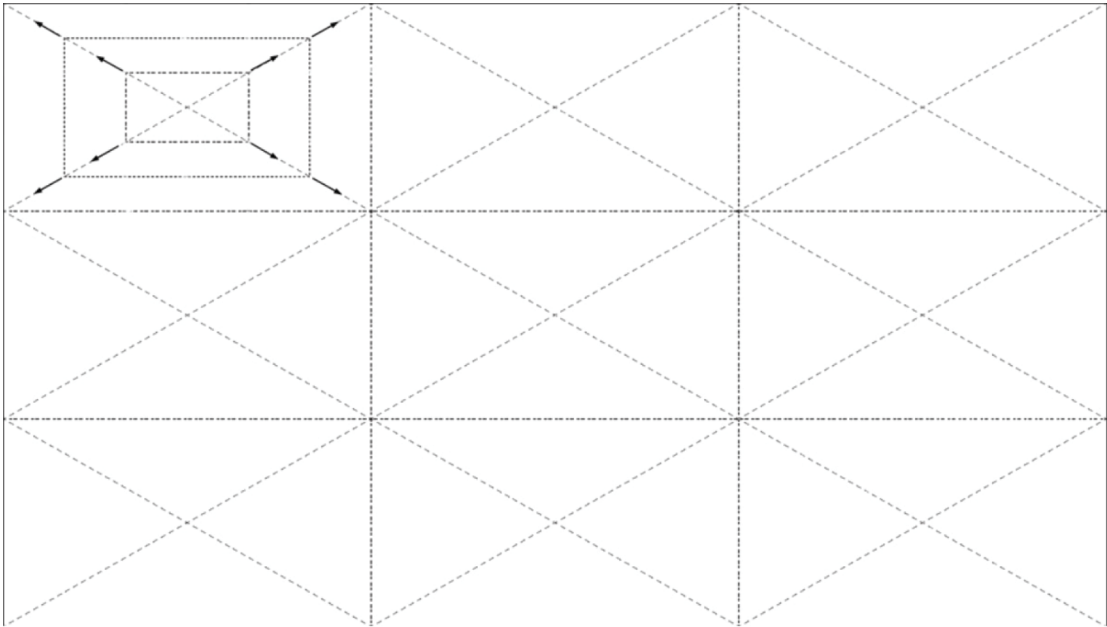


Figure 3 – Test pattern scaling used to define the area size of the coloured rectangles in the active area of the display

The standard test pattern for basic primary luminance and colour measurements shall use the low APL loading example of the colour tile test patterns illustrated in Figure 4. In this case, coloured rectangular boxes, with 1/9 of the dimensions of the active area, are centred on the nine standard active area locations on a black background. The red, green, and blue boxes are driven at the maximum input signal levels for the primary channels. For example, the red box is driven at the maximum input signal for the red channel, while the green and blue channels are at their minimum signal level. The white boxes are driven at their maximum red, green, and blue channel inputs. Each colour tile pattern is identified by the initials CT (colour tile) and the colour of the centre box. The patterns in Figure 4 are identified as CTR, CTG, CTB, and CTW starting at the upper left-hand pattern and moving clockwise.

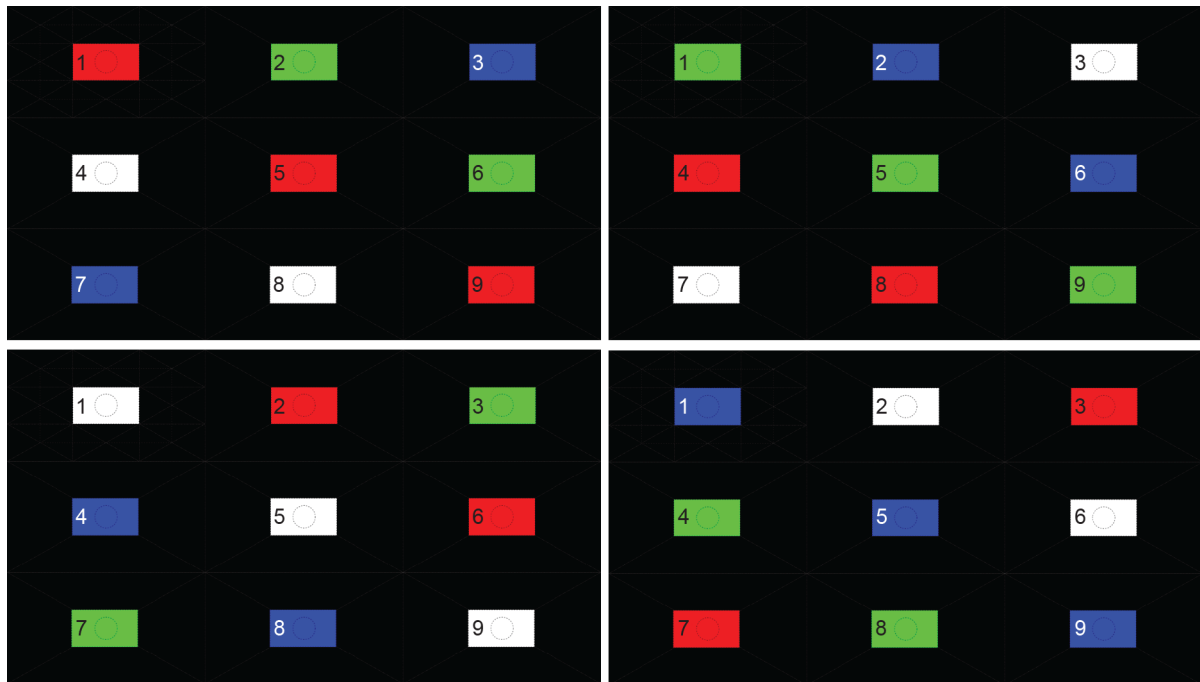

IEC

Figure 4 – Low APL loading series of red, green, blue, and white test patterns used for basic luminance, colour, and uniformity measurements

The area scaling of the coloured rectangles is adjusted to manipulate the APL loading on the display. The amount of APL loading is input-referred, assuming it is an RGB digital input. The percent APL is defined as:


$$\text{APL}(\%) = 100 \times \frac{\sum_{i=1}^N PL_i}{N} \quad (1)$$

where the summation is over all pixels in the active area, PL_i is the normalized signal pixel level of the i^{th} pixel relative to maximum white level, and N is the total number of pixels. A 100 % APL would be represented by all pixels in the active area at maximum white level. This would be implemented by setting the levels for the red, green, and blue input channels to their maximum values. A single primary colour (e.g. red) rendered on a full screen would have 1/3 of the APL of a full white screen. If it is assumed that the red, green, and blue areas correspond to 1/3 of the APL of the white areas, then the APL for each pattern in Figure 4 is (starting at the upper left-hand corner and going clockwise) 5,3 %, 5,3 %, 5,3 %, and 6,2 %. The average APL for the four patterns in Figure 4 is 5,6 %. An example calculation of the top left pattern in Figure 4 is given by:

$$\begin{aligned} & [(7 \text{ primary colours} \times 1/3 \text{ of white}) + (2 \text{ white boxes} \times 3 / 3 \text{ of white})] \\ & \times [(1 / 9)^2 \text{ fractional area of boxes}] = 5,3 \text{ \% APL} \end{aligned}$$

(2)

Higher loading versions of the colour tile pattern are illustrated in Figure 5. The sequence of four-colour tile patterns at the medium loading geometry would give an average APL equivalent of 22 %, whereas the high loading pattern would give an average APL equivalent of 50 %.

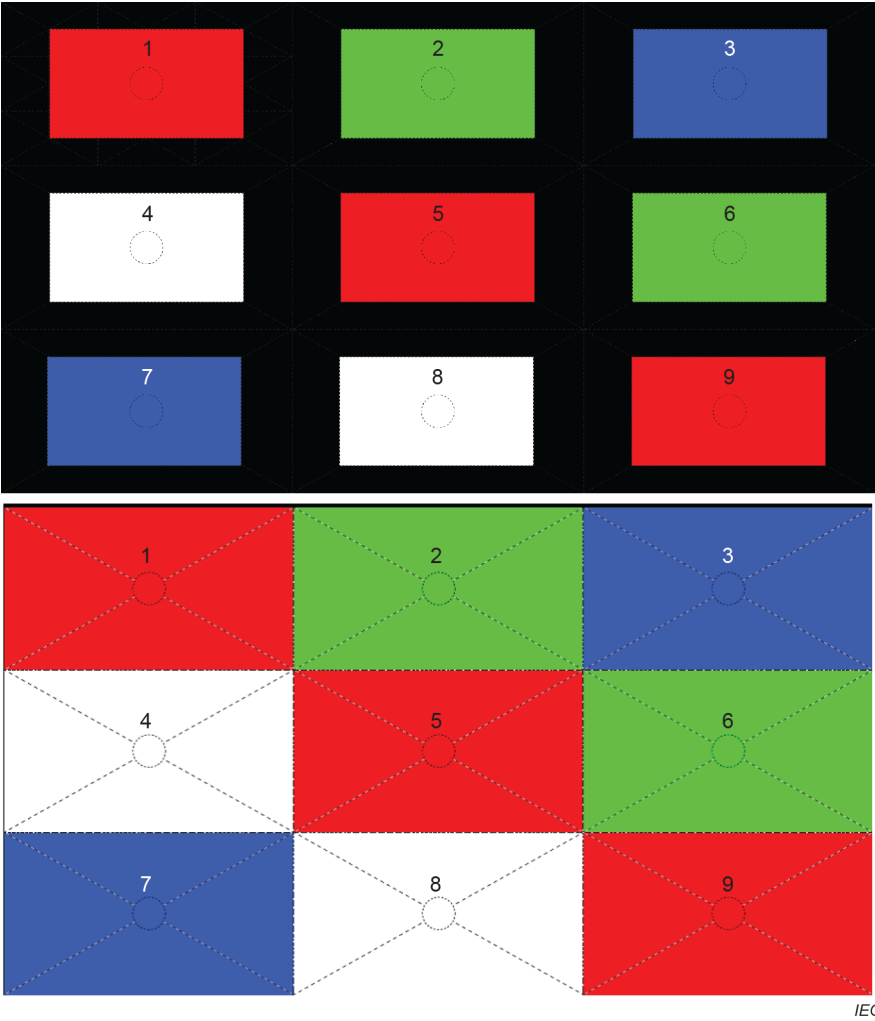

NOTE The corresponding CTG, CTB, and CTW patterns are of similar size but have green, blue, and white, respectively, in the centre box.

Figure 5 – Medium (top) and high (bottom) APL loading versions of CTR pattern