



DPC: 23 / 30484686 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 19 December 2023

Origin: International

Latest date for receipt of comments: 7 February 2024

Project No. 2023/00863

Responsible committee: W/- Miscellaneous Standards # Consumer Products and Services

Interested committees:

Title: Draft BS EN IEC 60122-2 Quartz crystal units of assessed quality.

Part 2. Guide to the use

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 7 February 2024**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Responsible Committee Secretary: **Committee Service Centre (BSI)**
Direct tel: **020 8996 7009**
E-mail: csc@bsigroup.com

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



49/1451/CD

COMMITTEE DRAFT (CD)

PROJECT NUMBER:

IEC 60122-2 ED3

DATE OF CIRCULATION:

2023-12-15

CLOSING DATE FOR COMMENTS:

2024-03-08

SUPERSEDES DOCUMENTS:

49/1419/CD, 49/1438A/CC

IEC TC 49 : PIEZOELECTRIC, DIELECTRIC AND ELECTROSTATIC DEVICES AND ASSOCIATED MATERIALS FOR FREQUENCY CONTROL, SELECTION AND DETECTION

SECRETARIAT:

Japan

SECRETARY:

Mr Masanobu Okazaki

OF INTEREST TO THE FOLLOWING COMMITTEES:

PROPOSED HORIZONTAL STANDARD:



Other TC/SCs are requested to indicate their interest, if any, in this CD to the secretary.

FUNCTIONS CONCERNED:

☐ EMC

☐ ENVIRONMENT

☒ QUALITY ASSURANCE

☐ SAFETY

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Recipients of this document are invited to submit, with their comments, notification of any local regulations or technical reasons that may exist and should be considered should this proposal proceed, recognizing that failure to address such requirements could result in the need for new or existing "In Some Countries" clauses. (SEE [AC/22/2007](#) OR [NEW GUIDANCE DOC](#)).

TITLE:

Quartz crystal units of assessed quality - Part 2: Guidelines for the use

NOTE FROM TC/SC OFFICERS:

Sub-part title was changed based on the decision at the Tsukuba meeting.

Copyright © 2023 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

1		
2		
3	FOREWORD	4
4	INTRODUCTION	6
5		
6	1 Scope	7
7	2 Normative references	7
8	3 Terms and definitions	7
9	4 The quartz crystal unit as an electronic component	7
10	4.1 General	7
11	4.2 Modes of vibration	8
12	4.3 The equivalent electrical circuit of a quartz crystal unit	9
13	4.4 Crystal resistance	10
14	4.5 Frequency versus temperature characteristics	11
15	4.6 Q Factor	14
16	4.7 level of drive and drive level dependency	15
17	4.7.1 level of drive	15
18	4.7.2 Low level of drive	15
19	4.7.3 drive level dependency	15
20	4.8 Specifying frequency tolerance and operating temperature range	16
21	4.9 Load capacitance and frequency pulling	17
22	4.10 Unwanted responses	19
23	4.11 Effects of ageing	22
24	Figure 11 –Typical aging curves	23
25	4.12 Crystal unit enclosures	24
26	4.13 Start-up time	24
27	4.14 Mechanical reliability	25
28	5 Application guide	25
29	5.1 Oscillator circuits and oscillation condition	25
30	5.1.1 Factors affecting the frequency	25
31	5.1.2 Types of oscillators	25
32	5.1.3 Series resonance oscillators	26
33	5.2 Oscillators, practical considerations	28
34	5.2.1 Crystal unit resistance	28
35	5.2.2 Unwanted responses	28
36	5.2.3 Drive level	28
37	5.2.4 Frequency stability	28
38	5.3 Use in filter applications	28
39	6 Factors affecting cost and availability of quartz crystal units	29
40	6.1 Introduction	29
41	6.2 Crystal unit frequency	29
42	6.3 Crystal unit enclosures	29
43	6.4 Frequency tolerances	30
44	6.5 AT-cut. Temperature coefficient cost aspects	30
45	6.6 Ageing	31
46	6.7 Environmental	31
47	6.8 General testing considerations	

48	7	Technical data to accompany order form	32
49	7.1	Check list of crystal unit parameters to be specified in article sheet	32
50	7.2	Mandatory requirements	32
51		Table 3 – Checklist	32
52		Bibliography.....	34
53			
54		Figure 1 – Designation of the most commonly used crystal cuts	8
55		Figure 2 – Equivalent circuit of a quartz crystal unit	10
56		Figure 3 – Reactance/frequency variation characteristic in the vicinity of resonance	11
57		Figure 4 – Theoretical frequency/temperature curves of some common crystal cuts	12
58		Figure 5 –Frequency/temperature curves generalized(AT-cut)	13
59		Figure 6 –Frequency/temperature curves generalized(SC-cut)	14
60		Figure 7 –Theoretical frequency/temperature curves of SC cuts	17
61		Figure 8 –Fractional load resonance frequency offset (DL), fractional pulling range (DL1, L2) and pulling sensitivity of a quartz crystal unit	19
62		Figure 9 –Pulling sensitivity (S) versus Co/C1 for various values of load capacitance CL	19
63		Figure 10 –Five example unwanted crystal responses measured over the spectrum adjacent to the main response	21
64		Figure 11 –Typical aging curves	23
65		Figure 12 –Series resonance oscillator	26
66		Figure 13 –Positive reactance oscillator	26
67		Figure 14 –The crystal unit operates as an inductance in the phase shifting network	27
68		Figure 15 –Crystal unit with a series connected load capacitance	28
69		Figure 11 –AT cut crystal units-frequency tolerance/temperature range difficulty aspect	30
70			
71		Table 1 – Modes of vibration as a function of frequency	9
72		Table 2 – Time acceleration factors for $E_a=0.38\text{eV}$	23
73		Table 3 – Checklist	32
74			
75			
76			
77			
78			

INTERNATIONAL ELECTROTECHNICAL COMMISSION

QUARTZ CRYSTAL UNITS OF ASSESSED QUALITY -

Part 2: Guidelines for the use

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
 - 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
 - 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
 - 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
 - 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
 - 6) All users should ensure that they have the latest edition of this publication.
 - 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
 - 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
 - 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.
- IEC 60122-2 has been prepared by IEC technical committee 49: Piezoelectric, dielectric and electrostatic devices and associated materials for frequency control, selection and detection.

This third edition cancels and replaces the second edition published in 1983. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Add SC cut type and related requirements
- b) According to the general specification, Add aging calculation and Low level of drive requirements have been added
- c) Update the frequency temperature curve according to the common cut requirements
- d) Remove infrequently used product types

The text of this International Standard is based on the following documents:

Draft	Report on voting
49XX/FDIS	49/XX/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

INTRODUCTION

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent. IEC takes no position concerning the evidence, validity, and scope of this patent right.

The holder of this patent right has assured IEC that s/he is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with IEC. Information may be obtained from the patent database available at patents.iec.ch/.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those in the patent database. IEC shall not be held responsible for identifying any or all such patent rights.

QUARTZ CRYSTAL UNITS OF ASSESSED QUALITY

Part 2: Guidelines for the use

1 Scope

This part of IEC 60122 has been compiled in response to a generally expressed desire on the part of both users and manufacturers for a guide to the use of quartz crystal units for filters and oscillators so that the crystal units may be used to their best advantage.

It draws attention to some of the more fundamental questions which should be considered by the user before he places his order for a unit for a new application, and in so doing will, it is hoped, help ensure against unsatisfactory performance, unfavourable cost and non-availability. It is not the function of this standard to explain theory, nor to attempt to cover all the eventualities that may arise in practical circumstances. Lastly, it should not be considered as a substitute for close liaison between manufacturer and user.

Standard specifications, such as those of the IEC of which this guide forms a part, and national specifications or detail specifications issued by manufacturers, will define the available combinations of the resonant characteristics and the temperature characteristic. These specifications are compiled to include a wide range of quartz crystal units with standardized performances. It cannot be over-emphasized that the user should, wherever possible, select his quartz crystal units from these specifications, when available, even if it may lead to making small modifications to his circuit to enable the use of standard resonators. This applies particularly to the selection of the nominal frequency.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60122-1:2002, Quartz crystal units of assessed quality - Part 1: Generic specification

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60122-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

4 The quartz crystal unit as an electronic component

4.1 General

The quartz crystal element is a vibrating resonant structure whose orientation and dimensions determine its frequency for a given mode of vibration and which relies on the piezoelectric effect to couple it to an electrical circuit. The intrinsic properties of quartz make it a unique device for highly accurate and stable frequency control and selection because of its high "quality factor" Q. Crystal units are not a primary frequency standard, but when

precisely defined can provide stabilization far in excess of most requirements in the electronic industry.

The crystal element is cut from monocrystalline quartz with precise orientation to the crystallographic axes as shown in Figure 1. This figure only shows only generalized examples of the most commonly used crystal cuts.

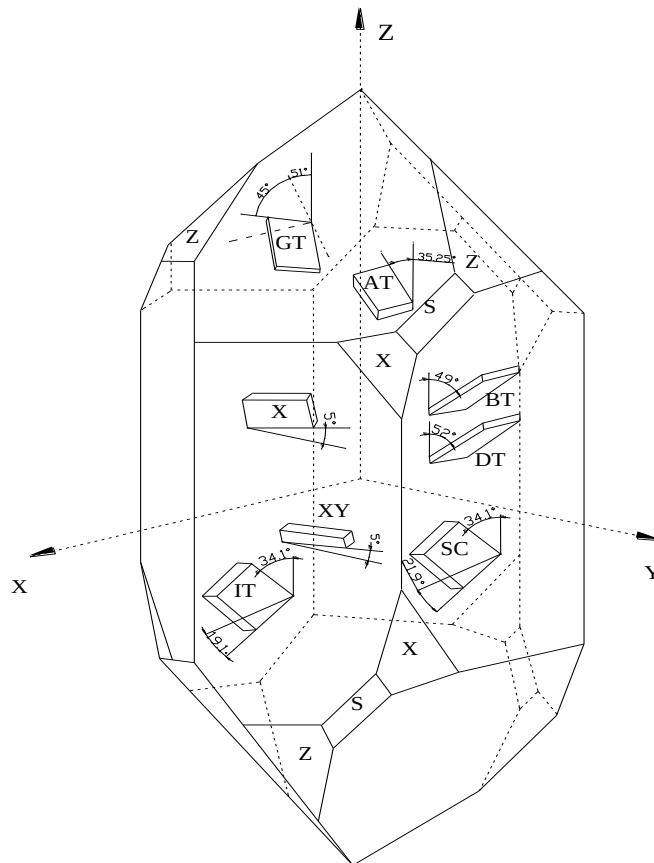


Figure 1 – Designation of the most commonly used crystal cuts

This figure shows a natural quartz crystal. However, most manufacturers now use synthetic material. Techniques have advanced to a point where synthetic quartz is almost indistinguishable from natural material with regard to electrical performance.

There are a number of different cuts and modes of vibration which will produce crystal units of near zero temperature coefficients over a wide frequency range.

4.2 Modes of vibration

The frequency range covered commercially by quartz crystal units may be taken as a few kHz to 500 MHz. Use is made of many cuts and modes of vibration to cover this range and crystals of the common types are summarized in Table I.

AT-cut crystal units can also be produced in the range from 400 kHz to 800 kHz, but they usually require larger enclosures.

The choice of mode or cut may be affected by the enclosure size or parameters other than the frequency itself.

229

Table 1 – Modes of vibration as a function of frequency

Designation of cut	Mode of vibration	Usual frequency range
XY	Flexural	1kHz~80kHz
5° X bar	Extensional	40kHz~200kHz
AT	Thickness shear (fundamental)	800kHz~500MHz
	3rd overtone	5MHz~215MHz
	5th overtone	5MHz~150MHz
	7th overtone	100MHz~200MHz
BT	Thickness shear (fundamental)	3MHz~30MHz
DT	Face shear	100kHz~500kHz
SC	Thickness shear (fundamental)	8.192Mhz~30MHz
	3rd overtone	5MHz~100MHz
	5th overtone	5MHz~130MHz
GT	Coupled mode by two extensional modes	100kHz~550kHz
IT	fundamental	8.192Mhz~30MHz
	3rd overtone	5MHz~100MHz


230

4.3 The equivalent electrical circuit of a quartz crystal unit

231

The properties of any mode of a lightly damped mechanical vibrator piezoelectrically excited through electrodes can be represented, in the region of the resonance frequency, by an equivalent electrical circuit which consists of a capacitance (C1), inductance (L1) and resistance (R1) in series, shunted by a second capacitance (C0).A representation of the quartz crystal unit equivalent circuit is shown in Figure 2.

236

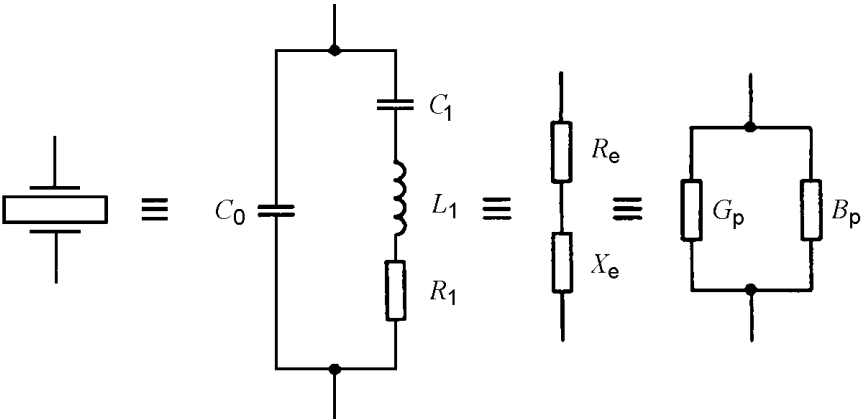

237

238 Co is Shunt (parallel) capacitance in the equivalent electric circuit(farad)

239 C1 is Motional capacitance in the equivalent electric circuit(farad)

240 L1 is Motional inductance in the equivalent electric circuit (henry)

241 R1 is Motional resistance in the equivalent electric circuit (ohm)

242 Re is Equivalent series resistance of resonator (ohm)

243 Xe is Equivalent series reactance of resonator (ohm)

244 Gp is Equivalent parallel conductance of resonator

245 Bp is Equivalent parallel susceptance of resonator.