



BSI Standards Publication

Industrial Communication Networks — Fieldbus Specifications

Part 6-3: Application layer protocol specification — Type 3 elements

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

raising standards worldwide™

Full document details: BS EN 61158-6-3:2012

National foreword

This British Standard is the UK implementation of EN 61158-6-3:2012. It is identical to IEC 61158-6-3:2010. It supersedes BS EN 61158-6-3:2008 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee AMT/7, Industrial communications: process measurement and control, including fieldbus.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012

Published by BSI Standards Limited 2012

ISBN 978 0 580 71563 1

ICS 25.04.40; 35.100.70; 35.110

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2012.

Amendments issued since publication

Amd. No.	Date	Text affected
----------	------	---------------

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 61158-6-3

June 2012

ICS 25.040.40; 35.100.70; 35.110

Supersedes EN 61158-6-3:2008

English version

**Industrial communication networks -
Fieldbus specifications -
Part 6-3: Application layer protocol specification -
Type 3 elements
(IEC 61158-6-3:2010)**

Réseaux de communication industriels -
Spécifications des bus de terrain -
Partie 6-3: Spécification des protocoles
des couches d'application -
Éléments de type 3
(CEI 61158-6-3:2010)

Industrielle Kommunikationsnetze -
Feldbusse -
Teil 6-3: Protokollspezifikation des
Application Layer (Anwendungsschicht) -
Typ 3-Elemente
(IEC 61158-6-3:2010)

This European Standard was approved by CENELEC on 2012-03-28. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

© 2012 CENELEC - All rights of exploitation in any form and by any means reserved worldwide for CENELEC members.

Ref. No. EN 61158-6-3:2012 E

 **Documents**
Document Sharing Hub

Foreword

The text of document 65C/607/FDIS, future edition 2 of IEC 61158-6-3, prepared by SC 65C, "Industrial networks", of IEC/TC 65, "Industrial-process measurement, control and automation" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61158-6-3:2012.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2012-12-28
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2015-03-28

This document supersedes EN 61158-6-3:2008.

EN 61158-6-3:2012 includes the following significant technical changes with respect to EN 61158-6-3:2008:

- corrections, in Table 10 and Table 48;
- clarification in 6.9.1.2;
- expired patents deleted and new patents disclosed.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 61158-6-3:2010 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following note has to be added for the standard indicated:

IEC/TR 61158-1:2010 NOTE Harmonized as CLC/TR 61158-1:2010 (not modified).

Annex ZA
(normative)**Normative references to international publications
with their corresponding European publications**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60559	-	Binary floating-point arithmetic for microprocessor systems	HD 592 S1	-
IEC 61158-3-3	2007	Industrial communication networks - Fieldbus specifications - Part 3-3: Data-link layer service definition - Type 3 elements	EN 61158-3-3	2008
IEC 61158-4-3	2010	Industrial communication networks - Fieldbus specifications - Part 4-3: Data-link layer protocol specification - Type 3 elements	EN 61158-4-3	2012
IEC 61158-5-3	2010	Industrial communication networks - Fieldbus specifications - Part 5-3: Application layer service definition - Type 3 elements	EN 61158-5-3	2012
IEC 61158-6-10	2010	Industrial communication networks - Fieldbus specifications - Part 6-10: Application layer protocol specification - Type 10 elements	EN 61158-6-10	2012
ISO/IEC 7498-1	-	Information technology - Open Systems Interconnection - Basic Reference Model: The Basic Model	-	-
ISO/IEC 8822	-	Information technology - Open Systems Interconnection - Presentation service definition	-	-
ISO/IEC 8824-1	-	Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation	-	-
ISO/IEC 9545	-	Information technology - Open Systems Interconnection - Application Layer structure	-	-
ISO/IEC 10731	-	Information technology - Open Systems Interconnection - Basic reference model - Conventions for the definition of OSI services	-	-

CONTENTS

INTRODUCTION	10
1 Scope	12
1.1 General	12
1.2 Specifications	13
1.3 Conformance	13
2 Normative references	13
3 Terms, definitions, abbreviations, symbols and conventions	14
3.1 Referenced terms and definitions	14
3.2 Additional definitions	15
3.3 Abbreviations and symbols	18
3.4 Conventions	19
3.5 Conventions used in state machines	21
4 FAL syntax description	24
4.1 APDU abstract syntax	24
4.2 Data types	28
5 Transfer syntax	30
5.1 Coding of basic data types	30
5.2 Coding section related to data exchange PDUs	33
5.3 Coding section related to slave diagnosis PDUs	33
5.4 Coding section related to parameterisation PDU	44
5.5 Coding section related to configuration PDUs	50
5.6 Coding section related to global control PDUs	54
5.7 Coding section related to clock-value-PDUs	55
5.8 Coding section related to function identification and errors	56
5.9 Coding section related to master diagnosis PDU	60
5.10 Coding section related to upload/download/act para PDUs	62
5.11 Coding section related to the bus parameter set	64
5.12 Coding section related to the slave parameter set	66
5.13 Coding section related to statistic counters	70
5.14 Coding section related to set slave address PDU	70
5.15 Coding section related to initiate/abort PDUs	70
5.16 Coding section related to read/write/data transport PDUs	74
5.17 Coding section related to load region and function invocation PDUs	74
5.18 Examples of diagnosis-RES-PDUs	77
5.19 Example of Chk_Cfg-REQ-PDU	79
5.20 Examples of Chk_Cfg-REQ-PDUs with DPV1 data types	80
5.21 Example structure of the Data_Unit for Data_Exchange	81
6 FAL protocol state machines	83
6.1 Overall structure	83
6.2 Assignment of state machines to devices	84
6.3 Overview DP-slave	85
6.4 Overview DP-master (class 1)	87
6.5 Overview DP-master (class 2)	88
6.6 Cyclic communication between DP-master (class 1) and DP-slave	89
6.7 Acyclic communication between DP-master (class 2) and DP-master (class 1)	90

6.8	Acyclic communication between DP-master (class 1) and DP-slave	92
6.9	Application relationship monitoring	94
7	AP-context state machine	100
8	FAL service protocol machines (FSPMs)	100
8.1	FSPMS	100
8.2	FSPMM1	136
8.3	FSPMM2	172
9	Application relationship protocol machines (ARPMs)	190
9.1	MSCY1S	190
9.2	MSAC1S	221
9.3	SSCY1S	234
9.4	MSRM2S	237
9.5	MSAC2S	243
9.6	MSCS1S	260
9.7	MSCY1M	262
9.8	MSAL1M	282
9.9	MSAC1M	291
9.10	MMAC1	304
9.11	MSCS1M	311
9.12	MSAC2M	316
9.13	MMAC2	331
10	DLL mapping protocol machines (DMPMs)	338
10.1	DMPMS	338
10.2	DMPMM1	351
10.3	DMPMM2	367
11	Parameters for a DP-slave	375
	Bibliography	376
	Figure 1 – Common structure of specific fields	20
	Figure 2 – Coding of the data type BinaryDate	31
	Figure 3 – Encoding of TimeOfDay value	31
	Figure 4 – Encoding of Time Difference value	32
	Figure 5 – Encoding of Network Time value	32
	Figure 6 – Encoding of Network Time Difference value	33
	Figure 7 – Example Modul_Status_Array	38
	Figure 8 – Example of Ext_Diag_Data in case of DPV1 diagnosis format with alarm and status PDU	78
	Figure 9 – Example of Ext_Diag_Data in case of the basic diagnosis format	79
	Figure 10 – Example of a special identifier format	79
	Figure 11 – Example of a special identifier format with data types	80
	Figure 12 – Example of a special identifier format with data types	80
	Figure 13 – Example of a empty slot with data types	81
	Figure 14 – Example for multi-variable device with AI and DO function blocks	81
	Figure 15 – Identifiers (ID)	82
	Figure 16 – Identifier list	82
	Figure 17 – Structure of the Data_Unit for the request- and response-DLPDU	82

Figure 18 – Structuring of the protocol machines and adjacent layers in a DP-slave	86
Figure 19 – Structuring of the protocol machines and adjacent layers in a DP-master (class 1)	87
Figure 20 – Structuring of the protocol machines and adjacent layers in a DP-master (class 2)	88
Figure 21 – Sequence of the communication between DP-master and DP-slave	90
Figure 22 – Sequence of communication between DP-master (class 2) and DP-master (class 1)	92
Figure 23 – Sequence of acyclic communication between DP-master (class 1) and DP-slave	94
Figure 24 – Example for connection establishment on MS2	97
Figure 25 – Idle at master-side on MS2	98
Figure 26 – Idle at slave-side on MS2	99
Figure 27 – Example for connection establishment on MS2(server-side)	239
Figure 28 – Structure of RM entries in the RM_Registry	240
Table 1 – State machine description elements	21
Table 2 – Description of state machine elements	22
Table 3 – Conventions used in state machines	22
Table 4 – APDU syntax	24
Table 5 – Substitutions	27
Table 6 – Alarm_Type range	36
Table 7 – Status_Type value range	36
Table 8 – Alarm_Specifier	37
Table 9 – Range of Modul_Status_Entry (1-4)	39
Table 10 – Error type	41
Table 11 – Specification of the bits Lock_Req and Unlock_Req	44
Table 12 – Range of Length_of_Manufacturer_Specific_Data if used in Chk_Cfg-REQ-PDU ..	51
Table 13 – Range of Length_of_Manufacturer_Specific_Data if used in Get_Cfg-RES-PDU ..	51
Table 14 – Values (codes) for data types	53
Table 15 – Specification of the bits for Un-/Sync and Un-/Freeze	54
Table 16 – Coding of the Function_Code/ Function_Num	57
Table 17 – Coding of the Error_Code / Function_Num	58
Table 18 – Values of Error_Decode	58
Table 19 – Coding of Error_Code_1 at DPV1	59
Table 20 – Values of MDiag_Identifier	60
Table 21 – Values for Area_Code_UpDownload	62
Table 22 – Values for Area_CodeActBrct	63
Table 23 – Values for Area_CodeAct	63
Table 24 – Values for Data_rate	64
Table 25 – Values for Slave_Type	67
Table 26 – Values for Alarm_Mode	68
Table 27 – Values for Subnet	73
Table 28 – Values of reason code if instance is DLL	73

Table 29 – Values of reason code if instance is MS2	73
Table 30 – Values of Extended_Function_Num	74
Table 31 – Values of FI_State	76
Table 32 – Assignment of state machines	85
Table 33 – Primitives issued by AP-Context to FSPMS	100
Table 34 – Primitives issued by FSPMS to AP-Context	102
Table 35 – FSPMS state table	110
Table 36 – Functions used by the FSPMS	135
Table 37 – Primitives issued by AP-Context to FSPMM1	137
Table 38 – Primitives issued by FSPMM1 to AP-Context	139
Table 39 – FSPMM1 state table	146
Table 40 – Functions used by the FSPMM1	172
Table 41 – Primitives issued by AP-Context to FSPMM2	173
Table 42 – Primitives issued by FSPMM2 to AP-Context	175
Table 43 – FSPMM2 state table	178
Table 44 – Functions used by the FSPMM2	189
Table 45 – Primitives issued by FSPMS to MSCY1S	190
Table 46 – Primitives issued by MSCY1S to FSPMS	191
Table 47 – Rules for DPV1_Status_1, DPV1_Status_2 and DPV1_Status_3 check	193
Table 48 – MSCY1S state table	198
Table 49 – Functions used by the MSCY1S	219
Table 50 – Primitives issued by FSPMS to MSAC1S	221
Table 51 – Primitives issued by MSAC1S to FSPMS	222
Table 52 – Primitives issued by MSCY1S to MSAC1S	222
Table 53 – Primitives issued by MSAC1S to MSCY1S	222
Table 54 – Parameter used with primitives exchanged between MSAC1S and MSCY1S	222
Table 55 – MSAC1S state table	224
Table 56 – Functions used by the MSAC1S	234
Table 57 – Primitives issued by FSPMS to SSCY1S	234
Table 58 – Primitives issued by SSCY1S to FSPMS	234
Table 59 – SSCY1S state table	236
Table 60 – Functions used by the SSCY1S	237
Table 61 – Primitives issued by FSPMS to MSRM2S	238
Table 62 – Primitives issued by MSRM2S to FSPMS	238
Table 63 – MSRM2S state table	241
Table 64 – Primitives issued by FSPMS to MSAC2S	244
Table 65 – Primitives issued by MSAC2S to FSPMS	245
Table 66 – Primitives issued by MSRM2S to MSAC2S	245
Table 67 – Primitives issued by MSAC2S to MSRM2S	246
Table 68 – Parameter used with primitives exchanged with MSAC2S	246
Table 69 – MSAC2S state table	249
Table 70 – Primitives issued by MSCS1S to FSPMS	260
Table 71 – MSCS1S state table	262

Table 72 – Primitives issued by FSPMM1 to MSCY1M	263
Table 73 – Primitives issued by MSCY1M to FSPMM1	264
Table 74 – Parameters used with primitives exchanged between FSPMM1 and MSCY1M	264
Table 75 – MSCY1M state table	267
Table 76 – Primitives issued by FSPMM1 to MSAL1M.....	282
Table 77 – Primitives issued by MSAL1M to FSPMM1.....	282
Table 78 – Primitives issued by MSCY1M to MSAL1M	282
Table 79 – Primitives issued by MSAL1M to MSCY1M	283
Table 80 – Parameter used with primitives exchanged between MSAL1M and MSCY1M	283
Table 81 – Possible values in the Alarm_State_Table	284
Table 82 – MSAL1M state table.....	287
Table 83 – Primitives issued by FSPMM1 to MSAC1M	292
Table 84 – Primitives issued by MSAC1M to FSPMM1	292
Table 85 – Primitives issued by MSAL1M to MSAC1M	293
Table 86 – Primitives issued by MSAC1M to MSAL1M	293
Table 87 – Parameter used with primitives exchanged between MSAL1M and MSCY1M	293
Table 88 – MSAC1M state table	299
Table 89 – Primitives issued by FSPMM1 to MMAC1	305
Table 90 – Primitives issued by MMAC1 to FSPMM1	305
Table 91 – MMAC1 state table.....	307
Table 92 – Primitives issued by FSPMM1 to MSCS1M	312
Table 93 – Primitives issued by MSCS1M to FSPMM1	312
Table 94 – MSCS1M state table	314
Table 95 – Primitives issued by FSPMM2 to MSAC2M	316
Table 96 – Primitives issued by MSAC2M to FSPMM2	317
Table 97 – Parameters used with primitives exchanged with MSAC2M.....	317
Table 98 – MSAC2M state table	321
Table 99 – Primitives issued by FSPMM2 to MMAC2	331
Table 100 – Primitives issued by MMAC2 to FSPMM2	332
Table 101 – Parameters used with primitives exchanged with MMAC2	332
Table 102 – MMAC2 state table.....	333
Table 103 – Primitives issued by FSPMS to DMPMS	338
Table 104 – Primitives issued by DMPMS to FSPMS	338
Table 105 – Primitives issued by MSCY1S to DMPMS	339
Table 106 – Primitives issued by DMPMS to MSCY1S	339
Table 107 – Primitives issued by DMPMS to SSCY1S.....	340
Table 108 – Primitives issued by MSAC1S, MSRM2S, MSAC2S to DMPMS	340
Table 109 – Primitives issued by DMPMS to MSAC1S, MSRM2S, MSAC2S	340
Table 110 – Primitives issued by DMPMS to MSCS1S	341
Table 111 – Primitives issued by DMPMS to DL.....	341
Table 112 – Primitives issued by DL to DMPMS.....	342
Table 113 – Parameters used with primitives exchanged with DMPMS.....	343
Table 114 – DMPMS state table	344

Table 115 – Functions used by the DMPMS.....	350
Table 116 – Primitives issued by FSPMM1 to DMPMM1.....	351
Table 117 – Primitives issued by DMPMM1 to FSPMM1.....	352
Table 118 – Primitives issued by MSCY1M to DMPMM1	352
Table 119 – Primitives issued by DMPMM1 to MSCY1M	353
Table 120 – Primitives issued by MSAL1M, MSAC1M to DMPMM1	353
Table 121 – Primitives issued by DMPMM1 to MSAL1M, MSAC1M	353
Table 122 – Primitives issued by MMAC1 to DMPMM1	354
Table 123 – Primitives issued by DMPMM1 to MMAC1	354
Table 124 – Primitives issued by MSCS1M to DMPMM1	354
Table 125 – Primitives issued by DMPMM1 to MSCS1M	355
Table 126 – Primitives issued by DMPMM1 to DL	355
Table 127 – Primitives issued by DL to DMPMM1	356
Table 128 – Parameters used with primitives exchanged with DMPMM1	357
Table 129 – Possible values of status.....	358
Table 130 – DMPMM1 state table.....	359
Table 131 – Functions used by the DMPMM1	367
Table 132 – Primitives issued by FSPMM2 to DMPMM2.....	368
Table 133 – Primitives issued by DMPMM2 to FSPMM2.....	368
Table 134 – Primitives issued by MSAC2M to DMPMM2	369
Table 135 – Primitives issued by DMPMM2 to MSAC2M	369
Table 136 – Primitives issued by MMAC2 to DMPMM2	369
Table 137 – Primitives issued by DMPMM2 to MMAC2	369
Table 138 – Primitives issued by DMPMM2 to DL	370
Table 139 – Primitives issued by DL to DMPMM2	370
Table 140 – Parameters used with primitives exchanged with DMPMM2	371
Table 141 – DMPMM2 state Table.....	371
Table 142 – Functions used by DMPMM2	375
Table 143 – Bus parameter/reaction times for a DP-slave.....	375

INTRODUCTION

This part of IEC 61158 is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the “three-layer” fieldbus reference model described in IEC/TR 61158-1.

The application protocol provides the application service by making use of the services available from the data-link or other immediately lower layer. The primary aim of this standard is to provide a set of rules for communication expressed in terms of the procedures to be carried out by peer application entities (AEs) at the time of communication. These rules for communication are intended to provide a sound basis for development in order to serve a variety of purposes:

- as a guide for implementors and designers;
- for use in the testing and procurement of equipment;
- as part of an agreement for the admittance of systems into the open systems environment;
- as a refinement to the understanding of time-critical communications within OSI.

This standard is concerned, in particular, with the communication and interworking of sensors, effectors and other automation devices. By using this standard together with other standards positioned within the OSI or fieldbus reference models, otherwise incompatible systems may work together in any combination.

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of patents concerning Type 3 elements and possibly other types given in the normative elements of this standard.

The following patent rights for Type 3 have been announced by [SI]:

Publication	Title
EP0604668-A1 (06.07.1994); EP0604668-B1 (18.02.1998)	Logical ring with monitoring of rotation time
EP0604669-A1 (06.07.1994); EP0604669-B1 (01.04.1998)	Bus system with monitoring of the activity state of participants

IEC takes no position concerning the evidence, validity and scope of these patent rights.

The holder of these patent rights has assured the IEC that he/she is willing to negotiate licences either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of these patent rights is registered with IEC. Information may be obtained from:

[SI]: Siemens AG
CT IP L&T
Hr. Hans-Jörg Müller
Otto-Hahn-Ring 6
D-81739 Munich
Germany

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

ISO (www.iso.org/patents) and IEC (http://www.iec.ch/tctools/patent_decl.htm) maintain on-line data bases of patents relevant to their standards. Users are encouraged to consult the data bases for the most up to date information concerning patents.

INDUSTRIAL COMMUNICATION NETWORKS – FIELDBUS SPECIFICATIONS –

Part 6-3: Application layer protocol specification – Type 3 elements

1 Scope

1.1 General

The Fieldbus Application Layer (FAL) provides user programs with a means to access the fieldbus communication environment. In this respect, the FAL can be viewed as a “window between corresponding application programs.”

This standard provides common elements for basic time-critical and non-time-critical messaging communications between application programs in an automation environment and material specific to Type 3 fieldbus. The term “time-critical” is used to represent the presence of a time-window, within which one or more specified actions are required to be completed with some defined level of certainty. Failure to complete specified actions within the time window risks failure of the applications requesting the actions, with attendant risk to equipment, plant and possibly human life.

This standard defines in an abstract way the externally visible behavior provided by the Type 3 fieldbus application layer in terms of

- a) the abstract syntax defining the application layer protocol data units conveyed between communicating application entities,
- b) the transfer syntax defining the application layer protocol data units conveyed between communicating application entities,
- c) the application context state machine defining the application service behavior visible between communicating application entities; and
- d) the application relationship state machines defining the communication behavior visible between communicating application entities; and.

The purpose of this standard is to define the protocol provided to

- a) define the wire-representation of the service primitives specified in IEC 61158-5-3, and
- b) define the externally visible behavior associated with their transfer.

This standard specifies the protocol of the Type 3 fieldbus application layer, in conformance with the OSI Basic Reference Model (ISO/IEC 7498-1) and the OSI Application Layer Structure (ISO/IEC 9545).

FAL services and protocols are provided by FAL application-entities (AE) contained within the application processes. The FAL AE is composed of a set of object-oriented Application Service Elements (ASEs) and a Layer Management Entity (LME) that manages the AE. The ASEs provide communication services that operate on a set of related application process object (APO) classes. One of the FAL ASEs is a management ASE that provides a common set of services for the management of the instances of FAL classes.

Although these services specify, from the perspective of applications, how request and responses are issued and delivered, they do not include a specification of what the requesting and responding applications are to do with them. That is, the behavioral aspects of the applications are not specified; only a definition of what requests and responses they can

send/receive is specified. This permits greater flexibility to the FAL users in standardizing such object behavior. In addition to these services, some supporting services are also defined in this standard to provide access to the FAL to control certain aspects of its operation.

1.2 Specifications

The principal objective of this standard is to specify the syntax and behavior of the application layer protocol that conveys the application layer services defined in IEC 61158-5-3.

A secondary objective is to provide migration paths from previously-existing industrial communications protocols. It is this latter objective which gives rise to the diversity of protocols standardized in parts of the IEC 61158-6 subparts.

1.3 Conformance

This standard does not specify individual implementations or products, nor does it constrain the implementations of application layer entities within industrial automation systems.

There is no conformance of equipment to the application layer service definition standard. Instead, conformance is achieved through implementation of this application layer protocol specification.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60559, *Binary floating-point arithmetic for microprocessor systems*

IEC 61158-3-3:2010¹, *Industrial communication networks – Fieldbus specifications – Part 3-3: Data-link layer service definition – Type 3 elements*

IEC 61158-4-3:2010¹, *Industrial communication networks – Fieldbus specifications – Part 4-3: Data-link layer protocol specification – Type 3 elements*

IEC 61158-5-3:2010¹, *Industrial communication networks – Fieldbus specifications – Part 5-3: Application layer service definition – Type 3 elements*

IEC 61158-6-10:2010¹, *Industrial communication networks – Fieldbus specifications – Part 6-10: Application layer protocol specification – Type 10 elements*

ISO/IEC 10731, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services*

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*

ISO/IEC 8822, *Information technology – Open Systems Interconnection – Presentation service definition*

ISO/IEC 8824-1, *Information technology – Abstract Syntax Notation One (ASN.1): Specification of basic notation*

¹ To be published

ISO/IEC 9545, *Information technology – Open Systems Interconnection – Application Layer structure*

3 Terms, definitions, abbreviations, symbols and conventions

3.1 Referenced terms and definitions

3.1.1 ISO/IEC 7498-1 terms

For the purposes of this document, the following terms as defined in ISO/IEC 7498-1 apply:

- a) application entity
- b) application process
- c) application protocol data unit
- d) application service element
- e) application entity invocation
- f) application process invocation
- g) application transaction
- h) real open system
- i) transfer syntax

3.1.2 ISO/IEC 8822 terms

For the purposes of this document, the following terms as defined in ISO/IEC 8822 apply:

- a) abstract syntax
- b) presentation context

3.1.3 ISO/IEC 9545 terms

For the purposes of this document, the following terms as defined in ISO/IEC 9545 apply:

- a) application-association
- b) application-context
- c) application context name
- d) application-entity-invocation
- e) application-entity-type
- f) application-process-invocation
- g) application-process-type
- h) application-service-element
- i) application control service element

3.1.4 ISO/IEC 8824-1 terms

For the purposes of this document, the following terms as defined in ISO/IEC 8824-1 apply:

- a) object identifier
- b) type

3.1.5 Fieldbus Data Link Layer terms

For the purposes of this document, the following terms as defined in IEC 61158-3-3 and IEC 61158-4-3 apply.

- a) DL-Time

- b) DL-Scheduling-policy
- c) DLCEP
- d) DLC
- e) DL-connection-oriented mode
- f) DLPDU
- g) DLSDU
- h) DLSAP
- i) link
- j) network address
- k) node address
- l) node
- m) scheduled

3.2 Additional definitions

3.2.1

access protection

limitation of the usage of an application object to one client

3.2.2

address-assignment-table

mapping of the client's internal I/O-Data object storage to the decentralised input and output data objects

3.2.3

channel

single physical or logical link of an input or output application object of a server to the process

3.2.4

channel related diagnosis

information concerning a specific element of an input or output application object, provided for maintenance purposes

EXAMPLE: validity of data

3.2.5

configuration check

comparison of the expected I/O-Data object structuring of the client with the real I/O-Data object structuring to the server in the start-up phase

3.2.6

configuration fault

an unacceptable difference between the expected I/O-Data object structuring and the real I/O-Data object structuring, as detected by the server

3.2.7

configuration identifier

representation of a portion of I/O Data of a single input- and/or output-module of a server.

3.2.8

configuration identifier related diagnosis

compromises all module specific data available at the server for maintenance purposes

3.2.9

control commands

action invocations transferred from client to server to clear outputs, freeze inputs and/or synchronise outputs

3.2.10

data consistency

means for coherent transmission and access of the input- or output-data object between and within client and server

3.2.11

Data-eXchange-Broadcast (DXB)

service for conveyance of information between the DP-master (Class 1) and the assigned DP-slaves initiating the Publisher and Subscriber functionality in the DP-slaves

3.2.12

default DL-address

value 126 as an initial value for DL-address, which has to be changed (e.g. by assignment of an DL-address via the fieldbus) before operation with a DP-master (class 1)

3.2.13

device related diagnosis

compromises all data related to the whole DP-slave available at the server for maintenance purposes

3.2.14

diagnosis information

all data available at the server for maintenance purposes

3.2.15

diagnosis information collection

system diagnosis information that is assembled at the client side

3.2.16

DP-master (class 1)

a controlling device which controls several DP-slaves (field devices)

NOTE This is usually a programmable controller or a distributed control system.

3.2.17

DP-master (class 2)

controlling device which manages configuration data (parameter sets) and diagnosis data of a DP-master (Class 1), and that additionally performs all communication capabilities of a DP-master (Class 1)

3.2.18

DP-slave

field device that can be assigned to one DP-master (Class 1) as a provider for cyclic I/O data exchange, in addition acyclic functions and alarms could be provided

3.2.19

DXB request

cyclic data exchange service request with a specific DL service between the DP-master (Class 1) and the assigned DP-slaves initiating the Publisher functionality in the DP-slaves

3.2.20

DXB response

cyclic data exchange service response not to the individual address of the requester (DP-master (Class 1)) but to the broadcast address (=127)

3.2.21

freeze

function at the DP-slaves for simultaneous data transfer between the input data object and the process

3.2.22

group

set of DP-slaves which perform a Freeze or Sync function

3.2.23

I/O data

object designated to be transferred cyclically for the purpose of processing.

3.2.24

ident number

DP-master (Class 1) or DP-slave device type

3.2.25

index

address of an object within an application process

3.2.26

isochronous mode

special operation mode of a DP system that implies both a constant DP cycle with a fixed schedule of the cyclic and acyclic DP services, and the synchronisation of the application in the DP-master (Class 1) and the DP-slaves with this constant DP cycle

3.2.27

master parameter set

the configuration and parameterisation data of all DP-slaves that are assigned to the corresponding DP-master and the bus parameters

3.2.28

module

addressable unit inside the DP-slave

3.2.29

process data

object(s) which are already pre-processed and transferred acyclically for the purpose of information or further processing

3.2.30

publisher

role of a CR endpoint that transmits APDUs onto the Fieldbus for consumption by one or more subscribers

NOTE A publisher may not be aware of the identity or the number of subscribers and it may publish its APDUs using a dedicated CR.

3.2.31

real configuration

input and output data structure of a DP-slave, including definition of data consistency

3.2.32

subscriber

role of a CREP in which it receives APDUs produced by a publisher

3.2.33

slot

address of a module within a DP-slave

3.2.34

sync

function at the DP-slaves for simultaneous data transfer between the output data object and the process

3.3 Abbreviations and symbols

Ack	Acknowledgement
Add	Address
AP	Application Process
APDU	Application Protocol Data Unit
API	Application Process Identifier
AR	Application Relationship
AREP	Application Relationship End Point
ARL	Application Relationship List
ASE	Application Service Element
Cfg	Configuration
cnf	confirmation primitive
CREP	Communication Relationship End Point
CRL	Communication Relationship List
D_	Destination
DLL	Data Link Layer
DLM	Data Link-management
DLSAP	Data Link Service Access Point
DLSDU	Data Link Service Data Unit
DMPM	Data Link Mapping Protocol Machine
DMPMM1	Data Link Mapping Protocol Machine DP-master (Class 1)
DMPMM2	Data Link Mapping Protocol Machine DP-master (Class 2)
DMPMS	Data Link Mapping Protocol Machine DP-slave
DSAP	Destination Service Access Point
DXB	Data eXchange Broadcast
FAL	Fieldbus Application Layer
FIFO	First In First Out
FSPMM1	FAL Service Protocol Machine DP-master (Class 1)
FSPMM2	FAL Service Protocol Machine DP-master (Class 2)
FSPMS	FAL Service Protocol Machine DP-slave
HSA	Highest Station Address
I&M	Identification and Maintenance Profile
ID	Identifier
IEC	International Electrotechnical Commission
ind	indication primitive
Inp	Input
ISO	International Organization For Standardization
IsoM	Isochronous Mode
L_sdu	Link Service Data Unit
lsb	least significant bit
msb	most significant bit
OSI	Open Systems Interconnection
Outp	Output
Param	Parameter
PDU	Protocol Data Unit
RD_	Read

Rem	Remote
Req	Request (used to indicate an APDU type)
req	request primitive
REQ	Request to indicate a Request PDU
RES	Response to indicate a Response PDU
RM	Resource Manager
RPL_UPD	Reply Update
Rsp	Response (used to indicate an APDU type)
rsp	response primitive
S_	Source
SAP	Service Access Point
SCL	Security Level
SD	Start Delimiter
SDN	Send Data with no Acknowledge
SDR	Station Delay Responder
Seq	Sequence
Src	Source
SRD	Send and Request Data with Reply
SSAP	Source Service Access Point
TR	Technical Report
USIF	User Interface
WD	Watchdog

3.4 Conventions

3.4.1 General concept

The FAL is defined as a set of object-oriented ASEs. Each ASE is specified in a separate subclause. Each ASE specification is composed of three parts: its class definitions, its services, and its protocol specification. The first two are contained in IEC 61158-5-3. The protocol specification for each of the ASEs is defined in this standard.

The class definitions define the attributes of the classes supported by each ASE. The attributes are accessible from instances of the class using the Management ASE services specified in IEC 61158-5-3 standard. The service specification defines the services that are provided by the ASE.

This standard uses the descriptive conventions given in ISO/IEC 10731.

3.4.2 Abstract syntax conventions

PDU's are described as octets or groups of octets.

- Groups of octets separated by a comma appear in the order they are transferred
If optional octets are not present the following octets appear without a gap
- If octets or groups of octets are grouped within "{ }" the order is arbitrary
- If octets or groups of octets are marked with "*" they may appear more than once.
If it is used within a "{ }" section they may appear mixed with other octets or group of octets of this section.
- Octets can be grouped or values can be assigned within "()"
- If octets or groups of octets are grouped within "["]" the group can be omitted
- Complex APDU's may be built by means of substitutions (sub-structures)
- Exclusive selections of octets or groups of octets are separated by "^"

NOTE 1 The formal PDU example

AP_PDU=Octet1,OctetGroup1,[Octet2],[Octet3],[OctGroup2*],OctetGroup3^Octet4}

According to this the following variants are valid on the wire (non exhaustive):



Variant 1: Octet1, OctetGroup1, Octet2, Octet3, OctetGroup2, OctetGroup3

Variant 2: Octet1, OctetGroup1, Octet2, Octet3, OctetGroup2, OctetGroup2, OctetGroup2, OctetGroup3

Variant 3: Octet1, OctetGroup1, OctetGroup2, OctetGroup2, OctetGroup2, OctetGroup3, OctetGroup2

Variant4: Octet1, OctetGroup1, OctetGroup2, OctetGroup3, OctetGroup2, OctetGroup2, OctetGroup2, OctetGroup2

Variant 5: Octet1, OctetGroup1, Octet3, Octet4

NOTE 2 The arbitrary order implies that groups of octets are characterised by a special header that is described within the coding rules.

NOTE 3 The APDU syntax implies that according to the maximum DLSDU a APDU must not exceed 244 octets in total.

3.4.3 Convention for the encoding of reserved bits and octets

The term "reserved" may be used to describe bits in octets or whole octets. All bits or octets that are reserved should be set to zero at the sending side and shall not be tested at the receiving side except it is explicitly stated or if the reserved bits or octets are checked by a state machine.

The term "reserved" may also be used to indicate that certain values within the range of a parameter are reserved for future extensions. In this case the reserved values should not be used at the sending side and shall not be tested at the receiving side except it is explicitly stated or if the reserved values are checked by a state machine.

3.4.4 Conventions for the common coding s of specific field octets

APDUs may contain specific fields that carry information in a primitive and condensed way. These fields shall be coded in the order according to Figure 1.

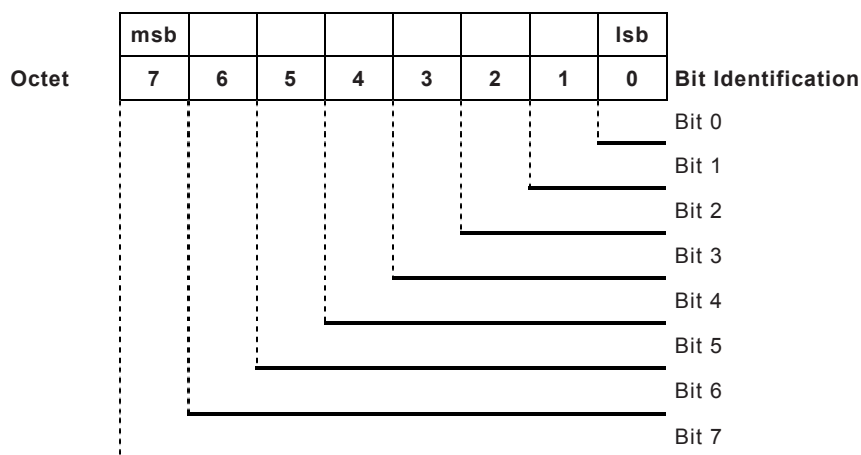


Figure 1 – Common structure of specific fields

- Bits may be grouped as group of bits. Each bit or group of bits shall be addressed by its Bit Identification (e.g. Bit 0, Bit 1 to 4). The position within the octet shall be according to the figure above. Alias names may be used for each bit or group of bits or they may be marked as reserved. The grouping of individual bits shall be in ascending order without gaps. The values for a group of bits may be represented as binary, decimal or hexadecimal values. This value shall only be valid for the grouped bits and can only represent the whole octet if all 8 bits are grouped. Decimal or hexadecimal values shall be transferred in binary values so that the bit with the highest number of the group represents the msb concerning the grouped bits.

EXAMPLE 1: Description and relation for the specific field octet

Bit 0: reserved.

Bit 1-3: Reason_Code The decimal value 2 for the Reason_Code means general error.

Bit 4-7: shall always set to one.

The octet that is constructed according to the description above looks as follows:

(msb) Bit 7 = 1,

Bit 6 = 1,

Bit 5 = 1,

Bit 4 = 1,

Bit 3 = 0,

Bit 2 = 1,

Bit 1 = 0,

(lsb) Bit 0 = 0.

The bit combination "0-1-0" for Bit 1-3 equals the decimal value 2.

3.5 Conventions used in state machines

3.5.1 State machine conventions

The protocol sequences are described by means of State Machines.

In state diagrams states are represented as boxes state transitions are shown as arrows. Names of states and transitions of the state diagram correspond to the names in the textual listing of the state transitions.

The textual listing of the state transitions is structured as follows, see also Table 1.

The first row contains the name of the transition.

The second row in define the current state.

The third row contains an optional event followed by Conditions starting with a "/" as first line character and finally followed by the Actions starting with a "=>" as first line character.

The last row contains the next state.

If the event occurs and the conditions are fulfilled the transition fires, i.e. the actions are executed and the next state is entered.

The layout of a Machine description is shown in Table 1. The meaning of the elements of a State Machine Description are shown in Table 2.

Table 1 – State machine description elements

#	Current state	Event or condition => action	Next state

Table 2 – Description of state machine elements

Description element	Meaning
Current state	Name of the given states.
Next state	
#	Name or number of the state transition.
Event	Name or description of the event.
/Condition	Boolean expression. The preceding “\” is not part of the condition.
=> Action	List of assignments and service or function invocations. The preceding “=>” is not part of the action.

The conventions used in the state machines are shown in Table 3.

Table 3 – Conventions used in state machines

Convention	Meaning
:=	Value of an item on the left is replaced by value of an item on the right. If an item on the right is a parameter, it comes from the primitive shown as an input event.
xxx	A parameter name. Example: Identifier := reason means value of a 'reason' parameter is assigned to a parameter called 'Identifier.'
"xxx"	Indicates fixed value. Example: Identifier := "abc" means value "abc" is assigned to a parameter named 'Identifier.'
=	A logical condition to indicate an item on the left is equal to an item on the right.
<	A logical condition to indicate an item on the left is less than the item on the right.
>	A logical condition to indicate an item on the left is greater than the item on the right.
<>	A logical condition to indicate an item on the left is not equal to an item on the right.
&&	Logical "AND"
	Logical "OR"
for (Identifier := start_value to end_value) actions endfor	This construct allows the execution of a sequence of actions in a loop within one transition. The loop is executed for all values from start_value to end_value.
If (condition) actions else actions	This construct allows the execution of alternative actions depending on some condition (which might be the value of some identifier or the outcome of a previous action) within one transition. The parts beginning with “else” can be omitted if there is no action if the condition is not fulfilled.

Readers are strongly recommended to refer to the subclauses for the AREP and CREP attribute definitions, the local functions, and the FAL-PDU definitions to understand protocol machines. It is assumed that readers have sufficient knowledge of these definitions and they are used without further explanations.

In addition the following description elements are used:

Wildcard in names

name_XXX: “XXX” is used as wildcard string for all names beginning with “name”.

The typical use of a wildcard is an Event. In this context there are as many state transitions as possible events for this wildcard exists.

Conditional macro

<CONDITIONAL -MACRO-NAME>

<

CONDITION1: macrobody1

CONDITION2: macrobody2

...

>

CONDITION1, CONDITION2, etc. define all possible cases for the conditional macro. The “CONDITIONAL-MACRO-NAME” acts as place holder for the “macrocode” depending on the result of the condition.

Replacement macro

<REPLACEMENT-MACRO-NAME>

<

XXX= Name1 : macrobody1

XXX= Name2 : macrobody2

...

>

Name1, Name2, etc. define all possible cases for the replacement macro. The “REPLACEMENT-MACRO-NAME” acts as place holder for the “macrocode” depending on the value of the current use of the wildcard XXX.

Example:

<SERVICE_REQ_PARA>

<

XXX=Read: Para1, Para2

XXX=Write: Para1, Para2, Para3

>

when called in

MSAB_XXX.req(<SERVICE_REQ_PARA>)

will result in

MSAB_Read.req(Para1, Para2) or MSAB_Write.req(Para1, Para2, Para3)

4 FAL syntax description

4.1 APDU abstract syntax

Table 4 defines the abstract syntax of the DP Application Layer PDUs referred to as APDUs. The defined order of octets shall be used to convey the APDUs.

Table 4 – APDU syntax

APDU name	APDU structure
DataExchange-REQ-PDU	[Outp_Data*]
DataExchange-RES-PDU	[Inp_Data*]
RD_Input-RES-PDU	[Inp_Data*]
RD_Output-RES-PDU	[Outp_Data*]
Chk_Cfg-REQ-PDU	{[Identifier_Format*], [Special_Identifier_Format*]^ [Extended_Special_Identifier_Format*]}
Get_Cfg-RES-PDU	{[Identifier_Format*], [Special_Identifier_Format*]^ [Extended_Special_Identifier_Format*]}
Set_Prm-REQ-PDU	Station_status, WD_Fact_1, WD_Fact_2, min_TSDR, Ident_Number, Group_Ident, User_Prm_Data
Set_Ext_Prm-REQ-PDU	Structured_Prm_Data*
Diagnosis-RES-PDU	Station_status_1, Station_status_2, Station_status_3, Diag_Master_Add, Ident_Number, {[Device_Related_Diagnosis*]^([Alarm], [Status*],[Modul_Status],[DXB_Link_Status], { [Red_Status] ^[PrmCmdAck]}), [Identifier_Related_Diagnosis], [Channel_Related_Diagnosis*], [Revision_Number]}
	The field Device_Related_Diagnosis may be present if DPV1=FALSE, otherwise if DPV1=TRUE it shall not be present. In this case the fields Alarm, Status, Modul_Status may be present.
Set_Slave_Add-REQ-PDU	New_Slave_Add, Ident_Number, No_Add_Chg, [Rem_Slave_Data*]
Global_Control-REQ-PDU	Control_Command, Group_Select
Clock-Value-PDU	Clock_value_time_event, Clock_value_previous_TE, Clock_value_status1, Clock_value_status2
Initiate-REQ-PDU	Function_Num(0x57), reserved (3 Octets), Send_Timeout, Features_Supported, Profile_Features_Supported, Profile_Ident_Number, Add_Addr_Para
Initiate-RES-PDU	Function_Num(0x57), Max_Len_Data_Unit, Features_Supported, Profile_Features_Supported, Profile_Ident_Number, Add_Addr_Param
Initiate-NRS-PDU	Function_Num(0xD7), Error_Decode, Error_Code_1, Error_Code_2
Abort-REQ-PDU	Function_Num(0x58), Subnet, Instance_Reason_Code
Read-REQ-PDU	Function_Num(0x5E), Slot_Number, Index (0 .. 254), Length
Read-RES-PDU	Function_Num(0x5E), Slot_Number, Index (0 .. 254), Length, [Data*]
Read-NRS-PDU Pull-NRS-PDU	Function_Num(0xDE), Error_Decode, Error_Code_1, Error_Code_2
Write-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (0 .. 254), Length, [Data*]
Write-RES-PDU	Function_Num(0x5F), Slot_Number, Index (0 .. 254), Length
Write-NRS-PDU Initiate_Load_NRS-PDU Push-NRS-PDU Terminate_Load-NRS-PDU Start-NRS-PDU Stop-NRS-PDU Resume-NRS-PDU Reset-NRS-PDU Call-NRS-PDU Get_FI_State-NRS-PDU	Function_Num(0xDF), Error_Decode, Error_Code_1, Error_Code_2
Alarm_Ack-REQ-PDU	Function_Num(0x5C), Slot_Number, Alarm_Type, Alarm_Specifier

APDU name	APDU structure
Alarm_Ack-RES-PDU	Function_Num(0x5C), Slot_Number, Alarm_Type, Alarm_Specifier
Alarm_Ack-NRS-PDU	Function_Num(0xDC), Error_Decode, Error_Code_1, Error_Code_2
Idle-REQ-PDU	Function_Num(0x48)
Idle-RES-PDU	Function_Num(0x48)
Data_Transport-REQ-PDU	Function_Num(0x51), Slot_Number, Index, Length, [Data*]
Data_Transport-RES-PDU	Function_Num(0x51), Slot_Number, Index, Length, [Data*]
Data_Transport-NRS-PDU	Function_Num(0xD1), Error_Decode, Error_Code_1, Error_Code_2
Initiate_Load-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x00), Options, LR_Index, LR_Length, Intersegment_Request_Timeout, [User_Specific]
Initiate_Load-RES-PDU	Function_Num(0x5E), Slot_Number, Index (255), Length, Extended_Function_Num (0x00), Max_Segment_Length, LR_Index, LR_Length, Max_Response_Delay
Push-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x01), Options, Sequence_Number, LR_Data
Pull-REQ-PDU	Function_Num(0x5E), Slot_Number, Index (255), Length
Pull-RES-PDU	Function_Num(0x5E), Slot_Number, Index (255), Length, Extended_Function_Num (0x02), Options, Sequence_Number, LR_Data
Terminate_Load-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x03), reserved (1 octet), reserved (2 Octets),
Start-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x04), reserved (1 octet), FI_Index, [Execution_Argument]
Stop-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x05), reserved (1 octet), FI_Index
Resume-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x06), reserved (1 octet), FI_Index, [Execution_Argument]
Reset-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x07), reserved (1 octet), FI_Index
Call-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x08), Entity Number, FI_Index (=0...64999), [Execution_Argument] Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x08), Entity Number, FI_Index (=65000...65199), [I MData_Exexecution_Argument]
Call-RES-PDU	Function_Num(0x5E), Slot_Number, Index (255), Length, Extended_Function_Num (0x08), Entity Number, FI_Index (=0...64999), [Result_Argument] Function_Num(0x5E), Slot_Number, Index (255), Length, Extended_Function_Num (0x08), Entity Number, FI_Index (=65000...65199), [IMData_Result_Argument]
Get_FI_State-REQ-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length, Extended_Function_Num (0x09), reserved (1 octet), FI_Index
Get_FI_State-RES-PDU	Function_Num(0x5E), Slot_Number, Index (255), Length, Extended_Function_Num (0x09), reserved (1 octet), FI_Index, FI_State
Push-RES-PDU Terminate_Load-RES-PDU Start-RES-PDU Stop-RES-PDU Resume-RES-PDU Reset-RES-PDU	Function_Num(0x5F), Slot_Number, Index (255), Length
RM-REQ-PDU	Function_Num(0x56), Server_SAP, Send_Timeout
Get_Master_Diag-REQ-PDU	Function_Num(0x41), MDiag_Identifier
Get_Master_Diag-RES-PDU	Function_Num(0x41), MDiag_Identifier(=0..125), Diagnosis-RES-PDU Function_Num(0x41), MDiag_Identifier(=126), System_Diagnosis, Function_Num(0x41), MDiag_Identifier(=127), Master_Status Function_Num(0x41), MDiag_Identifier(=128), Data_Transfer_List
Start_Seq-REQ-PDU	Function_Num(0x42), Area_CodeUpDownload, Timeout
Start_Seq-RES-PDU	Function_Num(0x42), Area_CodeUpDownload, Timeout, Max_Len_Data

APDU name	APDU structure
Download-REQ-PDU	Function_Num(0x43), Area_CodeUpDownload(=0..125), Add_Offset, DP_Slave_Parameter_Set Function_Num(0x43), Area_CodeUpDownload(=127), Add_Offset, Bus_Parameter_Set Function_Num(0x43), Area_CodeUpDownload(=129), Add_Offset, Statistic_Counters Function_Num(0x43), Area_CodeUpDownload(=136 to 139), Add_Offset, Master_Parameter_Set
Download-RES-PDU	Function_Num(0x43), Area_CodeUpDownload, Add_Offset
Upload-REQ-PDU	Function_Num(0x44), Area_CodeUpDownload, Add_Offset, Data_Len
Upload-RES-PDU	Function_Num(0x44), Area_CodeUpDownload(=0..125), Add_Offset, DP_Slave_Parameter_Set Function_Num(0x44), Area_CodeUpDownload(=127), Add_Offset, Bus_Parameter_Set Function_Num(0x44), Area_CodeUpDownload(=129), Add_Offset, Statistic_Counters Function_Num(0x43), Area_CodeUpDownload(=136 to 139), Add_Offset, Master_Parameter_Set
End_Seq-REQ-PDU	Function_Num(0x45)
End_Seq-RES-PDU	Function_Num(0x45)
Act_Para_Brct-REQ-PDU	Function_Num(0x46), Area_CodeActBrct
Act_Param-REQ-PDU	Function_Num(0x47), Area_CodeAct, Activate
Act_Param-RES-PDU	Function_Num(0x47), Area_CodeAct, Activate
ZERO-PDU	Octet1(0)
NULL-PDU	
NOTE 1 If a APDU consists only of user data octets the distinction is made by use of different Data Link Layer service access points (see Protocol Machines). NOTE 2 A ZERO-PDU contains one octet with all bits set to zero. This APDU is used to indicate diagnosis from a device without inputs. NOTE 3 A NULL-PDU contains no octets. It is used to submit no DLSDU to data link layer.	

Table 5 defines structures for substitutions of elements of the APDU structures shown in Table 4.

Table 5 – Substitutions

Substitution name	Structure
Identifier_Format	Cfg_Identifier
Special_Identifier_Format	Special_Cfg_Identifier, [Length_Octet] , [Length_Octet], [Manufacturer_Specific_Data*] Length_Octet fields shall always start with fields that indicate output data if present.
Extended_Special_Identifier_Format	Special_Cfg_Identifier,[Extended_Length_Octet], [Extended_Length_Octet], [Data_Type*], [Manufacturer_Specific_Data*] Extended_Length_Octet fields shall always start with fields that indicate output data if present. The field Data_Type shall only be omitted in case of an empty slot. Otherwise it shall be present in relation to the length fields.
Device_Related_Diagnosis	Header_Octet, Diagnosis_User_Data*
Identifier_Related_Diagnosis	Header_Octet, Identifier_Diagnosis_Data_Array
Channel_Related_Diagnosis	Identifier_Number, (Channel_Number, Type_of_Diagnosis)*
Alarm	Header_Octet, Alarm_Type, Slot_Number, Alarm_Specifier, [Diagnosis_User_Data*]
Status	Header_Octet, Status_Type, Slot_Number, Status_Specifier, Diagnosis_User_Data*
Modul_Status	Header_Octet, Status_Type(=Modul_Status), Slot_Number(=0), Status_Specifier, Modul_Status_Array
DXB_Link_Status	Header_Octet, Status_Type(=DXB_Link_Status), Slot_Number(=0), Status_Specifier, (Publisher_Address, Publisher_Status)*
PrmCmdAck	Header_Octet, Status_Type(=PrmCmdAck), Slot_Number(=0), Status_Specifier, Function, Red_Status1, Red_Status2, Red_Status3
Red_Status	Header_Octet, Status_Type(=Red_Status), Slot_Number(=0), Status_Specifier, Function, Red_Status1, Red_Status2, Red_Status3
User_Prm_Data	[DPV1_Status_1, DPV1_Status_2, DPV1_Status_3], [User_Prm_Data_Element*][Structured_Prm_Data*] The fields DPV1_Status_1, DPV1_Status_2 and DPV1_Status_3 shall be present if DPV1=TRUE. Structured_Prm_Data shall be present if the DPV1_Status_3.Prm_Structure is TRUE, otherwise it shall not be used.
Structured_Prm_Data	Structure_Length, Structure_Type, Slot_Number, reserved (1 octet), User_Prm_Data* Special Case DXB LinkTable: Structure_Length, Structure_Type(=3), Slot_Number(=0), reserved (1 octet), Version(=1), (Publisher_Addr, Publisher_Length, Sample_Offset, Sample_Length)* Special Case DXB-Subscribertable: Structure_Length, Structure_Type(=7), Slot_Number(=0), reserved (1 octet), Version(=1), (Publisher_Addr, Publisher_Length, Sample_Offset, Dest_Slot_Number, Offset_Data_Area, Sample_Length)* Special Case IsoM Parameter Structure_Length, Structure_Type(=4), Slot_Number(=0), reserved (1 octet), Version(=1), TBASE_DP, TDP, TMAPC, TBASE_IO, TI, TO, TDX, TPLL_W, TPLL_D Special Case PrmCmd Structure_Length, Structure_Type(=2), Slot_Number(=0), Specifier, Function, Properties, Output_Hold_Time Special Case Time AR Parameter: Structure_Length, Structure_Type(=8), Slot_Number(=0), reserved (1 octet), Clock Sync Interval, [CS Delay Time] Special Case F-Parameter Structure_Length, Structure_Type(=5), Slot_Number, reserved (1 octet), User_Prm_Data*

Substitution name	Structure
Features_Supported	Features_Supported_1, Features_Supported_2
Profile_Features_Supported	Profile_Features_Supported_1, Profile_Features_Supported_1
Add_Addr_Para	S_Type, S_Len, D_Type, D_Len, S_API, S_SCL, [S_Network_Address], [S_MAC_Address], D_API, D_SCL, [D_Network_Address], [D_MAC_Address]
Master_Status	USIF_State, Ident_Number, Hardware_Release_DP, Firmware_Release_DP, Hardware_Release_User, Firmware_Release_User, reserved (9 Octets)
DP_Slave_Parameter_Set	Slave_Para_Len, SI_Flag, Slave_Type, Max_Diag_Data_Len, Max_Alarm_Len, Max_Channel_Data_Length, Diag_Upd_Delay, Alarm_Mode, Add_SI_Flag, MS1_Timeout, reserved (4 Octets), Prm_Data_Len, Prm_Data, Cfg_Data_Len, Cfg_Data, Add_Tab_Len, Add_Tab, Slave_User_Data_Len, Slave_User_Data, Ext_Prm_Data_Len, [Ext_Prm_Data]
Bus_Parameter_Set	Bus_Para_Len, DL_Add, Data_rate, T _{SL} , min T _{SDR} , max T _{SDR} , T _{QUI} , T _{SET} , T _{TR} , G, HSA, max_retry_limit, Bp_Flag, Min_Slave_Interval, Poll_Timeout, Data_Control_Time, Alarm_Max, Max_User_Global_Control, reserved (4 Octets), Master_User_Data_Len, Master_Class2_Name, Master_User_Data*, T _{CT} , maxT _{SH}
Master_Parameter_Set	Bus_Parameter_Set, DP_Slave_Parameter_Set*
Statistic_Counters	Counter_Group*
Counter_Group	if Add_Offset 0..126: DLPDU_sent_count(Add_Offset), Error_count(Add_Offset) if Add_Offset 127: SD_sent_count, SD_error_count
Add_Tab	[Number_of_Entries], [Add_Tab_Entry_Header, I/O_Data_Length, IO_Config_Address, Host_Address]*
IMData_Execution_Argument	[I&M1] ^ [I&M2] ^ [I&M3] ^ [I&M4] ^ [I&M_Profile_Specific_x] ^ [I&M_Manufacturer_Specific_x]
IMData_Result_Argument	I&M0 ^ [I&M1] ^ [I&M2] ^ [I&M3] ^ [I&M4] ^ [I&M_Profile_Specific_x] ^ [I&M_Manufacturer_Specific_x]
I&M0	IM_Header, IM_Manufacturer_ID, OrderID, IM_Serial_Number, IM_Hardware_Revision, IM_Software_Revision, IM_Revision_Counter, IM_Profile_ID, IM_Profile_Specific_Type, IM_Version, IM_Supported
I&M1	IM_Header, IM_Tag_Function, IM_Tag_Location
I&M2	IM_Header, IM_Date
I&M3	IM_Header, IM_Descriptor
I&M4	IM_Header, IM_Signature
I&M_Profile_Specific_x	IM_Header, IM_Profile_Specific_Data
IM_Version	IM_Version_Major, IM_Version_Minor
IM_Software_Revision	SWRevisionPrefix, IM_SWRevision_Functional_Enhancement, IM_SWRevision_Bug_Fix, IM_SWRevision_Internal_Change
NOTE The DP_Slave_Parameter_Set and the Bus_Parameter_Set may exceed the maximum APDU size to a size up to 64 Octets. The conveyance of the data is therefore segmented by means of a window addressed with the parameter Add_Offset.	

4.2 Data types

4.2.1 Notation for the Boolean type

Boolean ::= BOOLEAN

-- TRUE if the value is non-zero.

-- FALSE if the value is zero.

4.2.2 Notation for the Integer type

Integer8 ::= INTEGER (-128..+127)	-- range $-2^7 \leq I \leq 2^7-1$
Integer16 ::= INTEGER (-32768..+32767)	-- range $-2^{15} \leq I \leq 2^{15}-1$
Integer32 ::= INTEGER	-- range $-2^{31} \leq I \leq 2^{31}-1$
Integer64 ::= INTEGER	-- range $-2^{63} \leq I \leq 2^{63}-1$

4.2.3 Notation for the Unsigned type

Unsigned8 ::= INTEGER (0..255)	-- range $0 \leq I \leq 2^8-1$
Unsigned16 ::= INTEGER (0..65535)	-- range $0 \leq I \leq 2^{16}-1$
Unsigned32 ::= INTEGER	-- range $0 \leq I \leq 2^{32}-1$
Unsigned64 ::= INTEGER	-- range $0 \leq I \leq 2^{64}-1$

4.2.4 Notation for the Floating Point type

Floating32 ::= BIT STRING SIZE (4)	-- IEC 60559 Single precision
Floating64 ::= BIT STRING SIZE (8)	-- IEC 60559 Double precision

4.2.5 Notation for the OctetString type

OctetString ::= OCTET STRING	-- For generic use
------------------------------	--------------------

4.2.6 Notation for VisibleString type

VisibleString2 ::= VISIBLE STRING	-- For generic use
-----------------------------------	--------------------

4.2.7 Notation for BinaryDate type

BinaryDate ::= OctetString7

4.2.8 Notation for TimeOfDay type

TimeOfDay with date indication ::= OctetString6
 TimeOfDay without date indication ::= OctetString4

4.2.9 Notation for TimeDifference type

TimeDifference with date indication ::= OctetString6
 TimeDifference without date indication ::= OctetString4

4.2.10 Notation for Network Time type

Network Time ::= OctetString8

4.2.11 Notation for Network Time Difference type

Network Time Difference ::= OctetString8

5 Transfer syntax

5.1 Coding of basic data types

5.1.1 Encoding of a Boolean value

- a) The encoding of a Boolean value shall be primitive. The ContentsOctets shall consist of a single octet.
- b) If the Boolean value is FALSE, the ContentsOctets shall be 0 (zero). If the Boolean value is TRUE, the ContentsOctets shall be 0xff.

5.1.2 Encoding of an Integer value

- a) The encoding of a fixed-length Integer value of Integer8, Integer16, and Integer32 types shall be primitive, and the ContentsOctets shall consist of exactly one, two, or four octets, respectively.
- b) The ContentsOctets shall be a two's complement binary number equal to the integer value, and consist of bits 7 to 0 of the first octet, followed by bits 7 to 0 of the second octet, followed by bits 7 to 0 of each octet in turn up to and including the last octet of the ContentsOctets.

NOTE The value of a two's complement binary number is derived by numbering the bits in the ContentsOctets, starting with bit 0 of the last octet as bit zero and ending the numbering with bit 7 of the first octet. Each bit is assigned a numerical value of 2^N , where N is its position in the above numbering sequence. The value of the two's complement binary number is obtained by adding the numerical values assigned to each bit for those bits which are set to one, excluding bit 7 of the first octet, and then reducing this value by the numerical value assigned to bit 7 of the first octet if that bit is set to one.

5.1.3 Encoding of an Unsigned value

- The encoding of a fixed-length Unsigned value of Unsigned8, Unsigned16, and Unsigned32 types shall be primitive, and the ContentsOctets shall consist of exactly one, two, or four octets, respectively.
- The ContentsOctets shall be a binary number equal to the Unsigned value, and consist of bits 7 to 0 of the first octet, followed by bits 7 to 0 of the second octet, followed by bits 7 to 0 of each octet in turn up to and including the last octet of the ContentsOctets.

NOTE The value of a binary number is derived by numbering the bits in the ContentsOctets, starting with bit 0 of the last octet as bit zero and ending the numbering with bit 7 of the first octet. Each bit is assigned a numerical value of 2^N , where N is its position in the above numbering sequence. The value of the binary number is obtained by adding the numerical values assigned to each bit for those bits which are set to one.

5.1.4 Encoding of a Floating-Point value

- a) The encoding of a Floating32 value shall be primitive, and the ContentsOctets shall consist of exactly four octets.
- b) The ContentsOctets shall contain floating-point values defined in conformance with IEC 60559. The sign is encoded in bit 7 of the first octet. It is followed by the exponent starting from bit 6 of the first octet, and then the mantissa starting from bit 6 of the second octet for Floating32.

5.1.5 Encoding of a Visible String value

- a) The encoding of a variable length VisibleString value shall be primitive.
- b) There is no Length field; the length is encoded implicitly.
- c) The ContentsOctets shall be a sequence of octets. The leftmost string element is encoded in the first octet, followed by the second octet, followed by each octet in turn up to and including the last octet as rightmost of the ContentsOctets.

5.1.6 Encoding of an Octet String value

- a) The encoding of a variable length OctetString value shall be primitive.
- b) There is no Length field; the length is encoded implicitly.

- c) The ContentsOctets shall be a sequence of octets. The leftmost string element is encoded in the first octet, followed by second octet, followed by each octet in turn up to and including the last octet as rightmost of the ContentsOctets.

5.1.7 Encoding of a BinaryDate value

- a) The encoding of a BinaryDate value shall be primitive.
- b) The ContentsOctets shall be equal in value to the octets in the data value, as shown in Figure 2:

bits	7	6	5	4	3	2	1	0	
octets									
1	2^{15}	2^{14}	2^{13}	2^{12}	2^{11}	2^{10}	2^9	2^8	0...59 999 ms
2	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
3	RSV	RSV	2^5	2^4	2^3	2^2	2^1	2^0	0...59 min
4	SU	RSV	RSV	2^4	2^3	2^2	2^1	2^0	0...23 hours
5	day of week			day of month					1...7 day of week
	2^2	2^1	2^0	2^4	2^3	2^2	2^1	2^0	1...31 day of month
6	RSV	RSV	2^5	2^4	2^3	2^2	2^1	2^0	1...12 months
7	RSV	2^6	2^5	2^4	2^3	2^2	2^1	2^0	0 ... 50 years 2000 to 2050 51 ... 99 years 1951 to 1999
msb									
NOTE To avoid the Y2K problem the values of the year are from 0 to 50 for the years 2000 to 2050 and from 51 to 99 for the years 1951 to 1999. This is according to the British Standards Institution (BSi) DISC PD2000-1:1998 "A Definition of Year 2000 Conformance Requirements" Rule 3 (b).									

Figure 2 – Coding of the data type BinaryDate

5.1.8 Encoding of a TimeOfDay with and without date indication value

- a) The encoding of a TimeOfDay with and without date indication value shall be primitive.
- b) The ContentsOctets shall be equal in value to the octets in the data value, as shown in Figure 3:

bits	7	6	5	4	3	2	1	0	
octets									
1	0	0	0	0	2^{27}	2^{26}	2^{25}	2^{24}	number of milliseconds since midnight
2	2^{23}	2^{22}	2^{21}	2^{20}	2^{19}	2^{18}	2^{17}	2^{16}	
3	2^{15}	2^{14}	2^{13}	2^{12}	2^{11}	2^{10}	2^9	2^8	
4	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
5	2^{15}	2^{14}	2^{13}	2^{12}	2^{11}	2^{10}	2^9	2^8	number of days since 01.01.84 only with date indication
6	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
msb									

Figure 3 – Encoding of TimeOfDay value

5.1.9 Encoding of a Time Difference with and without date indication value

- a) The encoding of a Time Difference with and without date indication value shall be primitive.
b) The ContentsOctets shall be equal in value to the octets in the data value, as shown in Figure 4:

bits	7	6	5	4	3	2	1	0	
octets									
1	2^{31}	2^{30}	2^{29}	2^{28}	2^{27}	2^{26}	2^{25}	2^{24}	milliseconds
2	2^{23}	2^{22}	2^{21}	2^{20}	2^{19}	2^{18}	2^{17}	2^{16}	
3	2^{15}	2^{14}	2^{13}	2^{12}	2^{11}	2^{10}	2^9	2^8	
4	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
5	2^{15}	2^{14}	2^{13}	2^{12}	2^{11}	2^{10}	2^9	2^8	days
6	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	only with date indication
msb									

Figure 4 – Encoding of Time Difference value

5.1.10 Encoding of a Network Time value

- a) The encoding of a Network Time value shall be primitive.
b) The ContentsOctets shall be equal in value to the octets in the data value, as shown in Figure 5:

bits	7	6	5	4	3	2	1	0	
octets									
1	2 ³¹	2 ³⁰	2 ²⁹	2 ²⁸	2 ²⁷	2 ²⁶	2 ²⁵	2 ²⁴	Sec. since 1.1.1900 0.00,00 or since 7.2. 2036 6.28,16 when time value less than 0x9dff4400.00000000
2	2 ²³	2 ²²	2 ²¹	2 ²⁰	2 ¹⁹	2 ¹⁸	2 ¹⁷	2 ¹⁶	
3	2 ¹⁵	2 ¹⁴	2 ¹³	2 ¹²	2 ¹¹	2 ¹⁰	2 ⁹	2 ⁸	
4	2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰	
5	2 ³¹	2 ³⁰	2 ²⁹	2 ²⁸	2 ²⁷	2 ²⁶	2 ²⁵	2 ²⁴	Fraction Part of Seconds one unit is 1/(2 ³²) s
6	2 ²³	2 ²²	2 ²¹	2 ²⁰	2 ¹⁹	2 ¹⁸	2 ¹⁷	2 ¹⁶	
7	2 ¹⁵	2 ¹⁴	2 ¹³	2 ¹²	2 ¹¹	2 ¹⁰	2 ⁹	2 ⁸	
8	2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰	
msb									

Figure 5 – Encoding of Network Time value

5.1.11 Encoding of a Network Time Difference value

- a) The encoding of a Network Time Difference value shall be primitive.
b) The ContentsOctets shall be equal in value to the octets in the data value, as shown in Figure 6.

bits	7	6	5	4	3	2	1	0	
octets									Seconds as Integer32
1	2 ³¹	2 ³⁰	2 ²⁹	2 ²⁸	2 ²⁷	2 ²⁶	2 ²⁵	2 ²⁴	
2	2 ²³	2 ²²	2 ²¹	2 ²⁰	2 ¹⁹	2 ¹⁸	2 ¹⁷	2 ¹⁶	
3	2 ¹⁵	2 ¹⁴	2 ¹³	2 ¹²	2 ¹¹	2 ¹⁰	2 ⁹	2 ⁸	
4	2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰	Fraction Part of Seconds one unit is 1/(2 ³²) s
5	2 ³¹	2 ³⁰	2 ²⁹	2 ²⁸	2 ²⁷	2 ²⁶	2 ²⁵	2 ²⁴	
6	2 ²³	2 ²²	2 ²¹	2 ²⁰	2 ¹⁹	2 ¹⁸	2 ¹⁷	2 ¹⁶	
7	2 ¹⁵	2 ¹⁴	2 ¹³	2 ¹²	2 ¹¹	2 ¹⁰	2 ⁹	2 ⁸	
8	2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰	
msb									

Figure 6 – Encoding of Network Time Difference value

5.1.12 Encoding of a Null value

- The encoding of a NULL value shall be primitive.
- The ContentsOctet shall be omitted.

5.2 Coding section related to data exchange PDUs

5.2.1 Coding of the field Outp_Data

One of the following data types shall be used for each Outp_Data field:

Boolean, Integer, Unsigned, Floating Point, Visible String, Octet String, Date, TimeOfDay, Time-Difference.

5.2.2 Coding of the field Inp_Data

One of the following data types shall be used for each Inp_Data field:

Boolean, Integer, Unsigned, Floating Point, Visible String, Octet String, Date, TimeOfDay, Time-Difference.

NOTE Data types with variable length (Visible String, Octet String, TimeOfDay, Time Difference) for Inp_Data or Outp_Data are only once present in the DataExchange-RES-PDU or DataExchange-REQ-PDU. The user data correspond to the contents of the Configuration-PDU.

5.3 Coding section related to slave diagnosis PDUs

5.3.1 Coding of the field Station_status_1

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: Diag.Station_Non_Existent

Shall be set to zero in case of Diagnoses-RES-PDU

Value (0): means FALSE if Get_Master_Diag-RES-PDU

Value (1): means TRUE if Get_Master_Diag-RES-PDU

Bit 1: Diag.Station_Not_Ready

FALSE (0), TRUE (1)

Bit 2: Diag.Cfg_Fault (Configuration Fault)
FALSE (0), TRUE (1)

Bit 3: Diag.Ext_Diag (Extended Diagnosis)
FALSE (0), TRUE (1)

Bit 4: Diag.Not_Supported
FALSE (0), TRUE (1)

Bit 5: Diag.Invalid_Slave_Response
Shall be set to zero if Diagnoses-RES-PDU

Value (0): means FALSE if Get_Master_Diag-RES-PDU

Value (1): means TRUE if Get_Master_Diag-RES-PDU

Bit 6: Diag.Prm_Fault (Parameter Fault)
FALSE (0), TRUE (1)

Bit 7: Diag.Master_Lock
Shall be set to zero if Diagnoses-RES-PDU

Value (0): means FALSE if Get_Master_Diag-RES-PDU

Value (1): means TRUE if Get_Master_Diag-RES-PDU

5.3.2 Coding of the field Station_status_2

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: Diag.Prm_Req (Parameterisation requested)
FALSE (0), TRUE (1)

Bit 1: Diag.Stat_Diag (Static Diagnosis)
FALSE (0), TRUE (1)

Bit 2: DP (DP Protocol)
Shall always set to ones

Bit 3: Diag.WD_On (Watchdog on)
FALSE (0), TRUE (1)

Bit 4: Diag.Freeze_Mode
FALSE (0), TRUE (1)

Bit 5: Diag.Sync_Mode (Synchronisation Mode)
FALSE (0), TRUE (1)

Bit 6: reserved

Bit 7: Diag.Deactivated
Shall be set to zero if Diagnoses-RES-PDU

Value (0): means FALSE if Get_Master_Diag-RES-PDU

Value (1): means TRUE if Get_Master_Diag-RES-PDU

5.3.3 Coding of the field **Station_status_3**

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 6: reserved

Bit 7: Diag.Ext_Diag_Overflow (Overflow of extended Diagnosis)
FALSE (0), TRUE (1)

5.3.4 Coding of the field **Diag_Master_Add**

This field shall be coded as data type Unsigned8 with the following values:

Decimal (0-125)

means the address of the DP-master (Class 1) which has parameterised this DP-slave

Decimal (255)

means DP-slave has not been parameterised or has got invalid parameterisation.

Decimal (126-254)

not allowed

5.3.5 Coding of the field **Ident_Number**

This field shall be coded as data type Unsigned16.

5.3.6 Coding of the field **Header_Octet**

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 5: Block_Length

It shall contain the length of the diagnosis block. The Header_Octet itself shall always be counted.

For the base diagnosis format of the Device Related Diagnosis the values shall be in the range of decimal 2 to 63. For the base diagnosis format of the Identifier Related Diagnosis the values shall be in the range of decimal 2 to 32. For the DPV1 diagnosis format for the Device Related Diagnosis the values shall be in the range of decimal 4 to 63.

NOTE The Identifier Related Diagnoses is limited to 32 because the identifier itself are limited to 244.

Bit 6 to 7: Selection

Decimal (0): means Device Related Diagnosis

Decimal (1): means Identifier Related Diagnosis

5.3.7 Coding of the field **Alarm_Type**

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 6: Alarm_Type

The Alarm_Type shall contain the values according to Table 6.

Table 6 – Alarm_Type range

Value (decimal)	Meaning
0	reserved
1	Diagnostic_Alarm
2	Process_Alarm
3	Pull_Alarm
4	Plug_Alarm
5	Status_Alarm
6	Update_Alarm
7 – 31	reserved
32 – 126	manufacturer-specific
127	reserved

Bit 7: shall be zero (identifying Alarm)

5.3.8 Coding of the field Status_Type

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 6: Status_Type

The Status_Type shall contain values according to Table 7.

Table 7 – Status_Type value range

Value (decimal)	Meaning
0	reserved
1	Status_Message
2	Modul_Status
3	DXB_Link_Status
4 to 29	reserved
30	PrmCmdAck
31	Red_Status
32 to 126	Manufacturer-specific
127	reserved

Bit 7: shall be one (identifying Status)

5.3.9 Coding of the field Slot_Number

This field shall be coded as data type Unsigned8. The value shall be taken from the range zero to 254. The value 255 is reserved.

5.3.10 Coding of the field Alarm_Specifier

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 1: Alarm_Specifier

This bit group shall contain the alarm specifier with the values according to Table 8.

Table 8 – Alarm_Specifier

Value (decimal)	Meaning	Comment
0	No further differentiation	
1	Error appears and Slot disturbed	the slot generates an alarm due to an error
2	Error disappears and Slot is okay	the slot generates an alarm and indicates that the slot has no further errors
3	Error disappears and Slot is still disturbed	the slot generates an alarm and indicates that the slot has still further errors

Bit 2: Additional_Acknowledge

Value (0): means no additional acknowledge used

Value (1): means additional acknowledge is used

Bit 3 to 7: Sequence_Number

The value range shall be from zero to 31 (decimal).

5.3.11 Coding of the field Status_Specifier

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 1: Status_Specifier

Decimal (0): means no further differentiation

Decimal (1): means status appears

Decimal (2): means status disappears

Decimal (3): reserved

Bit 2 to 7: reserved

5.3.12 Coding of the field Diagnosis_User_Data

One of the following data types shall be used for each Diagnosis_User_Data field:

Boolean, Integer, Unsigned, Floating Point, Visible String, Octet String, Date, TimeOfDay, Time-Difference.

5.3.13 Coding of the field Modul_Status_Array

The field Modul_Status_Array is an array of octets that shall contain at least one and at most 61 octets referred to as Modul_Status_Octet. A Modul_Status_Octet shall consist of at least one and at most 4 module stati referred to as Modul_Status_Entry_1 to Modul_Status_Entry_4 coded in two bits each. Therefore, the number of Modul_Status_Octet corresponds to the number of configured modules within a device and shall be calculated as follows

- a) $N = 1$ if $M_{\text{highest}} \leq 4$
- b) $N = M_{\text{highest}} \text{ DIV } 4 + 1$ if $M_{\text{highest}} \text{ MOD } 4 \neq 0$
- c) $N = M_{\text{highest}} \text{ DIV } 4$ if $M_{\text{highest}} \text{ MOD } 4 = 0$

where

N is the number of octets Modul_Status_Octet or the number of array elements,

M_{highest} is the highest number of configured modules within a device (maximum 244).

The last Modul_Status_Octet (octet N) may not contain all 4 module status entries. If M_{highest} MOD 4 ≠ 0 the octet N is not fully filled and the remaining bits shall be set to zero referred to as Padding Bits.

The status of the device's modules shall be structured in ascending order without gaps. The status of module number one is always placed in Modul_Status_Entry_1 of the Modul_Status_Octet number one. The coding of a Modul_Status_Octet shall be according to 3.4 and the individual bits shall have the following meaning:

NOTE The term "configured modules" addresses physical or virtual modules of a device that have had a related format field in the Chk_Cfg-REQ-PDU. Modules that are not part of the configuration are purely local and therefore not related to the Modul_Status_Array field.

Bit 0 to 1: Modul_Status_Entry_1

It shall contain the module status of a configured module with the number that meets $m \text{ MOD } 4 = 1$. Padding bits shall not be used here.

Bit 2 to 3: Modul_Status_Entry_2

It shall contain the module status of a configured module with the number that meets $m \text{ MOD } 4 = 2$. Otherwise padding bits (00 binary) shall be used.

Bit 4 to 5: Modul_Status_Entry_3

It shall contain the module status of a configured module with the number that meets $m \text{ MOD } 4 = 3$. Otherwise padding bits (00 binary) shall be used.

Bit 6 to 7: Modul_Status_Entry_4

These 2 bits shall contain the module status of a configured module with the number that meets $m \text{ MOD } 4 = 0$. Otherwise padding bits (00 binary) shall be used.

where

m is the number of the current module with $1 \leq m \leq N$.

Figure 7 illustrates the arrangement of Modul_Status_Entry_(1 to 4) fields as an example for a device with 6 configured modules.

Bit Number							
7	6	5	4	3	2	1	0
Modul_Status_Octet 1		status module number 4		status module number 3		status module number 2	
Modul_Status_Octet 2		status module number 1		status module number 6		status module number 5	
Modul_Status_Entry_4		Modul_Status_Entry_3		Modul_Status_Entry_2		Modul_Status_Entry_1	

Figure 7 – Example Modul_Status_Array

Each entry Modul_Status_Entry_1 to Modul_Status_Entry_4 shall contain the module status according to Table 9.

Table 9 – Range of Modul_Status_Entry (1-4)

Value (decimal)	Meaning
0	data valid
1	data invalid: the data of the corresponding module are not valid due to an error (e.g. short circuit)
2	data invalid/wrong module: the data of the corresponding module are not valid, due to a wrong module in place
3	data invalid/no module: the data of the corresponding module are not valid, because there is no module in place

5.3.14 Coding of the field Identifier_Diagnosis_Data_Array

The field Identifier_Diagnosis_Data_Array is an array of octets that shall contain at least one and at most 31 octets referred to as Identifier_Diagnosis_Data_Octet. A Identifier_Diagnosis_Data_Octet shall consist of at least one and at most 8 diagnosis entries referred to as Identifier_Diagnosis_Entry_1 to Identifier_Diagnosis_Entry_8. Therefore, the number of Identifier_Diagnosis_Data_Octet corresponds to the number of configured modules within a device and shall be calculated as follows

- a) $N = 1$ if $M_{\text{highest}} \leq 8$
- b) $N = M_{\text{highest}} \text{ DIV } 8 + 1$ if $M_{\text{highest}} \text{ MOD } 4 \neq 0$
- c) $N = M_{\text{highest}} \text{ DIV } 8$ if $M_{\text{highest}} \text{ MOD } 4 = 0$

where

N is the number of octets Identifier_Diagnosis_Data_Octet or the number of array elements,
 M_{highest} is the highest number of configured modules within a device (maximum 244).

The last Identifier_Diagnosis_Data_Octet (octet N) may not contain all 8 diagnosis entries. If $M_{\text{highest}} \text{ MOD } 8 \neq 0$ the octet N is not fully filled and the remaining bits shall be set to zero referred to as Padding Bits.

NOTE The term DIV stands for division without rest. The term MOD stands for the rest of the division.

The identifier diagnosis of the device's modules shall be structured in ascending order without gaps. The identifier diagnosis of module number one is always placed in Identifier_Diagnosis_Entry_1 of the Identifier_Diagnosis_Data_Octet number one. The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: Identifier_Diagnosis_Entry_1

This bit shall be set to one if the module with the number that meets $m \text{ MOD } 8 = 1$ indicates diagnosis otherwise it shall be set to zero. A padding bit shall not be used here.

Bit 1: Identifier_Diagnosis_Entry_2

This bit shall be set to one if the module with the number that meets $m \text{ MOD } 8 = 2$ indicates diagnosis otherwise it shall be set to zero. A padding bit shall be used if there is no module configured.

Bit 2: Identifier_Diagnosis_Entry_3

This bit shall be set to one if the module with the number that meets $m \text{ MOD } 8 = 3$ indicates diagnosis otherwise it shall be set to zero. A padding bit shall be used if there is no module configured.

Bit 3: Identifier_Diagnosis_Entry_4

This bit shall be set to one if the module with the number that meets $m \text{ MOD } 8 = 4$ indicates diagnosis otherwise it shall be set to zero. A padding bit shall be used if there is no module configured.

Bit 4: Identifier_Diagnosis_Entry_5

This bit shall be set to one if the module with the number that meets $m \bmod 8 = 5$ indicates diagnosis otherwise it shall be set to zero. A padding bit shall be used if there is no module configured.

Bit 5: Identifier_Diagnosis_Entry_6

This bit shall be set to one if the module with the number that meets $m \bmod 8 = 6$ indicates diagnosis otherwise it shall be set to zero. A padding bit shall be used if there is no module configured.

Bit 6: Identifier_Diagnosis_Entry_7

This bit shall be set to one if the module with the number that meets $m \bmod 8 = 7$ indicates diagnosis otherwise it shall be set to zero. A padding bit shall be used if there is no module configured.

Bit 7: Identifier_Diagnosis_Entry_8

This bit shall be set to one if the module with the number that meets $m \bmod 8 = 0$ indicates diagnosis otherwise it shall be set to zero. A padding bit shall be used if there is no module configured.

where m is the number of the current module with $1 \leq m \leq N$.

5.3.15 Coding of the field Identifier_Number

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 5: Identifier_Number

The values zero to 63 (decimal) are valid.

Bit 6 to 7: Selection

Decimal (2): means Channel Related Diagnosis

5.3.16 Coding of the field Channel_Number

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 5: Channel_Number

The values zero to 63 (decimal) are valid.

Bit 6 to 7: Input_Output_Selection

Decimal (0): reserved

Decimal (1): means input

Decimal (2): means output

Decimal (3): means input and output

5.3.17 Coding of the field Type_of_Diagnosis

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 4: Error_Type

The Error_Type shall be set as shown in Table 10.

Table 10 – Error type

Value (decimal)	Meaning
0	reserved
1	short circuit
2	Undervoltage
3	Overvoltage
4	Overload
5	Overtemperature
6	line break
7	upper limit value exceeded
8	lower limit value exceeded
9	Error
10 – 31	See ChannelErrorType in IEC 61158-6-10, 6.2.5.2

Bit 5 to 7: Channel_Type

Decimal (0): unspecific, may be used for any type

Decimal (1): means bit

Decimal (2): means 2 bit

Decimal (3): means 4 bit

Decimal (4): means octet

Decimal (5): means word

Decimal (6): means 2 words

Decimal (7): reserved

5.3.18 Coding of the field Revision_Number

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 5: Revision_Number

The values one to 63 (decimal) are valid.

Bit 6: shall be set to one

Bit 7: shall be set to one

5.3.19 Coding of the field Publisher_Address

This field shall be coded as data type Unsigned8. The range of values shall be zero to 125. This parameter shall contain the address of the DP-slave acting as Publisher.

5.3.20 Coding of the field Publisher_Status

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 7: Link_Status

TRUE (1) means no error and active, FALSE (0) error or not active during the last monitoring period

Bit 6: Link_Error

TRUE (1) means length error, FALSE (0) means no error

Bit 0 to 5: reserved

5.3.21 Coding of the field RedSpecifier

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 1: Status_Specifier

Decimal (0): means no further differentiation

Bit 3 to 7: Seq Number

Contains Sequence Number of the last PrmCmd processed

5.3.22 Coding of the field Function

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: reserved

Bit 1: Primary

TRUE (1) means a Primary request was executed last, FALSE (0) means no Primary request was executed last

Bit 2: Start MS1

TRUE (1) means a Start MS1 request was executed last, FALSE (0) means no Start MS1 request was executed last

Bit 3: Stop MS1

TRUE (1) means a Stop MS1 request was executed last, FALSE (0) means no Stop MS1 request was executed last

Bit 4: Check_Properties

TRUE (1) means a Check_Properties request was executed last, FALSE (0) means no Check_Properties request was executed last

Bit 5: reserved

Bit 6: MasterStateClear

TRUE (1) means a MasterStateClear request was executed last, FALSE (0) means no MasterStateClear request was executed last

Bit 7: reserved

5.3.23 Coding of the field Red_Status1

This field represents the Status of the Component which sent the status. The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: Backup

TRUE (1) means Component is in Backup State, FALSE (0) means Component is not in Backup State

Bit 1: Primary

TRUE (1) means Component is in Primary State, FALSE (0) means Component is not in Primary State

Bit 2: HW-Defect

TRUE (1) means Component has a Hardware Defect, FALSE (0) means has no Hardware Defect

Bit 3: DataExchange

TRUE (1) means Component is in DataExchange State, FALSE (0) means Component is not in DataExchange State

Bit 4: Fail Safe

TRUE (1) means Component is in Fail Safe State, FALSE (0) means Component is not in Fail Safe State

Bit 5: DatarateSet

TRUE (1) means Component has a Datarate set, FALSE (0) means has no Datarate set

Bit 6: TohStarted

TRUE (1) means Component has a started Toh, FALSE (0) means has not started Toh

Bit 7: reserved

5.3.24 Coding of the field Red_Status2

This field represents the Status of a Partner Component of the Component which sent the status. The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: Backup

TRUE (1) means Component is in Backup State, FALSE (0) means Component is not in Backup State

Bit 1: Primary

TRUE (1) means Component is in Primary State, FALSE (0) means Component is not in Primary State

Bit 2: HW-Defect

TRUE (1) means Component has a Hardware Defect, FALSE (0) means has no Hardware Defect

Bit 3: DataExchange

TRUE (1) means Component is in DataExchange State, FALSE (0) means Component is not in DataExchange State

Bit 4: Fail Safe

TRUE (1) means Component is in Fail Safe State, FALSE (0) means Component is not in Fail Safe State

Bit 5: DatarateSet

TRUE (1) means Component has a Datarate set, FALSE (0) means has no Datarate set

Bit 6: TohStarted

TRUE (1) means Component has a started Toh, FALSE (0) means has not started Toh

Bit 7: reserved

5.3.25 Coding of the field Red_Status3

This field shall be coded as data type Unsigned8. The values are user specific.

5.4 Coding section related to parameterisation PDU

5.4.1 Coding of the field Station_status

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: reserved

Bit 1: reserved

Bit 2: reserved

Bit 3: WD_On (Watchdog on)

FALSE (0), TRUE (1)

Bit 4: Freeze_Req

Value(0): Freeze mode not requested

Value(1): Freeze mode requested

Bit 5: Sync_Req

Value(0): Sync mode not requested

Bit 6: Unlock_Req

Shall be used as described in Table 11.

Value(1): Sync mode requested

Bit 7: Lock_Req

Shall be used as described in Table 11.

Table 11 – Specification of the bits Lock_Req and Unlock_Req

Bit 7	Bit 6	Meaning
0	0	The parameter min T_{SDR} can be changed. All other parameters remain unchanged.
0	1	The DP-slave will be unlocked for other Masters.
1	0	The DP-slave is locked for other Masters, all parameters are accepted (exception: min $T_{SDR} = 0$)
1	1	The DP-slave is unlocked for other Masters.

5.4.2 Coding of the field WD_Fact_1

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 1 to 255

5.4.3 Coding of the field WD_Fact_2

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 1 to 255

5.4.4 Coding of the field min_TSDR

This field shall be coded as data type Unsigned8 with the following value range:

Decimal(0 to max T_{SDR} (see Part 4)) if DP operation

Decimal(0): means current value remains unchanged

5.4.5 Coding of the field **Group_Ident**

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: Group_1

Bit 1: Group_2

Bit 2: Group_3

Bit 3: Group_4

Bit 4: Group_5

Bit 5: Group_6

Bit 6: Group_7

Bit 7: Group_8

Each of the bits above shall set to one if the device belongs to the indicated group number. Otherwise it shall be set to zero.

NOTE A device may belong to no groups (Group_Ident=decimal(0)) or all groups (Group_Ident=decimal(255)).

5.4.6 Coding of the field **User_Prm_Data_Element**

One of the following data types shall be used for each User_Prm_Data_Element:

Boolean, Integer, Unsigned, Floating Point, Visible String, Octet String, Date, TimeOfDay, Time-Difference.

5.4.7 Coding of the field **DPV1_Status_1**

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: reserved

Bit 1: reserved

Bit 2: WD_Base_1ms

Value(0): Watchdog time base equals 10 milliseconds

Value(1): Watchdog time base equals 1 millisecond

Bit 3 to 4: reserved

Bit 5: Publisher_Enable

FALSE(0), TRUE(1)

Bit 6: Fail_Safe

FALSE(0), TRUE(1)

Bit 7: DPV1_Enable
FALSE(0), TRUE(1)

5.4.8 Coding of the field DPV1_Status_2

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0: Check_Cfg_Mode
Value(0): normal check (restrictive)

Value(1): user specific check (more flexible)

Bit 1: reserved

Bit 2: Enable_Update_Alarm
FALSE(0), TRUE(1)

Bit 3: Enable_Status_Alarm
FALSE(0), TRUE(1)

Bit 4: Enable_Manufacturer_Specific_Alarm
FALSE(0), TRUE(1)

Bit 5: Enable_Diagnostic_Alarm
FALSE(0), TRUE(1)

Bit 6: Enable_Process_Alarm
FALSE(0), TRUE(1)

Bit 7: Enable_Pull_Plug_Alarm
FALSE(0), TRUE(1)

5.4.9 Coding of the field DPV1_Status_3

The coding of this field shall be according to 3.4 and the individual bits shall have the following meaning:

Bit 0 to 2: Alarm_Mode
Decimal(0): 1 alarm of each type

Decimal(1): 2 alarms in total

Decimal(2): 4 alarms in total

Decimal(3): 8 alarms in total

Decimal(4): 12 alarms in total

Decimal(5): 16 alarms in total

Decimal(6): 24 alarms in total

Decimal(7): 32 alarms in total

Bit 3: Prm_Structure
FALSE(0), TRUE(1)

Bit 4: IsoM_Req
FALSE(0), TRUE(1)

Bit 5 to 6: reserved
Bit 7: PrmCmd
FALSE(0), TRUE(1)

5.4.10 Coding of the field Structure_Length

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 5 to 244, 255

The field Structure_Length contains the number of octets including itself. A value of 255 means that all elements in the Prm_User_Data following this element belongs to this structure.

5.4.11 Coding of the field Structure_Type

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 0 to 1: reserved

Decimal 2: PrmCmd

Decimal 3: DXB Linktable

Decimal 4: IsoM Parameter

Decimal 5: F-Parameter

Decimal 6: reserved

Decimal 7: DXB Subscribertable

Decimal 8: Time AR Parameter

Decimal 9 to 31: reserved

Decimal 32 to 128: Manufacturer Specific

Decimal 129: User Prm Data

Decimal 130 to 255: reserved

5.4.12 Coding of the field Version

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 0: reserved

Decimal 1: Version 1

Decimal 2 to 255: reserved

5.4.13 Coding of the field Publisher_Addr

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 0 to 125, 128

Decimal 126, 127, 129 to 255: reserved

In case of the DXB-Subscribertable the value 128 indicates an entry for the DP-master (Class 1).

5.4.14 Coding of the field **Publisher_Length**

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 1 to 244

Decimal 0, 245 to 255: reserved

In case of a Master Data entry in the DXB-Subscribertable the value in this field is not relevant and shall be set to 0.

5.4.15 Coding of the field **Sample_Offset**

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 0 to 243

Decimal 244 to 255: reserved

5.4.16 Coding of the field **Sample_Length**

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 1 to 244

Decimal 0, 245 to 255: reserved

5.4.17 Coding of the field **Dest_Slot_Number**

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 1 to 244

Decimal 0, 245 to 255: reserved

5.4.18 Coding of the field **Offset_Data_Area**

This field shall be coded as data type Unsigned8 with the following value range:

Decimal 0 to 244

Decimal 245 to 255: reserved

5.4.19 Coding of the field **T_{BASE_DP}**

This field shall be coded as data type Unsigned32 with the allowed values of decimal 375, 750, 1500 (default), 3000, 6000, 12000. All other values are reserved.

5.4.20 Coding of the field **T_{DP}**

This field shall be coded as data type Unsigned16 with the value range from 154 to $2^{16}-1$.

5.4.21 Coding of the field **T_{MAPC}**

This field shall be coded as data type Unsigned8.

5.4.22 Coding of the field **T_{BASE_IO}**

This field shall be coded as data type Unsigned32 with the allowed values of decimal 375, 750, 1500 (default), 3000, 6000, 12000. All other values are reserved.

5.4.23 Coding of the field **T_I**

This field shall be coded as data type Unsigned16.