



BSI Standards Publication

Industrial communication networks — Profiles

Part 5-2: Installation of fieldbuses — Installation profiles for CPF 2

National foreword

This British Standard is the UK implementation of EN IEC 61784-5-2:2018+A1:2024. It is identical to IEC 61784-5-2:2018, incorporating amendment 1:2024. It supersedes BS EN IEC 61784-5-2:2018, which is withdrawn.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to IEC text carry the number of the IEC amendment. For example, text altered by IEC amendment 1 is indicated by **A1** **A1**.

The UK participation in its preparation was entrusted to Technical Committee GEL/65/3, Industrial communications: process measurement and control, including fieldbus.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2024
Published by BSI Standards Limited 2024

ISBN 978 0 539 31301 7
ICS 25.040.40; 35.100.05; 35.100.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 January 2019.

Amendments/corrigenda issued since publication

Date	Text affected
31 May 2024	Implementation of IEC amendment 1:2024 with CENELEC endorsement A1:2024

English Version

Industrial communication networks - Profiles - Part 5-2:
Installation of fieldbuses - Installation profiles for CPF 2
(IEC 61784-5-2:2018)

Réseaux de communication industriels - Profils - Partie 5-2 :
Installation des bus de terrain - Profils d'installation pour
CPF 2
(IEC 61784-5-2:2018)

Industrielle Kommunikationsnetze - Profile - Teil 5-2:
Feldbusinstallation - Installationsprofile für die
Kommunikationsprofilfamilie 2
(IEC 61784-5-2:2018)

This European Standard was approved by CENELEC on 2018-10-04. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 65C/924/FDIS, future edition 4 of IEC 61784-5-2, prepared by SC 65C "Industrial networks" of IEC/TC 65 "Industrial-process measurement, control and automation" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61784-5-2:2018.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2019-07-04
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2021-10-04

This document supersedes EN 61784-5-2:2013.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 61784-5-2:2018 was approved by CENELEC as a European Standard without any modification.

European foreword to Amendment 1

The text of document 65C/1283/FDIS, future IEC 61784-5-2/AMD1, prepared by SC 65C "Industrial networks" of IEC/TC 65 "Industrial-process measurement, control and automation" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61784-5-2:2018/A1:2024.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2025-01-25
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2027-04-25

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 61784-5-2:2018/AMD1:2024 was approved by CENELEC as a European Standard without any modification.

Annex ZA
(normative)

**Normative references to international publications
with their corresponding European publications**

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61918	2018	Industrial communication networks - Installation of communication networks in industrial premises	EN IEC 61918	2018 ¹
-	-		+ A11	2019
-	-		+ A12	2023
-	-		+ AC	2019-03
+ MD1	2022		+ 1	2022
+ MD2	2024		+ 2	2024

¹ The normative references of EN IEC 61918:2018, EN IEC 61918:2018/A11:2019, EN IEC 61918:2018/A12:2023, EN IEC 61918:2018/AC:2019-03, EN IEC 61918:2018/A1:2022 and EN IEC 61918:2018/A2:2024 apply.

CONTENTS

FOREWORD.....	10
INTRODUCTION.....	12
INTRODUCTION to Amendment 1	13
1 Scope.....	14
2 Normative references	14
3 Terms, definitions and abbreviated terms	14
4 CPF 2: Overview of installation profiles	14
5 Installation profile conventions	15
6 Conformance to installation profiles.....	16
Annex A (normative) CP 2/1 (ControlNet™) specific installation profile	17
A.1 Installation profile scope	17
A.2 Normative references.....	17
A.3 Installation profile terms, definitions, and abbreviated terms	17
A.3.1 Terms and definitions	17
A.3.2 Abbreviated terms	17
A.3.3 Conventions for installation profiles	17
A.4 Installation planning.....	18
A.4.1 General	18
A.4.2 Planning requirements.....	19
A.4.3 Network capabilities.....	20
A.4.4 Selection and use of cabling components	26
A.4.5 Cabling planning documentation	44
A.4.6 Verification of cabling planning specification.....	44
A.5 Installation implementation	44
A.5.1 General requirements	44
A.5.2 Cable installation	44
A.5.3 Connector installation	46
A.5.4 Terminator installation	55
A.5.5 Device installation	55
A.5.6 Coding and labelling	57
A.5.7 Earthing and bonding of equipment and devices and shield cabling	58
A.5.8 As-implemented cabling documentation	59
A.6 Installation verification and installation acceptance test	59
A.6.1 General	59
A.6.2 Installation verification	59
A.6.3 Installation acceptance test	62
A.7 Installation administration	64
A.8 Installation maintenance and installation troubleshooting	64
A.8.1 General	64
A.8.2 Maintenance.....	64
A.8.3 Troubleshooting.....	64
A.8.4 Specific requirements for maintenance and troubleshooting.....	69
Annex B (normative) CP 2/2 (EtherNet/IP™) specific installation profile.....	70
B.1 Installation profile scope	70
B.2 Normative references.....	70
B.3 Installation profile terms, definitions, and abbreviated terms	71

B.3.1	Terms and definitions	71
B.3.2	Abbreviated terms	71
B.3.3	Conventions for installation profiles	71
B.4	Installation planning	71
B.4.1	General	71
B.4.2	Planning requirements	72
B.4.3	Network capabilities	73
B.4.4	Selection and use of cabling components	79
B.4.5	Cabling planning documentation	94
B.4.6	Verification of cabling planning specification	94
B.5	Installation implementation	94
B.5.1	General requirements	94
B.5.2	Cable installation	94
B.5.3	Connector installation	95
B.5.4	Terminator installation	97
B.5.5	Device installation	97
B.5.6	Coding and labelling	97
B.5.7	Earthing and bonding of equipment and devices and shield cabling	97
B.5.8	As-implemented cabling documentation	99
B.6	Installation verification and installation acceptance test	99
B.6.1	General	99
B.6.2	Installation verification	99
B.6.3	Installation acceptance test	100
B.7	Installation administration	101
B.8	Installation maintenance and installation troubleshooting	101
Annex C (normative)	CP 2/3 (DeviceNet™) specific installation profile	102
C.1	Installation profile scope	102
C.2	Normative references	102
C.3	Installation profile terms, definitions, and abbreviated terms	102
C.3.1	Terms and definitions	102
C.3.2	Abbreviated terms	102
C.3.3	Conventions for installation profiles	102
C.4	Installation planning	103
C.4.1	General	103
C.4.2	Planning requirements	104
C.4.3	Network capabilities	105
C.4.4	Selection and use of cabling components	121
C.4.5	Cabling planning documentation	131
C.4.6	Verification of cabling planning specification	131
C.5	Installation implementation	131
C.5.1	General requirements	131
C.5.2	Cable installation	131
C.5.3	Connector installation	133
C.5.4	Terminator installation	146
C.5.5	Device installation	148
C.5.6	Coding and labelling	152
C.5.7	Earthing and bonding of equipment and devices and shield cabling	152
C.5.8	As-implemented cabling documentation	153
C.6	Installation verification and installation acceptance test	153

C.6.1	General	153
C.6.2	Installation verification	153
C.6.3	Installation acceptance test	156
C.7	Installation administration	157
C.8	Installation maintenance and installation troubleshooting	157
C.8.1	General	157
C.8.2	Maintenance	157
C.8.3	Troubleshooting	157
C.8.4	Specific requirements for maintenance and troubleshooting	157
Annex D (informative)	Additional information	161
D.1	Network validation check sheet for CP 2/3 (DeviceNet)	161
Bibliography		165
Figure 1	Standards relationships	12
Figure A.1	Interconnection of CPF 2 networks	18
Figure A.2	Overview of CPF 2/1 networks	19
Figure A.3	Drop cable requirements	21
Figure A.4	Placement of BNC/TNC plugs	21
Figure A.5	Placement of terminators	22
Figure A.6	Extending a network using repeaters	22
Figure A.7	Extending a network using active star topology	22
Figure A.8	Links	23
Figure A.9	Extending the network beyond 99 nodes	23
Figure A.10	Maximum allowable taps per segment	32
Figure A.11	Example of repeaters in star configuration	33
Figure A.12	Repeaters in parallel	34
Figure A.13	Repeaters in combination series and parallel	35
Figure A.14	Ring repeater	35
Figure A.15	Installing bulkheads	36
Figure A.16	Coaxial BNC and TNC terminators	37
Figure A.17	Terminator placement in a segment	37
Figure A.18	RC Shield Termination in Active Devices	39
Figure A.19	Redundant network icons	40
Figure A.20	Redundant coax media	40
Figure A.21	Redundant fibre media	40
Figure A.22	Repeaters in series versus length difference for coax media	41
Figure A.23	Repeaters in series versus length difference for fibre media	42
Figure A.24	Example of redundant coax network with repeaters	42
Figure A.25	Example of improper redundant node connection	43
Figure A.26	Example tool kit for installing BNC connectors	47
Figure A.27	Calibration of coaxial stripper	47
Figure A.28	Coax PVC strip length detail (informative)	48
Figure A.29	Memory cartridge and blade	49
Figure A.30	Cable position	49

Figure A.31 – Locking the cable	49
Figure A.32 – Stripping the cable	50
Figure A.33 – Install the crimp ferrule	50
Figure A.34 – Cable preparation for PVC type cables (informative)	51
Figure A.35 – Cable preparation for FEP type cables (informative)	51
Figure A.36 – Strip guides	51
Figure A.37 – Using the flare tool	52
Figure A.38 – Expanding the shields	52
Figure A.39 – Install the centre pin	52
Figure A.40 – Crimping the centre pin	53
Figure A.41 – Installing the connector body	53
Figure A.42 – Installing the ferrule	53
Figure A.43 – Crimp tool	54
Figure A.44 – Sealed IP65/67 cable	55
Figure A.45 – Terminator placement	55
Figure A.46 – Mounting the taps	56
Figure A.47 – Mounting the tap assembly using the universal mounting bracket	57
Figure A.48 – Mounting the tap using tie wraps or screws	57
Figure A.49 – Redundant network icons	58
Figure A.50 – Network test tool	60
Figure A.51 – Shorting the cable to test for continuity	61
Figure A.52 – Testing fibre segments	63
Figure A.53 – Multi-fibre backbone cable housing	65
Figure A.54 – Repeater adapter module	65
Figure A.55 – Short and medium distance fibre module LEDs	67
Figure A.56 – Long and extra long repeater module LEDs	68
Figure B.1 – Interconnection of CPF 2 networks	72
Figure B.2 – Redundant linear bus	73
Figure B.18 – Example of combination of basic active topologies	74
Figure B.3 – Peer-to-peer connections	74
Figure B.4 – Mated connections	77
Figure B.5 – The 8-way modular sealed jack & plug (plastic housing)	84
Figure B.6 – The 8-way modular sealed jack & plug (metal housing)	84
Figure B.7 – M12-4 connectors	85
Figure B.8 – Example of a metallic shell M12-8 X-coding connectors	86
Figure B.9 – Simplex LC connector	87
Figure B.10 – Duplex LC connector	87
Figure B.11 – IP65/67 sealed duplex LC connector	87
Figure B.12 – IP65/67 sealed duplex SC-RJ connector	88
Figure B.13 – M12-4 to 8-way modular bulkhead	90
Figure B.19 – Shield termination in star earthing arrangements	92
Figure B.20 – Shield termination in mesh earthing arrangements	92
Figure B.14 – The 8-way modular sealed jack & plug (plastic housing)	96

Figure B.15 – The 8-way modular sealed jack & plug (metal housing)	96
Figure B.16 – M12-4 connectors	96
Figure B.17 – Earthing of cable shield	98
Figure C.1 – Interconnection of CPF 2 networks	103
Figure C.2 – Connection to generic cabling.....	104
Figure C.3 – DeviceNet cable system uses a trunk/drop line topology.....	106
Figure C.4 – Measuring the trunk length	108
Figure C.5 – Measuring the trunk and drop length.....	108
Figure C.6 – Measuring drop cable in a network with multiports	109
Figure C.7 – Removable device using open-style connectors	109
Figure C.8 – Fixed connection using open-style connector.....	110
Figure C.9 – Open-style connector pin out	110
Figure C.10 – Open-style connector pin out 10 position	110
Figure C.11 – Power Bus Current derate as a function of temperature differential.....	113
Figure C.12 – Power supply sizing example	114
Figure C.13 – Current limit for thick cable for one power supply	115
Figure C.14 – Example of a continuous power bus.....	116
Figure C.15 – Current limit for thick cable and two power supplies common V+	117
Figure C.16 – Worst-case scenario	118
Figure C.17 – Example using the lookup method	118
Figure C.18 – One power supply end connected	120
Figure C.19 – Segmenting power in the power bus	121
Figure C.20 – Segmenting the power bus using power taps	121
Figure C.21 – Thick cable construction	132
Figure C.22 – Cable Type I construction	132
Figure C.23 – Thin cable construction	133
Figure C.24 – Flat cable construction.....	133
Figure C.25 – Cable preparation	134
Figure C.26 – Connector assembly	134
Figure C.28 – M12 connector pin assignment	135
Figure C.29 – Mini connector pin assignment.....	135
Figure C.30 – Preparation of cable end.....	136
Figure C.31 – Shrink wrap installation.....	136
Figure C.32 – Wire preparation	136
Figure C.33 – Open-style connector (female).....	137
Figure C.34 – Open-style (male plug)	137
Figure C.35 – Flat cable.....	138
Figure C.36 – Aligning the cable	138
Figure C.37 – Closing the assembly.....	139
Figure C.38 – Proper orientation of cable.....	139
Figure C.39 – Locking the assembly	139
Figure C.40 – Driving the IDC contacts in to the cable	140
Figure C.41 – End cap placement	140

Figure C.42 – End cap seated.....	141
Figure C.43 – End cap installation on alternate side of cable	141
Figure C.44 – Flat cable IDC connectors.....	142
Figure C.45 – Installing the connectors	142
Figure C.46 – Cable wiring to open-style terminals	143
Figure C.47 – Auxiliary power cable profile	143
Figure C.48 – Pin out auxiliary power connectors.....	144
Figure C.49 – Power supply cable length versus wire size	145
Figure C.50 – Sealed terminator	147
Figure C.51 – Open-style terminator	147
Figure C.52 – Open-style IDC terminator	147
Figure C.53 – Sealed terminator IDC cable	148
Figure C.54 – Direct connection to the trunk	149
Figure C.55 – Wiring of open-style connector.....	149
Figure C.56 – Wiring of open-style 10-position connector	149
Figure C.57 – Diagnostic temporary connections	150
Figure C.58 – Thick cable preterminated cables (cord sets)	151
Figure C.59 – Thin cable preterminated cables (cord sets).....	151
Table A.1 – Basic network characteristics for balanced cabling not based on Ethernet	24
Table A.2 – Network characteristics for optical fibre cabling.....	25
Table A.3 – RG6 coaxial electrical properties.....	27
Table A.4 – RG6 coaxial physical parameters	27
Table A.5 – Cable type selection.....	28
Table A.6 – Information relevant to optical fibre cables	29
Table A.7 – Copper connectors for ControlNet	30
Table A.8 – Optical fibre connecting hardware	30
Table A.9 – Relationship between FOC and fibre types (CP 2/1).....	31
Table A.10 – Parameters for coaxial RG6 cables	45
Table A.11 – Bend radius for coaxial cables outside conduit	45
Table A.12 – Parameters for silica optical fibre cables	45
Table A.13 – Parameters for hard clad silica optical fibre.....	46
Table A.14 – Test matrix for BNC/TNC connectors.....	61
Table A.15 – Wavelength and fibre types	64
Table A.16 – LED status table.....	66
Table A.17 – Repeater adapter and module diagnostic	66
Table A.18 – Repeater adapter indicator diagnostic	66
Table A.19 – Repeater module indicator	67
Table A.20 – Short and medium distance troubleshooting chart	68
Table A.21 – Long and extra long troubleshooting chart.....	69
Table B.1 – Network characteristics for balanced cabling based on Ethernet	75
Table B.2 – Network characteristics for optical fibre cabling.....	76
Table B.3 – Fibre lengths for 1 mm POF A4a.2 POF 0.5 NA	76

Table B.4 – Fibre lengths for 1 mm POF A4d POF 0.3 NA	77
Table B.5 – Recognized fibre types.....	78
Table B.6 – Recognized fibre PMDs.....	78
Table B.7 – Information relevant to copper cable: fixed cables 10/100 MHz	79
Table B.8 – Information relevant to copper cable: fixed cables 1 000 MHz	80
Table B.9 – Information relevant to copper cable: cords 10/100 MHz	80
Table B.27 – Unbalance attenuation limits for unshielded twisted-pair cabling serving 10BASE-T and 100BASE-T applications	81
Table B.28 – Unbalance attenuation limits for unshielded twisted-pair cabling serving 1000BASE-T applications with enhanced components	81
Table B.29 – Unbalance attenuation limits for unshielded twisted-pair cabling serving 1000BASE-T applications with length derating	82
Table B.30 – Coupling attenuation limits for screened twisted-pair cabling.....	82
Table B.15 – Information relevant to optical fibre cables	82
Table B.16 – Connectors for balanced cabling CPs based on Ethernet	83
Table B.17 – Unbalance Attenuation limits for connectors based on Ethernet serving 1000BASE-T applications	83
Table B.18 – Industrial EtherNet/IP 8-way modular connector parameters	84
Table B.19 – Industrial EtherNet/IP M12-4 D-coding connector parameters	85
Table B.20 – Industrial EtherNet/IP M12-8 X-coding connector parameters.....	86
Table B.21 – Optical fibre connecting hardware	87
Table B.22 – Relationship between FOC and fibre types (CP2/2).....	88
Table B.23 – Connector insertion loss.....	88
Table B.24 – Parameters for balanced cables	95
Table B.25 – Parameters for silica optical fibre cables	95
Table B.26 – Parameters for POF optical fibre cables	95
Table C.1 – Basic network characteristics for copper cabling not based on Ethernet.....	106
Table C.2 – Cable trunk and drop lengths for CP 2/3	107
Table C.3 – Summary of available current for trunk cables (CP 2/3).....	111
Table C.4 – Permissible current for thin cable drop lines of various lengths	112
Table C.5 – Power supply specification for DeviceNet.....	112
Table C.6 – Power supply tolerance stack up for DeviceNet.....	113
Table C.7 – Current versus cable length for one power supply thick cable	116
Table C.8 – Current versus length for two power supplies.....	117
Table C.9 – Definition of equation variables	119
Table C.10 – Information relevant to copper cable: fixed cables.....	122
Table C.11 – Information relevant to copper cable: cords.....	122
Table C.12 – DeviceNet cables and connector support cross reference	123
Table C.13 – DeviceNet cable profiles	124
Table C.14 – Copper connectors for non-Ethernet based fieldbus	126
Table C.15 – Additional connectors for CP 2/3 (DeviceNet)	126
Table C.16 – Parameters for balanced cables.....	131
Table C.17 – Wire colour code and function.....	137
Table C.18 – Auxiliary power cable colour code	143

Table C.19 – Auxiliary power supply requirements	144
Table C.20 – Signal wire verification	154
Table C.21 – Shield to earth	154
Table C.22 – Connector pin out	156

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –
PROFILES –****Part 5-2: Installation of fieldbuses –
Installation profiles for CPF 2****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61784-5-2 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation.

 This document is to be used in conjunction with IEC 61918:2018, IEC 61918:2018/AMD1:2022 and IEC 61918:2018/AMD2:2024. 

This fourth edition cancels and replaces the third edition published in 2013. This edition constitutes a technical revision.

 *Text deleted.* 

This edition includes the following significant technical changes with respect to the previous edition:

- a) references to ISO/IEC 24702 have been replaced with references to ISO/IEC 11801-3 in Table B.1;
- b) errors have been corrected;
- c) Tables B11 and B13 have been added in support of 1,000 Mb/s 4 Pair Ethernet;
- d) Clarification of dual power supplies for Annex C.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 61784-5 series, under the general title *Industrial communication networks – Profiles – Installation of fieldbuses*, can be found on the IEC website.

The committee has decided that the contents of this document and its amendment will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This **A1** document **A1** is one of a series produced to facilitate the use of communication networks in industrial control systems.

A1 IEC 61918:2018, IEC 61918:2018/AMD1:2022 and IEC 61918:2018/AMD2:2024 **A1** provide the common requirements for the installation of communication networks in industrial control systems. This installation profile standard provides the installation profiles of the communication profiles (CP) of a specific communication profile family (CPF) by stating which requirements of IEC 61918 fully apply and, where necessary, by supplementing, modifying, or replacing the other requirements (see Figure 1).

For general background on fieldbuses, their profiles, and relationship between the installation profiles specified in this document, see IEC 61158-1.

Each CP installation profile is specified in a separate annex of this document. Each annex is structured exactly as the reference standard IEC 61918 for the benefit of the persons representing the roles in the fieldbus installation process as defined in IEC 61918 (planner, installer, verification personnel, validation personnel, maintenance personnel, administration personnel). By reading the installation profile in conjunction with IEC 61918, these persons immediately know which requirements are common for the installation of all CPs and which are modified or replaced. The conventions used to draft this document are defined in Clause 5.

The provision of the installation profiles in one standard for each CPF (for example IEC 61784-5-2 for CPF 2) allows readers to work with standards of a convenient size.

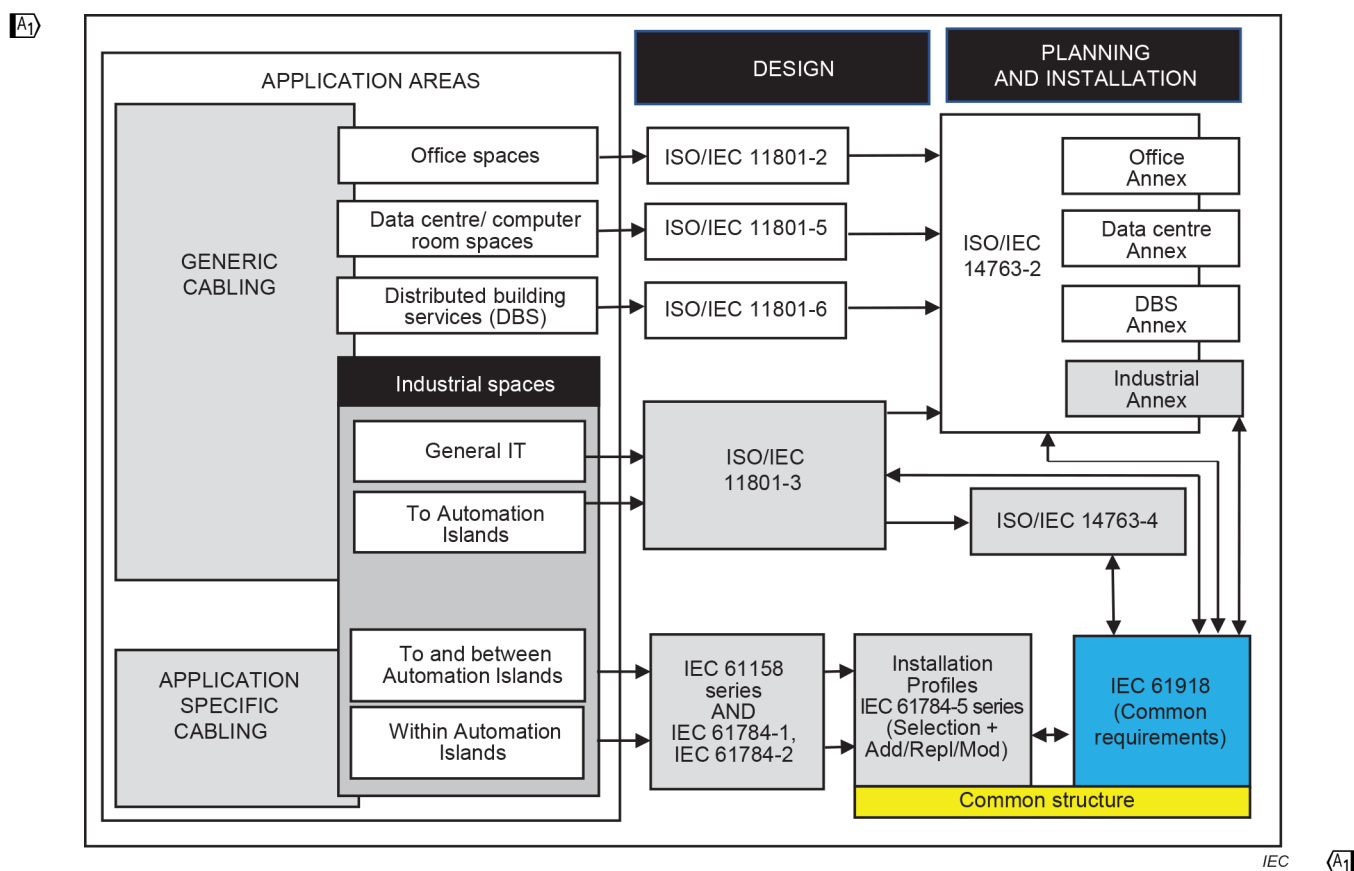


Figure 1 – Standards relationships

A1 INTRODUCTION to Amendment 1

This Amendment 1 includes the following significant technical changes with respect to IEC 61784-5-2:2018:

- a) Updated references of IEC 61918:2018 to include additions of IEC 61918:2018/AMD1:2022 and IEC 61918:2018/AMD2:2024,
- b) Added references for consideration of security to Subclause B.4.2.2,
- c) Updated optical fiber specifications and references in Subclauses B.4.3.3.2 and B.4.4.1.4,
- d) Added definition of electromagnetic compatibility options for conformance to Subclause B.4.4.1.2.1,
- e) Added support of mesh bonding systems to Subclause B.4.4 and Clause B.5,
- f) Added acceptance of end-to-end link verification and certification testing to Clause B.6. **A1**

INDUSTRIAL COMMUNICATION NETWORKS – PROFILES –

Part 5-2: Installation of fieldbuses – Installation profiles for CPF 2

1 Scope

This part of IEC 61784-5 specifies the installation profiles for CPF 2 (CIP™¹).

^{A1} The installation profiles are specified in the annexes. These annexes are read in conjunction with IEC 61918:2018, IEC 61918:2018/AMD1:2022 and IEC 61918:2018/AMD2:2024. ^{A1}

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

^{A1} IEC 61918:2018², *Industrial communication networks – Installation of communication networks in industrial premises*
IEC 61918:2018/AMD1:2022
IEC 61918:2018/AMD2:2024 ^{A1}

NOTE For profile specific normative references, see Clauses A.2, B.2, and C.2.

3 Terms, definitions and abbreviated terms

For the purpose of this document, the terms, definitions and abbreviated terms given in ^{A1} IEC 61918:2018 Clause 3, IEC 61918:2018/AMD1:2022, Clause 3, and Clauses A.3, B.3, C.3 of this document, apply. ^{A1}

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 CPF 2: Overview of installation profiles

CPF 2 consists of three basic communication profiles as specified in IEC 61784-1 and IEC 61784-2. These profiles share a common upper layers protocol named CIP™ (Common Industrial Protocol).

¹ CIP™ (Common Industrial Protocol) is a trade name of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this document does not require use of the trade name CIP™. Use of the trade name CIP™ requires permission of ODVA, Inc.

² The normative references of IEC 61918:2018, Clause 2, IEC 61918:2018/AMD1:2022, Clause 2 and IEC 61918:2018/AMD2:2024, Clause 2, apply.

The installation requirements for CP 2/1 (ControlNet™³) are specified in Annex A.

The installation requirements for CP 2/2 (EtherNet/IP™⁴) are specified in Annex B.

The installation requirements for CP 2/3 (DeviceNet™⁵) are specified in Annex C.

5 Installation profile conventions

The numbering of the clauses and subclauses in the annexes of this document corresponds to the numbering of IEC 61918 main clauses and subclauses.

The annex clauses and subclauses of this document supplement, modify, or replace the respective clauses and subclauses in IEC 61918.

Where there is no corresponding subclause of IEC 61918 in the normative annexes in this document, the subclause of IEC 61918 applies without modification.

The annex heading letter represents the installation profile assigned in Clause 4. The annex (sub)clause numbering following the annex letter shall represent the corresponding (sub)clause numbering of IEC 61918.

EXAMPLE "Subclause B.4.4" in IEC 61784-5-2 means that CP 2/2 specifies the Subclause 4.4 of IEC 61918:2018.

All main clauses of IEC 61918 are cited and apply in full unless otherwise stated in each normative installation profile annex.

If all subclauses of a (sub)clause are omitted, then the corresponding IEC 61918 (sub)clause applies.

If in a (sub)clause it is written "Not applicable.", then the corresponding IEC 61918 (sub)clause does not apply.

If in a (sub)clause it is written "*Addition*:", then the corresponding IEC 61918 (sub)clause applies with the additions written in the profile.

If in a (sub)clause it is written "*Replacement*:", then the text provided in the profile replaces the text of the corresponding IEC 61918 (sub)clause.

NOTE A replacement can also comprise additions.

If in a (sub)clause it is written "*Modification*:", then the corresponding IEC 61918 (sub)clause applies with the modifications written in the profile.

³ ControlNet™ is a trade name of ODVA, Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name ControlNet™. Use of the trade name ControlNet™ requires the permission of ODVA, Inc.

⁴ EtherNet/IP™ is a trade name of ODVA, Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherNet/IP™. Use of the trade name EtherNet/IP™ requires the permission of ODVA, Inc.

⁵ DeviceNet™ is a trade name of ODVA, Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this document does not require use of the trade name DeviceNet™. Use of the trade name DeviceNet™ requires the permission of ODVA, Inc.

If all (sub)clauses of a (sub)clause are omitted but in this (sub)clause it is written "(Sub)clause $\times$ has *"addition:"* (or *"replacement:"*) or "(Sub)clause $\times$ is not applicable.", then (Sub)clause $\times$ becomes valid as declared and all the other corresponding IEC 61918 (sub)clauses apply.

6 Conformance to installation profiles

Each installation profile within this document includes part of IEC 61918:2018. It may also include defined additional specifications.

A statement of compliance to an installation profile of this document shall be stated as either

$\boxed{A_1}$ Compliance with IEC 61784-5-2:2018 and IEC 61784-5-2:2018/AMD1:2024 for CP 2/m <name> or

Compliance with IEC 61784-5-2 (Ed.4.1) for CP 2/m <name>. $\boxed{A_1}$

where the name within the angle brackets < > is optional and the angle brackets $\boxed{A_1}$ shall $\boxed{A_1}$ not be included. The m within CP 2/m shall be replaced by the profile number 1 to 3.

NOTE The name $\boxed{A_1}$ can $\boxed{A_1}$ be the name of the profile, e.g. ControlNet, EtherNet/IP or DeviceNet.

If the name is a trade name then the permission of the trade name holder shall be required.

Product standards shall not include any conformity assessment aspects (including quality management provisions), neither normative nor informative, other than provisions for product testing (evaluation and examination).

Annex A (normative)

CP 2/1 (ControlNet™) specific installation profile

A.1 Installation profile scope

Addition:

This annex specifies the installation profile for Communication Profile CP 2/1 (ControlNet). The CP 2/1 is specified in IEC 61784-1.

The installation profiles are specified in the annexes. These annexes are read in conjunction with IEC 61918:2018.

A.2 Normative references

Addition:

IEC 60096-2:1961⁶, *Radio-frequency cables – Part 2: Relevant cable specifications*

A.3 Installation profile terms, definitions, and abbreviated terms

A.3.1 Terms and definitions

A.3.2 Abbreviated terms

Addition:

DVM	Digital voltmeter
HMI	Human machine interface
I/O	Input/Output
IS	Intrinsic safety
MM	Multi mode
NAP	Network access port (local access to a device, i.e. not via the bus)
OTDR	Optical time domain reflectometer
PLC	Programmable logic controller
PVC	Polyvinyl chloride
RG6	Coaxial cable
SM	Single mode
TDR	Time domain reflectometer

A.3.3 Conventions for installation profiles

Not applicable.

⁶ This document has been withdrawn but for the purposes of this document, the edition cited is applicable.

A.4 Installation planning

A.4.1 General

A.4.1.1 Objective

A.4.1.2 Cabling in industrial premises

Addition:

CP 2/1 networks can be connected to generic cabling via a converter/adaptor as mentioned in IEC 61918:2018, 4.1. Connection to the generic cabling system can also be facilitated through EtherNet/IP and the AO as shown in Figure A.1.

CP 2/1 is designed to be deployed within the automation island and between automation islands as detailed in IEC 61918:2018, 4.1.2, Figure 4, Figure 5 and Figure 6. The network is constructed of passive Taps ^[T] and Repeaters ^[R] interconnected by coaxial cable. Links are connected by Bridges ^[B]. The network can span an entire factory floor.

The interconnection of CP 2/1 with CP 2/2 and CP 2/3 can be accomplished through an appropriate converter/adaptor (linking device) as shown in Figure A.1.

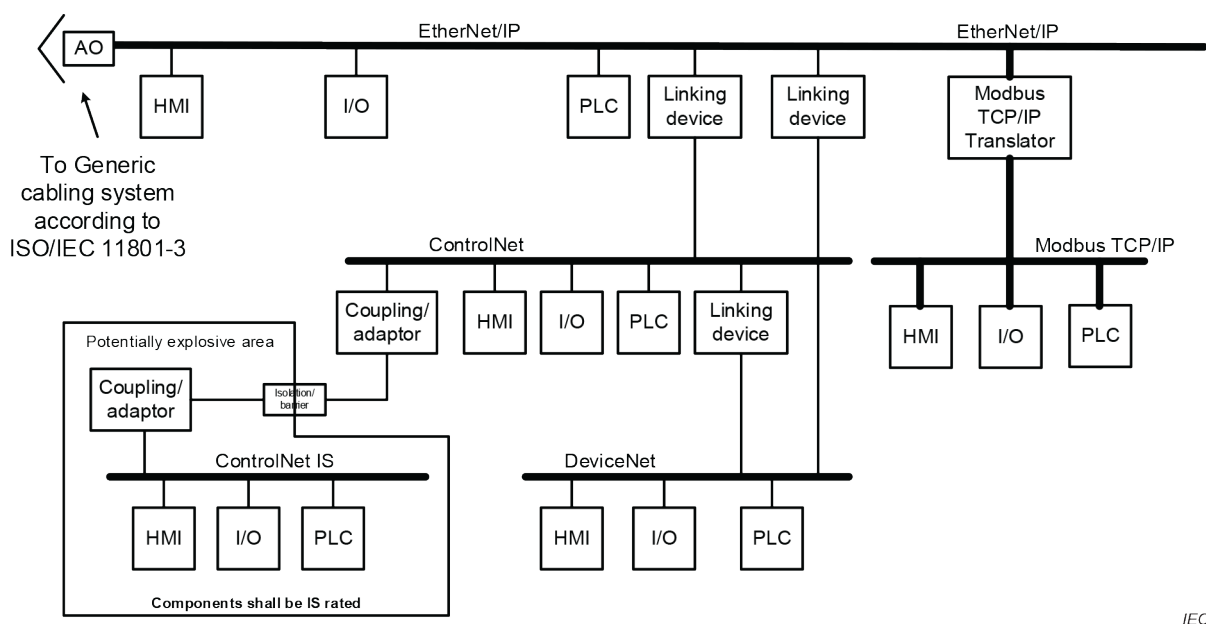


Figure A.1 – Interconnection of CPF 2 networks

The CP 2/1 coaxial media system is made up of the components found in Figure A.2. These parts are as follows:

- coaxial cable and associated connectors (BNC/TNC);
- passive taps (non-sealed and sealed) with fixed 1 m drop cable BNC/TNC connector on the end of the drop cable, which shall not be extended under any circumstances;
- trunk line terminators BNC/TNC;
- repeaters (linear, ring and star) fibre and copper;
- various coaxial couplers, bulkhead, jack-to-jack and plug-to-plug (BNC/TNC).

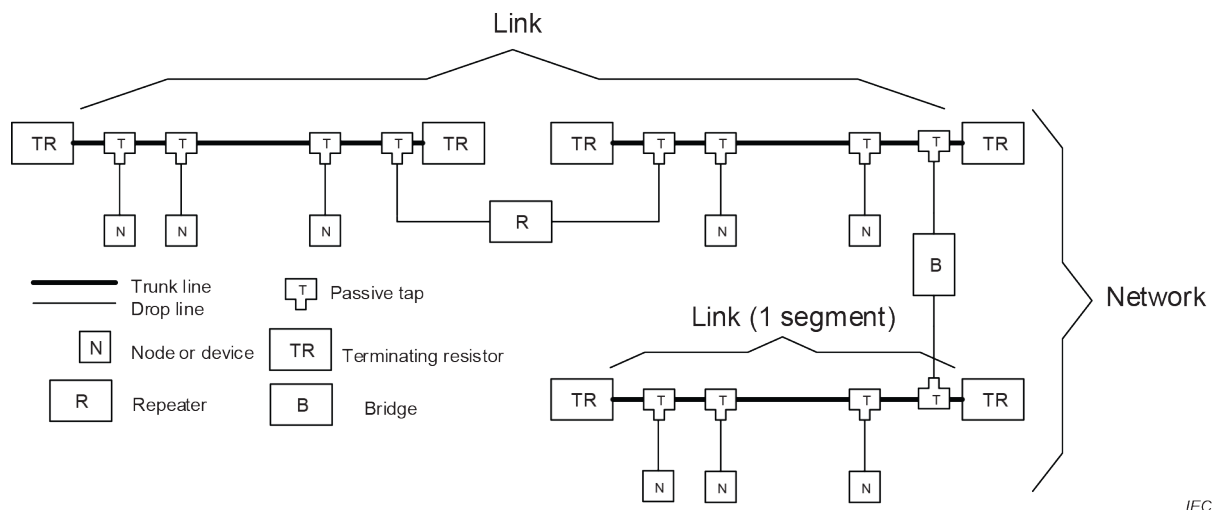


Figure A.2 – Overview of CPF 2/1 networks

A.4.2 Planning requirements

A.4.2.1 Safety

A.4.2.1.1 General

A.4.2.1.2 Electrical safety

A.4.2.1.3 Functional safety

Not applicable.

A.4.2.1.4 Intrinsic safety

Not applicable.

A.4.2.1.5 Safety of optical fibre communication systems

A.4.2.2 Security

A.4.2.3 Environmental considerations and EMC

A.4.2.3.1 Description methodology

Addition:

The configuration of the low-voltage power distribution system shall comply with local regulations. In some cases and geographical areas, additional earthing and bonding is necessary to control noise currents and provide a low noise functional earth for the low signal communications devices. This may be achieved through methods described in IEC 61918:2018, 4.4.7 and A.4.4.7.3 of this document.

This network uses a parallel RC between earth and the shield of the coaxial cable. The shields shall not directly reference to earth at any point in the system, as doing so will allow noise currents to flow in the shields causing high error rates in the network.

A.4.2.3.2 Use of the described environment to produce a bill of material

A.4.2.4 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3

Not applicable.

A.4.3 Network capabilities

A.4.3.1 Network topology

A.4.3.1.1 Common description

A.4.3.1.2 Basic physical topologies for passive networks

Modification:

ControlNet supports passive bus topologies. Passive star topologies are not supported.

A.4.3.1.3 Basic physical topologies for active networks

Modification:

ControlNet supports active linear, star and ring topologies.

A.4.3.1.4 Combination of basic topologies

Addition:

ControlNet supports both series connected and parallel connected linear passive bus topologies. In addition, ControlNet supports network redundancy using both series connected and parallel connected linear passive bus topologies. Both networks shall have the same number of active nodes in the same order on the network.

A.4.3.1.5 Specific requirements for CPs

Addition:

A.4.3.1.5.1 General

CP 2/1 supports both coaxial and fibre media in the trunk segments. Drop cables shall be coaxial. The network is an amplitude and delay limited network. In general, for the coaxial variant, amplitude is the limiting factor. Fibre trunk segments have much less loss, so delay limits can be readily exceeded. In either case, the amplitude and delay limits shall be observed. The maximum delay for any network construction (cabling and repeaters) shall be limited to 242 μ s round trip or 121 μ s each way.

ControlNet can be configured as a redundant network for both active star and active linear topologies in copper and fibre. See A.4.4.9.6 for specific design considerations. When configured as a redundant network, the number of nodes and addressing shall be the same for both networks.

The following Subclauses A.4.3.1.5.2 to A.4.3.1.5.8 describe the various components and topology constructions possible.

A.4.3.1.5.2 Taps (coaxial media)

Taps connect each node on a network to the coax media system via a fixed 1 m drop cable as shown in Figure A.3.

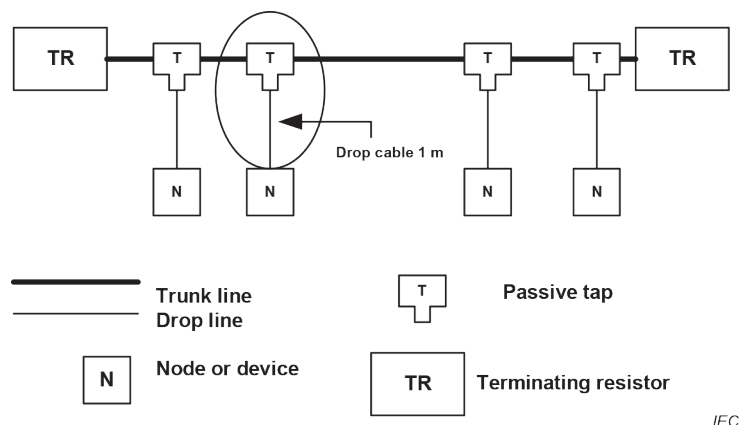


Figure A.3 – Drop cable requirements

A.4.3.1.5.3 Trunk cable

The trunk cable is the bus or central part of the CP 2/1 coax media system. The trunk cable is composed of multiple sections of cable. The standard cable that can be used to construct trunk cable sections is defined in A.4.4.1.2.1.

A.4.3.1.5.4 Trunk line connectors

BNC/TNC plugs are used to connect the coaxial cables to the taps. Devices are connected to the tap through a 1 m cable attached to the tap with the appropriate BNC/TNC plug. Each trunk cable section shall have a BNC or TNC plug installed on each end as shown in Figure A.4.

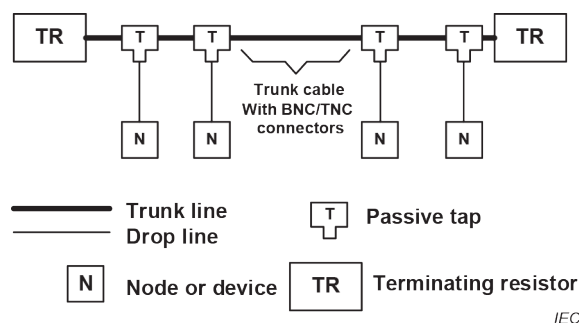


Figure A.4 – Placement of BNC/TNC plugs

A.4.3.1.5.5 Terminators

To minimize reflections, the network segment(s) shall be terminated with the appropriate 75 Ω coaxial terminators (see A.4.4.4.2).

Figure A.5 details the location of the 75 Ω coaxial terminators. The designer shall specify the placement of the 75 Ω coaxial terminators in the design documentation. The terminators are generally installed on the outside port of the tap located at each end of a segment. The terminator is fully described in A.4.4.4.

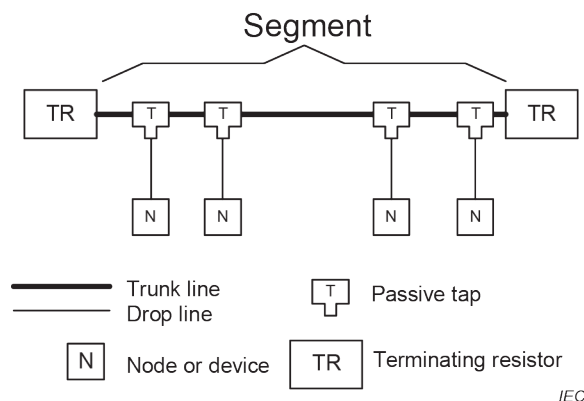


Figure A.5 – Placement of terminators

A.4.3.1.5.6 Repeaters

Repeater adapters shall be used to increase the number of taps, extend the total length of the network (see Figure A.6), or create an active star configuration as shown in Figure A.7. The number of repeaters and cable length total is limited depending on the network topology. See A.4.4.3.3.2 for information on limitations of length and number of nodes per segment. A repeater creates a new segment allowing additional cable or taps or both.

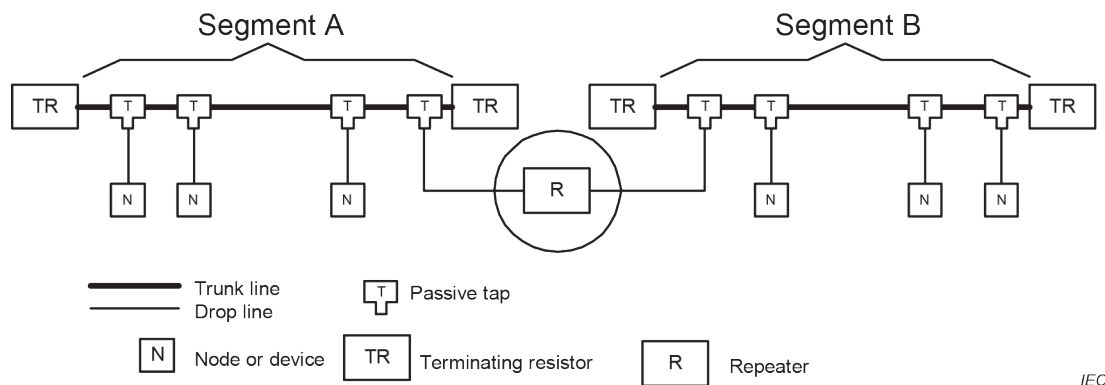


Figure A.6 – Extending a network using repeaters


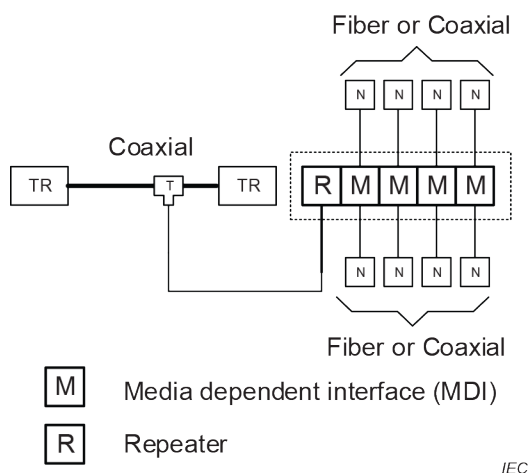


Figure A.7 – Extending a network using active star topology

A.4.3.1.5.7 Links

A link is formed by connecting multiple segments together through repeaters (see Figure A.8). A link may consist of only one segment. Each node in a link shall have a unique address in the range of 0 to 99. Node address 0 shall be reserved for devices that are auto address nodes or nodes without address switches.

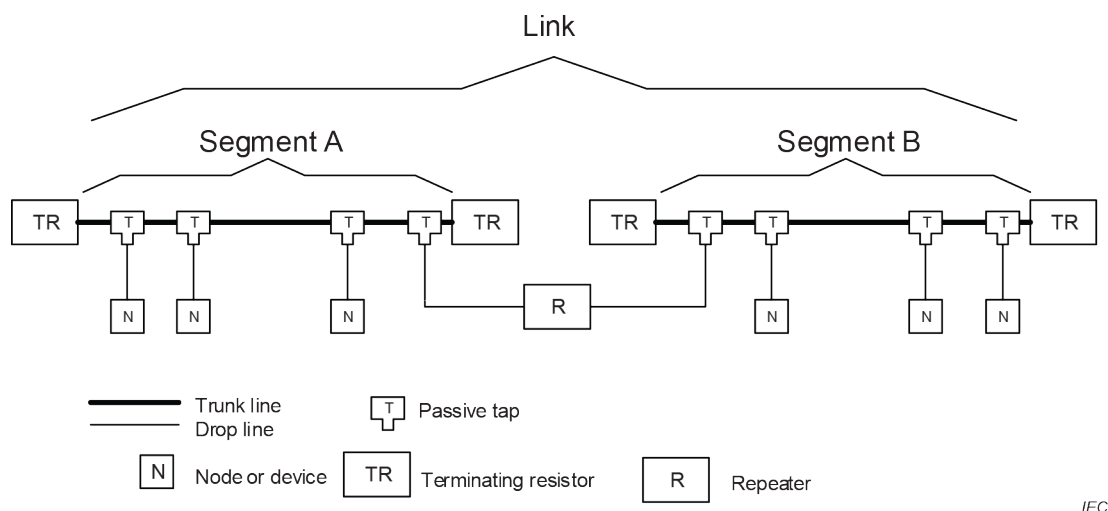


IEC

Figure A.8 – Links

A.4.3.1.5.8 Bridges

Bridges may be used to connect links together and to extend the network addressing beyond 99 nodes. A bridge connects links together as shown in Figure A.9.

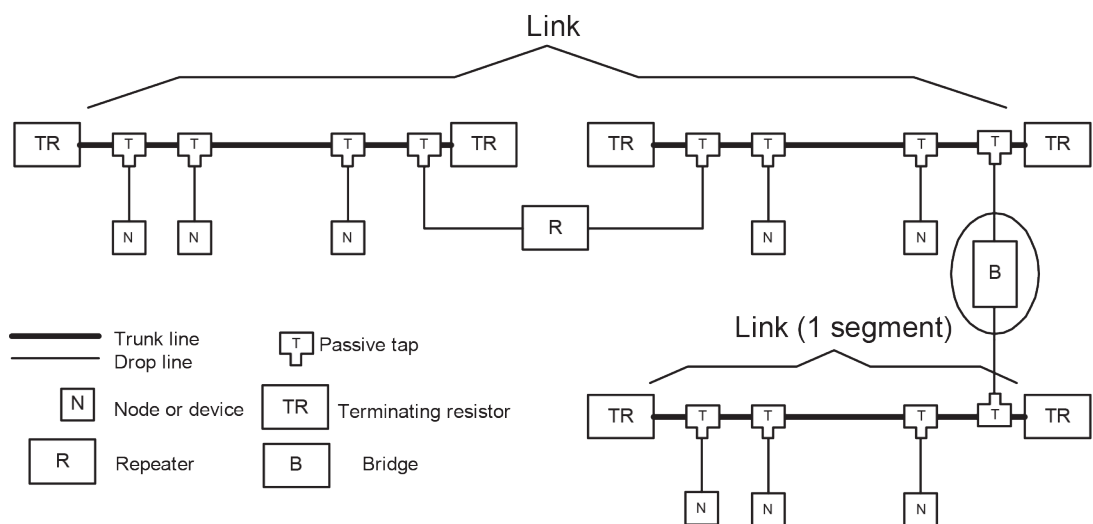

IEC

Figure A.9 – Extending the network beyond 99 nodes

A.4.3.1.6 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3

A.4.3.2 Network characteristics

A.4.3.2.1 General

A.4.3.2.2 Network characteristics for balanced cabling not based on Ethernet

Replacement:

ControlNet is a coaxial based system, balanced cabling is not supported.

Table A.1 provides values based on the template given in IEC 61918:2018, Table 1.

Table A.1 – Basic network characteristics for balanced cabling not based on Ethernet

Characteristics	CP 2/1
Basic transmission technology	Linear bus
Length / transmission speed	
Transmission speed	Segment length m
5 Mbit/s	Segment: 1 000 m maximum (see Figure A.10) Link: 20 km maximum ^a
Maximum capacity	Max. no.
Devices / segment	48
Devices / link	99
Devices / network	Unlimited
^a The total link length is limited to 20 km due to delay limitations of 242 µs round trip (121 µs one-way trip).	

A.4.3.2.3 Network characteristics for balanced cabling based on Ethernet

Not applicable.

A.4.3.2.4 Network characteristics for optical fibre cabling

Replacement:

The allowable fibre segment lengths and wavelengths are detailed in Table A.2 for CP 2/1 based on the template given in IEC 61918:2018, Table 3.

Table A.2 – Network characteristics for optical fibre cabling

CP 2/1		
Optical fibre type	Description	
Single mode silica	Bandwidth (MHz) or equivalent at λ (nm)	20 MHz 1 310 nm
	Minimum length (m)	0
	Maximum length ^a (m)	20 000 ^b
	Maximum channel Insertion loss/optical power budget (dB)	10,5
	Connecting hardware	See A.4.4.2.5
Multimode silica	Modal bandwidth (MHz × km) at λ (nm)	20 MHz 1 300 nm
	Minimum length (m)	0
	Maximum length ^a (m)	M = 3 000 ^c L = 10 000 ^c XL = 10 000 ^c
	Maximum channel Insertion loss/optical power budget (dB)	M = 13,3 L = 15 XL = 10,5
	Connecting HW	See A.4.4.2.5
POF	Modal bandwidth (MHz × km) at λ (nm)	–
	Minimum length (m)	–
	Maximum length ^a (m)	–
	Maximum channel Insertion loss/optical power budget (dB)	–
	Connecting HW	–
Hard clad silica	Modal bandwidth (MHz × km) at λ (nm)	20 MHz 650 nm
	Minimum length (m)	0
	Maximum length ^a (m)	300
	Maximum channel Insertion loss/optical power budget (dB)	4,2 ^d
	Connecting HW	See A.4.4.2.5
^a This value is reduced by connections, splices and bends in accordance with Formula (1) in 4.4.3.4.1 of IEC 61918:2018. ^b Extra Long Repeaters Only. ^c M = Medium distance capable modules, L = Long distance capable modules and XL = Extra long distance capable modules. ^d Short distance modules only.		

A.4.3.2.5 Specific network characteristics

Addition:

CP 2/1 supports active fibre rings, active line and active star topologies.

Fibre redundancy is only available for active linear and active star topologies, see A.4.4.9.6 for the design and limitations of redundant networks.

Fibre ring is inherently redundant and does not require duplicate hardware.

A.4.3.2.6 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3**A.4.4 Selection and use of cabling components****A.4.4.1 Cable selection****A.4.4.1.1 Common description****A.4.4.1.2 Copper cables****A.4.4.1.2.1 Balanced cables for Ethernet-based CPs**

Not applicable.

A.4.4.1.2.2 Copper cables for non-Ethernet-based CPs

Replacement:

The selection of connector and installation tools shall be compatible with coaxial cable (referred to as RG6). If these are not properly matched, network failures may result.

The coaxial cable electrical requirements, on which the standard topology is based, can be found in Table A.3. The mechanical properties for the standard coaxial cable are described in Table A.4. These parameters (electrical and mechanical) can be used to procure the proper cable for standard installations. Speciality cables as described in Table A.5 may require different mechanical and/or electrical properties and therefore shall be accounted for in the network length limits and tools used for connector installation. Since the network is designed to be a 75 Ω system, substitution of the cable impedance is not allowed.

The electrical parameters detailed in Table A.3 shall be met in order to maintain standard network configurations as described in this installation profile.

Table A.3 – RG6 coaxial electrical properties

Specification	Limits/Characteristics
Shielding	Quad shield
Impedance	$(75 \pm 3) \Omega$
Delay	$(4,1 \pm 0,1) \text{ ns/m}$
Frequency	Attenuation (dB/100 m)
1 MHz	1,15
2 MHz	1,25
5 MHz	1,48
10 MHz	1,94
20 MHz	2,82
50 MHz	4,49
Structural return loss	23 dB minimum from 5 MHz to 50 MHz
Conductor DC resistance	92 Ω /km nominal
Shield DC resistance	24 Ω /km nominal
Capacitance	53,2 pF/m

The physical parameters listed in Table A.4 shall be met in order to maintain noise immunity and connector compatibility.

Table A.4 – RG6 coaxial physical parameters

Specification	Characteristics
Centre conductor material and diameter	18 AWG solid bare copper covered steel $0,823 \text{ mm}^2 \pm 0,020 \text{ mm}^2$
Dielectric material and diameter	$4,65 \text{ mm} \pm 0,13 \text{ mm}$
Shield construction 4 layers	Layer 1: foil Layer 2: 60 % braid Layer 3: foil Layer 4: 40 % braid
Jacket diameter	$7,67 \text{ mm} \pm 0,13 \text{ mm}$

Addition:

CP 2/1 uses 75 Ω RG6 quad shield coaxial cables compliant with IEC 60096-2.

Specific cable designs shall be selected based on the application and the environment. The MICE concept can be used to help determine the environmental conditions and to select components and/or appropriate mitigation. Table A.5 provides guidance for application-specific cables.

Table A.5 – Cable type selection

Application type	Example cable type ^a
Light industrial applications	Standard – PVC CM-CL2
Industrial applications	Lay-on armoured and interlocking armour
High and low temperature application, as well as corrosive area (harsh chemicals – see manufacturing data sheets for chemical resistivity)	Plenum-FEP CMP-CL2P
Festooning or flexing applications (rolling "C" track and robotic tic-toc)	High flex
Moisture resistant applications; direct burial, with flooding compound, fungus resistant	Flood burial
^a See the local cable distributor for cable availability.	

All coaxial cables used in the ControlNet system shall meet the electrical requirements of this Clause A.4. In addition, they shall be constructed with quad shields (single, dual and tri shields are not allowed). It is important that the attenuation be met over the frequencies listed in this Clause A.4. If the attenuation is greater than listed in this Clause A.4, additional length derating shall be determined by using the equations in this Clause A.4. If the segment attenuation is too high, the segment shall be divided using repeaters.

The cabling components shall be selected based on the environmental and application requirements. Highflex applications shall use cables designed to meet high flex. Cables expected to be subjected to weld splatter shall have the appropriate protection or jacket designs. Cables used in outdoor applications, shall have the appropriate UV protection or jacketing design.

A.4.4.1.3 Cables for wireless installation

A.4.4.1.4 Optical fibre cables

Addition:

For optical fibre, cabling shall conform to the requirements given in Table A.2. In addition the planner shall consider the following.

The planner shall define the maximum cable length allowed between any two devices. When installing optical fibre cables, this maximum cable length shall not exceed the lengths as defined in Table A.2. Using special cables or optical fibre splices can further reduce cable lengths. Reliable data transmission may be ensured up to this certified length if the cables and the connections have been installed correctly.

The properties of an optical fibre transmission system are mainly characterized by:

- the output power of the optical interface;
- the type of cable used;
- the quality of installation and the plug configuration.

Planner and installer shall observe the insertion loss requirements (cables and connectors) to insure proper functioning segment. In addition, the instructions of the cable, plug connector and device manufacturer shall be observed. For optical fibre cables of an industrial network the planner shall use the data defined in Table A.6.

Some additional information that shall be considered by the installer and maintenance personnel are given in the relevant clauses of this document.

Table A.6 provides values based on the template given in IEC 61918:2018, Table 6.

Table A.6 – Information relevant to optical fibre cables

Characteristic	9..10/125 µm single mode silica	50/125 µm multimode silica	62,5/125 µm multimode silica	980/1 000 µm step index POF	200/230 µm step index hard clad silica
Standard	OS1	OM1, OM2 or OM3 1 300 nm	OM1, OM2 or OM3 1 300 nm	–	–
Attenuation per km (650 nm)	–	–	–	–	≤ 6,0 dB
Attenuation per km (820 nm)	–	–	–	–	–
Attenuation per km (1 310 nm)	≤ 1,0 dB or OS1	≤ 2,5 dB or OM1	≤ 3,5 dB or OM1	–	–
Number of optical fibres	2	2	2	–	2
Connector type (e.g. duplex or simplex)	BFOC 2,5	BFOC 2,5	BFOC 2,5	–	V-Pin
Jacket colour requirements	User defined	User defined	User defined	–	User defined
Jacket material	Application specific	Application specific	Application specific	–	Application specific
Resistance to harsh environment (e.g. UV, oil resist, LS0H)	Yes ^a	Yes ^a	Yes ^a	–	Yes ^a
NOTE Duplex and simplex cords/cables are supported.					
^a If application requires.					

A.4.4.1.5 Special purpose balanced and optical fibre cables

A.4.4.1.6 Specific requirements for CPs

Not applicable.

A.4.4.1.7 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3

A.4.4.2 Connecting hardware selection

A.4.4.2.1 Common description

A.4.4.2.2 Connecting hardware for balanced cabling CPs based on Ethernet

Not applicable.

A.4.4.2.3 Connecting hardware for copper cabling CPs not based on Ethernet

Replacement:

The connectors used in this network are limited to those shown in Table A.7.

Table A.7 – Copper connectors for ControlNet

CP 2/1	Coaxial IEC 61169-8	Others
Characteristics for CP 2/1 (ControlNet)	BNC	TNC RJ45 (NAP)

Addition:

The centre conductor contact shall be plated in conformance with one of the following specifications:

- 0,75 µm gold minimum over 1,25 µm nickel minimum over base metal;
- 0,05 µm to 0,2 µm gold flash over 1,25 µm palladium nickel minimum over 1,25 µm nickel minimum over base metal.

The connector characteristic impedance shall be 75 Ω nominal, 45 Ω minimum and 80 Ω maximum, from DC to 50 MHz.

For network reliability, the cables, connectors and installation tools shall be mechanically compatible. The cable and connector manufacturer's data sheets shall be consulted for compatibility and installation tool requirements.

Passive taps are used to connect the trunk sections together and provide a connection point for each node. A tap is required for each active device connected to the network. There are two variants of the taps available:

- sealed meeting IP67 minimum, using TNC connectors;
- non-sealed meeting IP65 maximum, using BNC connectors.

For reliability reasons, the number of connections in a segment shall be minimized.

The cabling components shall be selected based on the environmental and application requirements.

A.4.4.2.4 Connecting hardware for wireless installation

A.4.4.2.5 Connecting hardware for optical fibre cabling

Replacement:

Table A.8 provides values based on the template given in IEC 61918:2018, Table 9.

Table A.8 – Optical fibre connecting hardware

	IEC 61754-2	IEC 61754-4	IEC 61754-24	IEC 61754-20	IEC 61754-22	Others
	BFOC/2,5	SC	SC-RJ	LC	F-SMA	VPIN
CP 2/1 (ControlNet)	Yes	No	No	No	No	Yes
NOTE The IEC 61754 series defines the optical fibre connector mechanical interfaces; performance specifications for optical fibre connectors terminated to specific fibre types are standardised in the IEC 61753 series.						

To minimize noise coupling into the sensitive receiver, connectors with plastic or ceramic ferrules are recommended.

Table A.9 provides values based on the template given in IEC 61918:2018, Table 10.

Table A.9 – Relationship between FOC and fibre types (CP 2/1)

FOC	Fibre type					
	9..10/125 µm single mode silica	50/125 µm multimode silica	62,5/125 µm multimode silica	980/1 000 µm step index POF	200/230 µm step index hard clad silica	Others
BFOC/2,5	No	Yes	Yes	No	No	No
SC	No	No	No	No	No	No
SC-RJ	No	No	No	No	No	No
LC	No	No	No	No	No	No
F-SMA	No	No	No	No	No	No
V-PIN	No	No	No	No	Yes	No
Insertion loss correction factors shall be used when using MMF fibres smaller than 62,5/125 µm.						

A.4.4.2.6 Specific requirements for CPs

Not applicable.

A.4.4.2.7 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3

A.4.4.3 Connections within a channel/permanent link

A.4.4.3.1 Common description

Not applicable.

A.4.4.3.2 Balanced cabling connections and splices for CPs based on Ethernet

Not applicable.

A.4.4.3.3 Copper cabling connections and splices for CPs not based on Ethernet

A.4.4.3.3.1 Common description

A.4.4.3.3.2 Connections minimum distance

Replacement:

a) General

The shortest path for routing the cable shall be selected to minimize the amount of cable needed. The specific details of planning cabling route depend upon the needs of the network.

When determining the cable length of trunk-cable sections, it is important to measure the actual cable path as it is routed in the network. Vertical dimensions as well as horizontal dimensions shall be considered. The three-dimensional routing path distance shall always be calculated when determining cable lengths.

The total allowable length of a segment containing standard RG6 quad shield depends on the requirements of Table A.1 and Table A.3, and of the number of taps in the segment. There is no minimum trunk-cable section or segment length requirement. The maximum allowable total length of a segment is 1 000 m with two taps installed. Each additional tap decreases the

maximum length of the segment by 16,3 m. The maximum number of taps allowed on a segment is 48. With 48 taps the maximum segment length is limited to 250 m. Figure A.10 details the relationship between the number of taps allowed in a segment and the segment length. If the network design falls in the grey area, then a repeater is required.

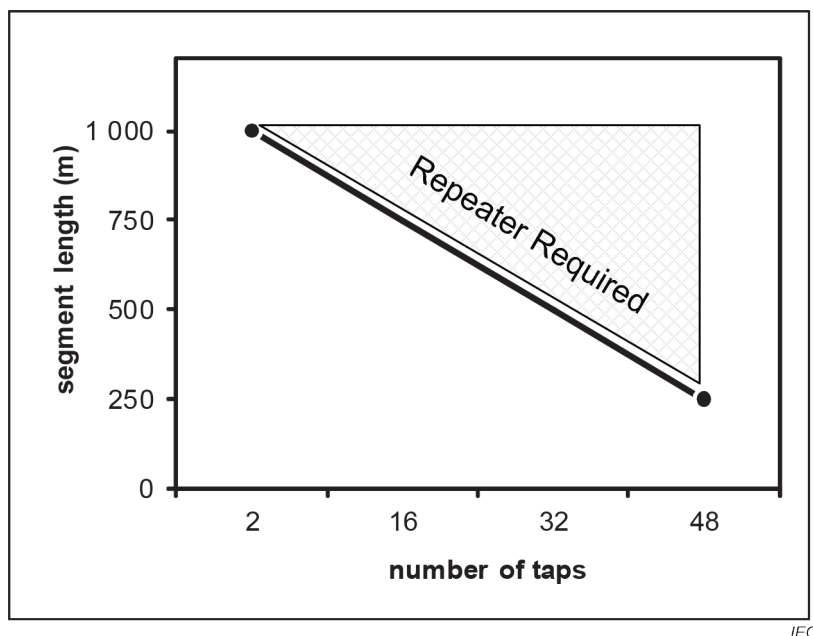


Figure A.10 – Maximum allowable taps per segment

Maximum allowable segment length = 1 000 m – 16,3 m × [number of taps – 2]

EXAMPLE 1

The following is an example of how to calculate the number of taps allowed for different segment lengths.

If the segment requires 10 taps, then the maximum segment length is:

$$1\,000\text{ m} - 16,3\text{ m} \times [10 - 2]$$

$$1\,000\text{ m} - 130,4\text{ m} = 869,6\text{ m}$$

The amount of high flex RG6 cable that can be used in a system is less than the amount of standard RG6 cable. The designer is encouraged to keep the length of high flex cable use to a minimum. BNC bullet connectors or isolated bulkhead connectors shall be used to isolate areas that require high flex RG6 cable from areas that require standard RG6 cable; this allows the high flex RG6 section to be replaced before flex life is exhausted. An allowable total length of RG6 flex cable segment in the application can be determined using the equation below. Each additional tap decreases the maximum length of the segment. The maximum segment length depends on the attenuation of the high flex cable used. The maximum allowable segment length is then as follows:

$$\text{Segment}_{\text{Length}} = \frac{[20,29\text{ dB} - (\text{Number}_{\text{taps}} \times 0,32\text{ dB})]}{\text{Cable}_{\text{Attenuation@10MHz}}}$$

Important: The cable attenuation at 10 MHz per unit length is defined as the signal loss measured at 10 MHz per 100 m of cable.

Cable attenuation for ControlNet cables are listed in the manufacturers' data sheets.

EXAMPLE 2

The cable selected for this example is high flex cable. The attenuation for this high flex coaxial cable is 2,36 dB per 100 m at 10 MHz. For a segment that requires 3 taps using high flex cable, the maximum segment length is:

$$\text{Segment}_{\text{Length}} = \left[\frac{[20,29 \text{ dB} - (3 \times 0,32 \text{ dB})]}{2,36 \text{ dB}} \right] \times 100 \text{ m}$$

or

$$\text{Segment}_{\text{Length}} = \left[\frac{19,33 \text{ dB}}{2,36 \text{ dB}} \right] \times 100 \text{ m} = 820 \text{ m}$$

The total trunk-cable length or number of taps (connections) can be increased by breaking up the segment into smaller segments.


b) Repeaters

ControlNet supports copper and fibre repeaters. Regardless of the media, the repeaters can be configured in the following topologies.

A link may be configured in one of five ways:

- series up to 20 repeaters;
- star topology (see Figure A.11);
- parallel up to 48 repeaters (see Figure A.12);
- combination of series and parallel (see Figure A.13);
- ring up to 20 repeaters (see Figure A.14).

The total link length is limited to 20 km due to delay limitations of 121 µs each way (242 µs round trip).

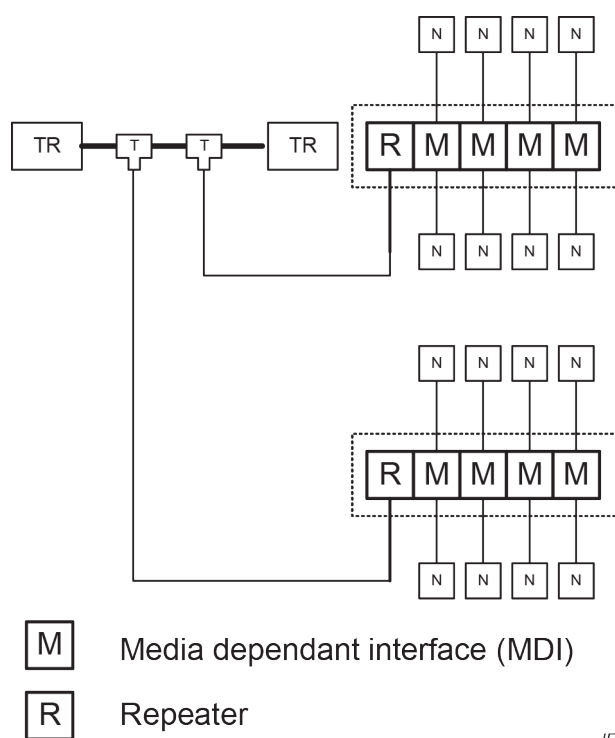

IEC

Figure A.11 – Example of repeaters in star configuration

The appropriate repeater module is required for the specific repeater topology needed. For example ring capable repeaters are required for fibre ring topologies.

A repeater can be connected to a segment at any tap location along the trunk. Fibre repeaters may be connected in series through the fibre ports.


The maximum link length is based on the distance between any two nodes. The maximum distance between any two nodes in a link is limited by the delay between the nodes. The maximum delay is limited to 121 μ s end-to-end or 242 μ s round trip.

c) Series connected repeaters

When installing repeaters in series, ControlNet network management software should be used to verify that the system is an allowable configuration. The system size is based on the maximum number of repeaters (20) in series and length of the media used between any two nodes. The total network delay described above in b) shall not be exceeded. See the installation instructions that were shipped with the repeater for an example series topology drawing and configuration instructions.

d) Parallel connected repeaters

When installing repeaters in parallel, a maximum of 48 repeaters (the maximum number of taps per 250 m segment) on any one segment is allowed. If the link is configured using repeaters in parallel, one shall count one of the repeater taps for one segment and the other repeater tap for the parallel segment that the repeater is connecting to the backbone network. See Figure A.12 for an example of repeaters in parallel. For further instructions on repeaters in series and parallel, see the instructions that were shipped with the repeater.

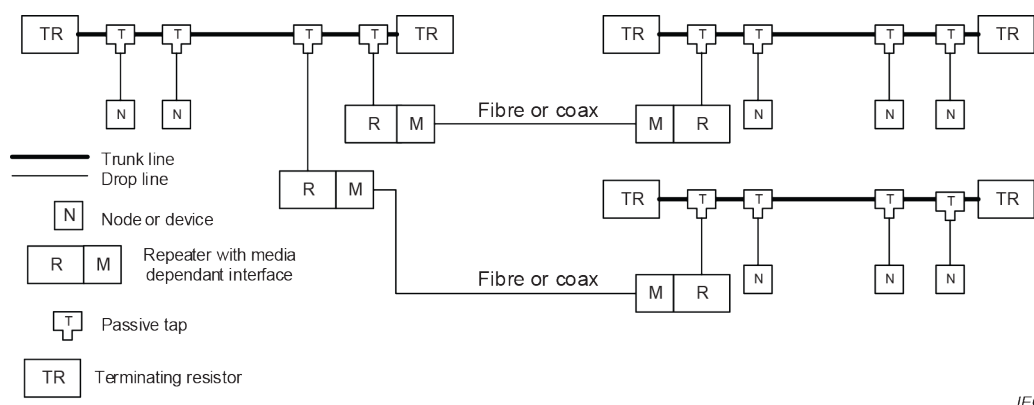

IEC

Figure A.12 – Repeaters in parallel

e) Repeaters in a combination of series and parallel

Repeaters can be installed in a combination of series and parallel connections to form a link. The guidelines listed for each type shall be followed. For mixed topologies (series and parallel), the maximum number of repeaters and media should be verified by using the appropriate network configuration software. See the installation instructions that were shipped with the repeater for an example combination series/parallel topology drawing. There shall not be more than one communication path to a node on a network. Ring repeaters have two paths by definition.

When the network is configured using repeaters in combination of series and parallel as shown in Figure A.13, it is important to count the taps and repeaters in all segments.

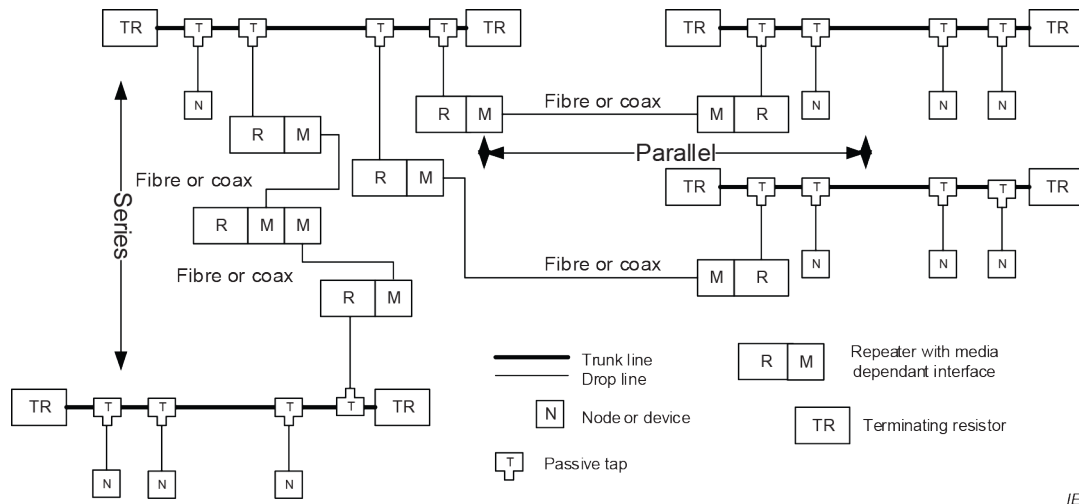


Figure A.13 – Repeaters in combination series and parallel

f) Ring repeaters

For a ring topology, the network designer shall use the appropriate ControlNet fibre ring repeaters. See Figure A.14 for an example of a fibre ring. See the installation instructions that were shipped with the repeater for instructions on setting up the ring. ControlNet supports both linear redundancy and ring topologies.

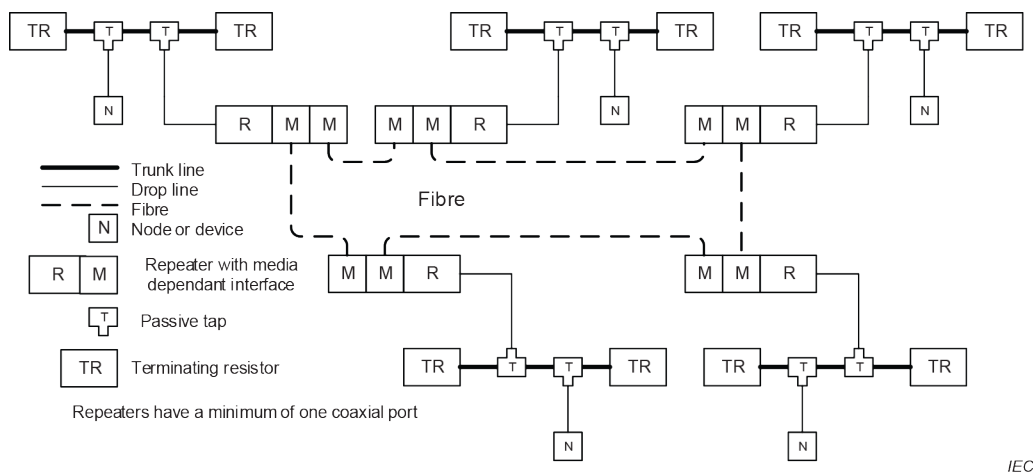


Figure A.14 – Ring repeater

A.4.4.3.3 Copper cabling splices

Addition:

The planner shall specify J-J BNC or TNC couplers when splices are necessary.

A.4.4.3.4 Copper cabling bulkhead connections

Replacement:

Copper bulkheads shall be isolated from earth. Copper bulkheads shall be constructed of back-to-back BNC jacks, TNC jacks or a combination of BNC and TNC jacks. They shall provide environmental isolation. Examples of how bulkheads are used in this profile are shown in Figure A.15.

When copper adaptors are used they shall have a nominal characteristic impedance of 75 Ω , 45 Ω minimum and 80 Ω maximum, from DC to 50 MHz.

In this example, ControlNet cable:

- enters and exits the panel enclosure from the side using isolated-bulkhead connectors;
- contains two adjacent taps connected by a barrel connector;
- reserves one future tap location with a bullet.

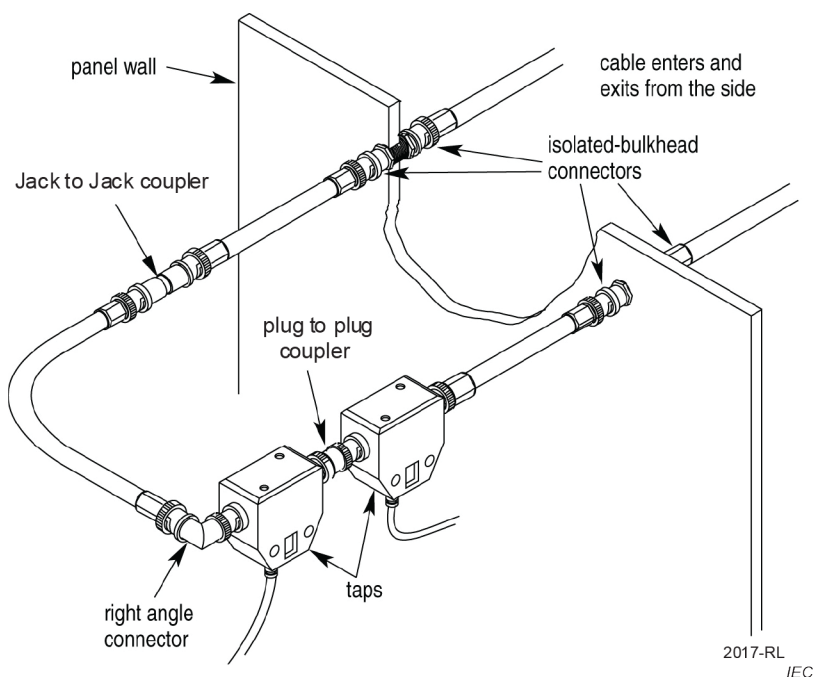


Figure A.15 – Installing bulkheads

A.4.4.3.3.5 Copper cabling J-J couplers (J-J adaptors)

Replacement:

When extending a trunk section, the appropriate BNC or TNC J-J coupler connector shall be used (see Figure A.15).

Copper adaptors shall have a nominal characteristic impedance of 75 Ω , 45 Ω minimum and 80 Ω maximum, from DC to 50 MHz

A.4.4.3.4 Optical fibre cabling connections and splices for CPs based on Ethernet

Not applicable.

A.4.4.3.5 Optical fibre cabling connections and splices for CPs not based on Ethernet

Addition:

The designer is encouraged to minimize the number of mechanical connections to minimize the risk of failure.

Each connection adds losses that shall be accounted for in the power budget found in Table A.2.

A.4.4.3.6 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3

A.4.4.4 Terminators

A.4.4.4.1 Common description

A.4.4.4.2 Specific requirements for CPs

Addition:

Terminators are required for ControlNet in order to minimize reflections in the trunk system. Figure A.16 shows examples of BNC and TNC coaxial terminators. A $75\ \Omega$ terminator shall be placed at the end of each segment for the ControlNet cable system (see Figure A.17 for placement).

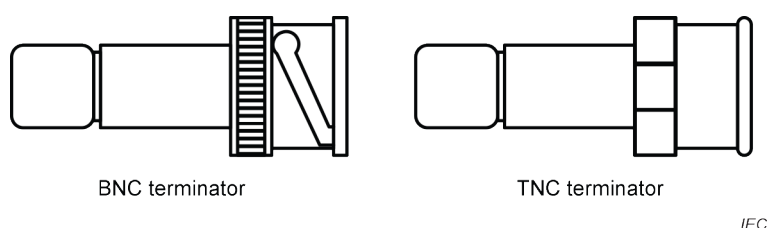


Figure A.16 – Coaxial BNC and TNC terminators

The number of required terminators is determined by multiplying the number of segments by two.

The terminators shall be coaxial $75\ \Omega$ 1 %, 0,5 W low inductance BNC or TNC.

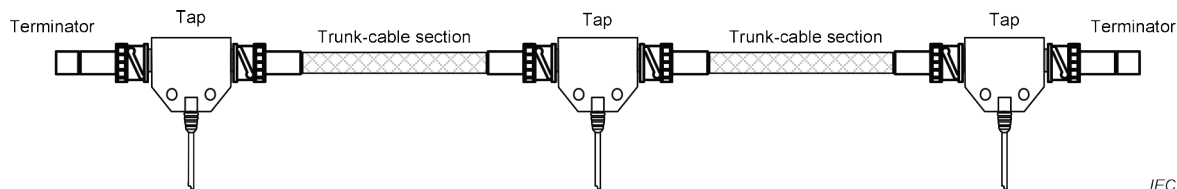


Figure A.17 – Terminator placement in a segment

A.4.4.4.3 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3

Not applicable.

A.4.4.5 Device location and connection

A.4.4.5.1 Common description

A.4.4.5.2 Specific requirements for CPs

Addition:

Devices shall be installed in accordance with the following:

- manufacturer's documentation;
- planner's documentation;
- cable routing;

- location of the taps. Taps have a 1 metre maximum drop length.

A.4.4.5.3 Specific requirements for wireless installation

Not applicable.

A.4.4.5.4 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3

A.4.4.6 Coding and labelling

A.4.4.7 Earthing and bonding of equipment and devices and shielded cabling

A.4.4.7.1 Common description

A.4.4.7.2 Bonding and earthing of enclosures and pathways

A.4.4.7.2.1 Equalization and earthing conductor sizing and length

Addition:

ControlNet supports both earthing schemes, Star and Equipotential earthing systems. If the building does not have an adequate equipotential earthing system, then the star earthing system shall be used to mitigate earth potential offsets within the communications coverage area. Equipotential earthing system can be installed in accordance with IEC 61918:2018.

A.4.4.7.2.2 Bonding straps and sizing

A.4.4.7.3 Earthing methods

A.4.4.7.3.1 Equipotential

A.4.4.7.3.2 Star

A.4.4.7.3.3 Earthing of equipment (devices)

Addition:

Equipment shall be earthed in accordance with the manufacturer's installation instructions.

A.4.4.7.3.4 Copper bus bars

A.4.4.7.4 Shield earthing

A.4.4.7.4.1 Non-earthing or parallel RC

Modification:

ControlNet coaxial shields are connected to earth via a parallel RC circuit that is integral to the active devices as modelled in Figure A.18. The coaxial shields shall not be directly bonded to earth as this will introduce noise in the network.

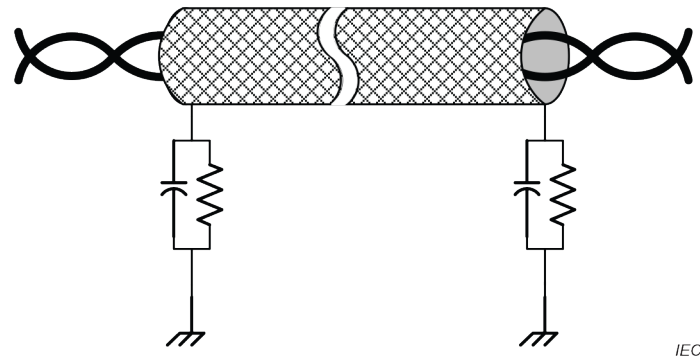


Figure A.18 – RC Shield Termination in Active Devices

A.4.4.7.4.2 Direct

Not applicable.

A.4.4.7.4.3 Derivatives of direct and parallel RC

Not applicable.

A.4.4.7.5 Specific requirements for CPs

Not applicable.

A.4.4.7.6 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3

A.4.4.8 Storage and transportation of cables

A.4.4.9 Routing of cables

A.4.4.9.1 Common description

A.4.4.9.2 Cable routing of assemblies

A.4.4.9.3 Requirements for cable routing inside enclosures

Addition:

Cable sections that run inside protective equipment enclosures are relatively short. For wiring external to enclosures, the maximum separation shall be maintained between ControlNet cable and Category-1 conductors. The minimum separation from other circuits is defined in Table 17 of IEC 61918:2018. When running cable inside an enclosure, the installer shall route the conductors external to all pathways in the same enclosure, or in a pathway separate from Category-1 conductors.

A.4.4.9.4 Cable routing inside buildings

A.4.4.9.5 Cable routing outside and between buildings

A.4.4.9.6 Installing redundant communication cables

Addition:

A second trunk cable is used between ControlNet nodes for redundant media. With redundant media, nodes send signals on two separate segments. The receiving node compares the quality of the two signals and accepts the better signal to permit use of the best signal. This


also provides a backup cable if one cable fails. Trunk cables on a redundant cable link are defined by the segment number and the redundant trunk-cable letter.

ControlNet products are labelled with the icons in Figure A.19. The light-coloured icon should be placed on drop cables connected to port A of the devices. The dark-coloured icon should then be placed on redundant node ports marked B. See Figure A.20 for redundant coax media example. Figure A.21 is an example of a redundant network using repeaters to extend the network. The difference in length of redundant network A and network B shall not exceed the limits in Figure A.22 for coax repeaters and Figure A.23 for fibre repeaters.



Figure A.19 – Redundant network icons


In Figure A.20, trunk cable A is denoted by the light icon and trunk cable B is denoted by the dark icon. The cabling system should be marked accordingly with the proper icon or letter. Redundant nodes are connected to trunk cable A and trunk cable B as shown in Figure A.20

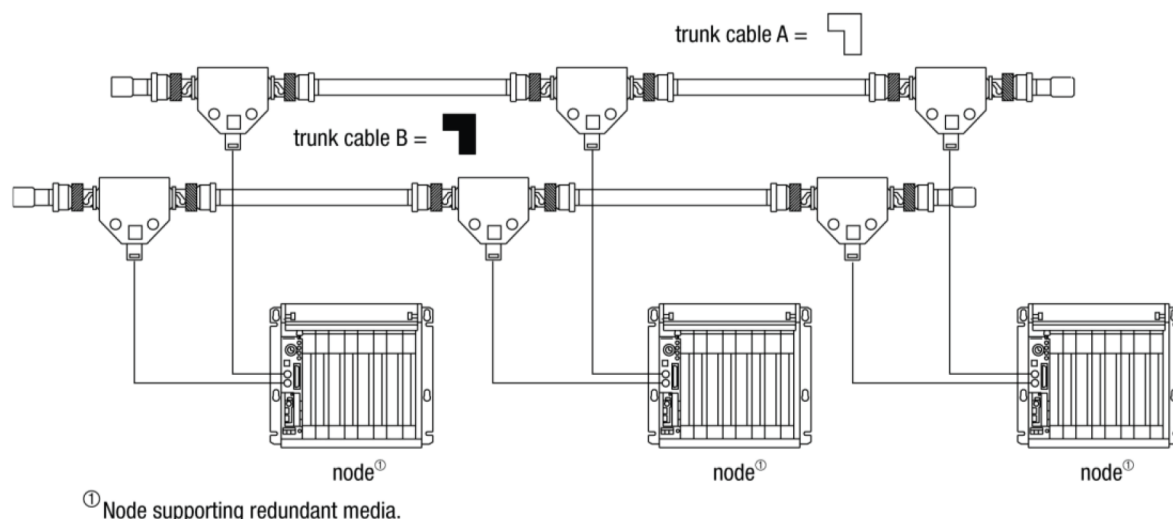

IEC

Figure A.20 – Redundant coax media

Fibre media can be used to extend a redundant network as shown in Figure A.21.

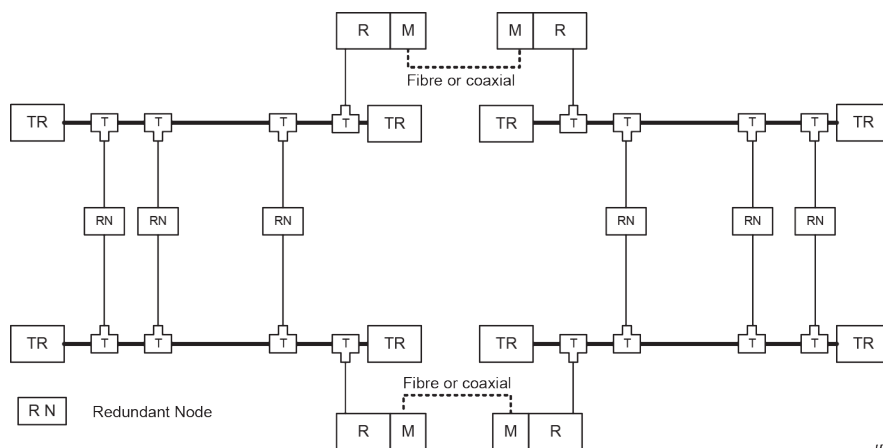

IEC

Figure A.21 – Redundant fibre media

The following guidelines shall be observed when planning a redundant media system.

- The two trunk cables (trunk cable A and trunk cable B) shall be routed differently to reduce the chance of both cables being damaged at the same time.
- Each node on a redundant-cable link shall support redundant coax connections and be connected to both trunk cables at all times. Any nodes connected to only one side of a redundant-cable link will result in media errors on the unconnected trunk cable.
- The cabling system shall be installed so that the trunk cables at any physical device location can be easily identified and labelled with the appropriate icon or letter. Each redundant ControlNet device is labelled so that it can be connected to the corresponding trunk cable.
- Both trunk cables (trunk cable A and trunk cable B) of a redundant-cable link shall have the same configurations. Each segment shall contain the same number of taps, nodes and repeaters. Nodes and repeaters shall be connected in the same relative sequence on both trunk cables.
- Cable shall be installed on each side of a redundant cable system so that each cable is about the same length. As the number of repeaters in a network increases, the allowable difference in length of the two redundant cabling systems is decreased as shown in Figure A.22.
- The difference in length between the two paths (trunk cable A and trunk cable B) shall not exceed the worst-case limit line as detailed in Figure A.22 for coax media when using repeaters.
- The difference in length between the two paths (trunk cable A and trunk cable B) shall not exceed the worst-case limit line as detailed in Figure A.23 for fibre media when using repeaters.
- When there are no repeaters in a redundant network, the difference between the redundant paths (trunk cable A and trunk cable B) shall not exceed that detailed for zero repeaters in Figure A.22 or Figure A.23.
- Both redundant connections of a node shall not be connected to the same network; doing so will cause erratic operation. In addition, all nodes with redundant ports shall be connected to a redundant network at the same physical location within the network. See Figure A.24 and Figure A.25 for both proper and improper connection of redundant nodes.
- The two networks shall not be connected together.
- ControlNet supports linear redundancy and ring topology. Dual redundant rings are not supported and will result in multiple communications paths and lead to network instabilities.

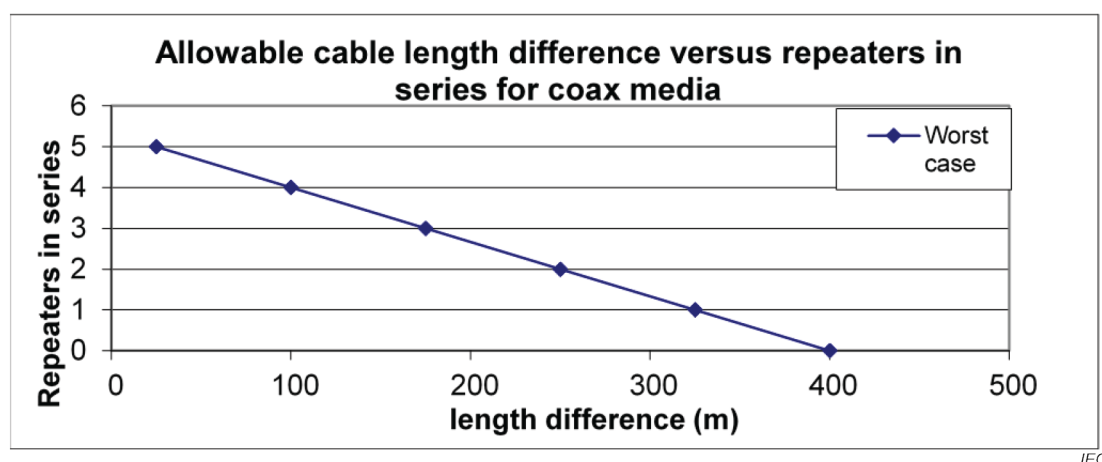


Figure A.22 – Repeaters in series versus length difference for coax media

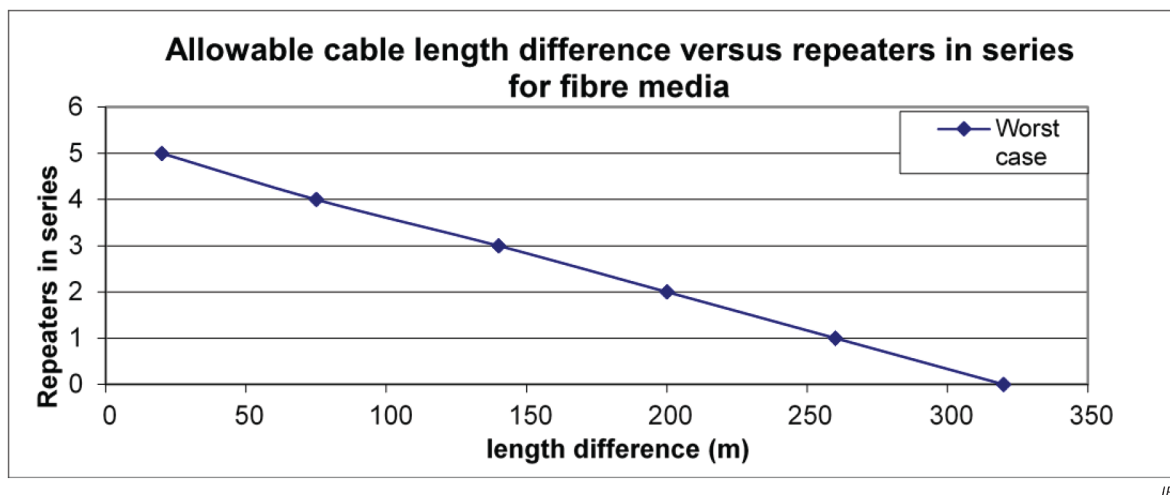


Figure A.23 – Repeaters in series versus length difference for fibre media

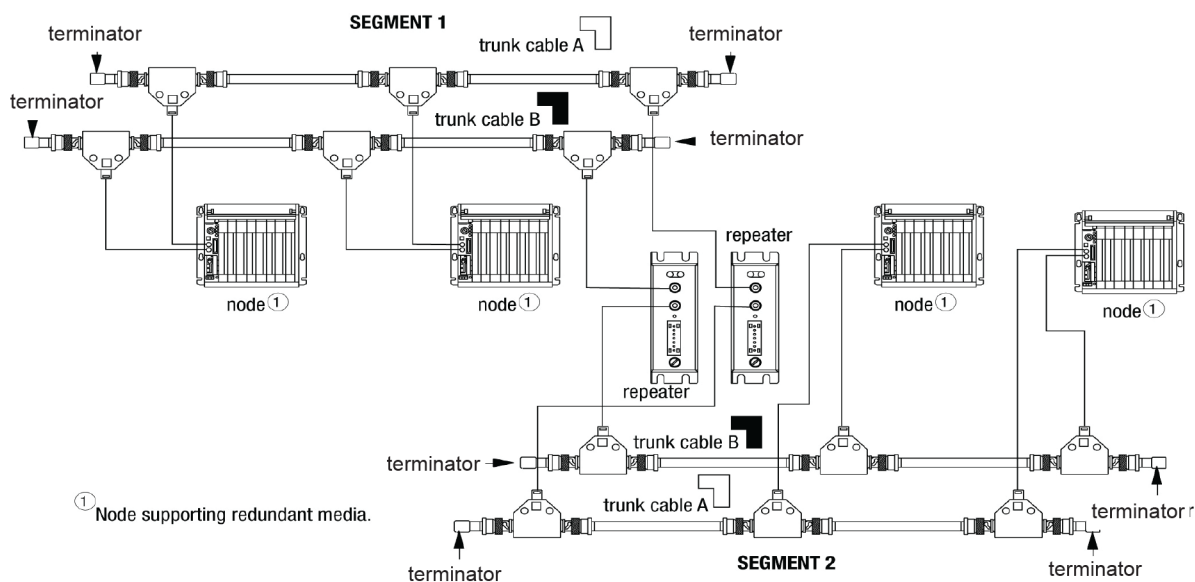


Figure A.24 – Example of redundant coax network with repeaters

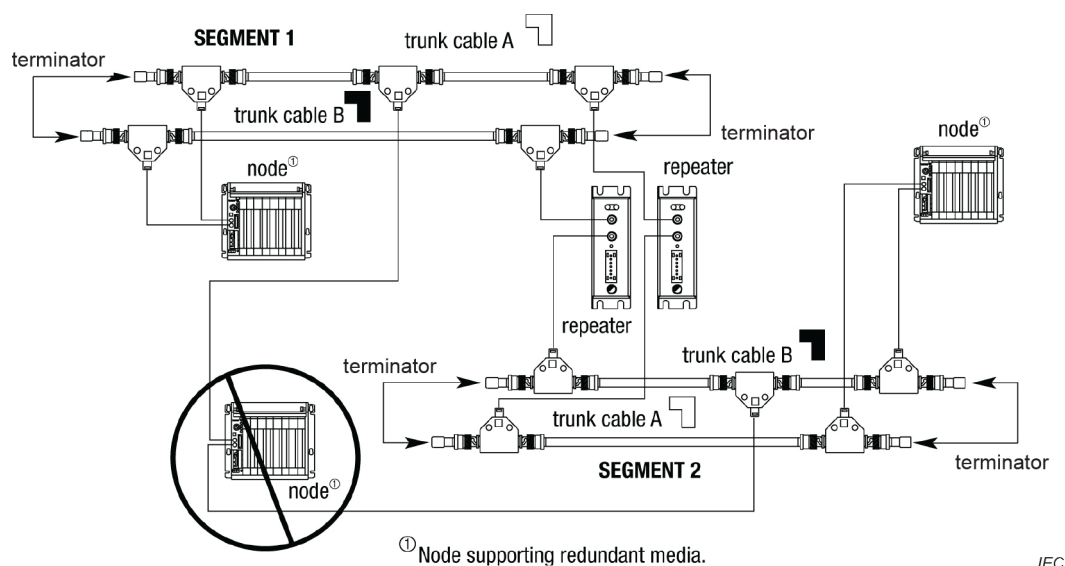


Figure A.25 – Example of improper redundant node connection

The allowable difference in length of trunk cable A and B can be found by counting the number of repeaters needed for the network and looking in the graph for coax repeaters above. When one repeater is used, the allowable difference in length between network cable A and B is limited to 325 m (see Figure A.22 and Figure A.24).

A node supporting redundant trunk-cable connections will function even if trunk cable A is connected to the B connector on the node and vice-versa. However, doing so is not recommended because this makes cable fault indications (on the hardware or in the software) difficult to interpret and this makes locating a bad cable segment very difficult.

A.4.4.10 Separation of circuits

Addition:

These additional guidelines shall be followed for wiring all ControlNet cables:

- if cables are required to cross power lines, they should do so at right angles;
- cable shall be routed at least 1,5 m (5 ft.) from high-voltage enclosures, or sources of rf/microwave radiation.

If the conductor is in a metal wireway or conduit, each section of the wireway or conduit shall be bonded to each adjacent section so that it has electrical continuity along its entire length, and shall be bonded to the enclosure at the entry point.

A.4.4.11 Mechanical protection of cabling components

A.4.4.11.1 Common description

Specific requirements for CPs.

Not applicable.

A.4.4.11.2 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3**A.4.4.12 Installation in special areas****A.4.4.12.1 Common description****A.4.4.12.2 Specific requirements for CPs**

Addition:

The cabling components shall be selected based on the environmental and application requirements. Highflex applications shall use cables designed to meet high flex. Cables expected to be subjected to weld splatter shall have the appropriate protection or jacket designs. Cables used in outdoor applications shall have the appropriate UV protection or jacketing design.

A.4.5 Cabling planning documentation**A.4.6 Verification of cabling planning specification****A.5 Installation implementation****A.5.1 General requirements****A.5.1.1 Common description****A.5.1.2 Installation of CPs****A.5.1.3 Installation of generic cabling in industrial premises**

Not applicable.

A.5.2 Cable installation**A.5.2.1 General requirements for all cabling types****A.5.2.1.1 Storage and installation****A.5.2.1.2 Protecting communications cables against potential mechanical damage**

Addition:

When pulling the RG6 type coax cable through multiple conduit bends, the specifications detailed in Table A.10 shall be followed.

Table A.10 – Parameters for coaxial RG6 cables

Characteristic		Value	
		PVC	FEP
Mechanical force	Minimum bending radius, single bending (mm)	77	70
	Bending radius, multiple bending (mm)	See manufacturer's data sheet	See manufacturer's data sheet
	Pull forces (N)	400	600
	Permanent tensile forces (N)	See manufacturer's data sheet	See manufacturer's data sheet
	Maximum lateral forces (N/cm)	See manufacturer's data sheet	See manufacturer's data sheet
	Temperature range during installation (°C)	See manufacturer's data sheet	See manufacturer's data sheet

When pulling the RG6 type coax cable outside of the conduit, the specifications detailed in Table A.11 shall be followed. Table A.12 and Table A.13 provide values based on the template given in IEC 61918:2018, Table 19 and Table 21.

Table A.11 – Bend radius for coaxial cables outside conduit

For this coax cable	The bend radius shall not exceed
PVC	38 mm
FEP	36 mm
Tap drop-cable	26 mm

Table A.12 – Parameters for silica optical fibre cables

Characteristic		Value	
		GI Single mode	GI Multi mode
Mechanical force	Minimum bending radius, single bending (mm)	See manufacturer's data sheet	See manufacturer's data sheet
	Bending radius, multiple bending (mm)	See manufacturer's data sheet	See manufacturer's data sheet
	Pull forces (N)	See manufacturer's data sheet	See manufacturer's data sheet
	Permanent tensile forces (N)	See manufacturer's data sheet	See manufacturer's data sheet
	Maximum lateral forces (N/cm)	See manufacturer's data sheet	See manufacturer's data sheet
	Temperature range during installation (°C)	See manufacturer's data sheet	See manufacturer's data sheet

Table A.13 – Parameters for hard clad silica optical fibre

Characteristic		Value
		200 µm SI MM Fibre
Mechanical force	Minimum bending radius, single bending (mm)	See manufacturer's data sheet
	Bending radius, multiple bending (mm)	See manufacturer's data sheet
	Pull forces (N)	See manufacturer's data sheet
	Permanent tensile forces (N)	See manufacturer's data sheet
	Maximum lateral forces (N/cm)	See manufacturer's data sheet
	Temperature range during installation (°C)	See manufacturer's data sheet

A.5.2.2 Installation and routing**A.5.2.3 Specific requirements for CPs**

Not applicable.

A.5.2.4 Specific requirements for wireless installation

Not applicable.

A.5.2.5 Specific requirements for generic cabling in accordance with ISO/IEC 11801-3**A.5.3 Connector installation****A.5.3.1 Common description****A.5.3.2 Shielded connectors****A.5.3.3 Unshielded connectors**

Not applicable.

A.5.3.4 Specific requirements for CPs

Addition:

a) Tools

To install the cable connector, it is recommended that the proper tools be used that match the cable and the connectors. An example toolkit is provided in Figure A.26.