



DPC: 24 / 30488106 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 29 February 2024

Origin: International

Latest date for receipt of comments: 20 March 2024

Project No. 2024/00594

Responsible committee: EPL/47 Semiconductors

Interested committees:

Title: BS IEC 62908-12-10 Touch and interactive displays

Part 12-10: Measurement methods of touch displays - Touch and electrical performance

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 20 March 2024**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Responsible Committee Secretary: **Committee Service Centre (BSI)**
Direct tel: **020 8996 7009**
E-mail: csc@bsigroup.com

 **Documents**
Document Sharing Hub

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



110/1624/CD

COMMITTEE DRAFT (CD)

PROJECT NUMBER:
IEC 62908-12-10 ED3

DATE OF CIRCULATION:
2024-02-23

CLOSING DATE FOR COMMENTS:
2024-04-19

SUPERSEDES DOCUMENTS:
110/1623/RR

IEC TC 110 : ELECTRONIC DISPLAYS

SECRETARIAT:
Japan

SECRETARY:
Mr Yoshi SHIBAHARA

OF INTEREST TO THE FOLLOWING COMMITTEES:

PROPOSED HORIZONTAL STANDARD:

☐

Other TC/SCs are requested to indicate their interest, if any, in this CD to the secretary.

FUNCTIONS CONCERNED:

☐ EMC

☐ ENVIRONMENT

☐ QUALITY ASSURANCE

☐ SAFETY

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Recipients of this document are invited to submit, with their comments, notification of any local regulations or technical reasons that may exist and should be considered should this proposal proceed, recognizing that failure to address such requirements could result in the need for new or existing "In Some Countries" clauses. (SEE [AC/22/2007](#) OR [NEW GUIDANCE DOC](#)).

TITLE:

Touch and interactive displays - Part 12-10: Measurement methods of touch displays - Touch and electrical performance

NOTE FROM TC/SC OFFICERS:

Copyright © 2024 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

1		
2		
3	FOREWORD.....	6
4	1 Scope.....	8
5	2 Normative references	8
6	3 Terms and definitions	8
7	4 Measuring conditions.....	8
8	4.1 Standard measuring environmental conditions	8
9	4.2 Standard atmospheric conditions for reference measurements and tests	9
10	4.3 Standard positioning equipment and setup.....	9
11	4.4 Human operator alternative to standard positioning equipment	10
12	4.5 Test bar and touch pen	11
13	4.6 Equipment for pressure characteristics measurement	12
14	5 Touch performance measurement methods	13
15	5.1 General.....	13
16	5.2 Accuracy test	13
17	5.2.1 Purpose	13
18	5.2.2 Test procedure	13
19	5.2.3 Report	17
20	5.3 Repeatability or jitter test	18
21	5.3.1 Purpose	18
22	5.3.2 Test procedure	18
23	5.3.3 Report	20
24	5.4 Linearity test	20
25	5.4.1 Purpose	20
26	5.4.2 Test procedure	20
27	5.4.3 Report	23
28	5.5 Reproducibility test	23
29	5.5.1 Purpose	23
30	5.5.2 Test procedure	24
31	5.5.3 Report	25
32	5.6 Signal-to-noise ratio (SNR) test	26
33	5.6.1 Purpose	26
34	5.6.2 Test procedure	27
35	5.6.3 Report	28
36	5.7 Report rate test.....	28
37	5.7.1 Purpose	28
38	5.7.2 Test procedure	28
39	5.7.3 Report	29
40	5.8 Latency test	29
41	5.8.1 Purpose	29
42	5.8.2 Test procedure	29
43	5.8.3 Report	30
44	5.9 Electrical noise immunity test.....	30
45	5.9.1 Purpose	30
46	5.9.2 Test procedure	30
47	5.9.3 Report	31

48	5.10	Water droplet immunity test	31
49	5.10.1	Purpose	31
50	5.10.2	Test procedure	32
51	5.10.3	Report	32
52	5.11	Optical noise immunity test	32
53	5.11.1	Purpose	32
54	5.11.2	Test procedure	33
55	5.11.3	Report	33
56	5.12	Power consumption test	33
57	5.12.1	Purpose	33
58	5.12.2	Test procedure	33
59	5.12.3	Report	33
60	5.13	Perpendicular hover distance test	33
61	5.13.1	Purpose	33
62	5.13.2	Test procedure	33
63	5.13.3	Report	34
64	5.14	Pressure characteristics test	34
65	5.14.1	Purpose	34
66	5.14.2	Test procedure	34
67	5.14.3	Report	35
68	6	In-plane hovering performance measurement methods	35
69	6.1	General	35
70	6.2	Accuracy test	35
71	6.2.1	Purpose	35
72	6.2.2	Test procedure	36
73	6.2.3	Report	38
74	6.3	Repeatability or jitter test	39
75	6.3.1	Purpose	39
76	6.3.2	Test procedure	39
77	6.3.3	Report	41
78	6.4	Report rate test	41
79	6.4.1	Purpose	41
80	6.4.2	Test procedure	42
81	6.4.3	Report	43
82	Annex A (informative)	Electrical performance measurement methods of touch sensors	44
83	A.1	Resistance	44
84	A.1.1	General	44
85	A.1.2	Test samples	44
86	A.1.3	Measurement equipment	44
87	A.1.4	Procedures	44
88	A.1.5	Data analysis	45
89	A.1.6	Report	45
90	A.2	Trans-capacitance	45
91	A.2.1	General	45
92	A.2.2	Test samples	45
93	A.2.3	Measurement equipment	45
94	A.2.4	Procedure	45
95	A.2.5	Data analysis	46
96	A.2.6	Report	46

97	Bibliography	47
98		
99	Figure 1 – Composition of test equipment	10
100	Figure 2 – Concept of performance measurement	10
101	Figure 3 – Example of manual test tool (left), positioning without triggering a touch	
102	event (middle) and recording a touch event (right)	11
103	Figure 4 – Examples of test bars	12
104	Figure 5 – Force sensor added to Figure 1 in red for pressure characteristics	
105	measurement of pressure sensitive touch sensor modules	12
106	Figure 6 – Block diagram showing function and data added to Figure 2 in red for	
107	pressure characteristics measurement	13
108	Figure 7 – Location of edge area and centre area	14
109	Figure 8 – Point grid	14
110	Figure 9 – Accuracy definition	15
111	Figure 10 – Example of measurement result and calculation of accuracy	17
112	Figure 11 – Repeatability in the touch sensor module	18
113	Figure 12 – Example of measurement result for repeatability	20
114	Figure 13 – Dragging line for linearity test.....	21
115	Figure 14 – Linearity definition.....	21
116	Figure 15 – Example of measurement and calculation of linearity	23
117	Figure 16 – Example of reproducibility test results	24
118	Figure 17 – Reproducibility test procedure	25
119	Figure 18 – Examples of measurements of reproducibility – Velocity dependence.....	26
120	Figure 19 – SNR definition concept.....	27
121	Figure 20 – Dragging direction for reporting time measurement	28
122	Figure 21 – Reporting time interval measurement	29
123	Figure 22 – Latency measurement	29
124	Figure 23 – Example of the effect of external noise	30
125	Figure 24 – External noise injection	31
126	Figure 25 – Report of external noise immunity	31
127	Figure 26 – Example of water drop effect.....	32
128	Figure 27 – Water droplet test procedure	32
129	Figure 28 – Perpendicular hover distance measurement	34
130	Figure 29 – Example of force-pressure curve	35
131	Figure 30 – Point grid	36
132	Figure 31 – Accuracy definition for in-plane of XY coordinates on the target projection	
133	plane (I) of the active area	37
134	Figure 32 – Accuracy definition for Z coordinate on the target projection plane (I) of the	
135	active area.....	37
136	Figure 33 – Repeatability for in-plane of XY coordinates on the target projection plane	
137	(I) of the active area.....	39
138	Figure 34 – Repeatability for Z coordinate on the target projection plane (I) of the	
139	active area.....	40
140	Figure 35 – Dragging direction of in-plane for reporting time measurement	42
141	Figure 36 – Dragging direction of Z -axis for reporting time measurement	43

142	Figure 37 – Reporting time interval measurement	43
143	Figure A.1 – Diagrammatic representation of measurement of resistance	45
144	Figure A.2 – Diagrammatic representation of measurement of capacitance	46
145		
146	Table 1 – Standard conditions for reference measurements and tests	9
147	Table A.1 – Specification of LCR impedance meter	44
148		
149		

INTERNATIONAL ELECTROTECHNICAL COMMISSION

TOUCH AND INTERACTIVE DISPLAYS –

**Part 12-10: Measurement methods of touch displays –
Touch and electrical performance**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62908-12-10 has been prepared by IEC technical committee 110: Electronic displays. It is an International Standard.

This third edition cancels and replaces the second edition published on 2023-01-30. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) added principle of pressure sensitive touch sensor module and pressure characteristics measurement;
- b) added required equipment for pressure characteristic measurement of pressure sensitive touch sensor module; and
- c) added test method for pressure characteristics measurement.

The text of this International Standard is based on the following documents:

Draft	Report on voting
XX/XX/FDIS	XX/XX/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

TOUCH AND INTERACTIVE DISPLAYS –

Part 12-10: Measurement methods of touch displays – Touch and electrical performance

1 Scope

This part of IEC 62908 specifies the standard measuring conditions and measurement methods for determining touch and hovering performance of a touch sensor module. This document is applicable to touch sensor modules, where the structural relationship between touch sensor, touch controller, touch sensor module, display panel, touch display panel, and touch display module is defined in IEC 62908-1-2.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1, *Environmental testing – Part 1: General and guidance*

IEC 62908-1-2, *Touch and interactive displays – Part 1-2: Generic – Terminology and letter symbols*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60068-1 and IEC 62908-1-2 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

4 Measuring conditions

4.1 Standard measuring environmental conditions

Measurements shall be carried out under the standard environmental conditions:

- temperature: 25 °C ± 3 °C,
- relative humidity: 25 % RH to 85 % RH,
- atmospheric pressure: 86 kPa to 106 kPa.

When different environmental conditions are used, they shall be noted in the measurement report.

4.2 Standard atmospheric conditions for reference measurements and tests

If the parameters to be measured depend on temperature, pressure and humidity, and their dependence on temperature, pressure and humidity is unknown, the atmospheres to be specified shall be selected from the following values, as shown in Table 1. The selected values shall be noted in the relevant specifications.

Table 1 – Standard conditions for reference measurements and tests

Temperature ^a °C	Relative humidity ^{a, b} % RH	Air pressure ^a kPa
(20, 25, 30, and 35) ± 3	45 to 75	86 to 106
^a Including extreme values.		
^b Absolute humidity ≤ 22 g/m ³ .		

4.3 Standard positioning equipment and setup

The standard positioning equipment for touch performance shall be the positioning machine equipped with a test bar, a moving arm, and a stage onto which the touch sensor module is placed, as shown in Figure 1. The positioning machine shall move its arm and stage to place the test bar on or over the touch sensor module.

There are three types of positions associated with a given test: target, actual and reported positions. The target position is a desired measurement location in physical space referenced to a fixed datum on or over the touch sensor module surface. The actual position is the actual location of contact or hovering during test, referenced to the same fixed datum, which can differ from the target position due to test bar placement error. The reported position is the location reported by the touch controller.

As shown in Figure 2, the reported positions from the touch controller are analysed to define performance measures with respect to the target positions.

The touch sensor module and the stage shall be aligned correctly while setting up the measurement equipment, because a misalignment between them can introduce coordinate shifts or rotation between the actual touch positions and target positions; each positioning machine has its inherent accuracy, which means that an actual touched position does not coincide with its target position. The performance measurements based on the target positions can include errors due to the accuracy of the positioning machine. The touch sensor module under test shall be attached to the stage and connected to the electrical interface. The test bar of the selected diameter shall be attached to the moving arm. In case of measurement of the pen touch performance, instead of the test bar, a selected touch pen (stylus pen) shall be attached to the moving arm.

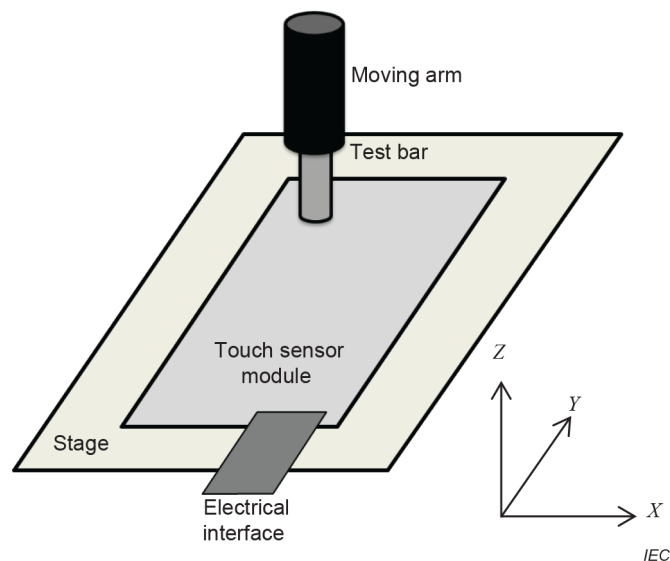


Figure 1 – Composition of test equipment

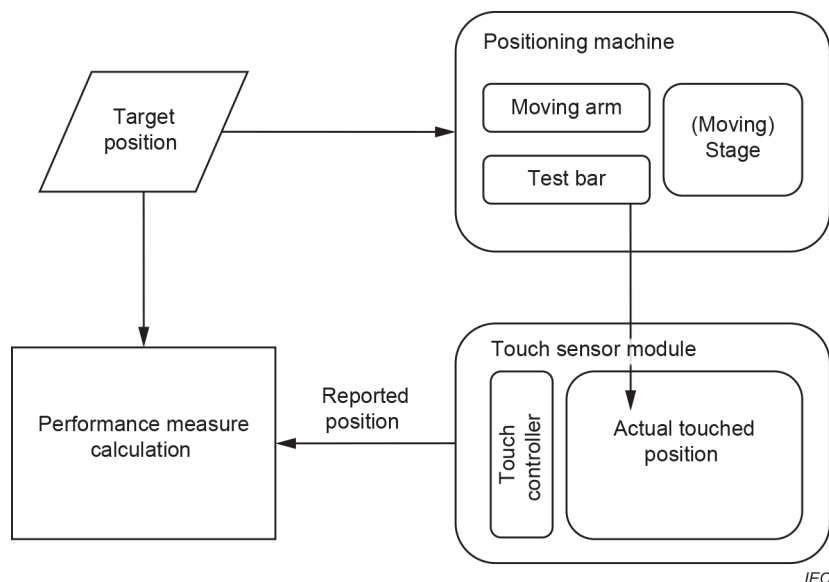


Figure 2 – Concept of performance measurement

4.4 Human operator alternative to standard positioning equipment

Under certain circumstances, for example if the display under test is too large for suitable positioning equipment to be available, a suitably designed test arm may be manually positioned to enable completion of a subset of the tests described in this document. In this situation, the test arm needs to be designed carefully to minimise the reasonable achievable error between actual and target positions when conducting measurements. An example of such a test arm can consist of a rod with a sliding tip (Figure 3, left), whose materials are chosen so that contact between the rod and the display does not trigger a touch event (Figure 3, middle), whereas contact between the sliding tip and the display does trigger a touch event (Figure 3, right). Such a test arm can be placed accurately and reliably by the human operator with the sliding tip away from the display, subsequent to which a measurement can be made by sliding the tip into contact with the display.

The human operator alternative is not recommended for hovering performance measurements because it is difficult to ensure the accuracy of positions, including the height.

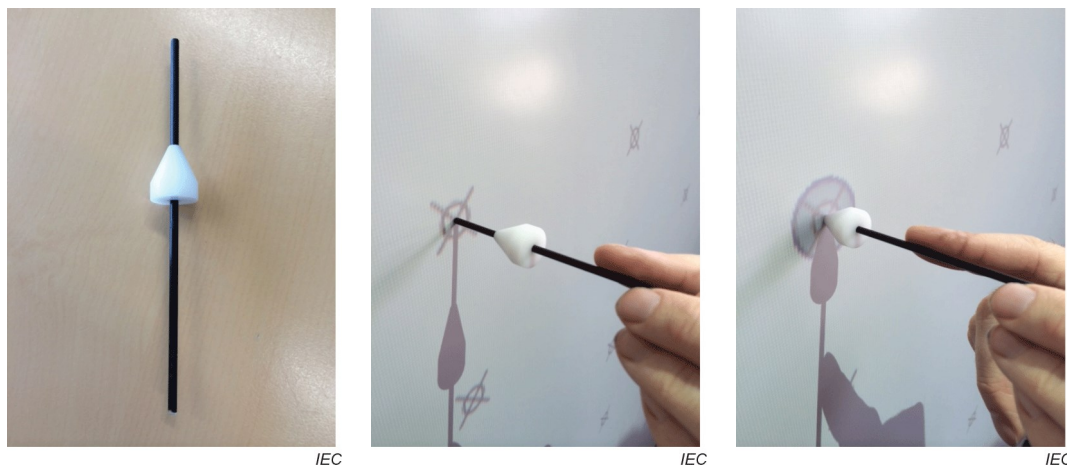


Figure 3 – Example of manual test tool (left), positioning without triggering a touch event (middle) and recording a touch event (right)

4.5 Test bar and touch pen


The parameters of the test bar shall be size, shape, and material. Examples of suitable sizes and shapes of the test bar are shown in Figure 4. The material parameters for the test bar shall be appropriately chosen given the device category under test.

When the touch sensor module is a capacitive touch system, the test bar shall be electrically conductive and shall additionally be grounded in order to avoid potential performance degradation due to electrical noise, unless otherwise stated. A test bar may have an insulating layer on the base to model the effect of a gloved finger.

For reflection-based optical systems, the reflectivity of the contact end of the test bar shall be chosen to be spectrally representative of human skin.

In all cases, the appropriate properties (including size, shape and material) of the test bar shall be reported.

In case of measurement of the pen touch performance, the selected touch pen shall be applied instead of the test bar. The touch pen corresponding to the touch sensor module shall be selected, because there are several types of touch pens (see IEC TR 62908-1-3). The information of the selected touch pen and related properties (i.e., tilt angle of touch pen, pressure of touch pen, etc.) shall be reported.

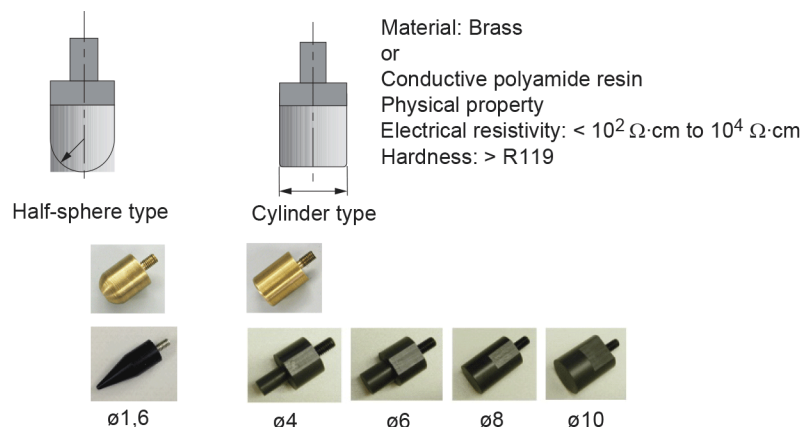

IEC

NOTE $\varnothing$ (test bar diameter) = 4 mm, 6 mm, 7 mm, 9 mm, or 12 mm.

Figure 4 – Examples of test bars

4.6 Equipment for pressure characteristics measurement

For the pressure characteristics measurement of pressure sensitive touch sensor modules, the positioning machine shall be equipped with a force sensor as shown in Figure 5 to detect physical force applied to the touch sensor module by measuring normal force from the touch sensor module. The resolution of the force sensor shall be smaller than 0,01 N or 1 gf (See ISO 7500-1).

The positioning machine shall move its arm in the direction vertically to the touch sensor module to vary the force applied to the touch sensor module. Then the physical force indicated by the force sensor and the pressure level are used for the pressure characteristics test (see Figure 6).

NOTE According to the industry terminology, “pressure level” is not a physical quantity but a reported digital value from the touch sensor module.

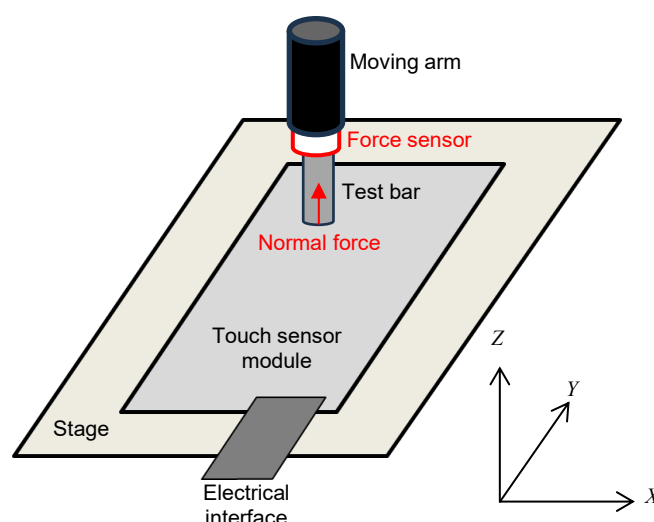


Figure 5 – Force sensor added to Figure 1 in red for pressure characteristics measurement of pressure sensitive touch sensor modules

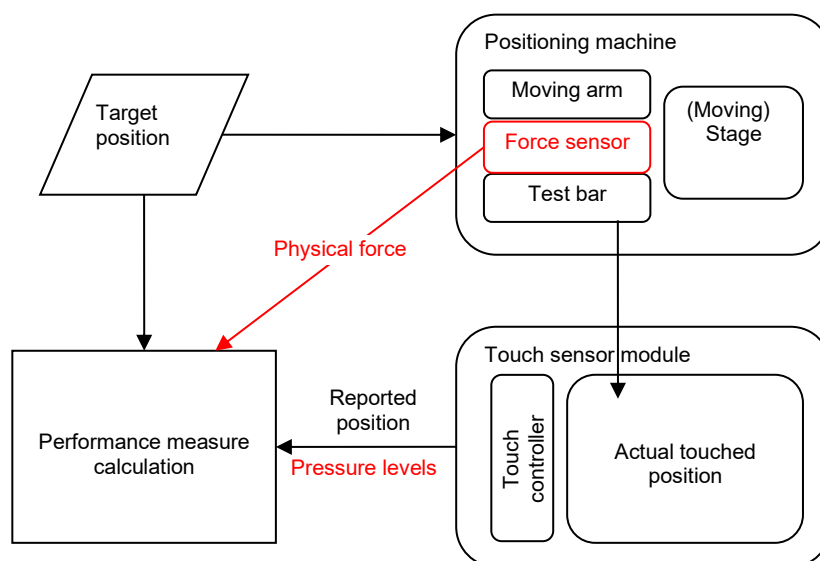


Figure 6 – Block diagram showing function and data added to Figure 2 in red for pressure characteristics measurement

5 Touch performance measurement methods

5.1 General

Fundamental touch performance measurement methods are described in Clause 5. They shall be applied during the characterization of a touch sensor module to provide a good user experience. (See Annex A regarding electrical performance measurement methods of touch sensors.)

5.2 Accuracy test

5.2.1 Purpose

The purpose of this test is to measure the ability of touch sensors and modules to indicate how close touch positions are reported relative to their target positions.

5.2.2 Test procedure

5.2.2.1 General

For the accuracy measurement, one of the following two methods can be selected. The first method is a straightforward method to evaluate the distance between each target point and its corresponding reported point. The second method is an indirect method where target grid points are estimated from reported points. This method can tolerate coordinate shifts which are caused by a misalignment between the touch sensor module and the stage while setting up the measurement equipment.

5.2.2.2 Method 1

The active area is defined as the area where touch is recognized. The centre area is defined as the rest of the active area without the edge area as shown in Figure 7. The edge area is defined as an area with the width of W from the edge of the active area. The origin and axis direction shall be defined.

The touch sensor module under test shall be attached to the stage and connected to the electrical interface. The test bar of the selected diameter size, shape and material shall be