



BSI Standards Publication

Information technology – Generic cabling for customer premises

Part 1: General requirements

National foreword

This British Standard is the UK implementation of ISO/IEC 11801-1:2017, incorporating corrigendum April 2018.

The start and finish of text introduced or altered by corrigendum is indicated in the text by tags. Text altered by ISO/IEC corrigendum April 2018 is indicated in the text by AC1 AC1.

The UK participation in its preparation was entrusted to Technical Committee TCT/7, Telecommunications - Installation requirements.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2018
Published by BSI Standards Limited 2018

ISBN 978 0 539 00685 8

ICS 35.200

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 January 2018.

Amendments/corrigenda issued since publication

Date	Text affected
31 May 2018	Implementation of ISO/IEC corrigendum April 2018



ISO/IEC 11801-1

Edition 1.0 2017-11

INTERNATIONAL STANDARD

**Information technology – Generic cabling for customer premises –
Part 1: General requirements**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-5050-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	11
INTRODUCTION	13
1 Scope	15
2 Normative references	15
3 Terms, definitions, abbreviations and symbols	20
3.1 Terms and definitions	20
3.2 Abbreviations	27
3.3 Symbols	29
3.3.1 Variables	29
3.3.2 Indices	30
4 Conformance	30
5 Structure of generic cabling	31
5.1 Functional elements	31
5.2 Interfaces	32
5.3 Cabling subsystems	32
5.3.1 Cabling subsystem 1	32
5.3.2 Cabling subsystems $n \geq 2$	33
5.3.3 Common subsystems	33
5.3.4 Tie cabling	34
5.3.5 Channel and permanent link	34
6 Channel performance requirements	34
6.1 General	34
6.2 Environmental performance	34
6.2.1 General	34
6.2.2 Environmental classification	35
6.3 Balanced cabling transmission performance	37
6.3.1 General	37
6.3.2 Component choice	38
6.3.3 Channel parameters	38
6.4 Coaxial cabling transmission performance	64
6.4.1 General	64
6.4.2 Component choice	65
6.4.3 Channel parameters	65
6.5 Optical fibre cabling transmission performance	67
6.5.1 Component choice	67
6.5.2 Channel parameters	67
7 Link performance requirements	67
7.1 General	67
7.2 Balanced cabling	68
7.2.1 General	68
7.2.2 Return loss	69
7.2.3 Insertion loss/attenuation	70
7.2.4 NEXT	72
7.2.5 Attenuation to crosstalk ratio at the near-end	76
7.2.6 Attenuation to crosstalk ratio at the far-end	78

7.2.7	Direct current loop resistance	82
7.2.8	Direct current resistance unbalance	83
7.2.9	Propagation delay	83
7.2.10	Delay skew	84
7.2.11	Unbalance attenuation and coupling attenuation	86
7.2.12	Alien crosstalk	89
7.3	Coaxial cabling	94
7.3.1	General	94
7.3.2	Return loss	94
7.3.3	Insertion loss	94
7.3.4	Direct current loop resistance	95
7.3.5	DC current carrying capacity	95
7.3.6	Screening attenuation	95
7.4	Optical fibre cabling	95
8	Reference implementation for backbone cabling subsystems	96
8.1	General	96
8.2	Balanced cabling	96
8.2.1	Component choice	96
8.2.2	Dimensions	96
8.3	Optical fibre cabling	97
8.3.1	General	97
8.3.2	Component selection	98
8.3.3	Dimensions	98
9	Cable requirements	98
9.1	General	98
9.2	Operating environment	98
9.3	Balanced cables	98
9.3.1	Basic requirements	98
9.3.2	Balanced cables of Category 5 through 7 _A , 8.1 and 8.2	99
9.3.3	Balanced cables of Category BCT-B	101
9.4	Coaxial cables	103
9.4.1	General	103
9.4.2	Environmental characteristics	103
9.4.3	Mechanical characteristics	103
9.4.4	Electrical characteristics	104
9.5	Optical fibre cable (cabled optical fibres)	104
9.5.1	Mechanical and environmental characteristics	104
9.5.2	Cabled optical fibre Categories	105
10	Connecting hardware requirements	106
10.1	General requirements	106
10.1.1	Overview	106
10.1.2	Location	106
10.1.3	Design	106
10.1.4	Operating environment	107
10.1.5	Mounting	109
10.1.6	Installation practices	109
10.1.7	Marking and colour coding	110

10.2	Category 5 through 7 _A , 8.1, and 8.2 connecting hardware for balanced cabling	110
10.2.1	General	110
10.2.2	Performance marking.....	110
10.2.3	Mechanical characteristics.....	110
10.2.4	Electrical characteristics	112
10.2.5	Additional requirements	124
10.3	BCT-B connecting hardware	125
10.4	Connecting hardware for use with coaxial cabling for BCT applications.....	125
10.4.1	General requirements	125
10.4.2	Performance marking.....	125
10.4.3	Electrical characteristics	125
10.5	Optical fibre connecting hardware	126
10.5.1	General requirements	126
10.5.2	Marking and colour coding.....	127
10.5.3	Mechanical and optical characteristics	127
10.6	Connecting hardware in accordance with IEC 60603-7 series	128
10.7	Connecting hardware in accordance with IEC 61076-3-104	129
10.8	Connecting hardware in accordance with IEC 61076-2-101 (Type D, 4 poles)	129
10.9	Connecting hardware in accordance with IEC 61076-2-109 (Type X, 8 poles)	129
10.10	Connecting hardware in accordance with IEC 61169-2 and IEC 61169-24 (Type F).....	130
10.11	Connecting hardware for two optical fibres.....	130
10.12	Connecting hardware for twelve and twenty-four optical fibres	130
11	Cord requirements	131
11.1	General.....	131
11.2	Operating environment.....	131
11.3	Balanced cords of Category 5 through 7 _A , 8.1, 8.2 and BCT-B	131
11.3.1	General	131
11.3.2	Identification.....	131
11.3.3	Operating environment	132
11.3.4	Return loss	132
11.3.5	NEXT.....	132
11.4	Coaxial cords	135
11.5	Optical fibre cords.....	135
11.5.1	General	135
11.5.2	Identification	136
11.5.3	Performance requirements for patch cords	136
Annex A (normative)	Conformance testing procedures for balanced cabling of Classes A to F _A , I and II and optical fibre cabling	137
A.1	General.....	137
A.2	Channel and link performance testing	137
A.2.1	General	137
A.2.2	Conformance testing of balanced cabling channels, and links	137
A.2.3	Installation conformance testing of optical fibre cabling channels	138
A.3	Overview of test schedules	138
Annex B (normative)	Mechanical and environmental performance testing of connecting hardware for balanced cabling	141
B.1	Overview.....	141

B.2	Solderless connections	141
B.3	Free and fixed connectors (modular plugs and jacks).....	142
B.4	Other connecting hardware	143
Annex C (informative)	Electromagnetic characteristics	145
Annex D (informative)	Acronyms for balanced cables.....	146
Annex E (informative)	Supported applications	148
E.1	Supported applications for balanced cabling	148
E.2	Supported applications for optical fibre cabling	151
E.3	Supported applications for coaxial cabling	154
E.4	Supported industrial applications for optical fibre cabling	155
Annex F (informative)	Optical fibre cable OM1, OM2 and OS1	156
Bibliography		157
Figure 1 – Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25.....		14
Figure 2 – General functional elements.....		31
Figure 3 – Interconnect models.....		31
Figure 4 – Cross-connect models.....		32
Figure 5 – Equipment and test interfaces		32
Figure 6 – Link options		68
Figure 7 – Link designations		68
Figure 8 – Backbone cabling model		96
Figure 9 – Pin grouping and pair assignments for IEC 60603-7 series interface for Categories 5, 6, 6 _A and 8.1 (front view of fixed connector (jack), not to scale).....		128
Figure 10 – Pin grouping and pair assignment for the IEC 60603-7 series interface for Categories 7, 7 _A , 8.2 and BCT-B (front view of fixed connector (jack), not to scale)		129
Figure 11 – Pin grouping and pair assignments for the IEC 61076-3-104 interface for Categories 7, 7 _A , 8.2 and BCT-B (front view of fixed connector (jack), not to scale)		129
Figure 12 – Four position connector pin and pair assignments for IEC 61076-2-101 connecting hardware (front view of male connector).....		129
Figure 13 – Eight position connector pin and pair grouping assignments for IEC 61076-2-109 connecting hardware (front view of male connector r).....		130
Figure 14 – Conductor assignment of IEC 61169-2 and IEC 61169-24 (Type F) connector.....		130
Figure 15 – Optical fibre assignments for connecting hardware for two optical fibres		130
Figure 16 – Optical fibre assignments for connecting hardware for 12 and 24 optical fibres (front view of fixed or free connector)		131
Figure D.1 – Cable naming schema		146
Figure D.2 – Cable types		147
Table 1 – Channel environments.....		35
Table 2 – Details of environmental classification		36
Table 3 – Return loss for a channel		39
Table 4 – Informative return loss values for a channel at key frequencies		40
Table 5 – Insertion loss for a channel		41
Table 6 – Informative insertion loss values for a channel at key frequencies		42

Table 7 – NEXT for a channel	43
Table 8 – Informative NEXT values for a channel at key frequencies	44
Table 9 – PS NEXT for a channel	45
Table 10 – Informative PS NEXT values for a channel at key frequencies	46
Table 11 – Informative ACR-N values for a channel at key frequencies	47
Table 12 – Informative PS ACR-N values for a channel at key frequencies	48
Table 13 – ACR-F for a channel	49
Table 14 – Informative ACR-F values for a channel at key frequencies	50
Table 15 – PS ACR-F for a channel	51
Table 16 – Informative PS ACR-F values for a channel at key frequencies	52
Table 17 – DC loop resistance for a channel	52
Table 18 – Propagation delay for a channel	53
Table 19 – Informative propagation delay values for a channel at key frequencies	54
Table 20 – Delay skew for a channel	55
Table 21 – TCL for channel for unscreened channels	56
Table 22 – Informative TCL values for unscreened channels at key frequencies	56
Table 23 – TCL for Class I and II screened channels	56
Table 24 – Informative TCL values for Class I and II screened channels at key frequencies	57
Table 25 – ELTCTL for channel for unscreened channels	57
Table 26 – Informative ELTCTL values for unscreened channels at key frequencies	58
Table 27 – ELTCTL for Class I and II channels	58
Table 28 – Informative ELTCTL values for Class I and II channels at key frequencies	58
Table 29 – Coupling attenuation for a channel for screened channels	59
Table 30 – PS ANEXT for a channel	60
Table 31 – Informative PS ANEXT values for a channel at key frequencies	60
Table 32 – PS ANEXT _{avg} for a channel	61
Table 33 – Informative PS ANEXT _{avg} values for a channel at key frequencies	61
Table 34 – PS AACR-F for a channel	62
Table 35 – Informative PS AACR-F values for a channel at key frequencies	63
Table 36 – PS AACR-F _{avg} for a channel	63
Table 37 – Informative PS AACR-F _{avg} values for a channel at key frequencies	64
Table 38 – Alien crosstalk and coupling attenuation for screened channels	64
Table 39 – Return loss for a channel	65
Table 40 – Insertion loss for a channel	65
Table 41 – Informative insertion loss values for a channel at key frequencies	66
Table 42 – DC loop resistance for a channel	66
Table 43 – DC current carrying capacity for a channel	66
Table 44 – Operating voltage for a channel	66
Table 45 – Screening attenuation for a channel	67
Table 46 – Return loss for 2-connection or 3-connection link	69
Table 47 – Informative return loss values for links at key frequencies	70
Table 48 – Insertion loss for 2-connection or 3-connection link	70

Table 49 – Informative insertion loss values for links with maximum implementation at key frequencies	72
Table 50 – NEXT for 2-connection or 3-connection link	72
Table 51 – Informative NEXT values for links with maximum implementation at key frequencies	74
Table 52 – PS NEXT for 2-connection or 3-connection link	75
Table 53 – Informative PS NEXT values for links with maximum implementation at key frequencies	76
Table 54 – Informative ACR-N values for links with maximum implementation at key frequencies	77
Table 55 – Informative PS ACR-N values for links with maximum implementation at key frequencies	78
Table 56 – ACR-F for 2-connection or 3-connection link	79
Table 57 – Informative ACR-F values for links with maximum implementation at key frequencies	80
Table 58 – PS ACR-F for 2-connection or 3-connection link	81
Table 59 – Informative PS ACR-F values for links with maximum implementation at key frequencies	82
Table 60 – DC loop resistance for 2-connection or 3-connection link	82
Table 61 – Informative DC loop resistance for links with maximum implementation	83
Table 62 – Propagation delay for 2-connection or 3-connection link	84
Table 63 – Informative propagation delay values for links with maximum implementation at key frequencies	84
Table 64 – Delay skew for 2-connection or 3-connection link	85
Table 65 – Informative delay skew for links with maximum implementation	86
Table 66 – TCL for Class I and II screened permanent links	87
Table 67 – Informative TCL values for Class I and II screened permanent links at key frequencies	87
Table 68 – ELTCTL for Class I and II permanent links	88
Table 69 – Informative ELTCTL values for Class I and II permanent links at key frequencies	88
Table 70 – Coupling attenuation for a screened permanent link	89
Table 71 – Informative coupling attenuation values for screened permanent links at key frequencies	89
Table 72 – PS ANEXT for 2-connection or 3-connection link	90
Table 73 – Informative PS ANEXT values for links at key frequencies	91
Table 74 – PS ANEXT _{avg} for 2-connection or 3-connection link	91
Table 75 – Informative PS ANEXT _{avg} values for links at key frequencies	92
Table 76 – PS AACR-F for 2-connection or 3-connection link	92
Table 77 – Informative PS AACR-F values for links at key frequencies	93
Table 78 – PS AACR-F _{avg} for a 2-connection or 3-connection link	93
Table 79 – Informative PS AACR-F _{avg} values for links at key frequencies	94
Table 80 – Alien crosstalk and coupling attenuation for screened links	94
Table 81 – Insertion loss for link	95
Table 82 – Informative insertion loss values for link at key frequencies	95
Table 83 – DC loop resistance for link	95

Table 84 – Backbone link length equations	97
Table 85 – Basic requirements of balanced cables.....	99
Table 86 – Mechanical characteristics of balanced cables of Category 5, 6, 6A, 7 and 7A	99
Table 87 – Mechanical characteristics of balanced cables of Category BCT-B	102
Table 88 – Minimum transmission performance requirements BCT-B balanced pairs	102
Table 89 – Basic requirements of coaxial cables.....	103
Table 90 – Mechanical performance requirements for coaxial BCT cables	103
Table 91 – Minimum electrical performance requirements for cables of Category BCT-C	104
Table 92 – Cabled optical fibre attenuation (maximum), dB/km	105
Table 93 – Multimode optical fibre modal bandwidth	105
Table 94 – Environmental performance specifications for balanced cabling connecting hardware	107
Table 95 – Environmental performance specifications for coaxial cabling connecting hardware	108
Table 96 – Environmental performance specifications for optical fibre cabling connecting hardware.....	109
Table 97 – Mechanical characteristics of connecting hardware for use with balanced cabling.....	111
Table 98 – Matrix of backward compatible mated free and fixed connector (plug and jack) performance	113
Table 99 – Return loss	113
Table 100 – Informative return loss values for connector at key frequencies	114
Table 101 – Insertion loss.....	114
Table 102 – Informative insertion loss values for connector at key frequencies	115
Table 103 – Near-end crosstalk (NEXT).....	115
Table 104 – Informative NEXT values for connector at key frequencies	116
Table 105 – Power sum near-end crosstalk (PS NEXT) (for information only)	116
Table 106 – Informative PS NEXT values for connector at key frequencies	117
Table 107 – Far-end crosstalk (FEXT)	117
Table 108 – Informative FEXT values for connector at key frequencies.....	118
Table 109 – Power sum far-end crosstalk (PS FEXT) (for information only).....	118
Table 110 – Informative PS FEXT values for connector at key frequencies	119
Table 111 – Input to output resistance	119
Table 112 – Input to output resistance unbalance	119
Table 113 – DC current carrying capacity	119
Table 114 – Propagation delay	120
Table 115 – Delay skew.....	120
Table 116 – Transverse conversion loss (TCL)	120
Table 117 – Informative TCL values for connector at key frequencies	121
Table 118 – Transverse conversion transfer loss (TCTL)	121
Table 119 – Informative TCTL values for connector at key frequencies	121
Table 120 – Transfer impedance (screened connectors only).....	122

Table 121 – Informative transfer impedance values (screened connectors only) at key frequencies.....	122
Table 122 – Coupling attenuation (screened connectors only)	122
Table 123 – Informative coupling attenuation values (screened connectors only) at key frequencies.....	122
Table 124 – Insulation resistance.....	123
Table 125 – Voltage proof.....	123
Table 126 – Power sum alien near-end crosstalk (PS ANEXT).....	123
Table 127 – Informative PS ANEXT values at key frequencies	123
Table 128 – Power sum alien far-end crosstalk (PS AFEXT)	124
Table 129 – Informative PS AFEXT values at key frequencies	124
Table 130 – Coupling attenuation for BCT-B connecting hardware	125
Table 131 – Formulae for return loss limits for BCT-C connecting hardware	125
Table 132 – Return loss limits for BCT-C connecting hardware at key frequencies.....	126
Table 133 – Formulae for insertion loss limits for BCT-C connecting hardware	126
Table 134 – Insertion loss limits for BCT-C connecting hardware at key frequencies.....	126
Table 135 – Screening attenuation limits for BCT-C connecting hardware.....	126
Table 136 – Attenuation of connecting hardware for optical fibre	127
Table 137 – Return loss of optical fibre connecting hardware.....	127
Table 138 – Electrical characteristics of terminal equipment outlets intended for use with balanced cabling	128
Table 139 – Minimum return loss for balanced cords	132
Table 140 – Informative values of return loss for balanced cords at key frequencies.....	132
Table 141 – Assumptions for cabling components used in the calculation of NEXT informative values.....	134
Table 142 – Informative values of NEXT for 2 m balanced cords at key frequencies	134
Table 143 – Informative values of NEXT for 5 m balanced cords at key frequencies	135
Table 144 – Informative values of NEXT for 10 m balanced cords at key frequencies	135
Table A.1 – Test regime for reference conformance and installation conformance – Balanced cabling of Classes A through F _A , BCT-B, I and II.....	139
Table A.2 – Test regime for reference conformance and installation conformance – Optical fibre cabling	140
Table B.1 – Standards for solderless connections	141
Table B.2 – Standards for free and fixed connectors (modular plugs and jacks).....	142
Table B.3 – Standards for M12 style connectors	142
Table B.4 – Free and fixed connectors (modular plugs and jacks) operations matrix	143
Table B.5 – Reference for reliability testing of other connecting hardware.....	143
Table B.6 – Other connecting hardware operations matrix	144
Table E.1 – Applications using balanced cabling.....	149
Table E.2 – Industrial applications using balanced cabling.....	150
Table E.3 – Modular connector pin assignment for applications	151
Table E.4 – Maximum channel attenuation for supported applications using optical fibre cabling.....	152
Table E.5 – Maximum channel lengths supported by optical fibre applications for multimode optical fibre	153

Table E.6 – Maximum channel length supported by optical fibre applications for single-mode optical fibre	154
Table E.7 – Supported BCT applications using balanced cabling	154
Table E.8 – Supported BCT applications using coaxial cabling	155
Table E.9 – Supported applications and maximum channel lengths with cabled multimode optical fibres	155
Table E.10 – Supported applications and maximum channel lengths with cabled all-silica single-mode optical fibres	155
Table F.1 – Grandfathered OM1, OM2 and OS1 specifications.....	156
Table F.2 – Supported applications and maximum channel lengths with cabled all-silica multimode optical fibres	156
Table F.3 – Supported applications and maximum channel lengths with cabled all-silica singlemode optical fibres.....	156

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 1: General requirements

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.
- 3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 11801-1 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This first edition, together with ISO/IEC 11801-2, cancels and replaces ISO/IEC 11801:2002, Amendment 1:2008 and Amendment 2:2010. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) standard re-structured to contain those elements and requirements, that are common to generic cabling systems (in application fields such as offices and industrial premises), namely requirements for common elements of topology and transmission performance of channels, links and related components;
- b) addition of balanced cabling channel and link Classes BCT-B, I and II;
- c) addition of coaxial cabling channel and link Class BCT-C;
- d) addition of balanced cabling component requirements for  Categories BCT-B, 8.1 and 8.2; 

- e) addition of coaxial cabling component requirements for Category BCT-C;
- f) AC1 addition of cabled optical fibre Categories OS1a and OM5; AC1
- g) removal of AC1 optical fibre classes; AC1
- h) AC1 cabled optical fibre Categories OM1, OM2 and OS1 have been moved to an informative annex. AC1

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the ISO/IEC 11801 series, published under the general title *Information technology – Generic cabling for customer premises*, can be found on the IEC website.

The contents of the corrigendum of April 2018 have been included in this copy.

INTRODUCTION

AC1 This document contains general requirements in support of the other premises-specific referenced cabling design documents developed by ISO/IEC JTC 1/SC 25 including ISO/IEC 11801-2, ISO/IEC 11801-3, ISO/IEC 11801-4, ISO/IEC 11801-5, ISO/IEC 11801-6, related Technical Specifications and Technical Reports (including the ISO/IEC TR 11801-99xx series, ISO/IEC TR 24704, ISO/IEC TR 24750 and ISO/IEC TS 29125). **AC1**

This document specifies a multi-vendor cabling system which may be implemented with material from single or multiple sources, and is related to:

- a) International Standards for cabling components developed by technical committees of the IEC, for example copper cables and connectors as well as optical fibre cables and connectors (see Clause 2 and bibliography);
- b) standards for the testing of installed cabling (see Clause 2 and bibliography);
- c) applications developed by technical committees of the IEC, by subcommittees of ISO/IEC JTC 1, by study groups of ITU-T, for example for LANs and ISDN, and by IEEE 802;
- d) planning and installation guides and other standards which take into account the needs of specific applications for the configuration and the use of cabling systems on customer premises (e.g. ISO/IEC 14709 series, ISO/IEC 14763 series, ISO/IEC 30129, and ISO/IEC 18598).

Physical layer requirements for the applications listed in Annex E have been analysed to determine their compatibility with cabling classes specified in this document. These application requirements, together with statistics concerning premises-specific topologies and cabling models of the supported standards, have been used to develop the requirements for balanced, coaxial and optical fibre cabling.

As a result, generic cabling defined within this document:

- 1) specifies balanced cabling channel and link Classes A, B, C, D, E, E_A, F, F_A, I and II meeting both the requirements of standardized applications and to support the development and implementation of future applications;
- 2) specifies balanced cabling channel and link Class BCT-B to support the delivery of BCT applications;
- 3) specifies coaxial cabling channel and link Class BCT-C to support the delivery of BCT applications;
- 4) specifies optical fibre cabling meeting the requirements of standardized applications and exploiting component capabilities to ease the implementation of applications developed in the future;
- 5) invokes component requirements and specifies cabling implementations that ensure performance of links and of channels that meet or exceed the requirements for cabling classes.

Figure 1 shows the schematic and contextual relationships between the standards relating to information technology cabling produced by ISO/IEC JTC 1/SC 25, namely the ISO/IEC 11801 series of standards for generic cabling design, standards for the installation, operation and administration of generic cabling and for testing of installed generic cabling.

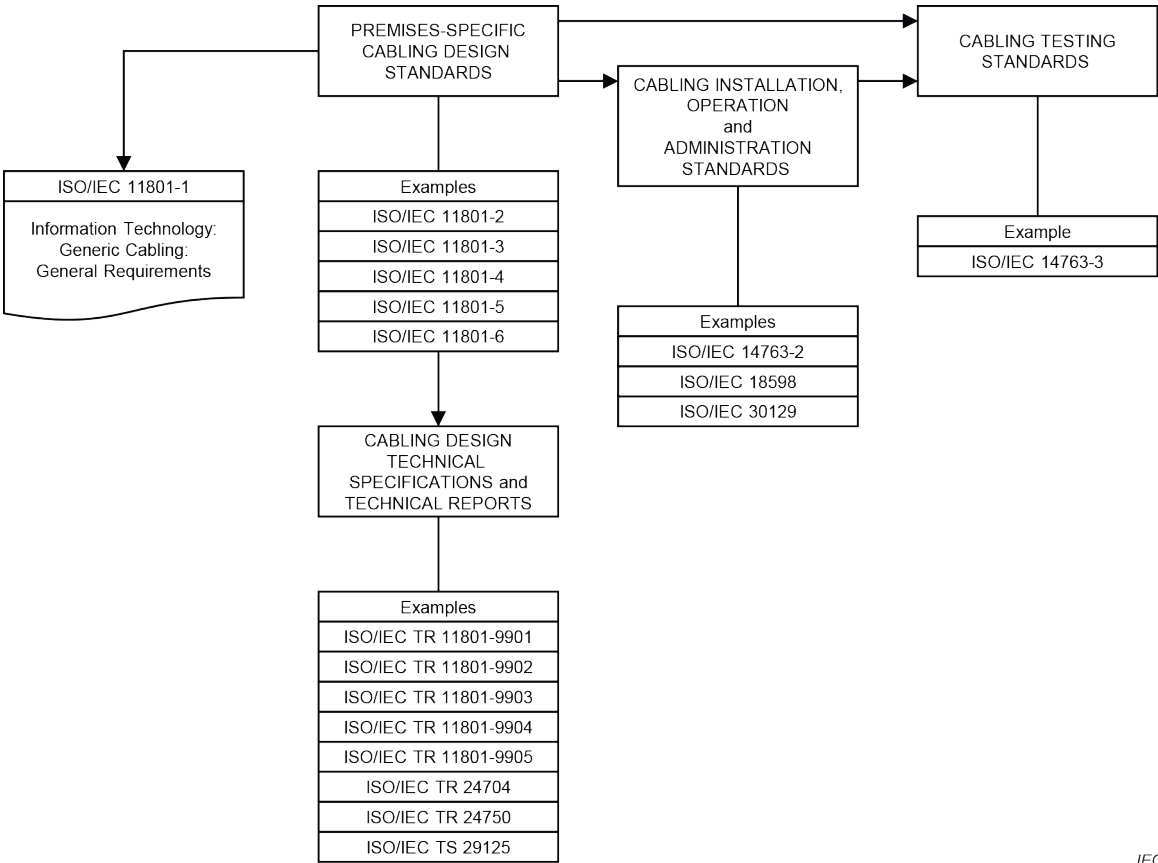


Figure 1 – Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25

This document refers to International Standards for components and test methods wherever appropriate International Standards are available.

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 1: General requirements

1 Scope

This part of ISO/IEC 11801 specifies requirements that are common to the other parts of the ISO/IEC 11801 series. Cabling specified by this document supports a wide range of services including voice, data, and video that may also incorporate the supply of power.

This document specifies:

- a) the fundamental structure and configuration of generic cabling requirements within the types of premises defined by the other parts of the ISO/IEC 11801 series,
- b) channel transmission and environmental performance requirements,
- c) link performance requirements,
- d) backbone cabling reference implementations in support of the parts of the ISO/IEC 11801 series,
- e) component performance requirements, referring to available International Standards for components and test methods where appropriate,
- f) test procedures to verify conformance to the cabling transmission performance requirements of the ISO/IEC 11801 series.

NOTE This document does not contain specific conformance requirements. The cabling design documents supported by ISO/IEC 11801-1 incorporate the requirements of this document as part of their individual conformance requirements.

In addition, this document provides information regarding the applications supported by the cabling channels.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60352-2, *Solderless connections – Part 2: Crimped connections – General requirements, test methods and practical guidance*

IEC 60352-3, *Solderless connections – Part 3: Solderless accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-4, *Solderless connections – Part 4: Solderless non-accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-5, *Solderless connections – Part 5: Press-in connections – General requirements, test methods and practical guidance*

IEC 60352-6, *Solderless connections – Part 6: Insulation piercing connections – General requirements, test methods and practical guidance*

IEC 60352-7, *Solderless connections – Part 7: Spring clamp connections – General requirements, test methods and practical guidance*

IEC 60352-8, *Solderless connections – Part 8: Compression mount connections – General requirements, test methods and practical guidance*

IEC 60512-4-1, *Connectors for electronic equipment – Tests and measurements – Part 4-1: Voltage stress tests – Test 4a: Voltage proof*

IEC 60512-4-2, *Connectors for electronic equipment – Tests and measurements – Part 4-2: Voltage stress tests – Test 4b: Partial discharge*

IEC 60512-6-2, *Connectors for electronic equipment – Tests and measurements – Part 6-2: Dynamic stress tests – Test 6b: Bump*

IEC 60512-6-3, *Connectors for electronic equipment – Tests and measurements – Part 6-3: Dynamic stress tests – Test 6c: Shock*

IEC 60512-6-4, *Connectors for electronic equipment – Tests and measurements – Part 6-4: Dynamic stress tests – Test 6d: Vibration (sinusoidal)*

IEC 60512-11-4, *Connectors for electronic equipment – Tests and measurements – Part 11-4: Climatic tests – Test 11d: Rapid change of temperature*

IEC 60512-11-7, *Connectors for electronic equipment – Tests and measurements – Part 11-7: Climatic tests – Test 11g: Flowing mixed gas corrosion test*

IEC 60512-11-9, *Connectors for electronic equipment – Tests and measurements – Part 11-9: Climatic tests – Test 11i: Dry heat*

IEC 60512-11-10, *Connectors for electronic equipment – Tests and measurements – Part 11-10: Climatic tests – Test 11j: Cold*

IEC 60512-11-12, *Connectors for electronic equipment – Tests and measurements – Part 11-12: Climatic tests – Test 11m: Damp heat, cyclic*

IEC 60512-16-4, *Connectors for electronic equipment – Tests and measurements – Part 16-4: Mechanical tests on contacts and terminations – Test 16d: Tensile strength (crimped connections)*

IEC 60512-17-4, *Connectors for electronic equipment – Tests and measurements – Part 17-4: Cable clamping tests – Test 17d: Cable clamp resistance to cable torsion*

IEC 60512-19-3, *Electromechanical components for electronic equipment – Basic testing procedures and measuring methods – Part 19: Chemical resistance tests – Section 3: Test 19c – Fluid resistance*

IEC 60512-23-3, *Electromechanical components for electronic equipment – Basic testing procedures and measuring methods – Part 23-3: Test 23c: Shielding effectiveness of connectors and accessories*

IEC 60512-99-001, *Connectors for electronic equipment – Tests and measurements – Part 99-001: Test schedule for engaging and separating connectors under electrical load – Test 99a: Connectors used in twisted pair communication cabling with remote power*

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 60603-7, *Connectors for electronic equipment – Part 7: Detail specification for 8-way, unshielded, free and fixed connectors*

IEC 60603-7-1, *Connectors for electronic equipment – Part 7-1: Detail specification for 8-way, shielded, free and fixed connectors*

IEC 60603-7-2, *Connectors for electronic equipment – Part 7-2: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 100 MHz*

IEC 60603-7-3, *Connectors for electronic equipment – Part 7-3: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 100 MHz*

IEC 60603-7-4, *Connectors for electronic equipment – Part 7-4: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*

IEC 60603-7-5, *Connectors for electronic equipment – Part 7-5: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*

IEC 60603-7-7, *Connectors for electronic equipment – Part 7-7: Detail specification for 8-way, shielded, free and fixed connectors for data transmission with frequencies up to 600 MHz*

IEC 60603-7-41, *Connectors for electronic equipment – Part 7-41: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 500 MHz*

IEC 60603-7-51, *Connectors for electronic equipment – Part 7-51: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 500 MHz*

IEC 60603-7-71, *Connectors for electronic equipment – Part 7-71: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 1 000 MHz*

IEC 60603-7-81, *Connectors for electronic equipment – Part 7-81: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 2 000 MHz*

IEC 60603-7-82, *Connectors for electronic equipment – Part 7-82: Detail specification for 8-way, 12 contacts, shielded, free and fixed connectors, for data transmission with frequencies up to 2 000 MHz*

IEC 60793-1-40, *Optical fibres – Part 1-40: Measurement methods and test procedures – Attenuation*

IEC 60793-2-10, *Optical fibres – Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres*

IEC 60793-2-50, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

IEC 60794-1-21, *Optical fibre cables – Part 1-21: Generic specification – Basic optical cable test procedures – Mechanical test methods*

IEC 60794-1-22, *Optical fibre cables – Part 1-22: Generic specification – Basic optical cable test procedures – Environmental test methods*

IEC 60794-2, *Optical fibre cables – Part 2: Indoor cables – Sectional specification*

IEC 60794-2-51, *Optical fibre cables – Part 2-51: Indoor cables – Detail specification for simplex and duplex cables for use in cords for controlled environment*

IEC 60794-3, *Optical fibre cables – Part 3: Outdoor cables – Sectional specification*

IEC 60794-5, *Optical fibre cables – Part 5: Sectional specification – Microduct cabling for installation by blowing*

IEC 60966-2-4, *Radio frequency and coaxial cable assemblies – Part 2-4: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 3 000 MHz, IEC 61169-2 connectors*

IEC 60966-2-5, *Radio frequency and coaxial cable assemblies – Part 2-5: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 1 000 MHz, IEC 61169-2 connectors*

IEC 60966-2-6, *Radio frequency and coaxial cable assemblies – Part 2-6: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 3000 MHz, IEC 61169-24 connectors*

IEC 61076-2-101, *Connectors for electronic equipment – Product requirements – Part 2-101: Circular connectors – Detail specification for M12 connectors with screw-locking*

IEC 61076-2-109, *Connectors for electronic equipment – Product requirements – Part 2-109: Circular connectors – Detail specification for connectors with M 12 × 1 screw-locking, for data transmission frequencies up to 500 MHz*

IEC 61076-3-104, *Connectors for electrical and electronic equipment – Product requirements – Part 3-104: Detail specification for 8-way, shielded free and fixed connectors for data transmissions with frequencies up to 2000 MHz*

IEC 61076-3-106, *Connectors for electronic equipment – Product requirements – Part 3-106: Rectangular connectors – Detail specification for protective housings for use with 8-way shielded and unshielded connectors for industrial environments incorporating the IEC 60603-7 series interface*

IEC 61076-3-110, *Connectors for electronic equipment – Product requirements – Part 3-110: Detail specification for shielded, free and fixed connectors for data transmission with frequencies up to 3000 MHz*

IEC 61156 (all parts), *Multicore and symmetrical pair/quad cables for digital communications*

IEC 61156-1, *Multicore and symmetrical pair/quad cables for digital communications – Part 1: Generic specification*

IEC 61156-2, *Multicore and symmetrical pair/quad cables for digital communications – Part 2: Symmetrical pair/quad cables with transmission characteristics up to 100 MHz – Horizontal floor wiring – Sectional specification*

IEC 61156-3, *Multicore and symmetrical pair/quad cables for digital communications – Part 3: Work area cable – Sectional specification*

IEC 61156-4, *Multicore and symmetrical pair/quad cables for digital communications – Part 4: Riser cables – Sectional specification*

IEC 61156-5:2009, *Multicore and symmetrical pair/quad cables for digital communications – Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Horizontal floor wiring – Sectional specification*

IEC 61156-5:2009/AMD1:2012

IEC 61156-5-1, *Multicore and symmetrical pair/quad cables for digital communications – Part 5-1: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Horizontal floor wiring – Blank detail specification*

IEC 61156-6, *Multicore and symmetrical pair/quad cables for digital communications – Part 6: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Work area wiring – Sectional specification*

IEC 61156-6-1, *Multicore and symmetrical pair/quad cables for digital communications – Part 6-1: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Work area wiring – Blank detail specification*

IEC 61156-7, *Multicore and symmetrical pair/quad cables for digital communications – Part 7: Symmetrical pair cables with transmission characteristics up to 1200 MHz – Sectional specification for digital and analog communication cables*

IEC 61156-9:2016, *Multicore and symmetrical pair/quad cables for digital communications – Part 9: Cables for channels with transmission characteristics up to 2 GHz – Sectional specification*

IEC 61156-10, *Multicore and symmetrical pair/quad cables for digital communications – Part 10: Cables for cords with transmission characteristics up to 2 GHz – Sectional specification*

IEC 61169-2, *Radio-frequency connectors – Part 2: Sectional specification – Radio frequency coaxial connectors of type 9,52*

IEC 61169-24, *Radio-frequency connectors – Part 24: Sectional specification – Radio frequency coaxial connectors with screw coupling, typically for use in 75 Ω cable networks (type F)*

IEC 61196-1, *Coaxial communication cables – Part 1: Generic specification – General, definitions and requirements*

IEC 61196-6, *Coaxial communication cables – Part 6: Sectional specification for CATV drop cables*

IEC 61196-7, *Coaxial communication cables – Part 7: Sectional specification for cables for BCT cabling in accordance with ISO/IEC 15018 – Indoor drop cables for systems operating at 5 MHz – 3 000 MHz*

IEC 61300-2-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-1: Tests – Vibration (sinusoidal)*

IEC 61300-2-4, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-4: Tests – Fibre/cable retention*

IEC 61300-2-5, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-5: Tests – Torsion*

IEC 61300-2-9, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-9: Tests – Shock*

IEC 61300-2-18, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-18: Tests – Dry heat – High temperature endurance*

IEC 61300-2-22, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-22: Tests – Change of temperature*

IEC 61300-2-34, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-34: Tests – Resistance to solvents and contaminating fluids of interconnecting components and closures*

IEC 61300-2-44, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-44: Tests – Flexing of the strain relief of fibre optic devices*

IEC 61300-2-46, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-46: Tests – Damp heat, cyclic*

IEC 61753-1, *Fibre optic interconnecting devices and passive components – Performance standard – Part 1: General and guidance for performance standards*

IEC 61753-021-2, *Fibre optic interconnecting devices and passive components – Performance standard – Part 021-2: Grade C/3 single-mode fibre optic connectors for category C – Controlled environment*

IEC 61753-022-2, *Fibre optic interconnecting devices and passive components – Performance standard – Part 022-2: Fibre optic connectors terminated on multimode fibre for category C – Controlled environment*

IEC 61754 (all parts), *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces*

IEC 61754-20-100, *Fibre optic interconnecting devices and passive components – Part 20-100: Interface standard for LC connectors with protective housings related to IEC 61076-3-106*

IEC 61935-1, *Specification for the testing of balanced and coaxial information technology cabling – Part 1: Installed balanced cabling as specified in ISO/IEC 11801 and related standards*

IEC 61935-2, *Specification for the testing of balanced and coaxial information technology cabling – Part 2: Cords as specified in ISO/IEC 11801 and related standards*

IEC 62012-1, *Multicore and symmetrical pair/quad cables for digital communications to be used in harsh environments – Part 1: Generic specification*

IEC 62664-1-1, *Fibre optic interconnecting devices and passive components – Fibre optic connector product specifications – Part 1-1: LC-PC duplex multimode connectors terminated on IEC 60793-2-10 category A1a fibre*

ISO 4892-1, *Plastics – Methods of exposure to laboratory light sources – Part 1: General guidance*

ISO 4892-2, *Plastics – Methods of exposure to laboratory light sources – Part 2: Xenon-arc lamps*

ISO/IEC 14763-2, *Information technology – Implementation and operation of customer premises cabling – Part 2: Planning and installation*

ISO/IEC 14763-3, *Information technology – Implementation and operation of customer premises cabling – Part 3: Testing of optical fibre cabling*

3 Terms, definitions, abbreviations and symbols

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1

administration

methodology defining the documentation requirements of a cabling system and its containment, the labelling of functional elements and the process by which moves, additions and changes are recorded

3.1.2

alien crosstalk

signal coupling from a disturbing pair of a channel to a disturbed pair of another channel

Note 1 to entry: This also applies to the signal coupling from a disturbing pair within a link or component, used to create a channel, to a disturbed pair within a link or component, used to create another channel.

Note 2 to entry: This is also known as exogenous crosstalk.

3.1.3

alien far-end crosstalk loss

signal coupling between a disturbing pair of a channel and a disturbed pair of another channel, measured at the far-end

Note 1 to entry: This also applies to the measurement of the signal coupling between a disturbing pair within a link or component, used to create a channel, and a disturbed pair within a link or component, used to create another channel.

Note 2 to entry: This is also known as exogenous far-end crosstalk loss.

3.1.4

alien near-end crosstalk loss

signal coupling between a disturbing pair of a channel and a disturbed pair of another channel, measured at the near-end

Note 1 to entry: This also applies to the measurement of signal coupling between a disturbing pair within a link or component, used to create a channel, and a disturbed pair within a link or component, used to create another channel.

Note 2 to entry: This is also known as exogenous near-end crosstalk loss.

3.1.5

application

system, including its associated transmission and power feeding method, which is supported by telecommunications cabling

3.1.6

attenuation

decrease in magnitude of power of a signal in transmission between points

Note 1 to entry: Attenuation indicates the total losses on cable, expressed as the ratio of power output to power input.

3.1.7

attenuation to alien crosstalk ratio at the far-end

difference, in decibels, between the alien far-end crosstalk loss from a disturbing pair of a channel and the insertion loss of a disturbed pair in another channel

Note 1 to entry: This also applies to the calculation using the alien far-end crosstalk loss from a disturbing pair within a link or component, used to create a channel, and the insertion loss of a disturbed pair within a link or component, used to create another channel.

Note 2 to entry: This is also known as attenuation to exogenous crosstalk ratio at the far-end.

3.1.8

attenuation to crosstalk ratio at the far-end

difference, in decibels, between the far-end crosstalk loss from a disturbing pair of a channel and the insertion loss of a disturbed pair of the same channel

Note 1 to entry: This also applies to the calculation using the far-end crosstalk loss from a disturbing pair within a link or component, used to create a channel, and the insertion loss of a disturbed pair within the link or component, of the same channel.

3.1.9

attenuation to crosstalk ratio at the near-end

difference, in decibels, between the near-end crosstalk loss from a disturbing pair of a channel and the insertion loss of a disturbed pair of the same channel

Note 1 to entry: This also applies to the calculation using the near-end crosstalk loss from a disturbing pair within a link or component, used to create a channel, and the insertion loss of a disturbed pair within the link or component, of the same channel.

3.1.10

average power sum alien near-end crosstalk loss

calculated average of the power sum alien near-end crosstalk loss of the pairs of a disturbed channel

Note 1 to entry: This also applies to the calculation using the pairs within a link used to create a channel.

Note 2 to entry: This is also known as average power sum exogenous near-end crosstalk loss.

3.1.11

average power sum attenuation to alien crosstalk ratio far-end

calculated average of the power sum attenuation to alien crosstalk ratio at the far-end of the pairs of a disturbed channel

Note 1 to entry: This also applies to the calculation using the pairs within a link used to create a channel.

Note 2 to entry: This is also known as average power sum attenuation to exogenous crosstalk ratio far-end.

3.1.12

balanced cable

cable consisting of one or more metallic symmetrical cable elements (twisted pairs or quads)

3.1.13

broadcast and communications technologies

group of applications including radio and TV

3.1.14

building backbone cable

fixed cable connecting distributors within the building backbone cabling subsystem

3.1.15

building distributor

distributor in which the building backbone cable(s) terminate(s) and at which connections to the campus backbone cable(s) may be made

3.1.16

building entrance facility

facility that provides all necessary mechanical and electrical services and which complies with all relevant regulations, for the entry of telecommunications cables into a building

3.1.17

cable

assembly of one or more cable units in an overall sheath

3.1.18

cable element

smallest construction unit in a cable

EXAMPLE Balanced pair, quad, single fibre, or coaxial pair.

3.1.19

cable sharing

using a single cable to support the simultaneous transmission of more than one application

3.1.20

cable unit

single assembly of one or more cable elements of the same type

Note 1 to entry: The cable unit may have a screen.

3.1.21

cabling

system of telecommunications cables, cords and connecting hardware that supports the connection of information technology equipment

3.1.22

cabling design document

relevant International Standard or Technical Report for cabling design developed by ISO/IEC JTC 1/SC 25

3.1.23

campus

premises containing one or more buildings

3.1.24

campus backbone cable

fixed cable connecting distributors within the campus backbone cabling subsystem

3.1.25

campus distributor

distributor from which the campus backbone cabling starts

3.1.26

channel

transmission path connecting any two pieces of application-specific equipment

3.1.27

centralized optical fibre cabling

cabling technique that creates a combined backbone/horizontal channel from the equipment areas to the centralized cross-connect or interconnect by allowing the use of pull-through cables or splices

3.1.28

coaxial pair

uniform transmission line consisting of two cylindrical conductors with the same axis

[SOURCE: IEC 60050-704:1993, 704-02-05]

3.1.29

connecting hardware

device or combination of devices used to connect cables or cable elements

3.1.30

connection

mated device or combination of devices including terminations used to connect cables or cable elements to other cables, cable elements or application-specific equipment

3.1.31

connector

component normally attached to a cable or mounted on a piece of apparatus (excluding an adapter) for joining separable parts of a cabling system

3.1.32

3.1.33

consolidation point

connection point in the horizontal cabling subsystem between a floor distributor and a terminal equipment outlet

3.1.34

consolidation point cord

cabling between the consolidation point and the terminal equipment outlet(s)

3.1.35

consolidation point link

part of the permanent link between the floor distributor and the consolidation point, including the connecting hardware at each end

3.1.36

cord

cable, cable unit or cable element with a minimum of one termination

3.1.37

coupling attenuation

ratio, in decibels, of the differential power in the signal pairs to the power generated by the excited common mode currents

3.1.38

cross-connect

passive connection between cabling subsystems using a patch cord or jumper

3.1.39

cross-connection

connection by means of a cross-connect

3.1.40

data centre

structure, or group of structures, dedicated to the centralized accommodation, interconnection and operation of information technology and network telecommunications equipment providing data storage, processing and transport services, together with all the facilities and infrastructures for power distribution and environmental control, together with the necessary levels of resilience and security required to provide the desired service availability

Note 1 to entry: A structure can consist of multiple buildings and/or spaces with specific functions to support the primary function.

Note 2 to entry: The boundaries of the structure or space considered to be the data centre which includes the information and communication technology equipment and supporting environmental controls can be defined within a larger structure or building.

[SOURCE: ISO/IEC 30134-1:2016, 3.1.4]

3.1.41
distributor

functional element enabling the termination and connection of cabling subsystems to other cabling subsystems or transmission equipment

3.1.42
equipment cord

cord connecting one end of the cabling subsystem in a distributor to transmission equipment

3.1.43
equipment interface

point at which application-specific equipment can be connected to the generic cabling or network access cabling

3.1.44
external network interface

termination point providing demarcation of external telecommunications service provision

3.1.45
fixed connector

balanced cabling jack, coaxial adapter (integrated with or housing a coaxial free connector), or optical fibre adapter (integrated with or housing an optical fibre free connector)

3.1.46
free connector

balanced, coaxial, or optical fibre cabling plug

3.1.47
functional performance

level of transmission performance that is able to support the intended Class of applications

3.1.48
generic cabling

structured telecommunications cabling system, capable of supporting a wide range of standardized applications

3.1.49
hybrid cable

assembly of two or more cable units of different types in an overall sheath

3.1.50
information and communications technologies

group of applications using information and communications (telecommunications) technologies

3.1.51
information technologies
telecommunications

technology concerned with the transmission, emission and reception of signs, signals, writing, images and sounds by cable, radio, optical or other electromagnetic systems

3.1.52
insertion loss

loss incurred by inserting a device between a source and load of equal impedance

Note 1 to entry: The device itself may have a different impedance from the load and source impedance.

Note 2 to entry: The terms operational attenuation or operational insertion loss are sometimes associated with this definition.

3.1.53

insertion loss deviation

difference between the measured insertion loss of cascaded components and the insertion loss determined by the sum of the individual component insertion losses

3.1.54

interconnect

passive connection to a cabling subsystem not using a patch cord or jumper

3.1.55

interface

point at which connections are made to the generic cabling

3.1.56

jack

balanced cabling socket connector

3.1.57

jumper

cable, cable unit or cable element without connectors used for a cross-connection

3.1.58

keying

mechanical feature of a connector system, which guarantees polarization or prevents the connection to an incompatible socket or optical fibre adapter

3.1.59

link

transmission path between two cabling system interfaces, including the connections at each end

3.1.60

longitudinal conversion loss

logarithmic ratio, expressed in decibels, of the common mode injected signal at the near-end to the resultant differential signal at the near-end of a balanced pair

3.1.61

longitudinal conversion transfer loss

logarithmic ratio, expressed in decibels, of the common mode injected signal at the near-end to the resultant differential signal at the far-end of a balanced pair

3.1.62

multi-unit cable

balanced cable containing more than four pairs

3.1.63

network access cable

cable connecting an external network interface to a generic cabling distributor

3.1.64

operating temperature

stabilized temperature of the local environment, measured on the outside sheath of the cable, combining ambient temperature with any increase due to the application being supported

3.1.65

optical fibre cable

cable comprising one or more optical fibre cable elements

3.1.66

pair

two conductors of a balanced transmission line

EXAMPLE Twisted pair cable element or one side circuit in a quad cable element.

3.1.67

patch cord

cord used for a cross-connection

3.1.68

patch panel

panel at a distributor presenting the interface(s) of cabling subsystems to facilitate administrative moves and changes using patch cords or jumpers

Note 1 to entry: The panel also enables interfaces to be connected to transmission equipment using interconnect cords.

3.1.69

permanent link

transmission path between distributors or between distributor 1 and the terminal equipment outlet including the connections at both ends

Note 1 to entry: The permanent link does not include TE area cords, equipment cords, patch cords and jumpers, but includes the connection at each end. It can include an optional consolidation point.

3.1.70

power sum alien far-end crosstalk loss

power sum of the signal coupling between multiple disturbing pairs of one or more channels, links or components and a disturbed pair of another channel, link or component, measured at the far-end

Note 1 to entry: This is also known as power sum exogenous far-end crosstalk loss.

3.1.71

power sum alien near-end crosstalk loss

power sum of the signal coupling between multiple disturbing pairs of one or more channels, links or components and a disturbed pair of another channel, link or component, measured at the near-end

Note 1 to entry: This is also known as power sum exogenous near-end crosstalk loss.

3.1.72

power sum attenuation to alien crosstalk ratio at the far-end

difference, in decibels, between the power sum alien far-end crosstalk loss from multiple disturbing pairs of one or more channels, links or components and the insertion loss of a disturbed pair in another channel, link or component

Note 1 to entry: This is also known as power sum attenuation to exogenous crosstalk ratio at the far-end.

3.1.73

power sum attenuation to crosstalk ratio at the far-end

difference, in decibels, between the power sum far-end crosstalk loss from multiple disturbing pairs of a channel, link or component and the insertion loss of a disturbed pair in the same channel, link or component

3.1.74

power sum attenuation to crosstalk ratio at the near-end

difference, in decibels, between the power sum near-end crosstalk loss from multiple disturbing pairs of a channel, link or component and the insertion loss of a disturbed pair in the same channel, link or component

3.1.75

quad

cable element that comprises four insulated conductors twisted together

Note 1 to entry: Two diametrically facing conductors form a transmission pair also referred to as a side circuit.

3.1.76

requirement to be met by design

requirement which may be met by calculation and selection of appropriate materials and installation techniques, where either there is no test method specified that allows verification or there is no requirement for verification by testing

3.1.77

screened balanced cable

balanced cable with an overall screen and/or screens for the individual elements

3.1.78

side circuit

two diametrically facing conductors in a quad that form a pair

3.1.79

splice

joining of conductors or optical fibres, generally from separate sheaths

3.1.80

telecommunications outlet

terminal equipment outlet

fixed connecting device which provides an interface to the terminal equipment

Note 1 to entry: The term telecommunications outlet is used in some of the other parts of the ISO/IEC 11801 series, while the term terminal equipment outlet is used in this document.

3.1.81

terminal equipment

equipment at an outlet used to access information provided by transmission equipment

3.1.82

test interface

location where a connection between test equipment and the cabling to be tested occurs

3.1.83

tie cables

optional fixed cables connecting distributors of the same hierarchical level which are installed in addition to the basic hierarchical topology

3.1.84

transmission equipment

active equipment used to distribute information from distributors to other distributors and to outlets

3.1.85

transverse conversion loss

ratio between the common mode signal power and the injected differential mode signal power

3.1.86

twisted pair

cable element that consists of two insulated conductors twisted together in a determined fashion to form a balanced transmission line

3.1.87

unscreened balanced cable

balanced cable without any screens

3.2 Abbreviations

AACR-F	attenuation to alien crosstalk ratio at the far-end
AC	alternating current
ACR	attenuation to crosstalk ratio
ACR-F	attenuation to crosstalk ratio at the far-end

ACR-N	attenuation to crosstalk ratio at the near-end
AFEXT	alien far-end crosstalk (loss)
ANEXT	alien near-end crosstalk (loss)
APC	angled physical contact
ATM	asynchronous transfer mode
BCT	broadcast and communications technologies, sometimes referred to as HEM (home entertainment & multimedia)
BD	building distributor
BEF	building entrance facility
B-ISDN	broadband ISDN
BO	broadcast outlet
	connection
CATV	community antenna television
CD	campus distributor
CP	consolidation point
CSMA/CD	carrier sense multiple access with collision detection
DAB	digital audio broadcasting
DC	direct current
DCE	data circuit terminating equipment
DRL	distributed return loss
DTE	data terminal equipment
DVB	digital video broadcasting
DVB-C	digital video broadcasting – cable
DVB-S	digital video broadcasting – satellite
DVB-T	digital video broadcasting – terrestrial
EI	equipment interface
ELTCTL	equal level TCTL
EMC	electromagnetic compatibility
EO	equipment outlet
EQP	transmission equipment
FEXT	far-end crosstalk (loss)
ffs	for further study
FOIRL	fibre optic inter-repeater link
IC	integrated circuit
ICT	information and communications technology
IDC	insulation displacement connection
IEC	International Electrotechnical Commission
IL	insertion loss
ILD	insertion loss deviation
IPC	insulation piercing connection
ISDN	integrated services digital network
ISO	International Organization for Standardization
IT	information technology

JTC	joint technical committee
LAN	local area network
LCL	longitudinal to differential conversion loss
LCTL	longitudinal to differential conversion transfer loss
LDP	local distribution point
Min.	minimum
N/A	not applicable
NEXT	near-end crosstalk (loss)
OF	optical fibre
PC	physical contact
PL	permanent link
PMD	physical media dependent sublayer
PS AACR-F	power sum attenuation to alien crosstalk ratio at the far-end
PS AACR-F _{avg}	average power sum attenuation to alien crosstalk ratio at the far-end
PS ACR	power sum attenuation to crosstalk ratio
PS ACR-F	power sum attenuation to crosstalk ratio at the far-end
PS ACR-N	power sum attenuation to crosstalk ratio at the near-end
PS AFEXT	power sum alien far-end crosstalk (loss)
PS AFEXT _{norm}	normalized power sum alien far-end crosstalk (loss)
PS ANEXT	power sum alien near-end crosstalk (loss)
PS ANEXT _{avg}	average power sum alien near-end crosstalk (loss)
PS FEXT	power sum FEXT (loss)
PS NEXT	power sum NEXT (loss)
PVC	polyvinyl chloride
RL	return loss
SC	subscriber connector (optical fibre connector)
SCP	service concentration point
SO	service outlet
TCL	transverse conversion loss
TCTL	transverse conversion transfer loss
TE	terminal equipment
TI	test interface
TO	telecommunications outlet
TP-PMD	twisted pair physical medium dependent
TV	television

NOTE The abbreviation “lg” in the formulas signifies “log₁₀”.

3.3 Symbols

3.3.1 Variables

<i>A</i>	coefficient of transmission matrix
<i>B</i>	length of backbone cable or coefficient of transmission matrix
<i>C</i>	length of the CP cable, designation for connector, or coefficient of transmission matrix
<i>D</i>	coefficient of transmission matrix

F	combined length of patch cords/jumpers, equipment and work area cords
H	maximum length of the fixed horizontal cable
K	coefficient of cable attenuation increase
L	length of cable
l	number of the disturbing channel
N	number of disturbing channels
X	ratio of work area cable attenuation to fixed horizontal cable attenuation
Y	ratio of the CP cable attenuation to the fixed horizontal cable attenuation
Z	complex impedance
NVP	velocity relative to speed of light ($NVP = v/c$)
c	speed of light in vacuum
e	base of natural logarithm
f	frequency
i	current number of disturbing pair
j	imaginary operator
k	current number of disturbed pair
$\lg$	$\log_{10}$
n	total number of pairs ($i \leq k \leq n$)
t	time
v	speed of propagation

3.3.2 Indices

C2	index to denominate a characteristic, measured from the connector at the floor distributor (second connector)
CH	index to denote the channel
CP	index to denote the consolidation point
PL	index to denominate a permanent link characteristic
avg	index to denominate average of the associated parameter across all of the pairs in the same channel or link
cable	index to denominate a cable characteristic
channel	index to denominate a channel characteristic
connector	index to denominate a connector characteristic
cord cable	index to indicate a characteristic of the cable used for cords
in	index to indicate an input condition
local	index to denominate a locally measured characteristic
norm	index to denominate scaling of the associated parameter
remote	index to denominate a characteristic measured at a distance
term	index to indicate a terminating condition

4 Conformance

This document does not contain specific cabling installation conformance requirements. The cabling design documents supported by this document incorporate the requirements of this document as part of their individual conformance requirements.

Annex A contains requirements and recommendations for testing of channels, and links in order to determine their conformance to the transmission performance requirements of the relevant cabling design documents.

5 Structure of generic cabling

5.1 Functional elements

The generic cabling specified by the cabling design standards features some or all of functional elements shown in Figure 2.

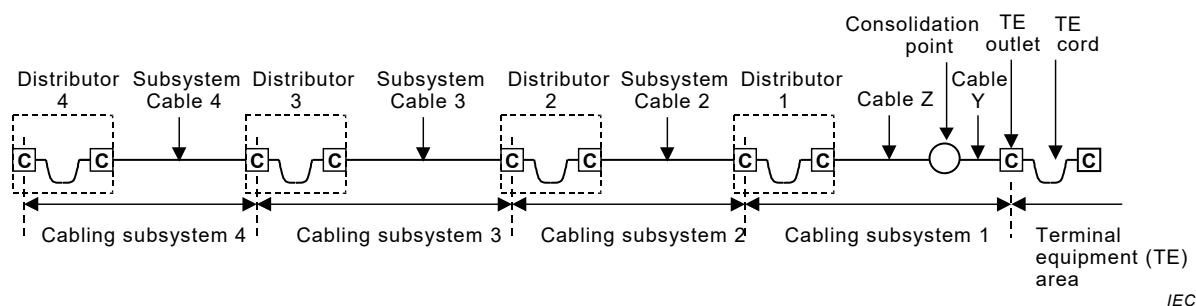


Figure 2 – General functional elements

These comprise

- terminal equipment (TE) outlet,
- consolidation point (CP),
- subsystem cable 1 (divided into cable Y and cable Z if consolidation point is present),
- distributor 1,
- other subsystem cables (2, 3 and 4 in Figure 2),
- other distributors (2, 3 and 4 in Figure 2).

Groups of these functional elements are connected together to form cabling subsystems.

NOTE The numbering of the cabling subsystems does not imply a hierarchy.

The presence of, and the terms applied to, each of the functional elements are specified in the cabling design standards.

Connections between cabling subsystems are either active, requiring application-specific equipment, or passive. Connection to application-specific equipment adopts either an interconnect or a cross-connect approach (see Figure 3 and Figure 4). Passive connections between cabling subsystems are generally achieved using cross-connections by way of either patch cords, jumpers or splices.

In the case of centralized cabling, passive connections in the distributors are achieved by using cross-connections or interconnections. In addition, for centralized optical fibre cabling, it is possible to create connections at the distributors using splices although this reduces the ability of the cabling to support re-configuration.

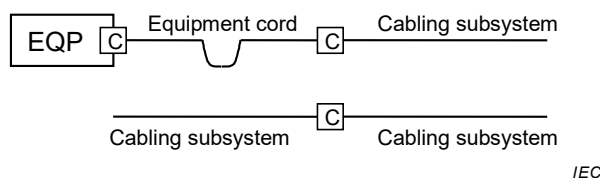


Figure 3 – Interconnect models

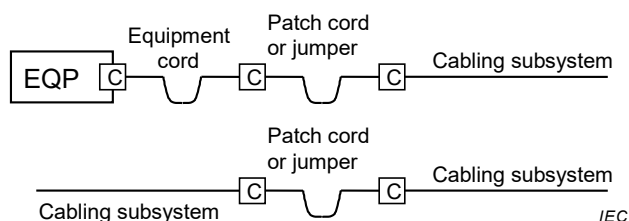


Figure 4 – Cross-connect models

5.2 Interfaces

Equipment interfaces to generic cabling are located at the ends of each subsystem. Any distributor may have an equipment interface to an external service at any port and may use either interconnects as shown in Figure 3 or cross-connects as shown in Figure 4. The consolidation point does not provide an equipment interface to the generic cabling system.

Figure 5 shows the potential equipment interfaces to the cabling subsystems.

Test interfaces to generic cabling are located at the ends of each subsystem and at consolidation points, where present. Figure 5 shows the potential test interfaces to the cabling subsystems.

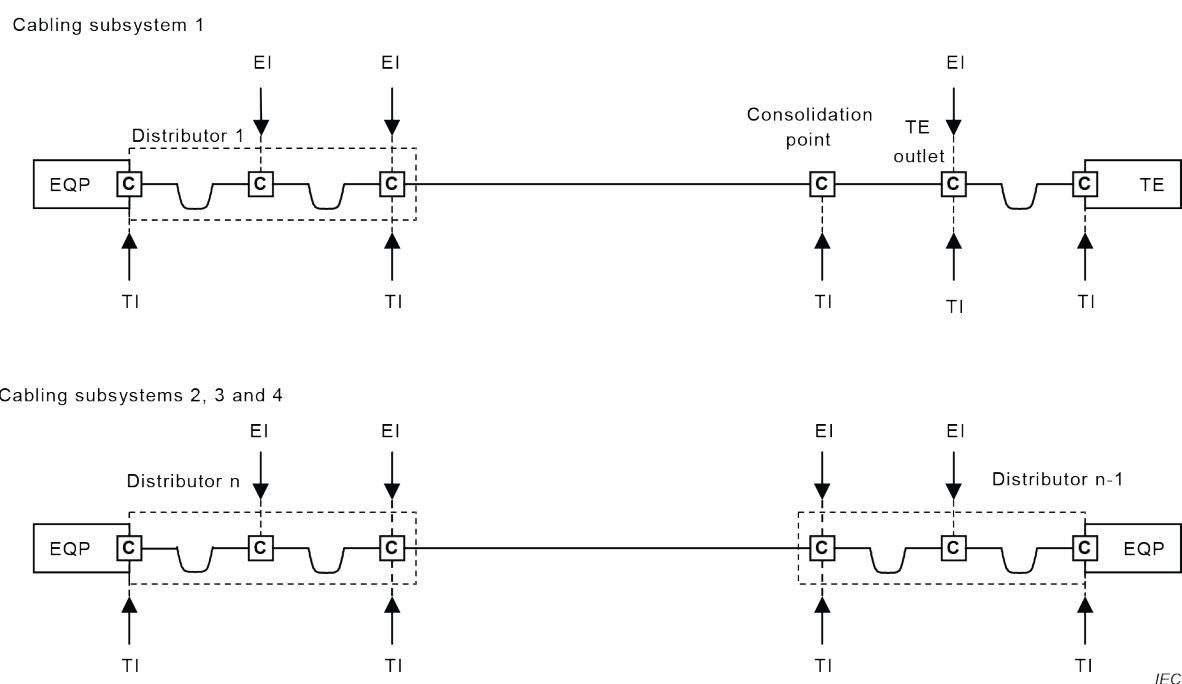


Figure 5 – Equipment and test interfaces

5.3 Cabling subsystems

5.3.1 Cabling subsystem 1

The cabling subsystem 1 extends from distributor 1 to the terminal equipment (TE) outlet(s) connected to it. The subsystem includes

- the subsystem cable 1 (or cables Y and Z of Figure 2, if a consolidation point is supported by the cable design standard and is present),
- jumpers and patch cords in distributor 1,
- the mechanical termination of the subsystem cable 1 (or cable Y of Figure 2, if a consolidation point is supported by the cable design standard and is present) at the TE outlet,

- d) the mechanical termination of the subsystem cable 1 at distributor 1 including the connecting hardware, for example of the interconnect or cross-connect (see Figure 3 and Figure 4),
- e) a consolidation point (optional, if supported by the cable design standard),
- f) the TE outlets.

Although terminal equipment cords and equipment cords are used to connect terminal and transmission equipment respectively to the cabling subsystem, they are not considered part of the cabling subsystem because they are application specific.

5.3.2 Cabling subsystems $n \geq 2$

The cabling subsystems n (for $n \geq 2$) extend from distributor n to distributor $n - 1$. When present, the subsystem includes

- a) the cables n ,
- b) jumpers and patch cords in distributor n and distributor $n - 1$,
- c) the connecting hardware on which the cables n are terminated (at distributor n and distributor $n - 1$).

Although equipment cords are used to connect the transmission equipment to the cabling subsystem, they are not considered part of the cabling subsystem because they can be application specific.

5.3.3 Common subsystems

5.3.3.1 General

The following subsystems and associated distributors are used in two or more parts of the ISO/IEC 11801 series and are detailed here to allow the relevant references to be made.

5.3.3.2 Campus backbone cabling subsystem

When present, the campus backbone cabling subsystem includes

- a) the campus backbone cables,
- b) components in building entrance facilities,
- c) the jumper and patch cords at the campus and building distributors (usually located in separate buildings),
- d) the connecting hardware on which the campus backbone cables are terminated (at the campus and building distributors).

5.3.3.3 Building backbone cabling subsystem

The building backbone cabling subsystem extends from building distributor to the following distributors connected to it:

- a) in ISO/IEC 11801-2: floor distributor,
- b) in ISO/IEC 11801-3: floor distributor,
- c) in ISO/IEC 11801-4: primary home distributor,
- d) in ISO/IEC 11801-6: service distributor.

When present, the building backbone cabling subsystem includes

- 1) the building backbone cables,
- 2) the jumper and patch cords at both distributors,
- 3) the connecting hardware on which the building backbone cables are terminated (at both distributors).

5.3.4 Tie cabling

Tie cables providing direct peer-to-peer connections between distributors are optional and, when provided, shall be in addition to that required for the basic hierarchical topology.

When present, the tie cabling includes

- a) the tie cables,
- b) the jumper and patch cords at both distributors,
- c) the connecting hardware on which the tie cables are terminated (at both distributors).

5.3.5 Channel and permanent link

The transmission performance of generic cabling is detailed in Clauses 6 and 7, in terms of the channel and the permanent link.

The channel is the transmission path between equipment such as a LAN switch/hub (EQP in Figure 5) and the terminal equipment. A typical interconnect channel consists of cabling subsystem 1 together with the terminal equipment cord and equipment cord. A typical cross-connect channel consists of cabling subsystem 1 together with the terminal equipment cord, a patch cord or jumper, and equipment cord. Optional consolidation points may be used. For longer reach services the channel may be formed by the connection of two or more subsystems (including terminal equipment cords and equipment cords). The performance of the channel excludes the connections at the application-specific equipment.

A permanent link is the transmission path of an installed cabling subsystem including the connecting hardware at the ends of the installed cable. In cabling subsystem 1, the permanent link consists of the TE outlet, the optional consolidation point (if supported by the cabling design standard), subsystem cable 1 (or cables Y and Z of Figure 2, if a consolidation point is supported by the cable design standard and is present) and the termination of subsystem cable 1 at distributor 1. The permanent link includes the connections at the ends of the installed cabling.

6 Channel performance requirements

6.1 General

The performance of a channel is specified between connections to active equipment. The channel comprises only passive sections of cable, connecting hardware, terminal equipment cords, equipment cords and patch cords. The connections at the active equipment are not taken into account.

The required transmission performance Class of Clause 6 shall be met for all environmental classifications specified for the channel.

Application support depends on channel performance, which in turn depends on cable length, number of connections, and performance of the components within the environments to which the channel is subjected. It may be possible to achieve equivalent channel performance over greater lengths by the use of fewer connections or by using components with higher performance.

6.2 Environmental performance

6.2.1 General

The environmental performance specifications of channels are classified to cover the different conditions under which channels are required to operate.

The environmental classification described in 6.2.2 shall be used for the selection of components and/or the protection afforded to them.

It is possible for the different locations within a channel to be subject to different environments. For example, one end of a channel can be in an office area and the other end of the channel can be subjected to a more severe environment. The description of the channel environment shall be divided up accordingly.

Furthermore, the applicable environment is that local to the cabling components within the channel. The local environment may, where relevant, be created by installation techniques applied to the channel in order to mitigate more extreme environments than exist within the premises. With regard to temperature, the local environment is considered to be the operating temperature of the cabling.

6.2.2 Environmental classification

This document classifies the environment for generic cabling as defined in Table 1.

Certain environments (e.g. nuclear, chemical, fire, explosive, damage risk from animals, salt mist) demand additional requirements beyond those of 6.2. Further details on specific environments are given in ISO/IEC TR 29106.

Table 1 – Channel environments

	1	2	3
Mechanical rating	M ₁	M ₂	M ₃
Ingress rating	I ₁	I ₂	I ₃
Climatic rating	C ₁	C ₂	C ₃
Electromagnetic rating	E ₁	E ₂	E ₃

The definition of a given classification includes the definition of lower classifications, i.e. channels designed to operate under environmental conditions defined by M₂ shall continue to operate under environmental conditions defined by M₁.

Channel environments may be classified by using any combination of the MICE scheme, e.g. M₁I₂C₃E₁. Care should be taken to accurately classify the channel environment in such a way as to allow the selection of suitable components.

The criteria for the MICE classification are based on M_xI_xC_xE_x, where “x” can equal 1, 2 or 3 based on the severity of the environment. For example, a typical office space has a minimum requirement of M₁I₁C₁E₁.

The environmental Classes are defined in Table 2.

For each M, I, C or E group, the classification of a given environment is determined by the most demanding parameter within the M, I, C or E group. However, the selection of components shall be based on the specific demands of each of the parameters within the M, I, C or E group, which may be less demanding than the overall classification of the group.

Table 2 – Details of environmental classification

Mechanical	M₁	M₂	M₃
Shock/bump^a			
Peak acceleration	40 ms ⁻²	100 ms ⁻²	250 ms ⁻²
Vibration			
Displacement amplitude (2 Hz to 9 Hz)	1,5 mm	7,0 mm	15,0 mm
Acceleration amplitude (9 Hz to 500 Hz)	5 ms ⁻²	20 ms ⁻²	50 ms ⁻²
Tensile strength	b	b	b
Crush	45 N over 25 mm (linear) min.	1 100 N over 150 mm (linear) min.	2 200 N over 150 mm (linear) min.
Impact	1 J	10 J	30 J
Bending, flexing and torsion	b	b	b
Ingress	I₁	I₂	I₃
Particulate ingress (max. diameter)	12,5 mm	50 µm	50 µm
Immersion	None	Intermittent liquid jet ≤ 12,5 l/min ≥ 6,3 mm jet > 2,5 m distance	Intermittent liquid jet ≤ 12,5 l/min ≥ 6,3 mm jet > 2,5 m distance and immersion (≤ 1 m for ≤ 30 min)
Climatic and chemical	C₁	C₂	C₃
Ambient temperature	–10 °C to +60 °C	–25 °C to +70 °C	–40 °C to +70 °C
Rate of change of temperature	0,1 °C per minute	1,0 °C per minute	3,0 °C per minute
Humidity	5 % to 85 % (non-condensing)	5 % to 95 % (condensing)	5 % to 95 % (condensing)
Solar radiation	700 Wm ⁻²	1 120 Wm ⁻²	1 120 Wm ⁻²
Liquid pollution ^c Contaminants	Concentration × 10 ⁻⁶	Concentration × 10 ⁻⁶	Concentration × 10 ⁻⁶
Sodium chloride (salt/sea water)	0 g/m ³	< 0,3 g/m ³	< 0,3 g/m ³
Oil (dry-air concentration) (for oil types see ^b)	0 mg/m ³	< 0,005 mg/m ³	< 0,5 mg/m ³
Sodium stearate (soap)	None	> 5 × 10 ⁴ mg/m ³ aqueous non-gelling	> 5 × 10 ⁴ mg/m ³ aqueous gelling
Detergent	None	ffs	ffs
Conductive materials	None	Temporary	Present
Gaseous pollution ^c Contaminants	Mean / Peak (Concentration × 10 ⁻⁶)	Mean / Peak (Concentration × 10 ⁻⁶)	Mean / Peak (Concentration × 10 ⁻⁶)
Hydrogen sulphide	< 0,003 mg/m ³ / < 0,01 mg/m ³	< 0,05 mg/m ³ / < 0,5 mg/m ³	< 10 mg/m ³ / < 50 mg/m ³
Sulphur dioxide	< 0,01 mg/m ³ / < 0,03 mg/m ³	< 0,1 mg/m ³ / < 0,3 mg/m ³	< 5 mg/m ³ / < 15 mg/m ³
Sulphur trioxide (ffs)	< 0,01 mg/m ³ / < 0,03 mg/m ³	< 0,1 mg/m ³ / < 0,3 mg/m ³	< 5 mg/m ³ / < 15 mg/m ³
Chlorine wet (> 50 % humidity)	< 0,000 5 mg/m ³ / < 0,001 mg/m ³	< 0,005 mg/m ³ / < 0,03 mg/m ³	< 0,05 mg/m ³ / < 0,3 mg/m ³

Chlorine dry (< 50 % humidity)	< 0,002 mg/m ³ / < 0,01 mg/m ³	< 0,02 mg/m ³ / < 0,1 mg/m ³	< 0,2 mg/m ³ / < 1,0 mg/m ³
Hydrogen chloride	– / < 0,06 mg/m ³	< 0,06 mg/m ³ / < 0,3 mg/m ³	< 0,6 mg/m ³ / 3,0 mg/m ³
Hydrogen fluoride	< 0,001 mg/m ³ / < 0,005 mg/m ³	< 0,01 mg/m ³ / < 0,05 mg/m ³	< 0,1 mg/m ³ / < 1,0 mg/m ³
Ammonia	< 1 mg/m ³ / < 5 mg/m ³	< 10 mg/m ³ / < 50 mg/m ³	< 50 mg/m ³ / < 250 mg/m ³
Oxides of nitrogen	< 0,05 mg/m ³ / < 0,1 mg/m ³	< 0,5 mg/m ³ / < 1 mg/m ³	< 5 mg/m ³ / < 10 mg/m ³
Ozone	< 0,002 g/m ³ / < 0,005 g/m ³	< 0,025 g/m ³ / < 0,05 g/m ³	< 0,1 g/m ³ / < 1 g/m ³
Electromagnetic	E₁	E₂	E₃
Electrostatic discharge – Contact (0,667 µC)	4 kV	4 kV	4 kV
Electrostatic discharge – Air (0,132 µC)	8 kV	8 kV	8 kV
Radiated RF – AM	3 V/m @ (80 to 1 000) MHz 3 V/m @ (1 400 to 2 000) MHz 1 V/m @ (2 000 to 2 700) MHz	3 V/m @ (80 to 1 000) MHz 3 V/m @ (1 400 to 2 000) MHz 1 V/m @ (2 000 to 2 700) MHz	10 V/m @ (80 to 1 000) MHz 3 V/m @ (1 400 to 2 000) MHz 1 V/m @ (2 000 to 2 700) MHz
Conducted RF	3 V@ 150 kHz to 80 MHz	3 V@ 150 kHz to 80 MHz	10 V@ 150 kHz to 80 MHz
EFT/B (comms)	500 V	500 V	1 000 V
Surge (transient ground potential difference) – signal, line to earth	500 V	1 000 V	1 000 V
Magnetic field (50/60 Hz)	1 Am ⁻¹	3 Am ⁻¹	30 Am ⁻¹
Magnetic field (60 Hz to 20 000 Hz)	ffs	ffs	ffs
^a Bump: the repetitive nature of the shock experienced by the channel shall be taken into account. ^b This aspect of environmental classification is installation-specific and should be considered in association with IEC 61918 and the appropriate component specification. ^c A single dimensional characteristic, i.e. concentration × 10⁻⁶, was chosen to unify limits from different standards.			

6.3 Balanced cabling transmission performance

6.3.1 General

This document specifies the following Classes for balanced cabling:

- Class A is specified up to 100 kHz,
- Class B is specified up to 1 MHz,
- Class C is specified up to 16 MHz,
- Class D is specified up to 100 MHz,
- Class E is specified up to 250 MHz,
- Class E_A is specified up to 500 MHz,
- Class F is specified up to 600 MHz,
- Class F_A is specified up to 1 000 MHz.

A Class A channel is specified so that it will provide the minimum transmission performance to support Class A applications. Similarly, Class B, C, D, E, E_A, F and F_A channels provide the

transmission performance to support Class B, C, D, E, E_A, F and F_A applications, respectively. Channels of a given Class will support all applications of a lower Class. Class A is regarded as the lowest Class.

This document specifies the following additional Classes for balanced cabling described in certain parts of the cabling design standards:

- 1) Class BCT-B: specified up to 1 000 MHz,
- 2) Class I and Class II: specified up to 2 000 MHz.

The insertion loss and other length related parameter performance of BCT-B cabling is further subdivided into two sub-Classes, L and M (see Table 5). These sub-Classes have identical performance requirements for all other transmission parameters.

Annex E lists known balanced cabling applications by Class. The requirements in 6.3 are given by limits computed to one decimal place, using the formula for a defined frequency range. The limits for the propagation delay and delay skew are computed to three decimal places. The additional tables are for information only and have limits derived from the relevant formula at key frequencies. Many specifications in 6.3 have a plateau in the specified requirement. These plateaus do not accurately depict the system performance. They have been added for measurement purposes.

6.3.2 Component choice

The parameters specified in 6.3 apply to channels with screened or unscreened cable elements, with or without an overall screen, unless explicitly stated otherwise.

The nominal differential mode impedance of channels is 100 Ω . This is achieved by suitable design and appropriate choice of cabling components (irrespective of their nominal impedance). In the case of cable sharing, additional crosstalk requirements specified in 9.3.2.5.1 should be taken into account.

6.3.3 Channel parameters

6.3.3.1 Return loss

The return loss requirements are only applicable to Classes C through F_A, BCT-B, I, and II.

The return loss (*RL*) of each pair of a channel shall meet the requirements in Table 3.

The *RL* of each pair of a channel at key frequencies is given in Table 4 for information only.

The return loss requirements shall be met at both ends of the cabling. Return loss (*RL*) values at frequencies where the insertion loss (*IL*) is below 3,0 dB are for information only.

Table 3 – Return loss for a channel

Class	Frequency MHz	Minimum return loss dB
C	$1 \leq f \leq 16$	15,0
D	$1 \leq f < 20$	17,0
	$20 \leq f \leq 100$	$30 - 10 \lg(f)$
E	$1 \leq f < 10$	19,0
	$10 \leq f < 40$	$24 - 5 \lg(f)$
	$40 \leq f \leq 250$	$32 - 10 \lg(f)$
E _A	$1 \leq f < 10$	19,0
	$10 \leq f < 40$	$24 - 5 \lg(f)$
	$40 \leq f < 398,1$	$32 - 10 \lg(f)$
	$398,1 \leq f \leq 500$	6,0
F	$1 \leq f < 10$	19,0
	$10 \leq f < 40$	$24 - 5 \lg(f)$
	$40 \leq f < 251,2$	$32 - 10 \lg(f)$
	$251,2 \leq f \leq 600$	8,0
F _A	$1 \leq f < 10$	19,0
	$10 \leq f < 40$	$24 - 5 \lg(f)$
	$40 \leq f < 251,2$	$32 - 10 \lg(f)$
	$251,2 \leq f < 631$	8,0
	$631 \leq f \leq 1\,000$	$36 - 10 \lg(f)$
BCT-B	$1 \leq f < 10$	19,0
	$10 \leq f < 100$	$24 - 5 \lg(f)$
	$100 \leq f < 251,2$	$29 - 7,5 \lg(f)$
	$251,2 \leq f < 600$	$17,2 - 2,6 \lg(f)$
	$600 \leq f < 1\,000$	$35 - 9 \lg(f)$
I	$1 \leq f < 10$	19,0
	$10 \leq f < 40$	$24 - 5 \lg(f)$
	$40 \leq f < 130$	16,0
	$130 \leq f < 1\,000$	$35 - 9 \lg(f)$
	$1\,000 \leq f < 1\,600$	8,0
	$1\,600 \leq f < 2\,000$	$8 - 19 \lg(\frac{f}{1600})$
II	$1 \leq f < 10$	19,0
	$10 \leq f < 40$	$24 - 5 \lg(f)$
	$40 \leq f < 130$	16,0
	$130 \leq f < 1\,000$	$35 - 9 \lg(f)$
	$1\,000 \leq f < 1\,600$	8,0
	$1\,600 \leq f < 2\,000$	$8 - 19 \lg(\frac{f}{1600})$

Table 4 – Informative return loss values for a channel at key frequencies

Minimum return loss dB									
Frequency MHz	Class								
	C	D	E	E _A	F	F _A	BCT-B	I	II
1	15,0	17,0	19,0	19,0	19,0	19,0	19,0	19,0	19,0
16	15,0	17,0	18,0	18,0	18,0	18,0	18,0	18,0	18,0
100	–	10,0	12,0	12,0	12,0	12,0	14,0	16,0	16,0
250	–	–	8,0	8,0	8,0	8,0	11,0	13,4	13,4
500	–	–	–	6,0	8,0	8,0	10,2	10,7	10,7
600	–	–	–	–	8,0	8,0	10,0	10,0	10,0
1 000	–	–	–	–	–	6,0	8,0	8,0	8,0
1 600	–	–	–	–	–	–	–	8,0	8,0
2 000	–	–	–	–	–	–	–	6,2	6,2

6.3.3.2 Insertion loss/attenuation

The term “attenuation” is still widely used in the cable industry; however, this characteristic is better described as “insertion loss”. In this document, the term “insertion loss” is adopted throughout to describe the signal attenuation over the length of channels, links and components. Unlike attenuation, insertion loss does not scale linearly with length.

The term “attenuation” is maintained for the following parameters:

- attenuation to crosstalk ratio at the near end (*ACR-N*) – see 6.3.3.4,
- attenuation to crosstalk ratio at the far end (*ACR-F*) – see 6.3.3.5,
- unbalance attenuation and coupling attenuation – see 6.3.3.12,
- power sum alien attenuation to crosstalk ratio at the far end (*PS AACR-F*) – see 6.3.3.13.4.

For the calculation of *ACR-N*, *PS ACR-N*, *ACR-F*, *PS ACR-F* and *PS AACR-F*, the corresponding value for insertion loss (*IL*) shall be used.

The insertion loss requirements are applicable to all cabling Classes.

The insertion loss (*IL*) of each pair of a channel shall meet the requirements in Table 5.

The *IL* of each pair of a channel at key frequencies is given in Table 6 for information only.

Table 5 – Insertion loss for a channel

Class	Frequency MHz	Maximum insertion loss dB
A	$f = 0,1$	16,0 ^a
B	$f = 0,1$	5,5 ^a
	$f = 1$	5,8 ^a
C	$1 \leq f \leq 16$	$1,05 \times (3,23\sqrt{f}) + 4 \times 0,2$ ^a
D	$1 \leq f \leq 100$	$1,05 \times (1,9108\sqrt{f} + 0,0222 \times f + 0,2/\sqrt{f}) + 4 \times 0,04 \times \sqrt{f}$ ^a
E	$1 \leq f \leq 250$	$1,05 \times (1,82\sqrt{f} + 0,0169 \times f + 0,25/\sqrt{f}) + 4 \times 0,02 \times \sqrt{f}$ ^a
E _A	$1 \leq f \leq 500$	$1,05 \times (1,82\sqrt{f} + 0,0091 \times f + 0,25/\sqrt{f}) + 4 \times 0,02 \times \sqrt{f}$ ^a
F	$1 \leq f \leq 600$	$1,05 \times (1,8\sqrt{f} + 0,01 \times f + 0,2/\sqrt{f}) + 4 \times 0,02 \times \sqrt{f}$ ^a
F _A	$1 \leq f \leq 1\,000$	$1,05 \times (1,8\sqrt{f} + 0,005 \times f + 0,25/\sqrt{f}) + 4 \times 0,02 \times \sqrt{f}$ ^a
BCT-B-L	$1 \leq f \leq 1\,000$	$0,138 \times (1,8\sqrt{f} + 0,005 \times f + 0,25/\sqrt{f}) + 2 \times 0,02 \times \sqrt{f}$ ^b
BCT-B-M	$1 \leq f \leq 1\,000$	$0,27 \times (1,8\sqrt{f} + 0,005 \times f + 0,25/\sqrt{f}) + 2 \times 0,02 \times \sqrt{f}$ ^b
I	$1 < f \leq 500$	$\left(0,634\sqrt{f} + 0,00156 \times f + \frac{0,078}{\sqrt{f}} \right)$ ^d
	$500 < f \leq 2\,000$	$\left(0,60698\sqrt{f} + 0,00277 \times f + \frac{0,078}{\sqrt{f}} \right)$ ^e
II	$1 < f \leq 2\,000$	$0,32 \times (1,8\sqrt{f} + 0,005 \times f + 0,25/\sqrt{f}) + 2 \times 0,02 \times \sqrt{f}$ ^c
^a Insertion loss (IL) at frequencies that correspond to calculated values of less than 4,0 dB shall revert to a maximum requirement of 4,0 dB. ^b Insertion loss (IL) at frequencies that correspond to calculated values of less than 2,0 dB shall revert to a maximum requirement of 2,0 dB. ^c Insertion loss (IL) at frequencies that correspond to calculated values of less than 3,0 dB shall revert to a maximum requirement of 3,0 dB. ^d This formula is derived using $0,312 \times \left(1,8\sqrt{f} + 0,005 \times f + \frac{0,25}{\sqrt{f}} \right) + 2 \times (0,02 \times \sqrt{f}) + 0,0324 \times \sqrt{f}$ ^e This formula is derived using $0,312 \times \left(1,8\sqrt{f} + 0,005 \times f + \frac{0,25}{\sqrt{f}} \right) + 2 \times (0,00649 \times \sqrt{f} + 0,000605 \times f) + 0,0324 \times \sqrt{f}$		

Table 6 – Informative insertion loss values for a channel at key frequencies

Maximum insertion loss dB												
Frequency MHz	Class											
	A	B	C	D	E	E _A	F	F _A	BCT- B-L ^a	BCT- B-M ^a	I ^a	II ^a
0,1	16,0	5,5	–	–	–	–	–	–	–	–	–	–
1	–	5,8	4,2	4,0	4,0	4,0	4,0	4,0	2,0	2,0	3,0	3,0
16	–	–	14,4	9,1	8,3	8,2	8,1	8,0	2,0	2,1	3,0	3,0
100	–	–	–	24,0	21,7	20,9	20,8	20,3	3,0	5,4	6,5	6,3
250	–	–	–	–	35,9	33,9	33,8	32,5	4,7	8,6	10,4	10,1
500	–	–	–	–	–	49,3	49,3	46,7	6,8	12,4	15,0	14,6
600	–	–	–	–	–	–	54,6	51,4	7,5	13,7	16,5	16,1
1 000	–	–	–	–	–	–	–	67,6	9,8	18,0	22,0	21,1
1 600	–	–	–	–	–	–	–	–	–	–	28,7	27,2
2 000	–	–	–	–	–	–	–	–	–	–	32,7	30,8

^a Values reflect reduced channel lengths as compared to those of other Classes.

6.3.3.3 NEXT

6.3.3.3.1 Pair-to-pair NEXT

The *NEXT* requirements are applicable to all cabling Classes.

The *NEXT* between each pair combination of a channel shall meet the requirements in Table 7.

The *NEXT* of each pair of a channel, at maximum implementation, at key frequencies is given in Table 8 for information only.

The *NEXT* requirements shall be met at both ends of the cabling. *NEXT* values at frequencies where the insertion loss (*IL*) is below 4,0 dB are for information only.

Table 7 – NEXT for a channel

Class	Frequency MHz	Minimum NEXT ^a dB
A	$f = 0,1$	27,0
B	$0,1 \leq f \leq 1$	$25 - 15 \lg(f)$
C	$1 \leq f \leq 16$	$39,1 - 16,4 \lg(f)$
D	$1 \leq f \leq 100$	$-20 \lg \left(\frac{65,3 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{83 - 20 \lg(f)}{-20} \right)$
E	$1 \leq f \leq 250$	$-20 \lg \left(\frac{74,3 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{94 - 20 \lg(f)}{-20} \right)$
E _A	$1 \leq f \leq 500$	$-20 \lg \left(\frac{74,3 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{94 - 20 \lg(f)}{-20} \right)$ ^{b, d}
F	$1 \leq f \leq 600$	$-20 \lg \left(\frac{102,4 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{102,4 - 15 \lg(f)}{-20} \right)$
F _A	$1 \leq f \leq 1\,000$	$-20 \lg \left(\frac{105,4 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{116,3 - 20 \lg(f)}{-20} \right)$ ^{c, d}
BCT-B	$1 \leq f \leq 1\,000$	$-20 \lg \left(\frac{105,4 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{116,3 - 20 \lg(f)}{-20} \right)$ ^{c, d}
I	$1 \leq f \leq 500$	$-20 \lg \left(\frac{75,3 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{94 - 20 \lg(f)}{-20} \right)$
	$500 < f \leq 2\,000$	$-20 \lg \left(\frac{75,3 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{40 - 38 \lg(f/500)}{-20} \right)$
II	$1 \leq f \leq 1\,000$	$-20 \lg \left(\frac{105,4 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{116,3 - 20 \lg(f)}{-20} \right)$
	$1\,000 < f \leq 1\,600$	$-20 \lg \left(\frac{105,4 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{56,3 - 90 \lg(f/1\,000)}{-20} \right)$
	$1\,600 < f \leq 2\,000$	$-20 \lg \left(\frac{105,4 - 15 \lg(f)}{10 - 20} + 2 \times 10 \frac{37,93 - 40 \lg(f/1\,600)}{-20} \right)$

^a NEXT at frequencies that correspond to calculated values of greater than 65,0 dB shall revert to a minimum requirement of 65,0 dB.

^b Whenever the Class E_A channel insertion loss at 450 MHz is less than 12 dB, subtract the term $1,4((f - 450)/50)$ from the formula stated above for the range of 450 MHz to 500 MHz.

^c Whenever the Class F_A channel insertion loss at 900 MHz is less than 17 dB, subtract the term $2,8((f - 900)/100)$ from the formula stated above for the range of 900 MHz to 1 000 MHz.

^d The terms in the formulas are not intended to imply component performance.

Table 8 – Informative NEXT values for a channel at key frequencies

Minimum channel NEXT dB											
Frequency MHz	Class										
	A	B	C	D	E	E _A	F	F _A	BCT-B	I	II
0,1	27,0	40,0	–	–	–	–	–	–	–	–	–
1	–	25,0	39,1	63,3	65,0	65,0	65,0	65,0	65,0	65,0	65,0
16	–	–	19,4	43,6	53,2	53,2	65,0	65,0	65,0	53,9	65,0
100	–	–	–	30,1	39,9	39,9	62,9	65,0	65,0	40,5	65,0
250	–	–	–	–	33,1	33,1	56,9	59,1	59,1	33,6	59,1
500	–	–	–	–	–	27,9	52,4	53,6	53,6	28,4	53,6
600	–	–	–	–	–	–	51,2	52,1	52,1	26,2	52,1
1 000	–	–	–	–	–	–	–	47,9	47,9	19,6	47,9
1 600	–	–	–	–	–	–	–	–	–	12,9	31,5
2 000	–	–	–	–	–	–	–	–	–	9,6	27,7

6.3.3.3.2 Power sum NEXT

The *PS NEXT* requirements are only applicable to Classes D through F_A, BCT-B, I, and II.

The *PS NEXT* of each pair of a channel shall meet the requirements in Table 9.

The *PS NEXT* of each pair of a channel, at maximum implementation, at key frequencies is given in Table 10 for information only.

The *PS NEXT* requirements shall be met at both ends of the cabling. *PS NEXT* values at frequencies where the insertion loss (*IL*) is below 4,0 dB are for information only.

PS NEXT_k of pair *k* is computed as follows:

$$PSNEXT_k = -10 \lg \sum_{i=1, i \neq k}^n 10^{\frac{-NEXT_{ik}}{10}} \quad (1)$$

where

i is the number of the disturbing pair;

k is the number of the disturbed pair;

n is the total number of pairs;

NEXT_{ik} is the near-end crosstalk loss coupled from pair *i* into pair *k*.

Table 9 – PS NEXT for a channel

Class	Frequency MHz	Minimum PS NEXT ^a dB
D	$1 \leq f \leq 100$	$-20 \lg \left(\frac{62,3 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{80 - 20 \lg(f)}{-20}} \right)$
E	$1 \leq f \leq 250$	$-20 \lg \left(\frac{72,3 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{90 - 20 \lg(f)}{-20}} \right)$
E _A	$1 \leq f \leq 500$	$-20 \lg \left(\frac{72,3 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{90 - 20 \lg(f)}{-20}} \right)^{b, d}$
F	$1 \leq f \leq 600$	$-20 \lg \left(\frac{99,4 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{99,4 - 15 \lg(f)}{-20}} \right)$
F _A	$1 \leq f \leq 1\,000$	$-20 \lg \left(\frac{102,4 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{113,3 - 20 \lg(f)}{-20}} \right)^{c, d}$
BCT-B	$1 \leq f \leq 1\,000$	$-20 \lg \left(\frac{102,4 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{113,3 - 20 \lg(f)}{-20}} \right)^{c, d}$
I	$1 \leq f \leq 500$	$-20 \lg \left(\frac{72,3 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{91 - 20 \lg(f)}{-20}} \right)$
	$500 < f \leq 2\,000$	$-20 \lg \left(\frac{72,3 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{37 - 38 \lg(f/500)}{-20}} \right)$
II	$1 \leq f \leq 1\,000$	$-20 \lg \left(\frac{102,4 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{113,3 - 20 \lg(f)}{-20}} \right)$
	$1\,000 < f \leq 1\,600$	$-20 \lg \left(\frac{102,4 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{53,3 - 90 \lg(f/1\,000)}{-20}} \right)$
	$1\,600 < f \leq 2\,000$	$-20 \lg \left(\frac{102,4 - 15 \lg(f)}{10^{-20}} + 2 \times 10^{\frac{34,93 - 40 \lg(f/1\,600)}{-20}} \right)$
^a PS NEXT at frequencies that correspond to calculated values of greater than 62,0 dB shall revert to a minimum requirement of 62,0 dB. ^b Whenever the Class E _A channel insertion loss at 450 MHz is less than 12 dB, subtract the term $1,4((f - 450)/50)$ from the formula stated above for the range of 450 MHz to 500 MHz. ^c Whenever the Class F _A channel insertion loss at 900 MHz is less than 17 dB, subtract the term $2,8((f - 900)/100)$ from the formula stated above for the range of 900 MHz to 1 000 MHz. ^d The terms in the formulas are not intended to imply component performance.		

Table 10 – Informative PS NEXT values for a channel at key frequencies

Frequency MHz	Minimum PS NEXT dB							
	Class							
	D	E	E _A	F	F _A	BCT-B	I	II
1	60,3	62,0	62,0	62,0	62,0	62,0	62,0	62,0
16	40,6	50,6	50,6	62,0	62,0	62,0	50,9	62,0
100	27,1	37,1	37,1	59,9	62,0	62,0	37,5	62,0
250	–	30,2	30,2	53,9	56,1	56,1	30,6	56,1
500	–	–	24,8	49,4	50,6	50,6	25,4	50,6
600	–	–	–	48,2	49,1	49,1	23,2	49,1
1 000	–	–	–	–	44,9	44,9	16,6	44,9
1 600	–	–	–	–	–	–	9,9	28,5
2 000	–	–	–	–	–	–	6,6	24,7

6.3.3.4 Attenuation to crosstalk ratio at the near-end

6.3.3.4.1 General

ACR-N and *PS ACR-N* requirements are only applicable to Classes D through F_A, BCT-B, I, and II.

Except for the name, the definition and formulas for *ACR-N* and *PS ACR-N* are identical to those used for *ACR* and *PS ACR*, respectively, in prior editions of the ISO/IEC 11801 series documents.

6.3.3.4.2 Pair-to-pair *ACR-N*

Pair-to-pair *ACR-N* is the difference between the pair-to-pair *NEXT* and the insertion loss (*IL*) of the disturbed pair in decibels.

The *ACR-N* of each pair combination of a channel shall meet the difference of the *NEXT* requirement of Table 7 and the insertion loss (*IL*) requirement of Table 5 of the respective class.

The *ACR-N* of each pair of a channel, at maximum implementation, at key frequencies is given in Table 11 for information only.

The *ACR-N* requirements shall be met at both ends of the cabling.

ACR-N_{ik} of pairs *i* and *k* is computed as follows:

$$ACR-N_{ik} = NEXT_{ik} - IL_k \quad (2)$$

where

i is the number of the disturbing pair;

k is the number of the disturbed pair;

NEXT_{ik} is the near-end crosstalk loss coupled from pair *i* into pair *k*;

IL_k is the insertion loss of pair *k*.

Table 11 – Informative ACR-N values for a channel at key frequencies

Frequency MHz	Minimum ACR-N dB								
	Class								
	D	E	E _A	F	F _A	BCT-B-L ^a	BCT-B-M ^a	I ^a	II ^a
1	59,3	61,0	61,0	61,0	61,0	63,0	63,0	62,0	62,0
16	34,5	44,9	45,0	56,9	57,0	63,0	62,9	51,3	62,0
100	6,1	18,2	19,0	42,1	44,7	60,0	59,6	34,0	58,7
250	–	–2,8	–0,8	23,1	26,7	54,4	50,5	23,2	49,0
500	–	–	–21,4	3,1	6,9	46,8	41,4	13,4	39,0
600	–	–	–	–3,4	0,7	44,6	39,4	9,7	36,0
1 000	–	–	–	–	–19,6	38,1	29,9	–2,4	26,8
1 600	–	–	–	–	–	–	–	–15,8	4,3
2 000	–	–	–	–	–	–	–	–23,1	–3,1
^a Values reflect reduced channel lengths as compared to those of other Classes.									

6.3.3.4.3 Power sum ACR-N

PS ACR-N is the difference between the *PS NEXT* and the insertion loss (*IL*) of the disturbed pair in decibels.

The *PS ACR-N* of each pair of a channel shall meet the difference of the *PS NEXT* requirement of Table 9 and the insertion loss (*IL*) requirement of Table 5 of the respective class.

The *PS ACR-N* of each pair of a channel, at maximum implementation, at key frequencies is given in Table 12 for information only.

The *PS ACR-N* requirements shall be met at both ends of the cabling.

PS ACR-N_k of pair *k* is computed as follows:

$$PS\ ACR - N_k = PS\ NEXT_k - IL_k \quad (3)$$

where

k is the number of the disturbed pair;

PS NEXT_k is the power sum near-end crosstalk loss of pair *k*;

IL_k is the insertion loss of pair *k*.

Table 12 – Informative PS ACR-N values for a channel at key frequencies

Minimum PS ACR-N dB									
Frequency MHz	Class								
	D	E	E _A	F	F _A	BCT-B-L ^a	BCT-B-M ^a	I ^a	II ^a
1	56,3	58,0	58,0	58,0	58,0	60,0	60,0	59,0	59,0
16	31,5	42,3	42,4	53,9	54,0	60,0	59,9	48,3	59,5
100	3,1	15,4	16,2	39,1	41,7	57,0	56,6	31,0	55,7
250	–	–5,8	–3,7	20,1	23,7	51,4	47,5	20,2	46,0
500	–	–	–24,5	0,1	3,9	43,8	38,4	10,4	36,0
600	–	–	–	–6,4	–2,3	41,6	36,4	6,7	33,0
1 000	–	–	–	–	–22,6	35,1	26,9	–5,4	23,8
1 600	–	–	–	–	–	–	–	–18,8	1,3
2 000	–	–	–	–	–	–	–	–26,1	–6,1

^a Values reflect reduced channel lengths as compared to those of other Classes.

6.3.3.5 Attenuation to crosstalk ratio at the far-end

6.3.3.5.1 General

ACR-F and PS ACR-F requirements are only applicable to Classes D through F_A, BCT-B, I, and II.

NOTE ACR-F and PS ACR-F replace parameters *ELFEXT* and *PS ELFEXT*, respectively, which were specified in prior editions of ISO/IEC 11801. Whereas *ELFEXT* is computed using the insertion loss of the disturbing pair, ACR-F is computed using the insertion loss of the disturbed pair. Because both disturbing pairs and disturbed pairs are subject to the same insertion loss requirements (see Table 5), the specified requirements in Table 13 and Table 15 for Classes D, E and F have not been changed.

6.3.3.5.2 Pair-to-pair ACR-F

The ACR-F of each pair combination of a channel shall meet the requirements in Table 13.

The ACR-F of each pair of a channel, at maximum implementation, at key frequencies is given in Table 14 for information only.

ACR-F_{ik} of pairs *i* and *k* is computed as follows:

$$ACR-F_{ik} = FEXT_{ik} - IL_k \quad (4)$$

where

i is the number of the disturbing pair;

k is the number of the disturbed pair;

*FEXT*_{ik} is the far-end crosstalk loss coupled from pair *i* into pair *k*;

*IL*_{*k*} is the insertion loss of pair *k*.