BS ISO/IEC 17821:2015

BSI Standards Publication

Information technology — Specification of low power wireless mesh network over channel-hopped TDMA links

bsi.

...making excellence a habit.™

Document Sharing Hub

National foreword

This British Standard is the UK implementation of ISO/IEC 17821:2015.

The UK participation in its preparation was entrusted to Technical Committee IST/6, Data communications.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.
Published by BSI Standards Limited 2015

ISBN 978 0 580 78724 9
ICS 35.110

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2015.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: BS ISO/IEC 17821:2015

INTERNATIONAL STANDARD

ISO/IEC 17821

First edition
2015-04-15

Information technology — Specification of low power wireless mesh network over channel-hopped TDMA links

Technologies de l'information — Spécification des réseaux maillés sans fil à faible puissance par liens AMRT à saut de canaux

Reference number
ISO/IEC 17821:2015(E)

Documents
Document Sharing Hub
© ISO/IEC 2015

Full document details: BS ISO/IEC 17821:2015

COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2015

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

© ISO/IEC 2015 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO/IEC 17821:2015

Contents

Page

Foreword ... **v**

Introduction ... **vi**

1 Scope ... **1**

2 Normative references ... **1**

3 Terms and definitions ... **1**

4 Abbreviations ... **2**

5 General description ... **3**
5.1 General ... 3
5.2 Components of the LPWMN ... 3
5.3 Architecture of the LPWMN ... 4
5.4 Functional overview ... 5
5.4.1 Link network formation ... 5
5.4.2 Link connection ... 6
5.4.3 Unbalanced cluster-tree addressing ... 7
5.4.4 Routing ... 8

6 Functional description ... **9**
6.1 Starting the LPWMN ... 9
6.1.1 Starting a link network ... 9
6.1.2 Starting a router ... 10
6.1.3 Starting a device ... 11
6.2 Joining a link network ... 12
6.2.1 Device procedure ... 12
6.2.2 Router procedure ... 12
6.3 Leaving a link network ... 13
6.4 Address assignment with an unbalanced cluster-tree structure ... 14
6.5 DSME MAC link and link-path ... 15
6.5.1 Establishing a link-path ... 15
6.5.2 Maintaining a link-path ... 16
6.5.3 Routing a link-path ... 17
6.6 Data services ... 19
6.6.1 General ... 19
6.6.2 DLN sublayer data service ... 19
6.6.3 DLC sublayer data service ... 20
6.6.4 Data reception ... 20

7 LPWMN services ... **21**
7.1 LPWMN management services ... 21
7.1.1 Primitives for link network formation ... 22
7.1.2 Primitives for link network joining as a router ... 24
7.1.3 Primitives for link network joining as a device ... 25
7.1.4 Primitives for the DLIB management ... 26
7.1.5 Primitives for link network resources management ... 29
7.2 LPWMN link management services ... 30
7.2.1 Primitives for link establishment ... 30
7.2.2 Primitives for link release ... 32
7.2.3 Primitives for link management ... 34
7.3 LPWMN data services ... 35
7.3.1 Primitives for data service on a CAP link ... 35
7.3.2 Primitives for data service on a shared GTS link ... 37
7.3.3 Primitives for data service on a dedicated link path ... 39
7.3.4 Primitives for data service through DLN sublayer ... 41

8 LPWMN frame formats ... **43**

© ISO/IEC 2015 – All rights reserved

AVA Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

8.1 General link network frame format ... 43
8.1.1 Frame Control field ... 44
8.1.2 Destination Address field ... 44
8.1.3 Source Address field ... 45
8.1.4 Destination IEEE Address field ... 45
8.1.5 Source IEEE Address field ... 45
8.1.6 Link Management subframe field ... 45
8.1.7 Link Network Management subframe field ... 45
8.1.8 Frame Payload field ... 45
8.2 Data frames ... 45
8.3 Link management command frames ... 46
8.3.1 Link Management Command Frame Identifier field ... 46
8.3.2 Sequence Number field ... 46
8.3.3 Length of Link Management Command field ... 47
8.3.4 Link Management Command Payload field ... 47
8.4 Link network management command frames ... 48
8.4.1 Link Network Management Command Frame Identifier field ... 49
8.4.2 Sequence Number field ... 49
8.4.3 Length of Link Network Management Command Frame field ... 50
8.4.4 Link Network Management Command Payload field ... 50

9 Link network constants, information bases, and status values ... 52
9.1 Link network constants ... 52
9.2 DSME MAC link Information base ... 52
9.3 Link network status values ... 57

Annex A (informative) **Enhanced MAC for reliable services ... 58**

Annex B (informative) **Authentication and Key Establishment Protocols (AKEP) ... 60**

Bibliography ... 65

© ISO/IEC 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/IEC JTC 1, *Information technology*, SC 6, *Telecommunications and information exchange between systems*.

© ISO/IEC 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

Introduction

This working draft defines the protocol for the low-power wireless mesh network over channel-hopped TDMA links (LPWMN). The objective of LPWMN is to define a wireless mesh network specification, which is relatively lightweight compared to the legacy WPAN network specifications and can maximize usefulness of the channel-hopped TDMA link which is followed by the deterministic and synchronous multichannel extension (DSME) MAC specified in IEEE 802.15.4e-2012 amendment.

In recent years, there is market demand for applying the low-energy short range communication of the WSN to the networks for mission-critical services or real-time services including remote monitoring and alarming of health devices or medicine equipment, sensing and actuation control of process automation, and voice service over the low-energy short range networks. To provide more reliable link and deterministic delay for the mission-critical services, enhancements of the IEEE 802.15.4-2006 MAC specification was started in March 2008 and the draft of the amendment is approved in February 2012. In the IEEE 802.15.4e-2012 amendment, three types of TDMA and two types of channel diversity function are added as optional MAC features.

These new MAC features introduce two attributes to be managed in the network layer, which includes time slots and radio channels. To employ the new enhanced MAC for the reliable and real-time services in the low-cost, low-power, short-range communication network, the network protocol needs to be designed for managing the network resources including time slots and radio channels. The LPWMN is a network specification over the DSME of IEEE 802.15.4e-2012 amendment. The LPWMN is applicable to industrial applications that require a loss sensitive large wireless network guaranteeing deterministic end-to-end delay with low-power resource-constrained communication nodes.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this document may involve the use of a patent concerning the functional procedure and message structure of LPWMN given in Clauses 5, 6, 7, and 8, and a patent concerning the authentication and key establishment protocols given in Annex B.

ISO and IEC take no position concerning the evidence, validity, and scope of this patent right.

The holder of this patent right has assured the ISO and IEC the willingness to negotiate licences either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO and IEC. Information may be obtained from the following:

— Patent holder: Electronics and Telecommunications Research Institute (ETRI)

  Address: 138 Gajeongno, Yuseong-gu, Daejeon, 305-700, Korea;

— Patent holder: China IWNCOMM Co., LTD

  Address: A201, QinFengGe, Xi'an Software Park, No. 68 Keji 2rd, Xi'an Hi-Tech Industrial Development Zone, Xi'an Shaanxi, P.R.China. 710075.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO (www.iso.org/patents) and IEC (http://patents.iec.ch) maintain online databases of patents relevant to their standards. Users are encouraged to consult the databases for the most up-to-date information concerning patents.

© ISO/IEC 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

INTERNATIONAL STANDARD ISO/IEC 17821:2015(E)

Information technology — Specification of low power wireless mesh network over channel-hopped TDMA links

1 Scope

This International Standard defines the network specification for devices, which are operated on IEEE Std. 802.15.4-2011 PHY, capable to support the channel-hopped TDMA links of the DSME MAC of IEEE Std. 802.15.4e-2012, to provide low-cost communication network that allows reliable, deterministic-latency, and scalable wireless mesh connectivity.

This International Standard provides the following:

— DSME MAC link control;

— unbalanced cluster-tree based network formation;

— directional multiple grades mesh connection;

— link-path routing and data forwarding;

— link and link-path maintenance.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEEE Std 802.15.4-2011, *IEEE Standard for Local and metropolitan area networks—Part 15.4: Low-Rate Wireless Personal Area Networks (LR-WPANs)*

IEEE Std 802.15.4e-2012, *IEEE Standard for Local and metropolitan area networks—Part 15.4: Low-Rate Wireless Personal Area Networks (LR-WPANs), Amendment 1: MAC sublayer*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1
coordinator
device in a low-rate wireless personal area network (LR WPAN) that provides synchronization services to other devices in the LR WPAN

3.2
device
any entity containing an implementation of the IEEE 802.15.4e-2012 DSME medium access control and physical interface to the wireless medium

Note 1 to entry: A device may be a reduced-function device or a full-function device.

3.3
frame
format of aggregated bits from a medium access control sublayer entity that are transmitted together in time

© ISO/IEC ISO pub-date year – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

3.4
full-function device
FFD
device capable of operating as a coordinator

3.5
personal area network (PAN) coordinator
coordinator that is the principal controller of a PAN

Note 1 to entry: An IEEE 802.15.4 network has exactly one PAN coordinator.

3.6
reduced-function device
RFD
device that is not capable of operating as a coordinator

4 Abbreviations

The following acronyms are used in this document.

AKEP	Authentication and Key Establishment Protocols
CSMA-CA	Carrier Sense Multiple Access – Collision Avoidance
DLCE	DSME MAC Link Control sublayer Entity
DLIB	DSME MAC Link network Information Base
DLNE	DSME MAC Link Network sublayer Entity
DLPDU	DSME MAC Link network sublayer Protocol Data Unit
DLSDU	DSME MAC Link network sublayer Service Data Unit
DSME	Deterministic and Synchronous Multi-channel Extension
FFD	Full Function Device
GTS	Guaranteed Time Slot
ID	Identification
IDAP	ID-based Authentication Protocol
IEEE	Institute of Electrical and Electronics Engineers
LPWMN	Low-Power Wireless Mesh Network
LSAP	Light-weight Shared-key Authentication Protocol
MAC	Media Access Control
MCPS	MAC Common Part Sublayer
MIB	MAC Information Base
MLME	MAC Layer Management Entity
MSDU	MAC Service Data Unit
PAN	Personal Area Network

© ISO/IEC 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

PHY	Physical Layer
PTK	Pairwise Temporal Key
QoS	Quality-of-Service
RF	Radio Frequency
RFD	Reduced Function Device
SAP	Service Access Point
TDMA	Time Division Multiple Access
WPAN	Wireless Personal Area Network
WSN	Wireless Sensor Network

5 General description

5.1 General

The LPWMN is a low cost communication network that allows reliable, deterministic-latency, and scalable wireless mesh connectivity with low-power and low-rate WPAN devices. The main objectives of an LPWMN are optimal utilization of the channel-hopped TDMA links, cluster-tree based mesh network formation, and multiple grade of path selection, while maintaining a simple procedure and a lightweight protocol.

Some of the capabilities provided by this standard are as follows:

— resource management of the DSME MAC links

— beacon-enabled multi-hop network formation

— unbalanced cluster-tree based address assignment

— directional multiple grades mesh connection

— address based mesh routing

— unicast data forwarding with deterministic-latency

— load balanced path maintaining

This standard defines the link network specification for devices that are operated on IEEE Std. 802.15.4-2011 PHY capable to support the channel-hopped TDMA links of the DSME MAC of IEEE Std. 802.15.4e-2012.

5.2 Components of the LPWMN

The LPWMN consists of a gateway router, routers, and devices, which follow the IEEE Std. 802.15.4-2011 and have the DSME MAC sublayer of the IEEE Std. 802.15.4e-2012. The gateway router starts a network by configuring the attributes of the link network and forming the link network topology, and interconnects the LPWMN to an external network. The routers join a link network and forward frames through the DSME MAC links. The devices are reduced-function device (RFD) or full-function device (FFD) of the IEEE Std. 802.15.4-2011 and perform applications.

The LPWMN operates in the star topology and the peer-to-peer topology, as shown in Figure 5.1. A device typically establishes a star topology to routers and is either the initiation point or the termination point for link network communications. The gateway router is the primary controller of the LPWMN. The gateway router and routers are capable to establish a peer-to-peer topology. All devices operating on a link network have unique 64bit MAC addresses and 16bit link network addresses. The link network address is allocated by the cluster group.

© ISO/IEC 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

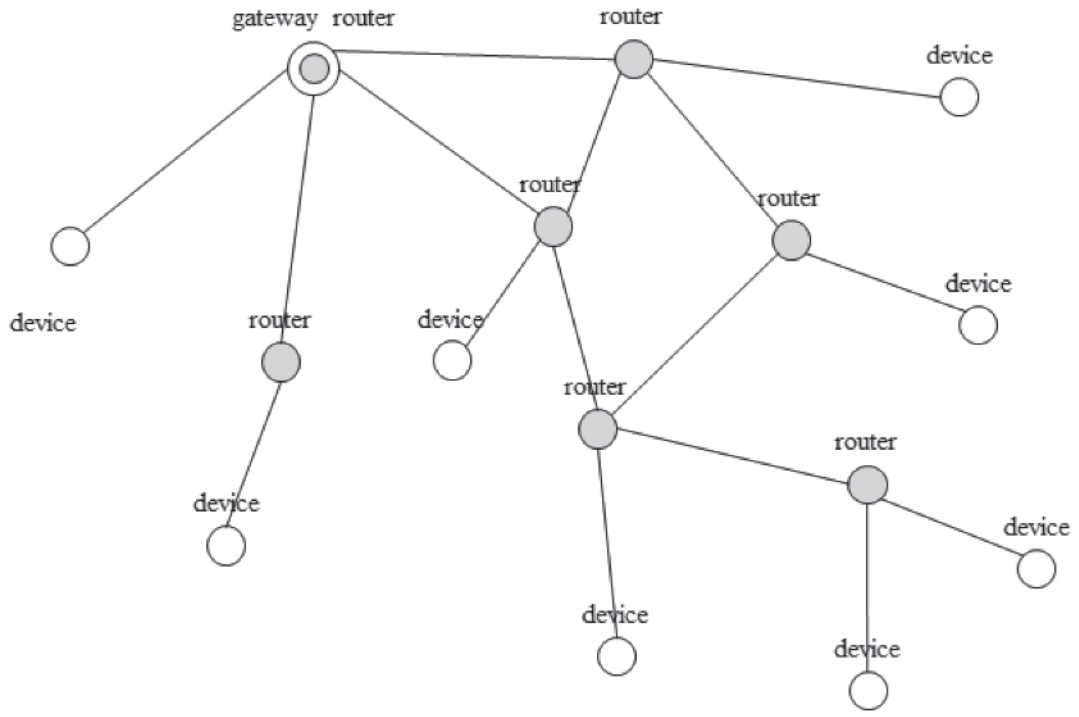

Figure 5.1 — An LPWMN topology

5.3 Architecture of the LPWMN

The reference architecture of the LPWMN is defined in terms of layers, as illustrated in Figure 5.2. The LPWMN provides link control layer interfaces to the next higher layer and link network layer interfaces to the next higher or to the application layer. The LPWMN operates over the IEEE Std 802.15.4e-2012 DSME MAC Sublayer and the IEEE Std 802.15.4-2011 PHY. The LPWMN offers services to the next higher layer.

The LPWMN consists of two sublayers: DSME MAC Link Control sublayer (DLC) and DSME MAC Link Network sublayer (DLN). The LPWMN DLC sublayer entity (DLCE) provides services to the next higher layer via the DSME MAC Link Control sublayer Service Access Point (DLC-SAP). The LPWMN DLN sublayer entity (DLNE) provides services to the next higher layer via the DSME MAC Link Network sublayer Service Access Point (DLN-SAP).

The DLC sublayer provides link connection control, link management services, data transmission on a link, and relaying frames with supporting of the DSME MAC sublayer via the MCPS-SAP and the MLME-SAP.

The DLN sublayer consists of link network formation block, addressing block, routing block, and link network management block, and data processing block which provides receiving function and forwarding function for the frames received from the MAC layer or for the data received from the next higher layer.

© ISO/IEC 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

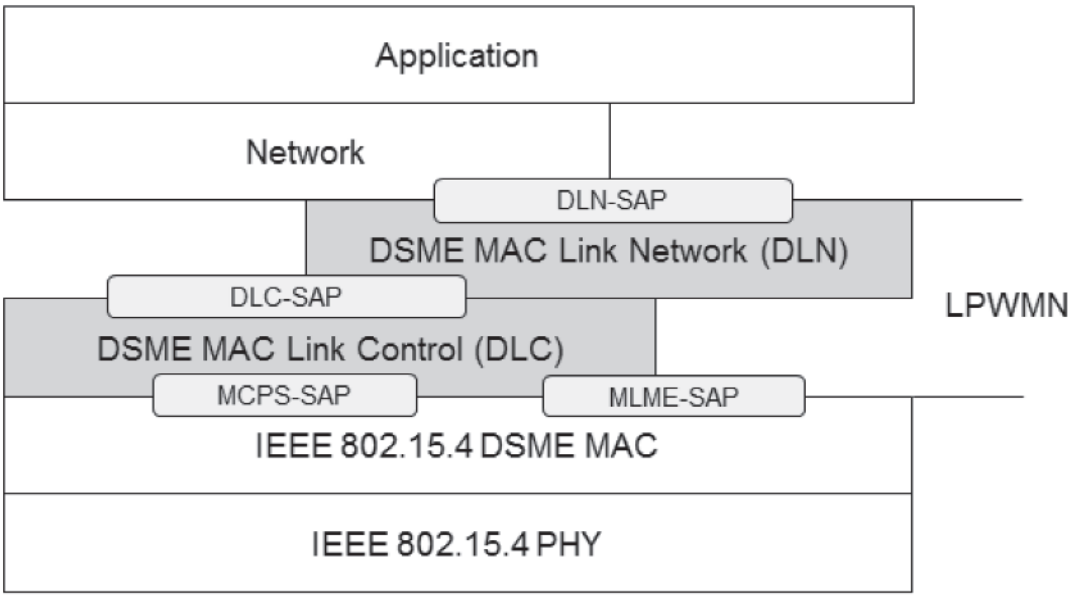

Figure 5.2 — Reference architecture of the LPWMN

5.4 Functional overview

5.4.1 Link network formation

The LPWMN establishes a link between two neighbour devices and a virtual link between two devices multi-hopped apart, as shown in the Figure 5.3. The LPWMN provides a routed link-path, link network, which is constituted of links and virtual links from a source to a destination device.

The link connects the two neighbour devices: link network router 2 and device 3 are neighbour and a link connects two devices. The virtual link is the multi-hop link connection through the routers which perform frame relaying instead of routed forwarding: network router 2 and device 6 are connected through router 4 and router 6 which relay the frames inward or outward. The routed link-path is provided by the DLN sublayer's routing functions: for connecting between device 4 and device 8, the LPWMN provides several routed link-paths which are the path 1 (device 4 - router 4 - link network router 2 - gateway router - link network router 3 - device 8), path 2 (device 4 - router 4 - link network router 2 - link network router 3 - device 8), and path 3 (device 4 - router 4 - router 5 - link network router 3 - device 8).

© ISO/IEC 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

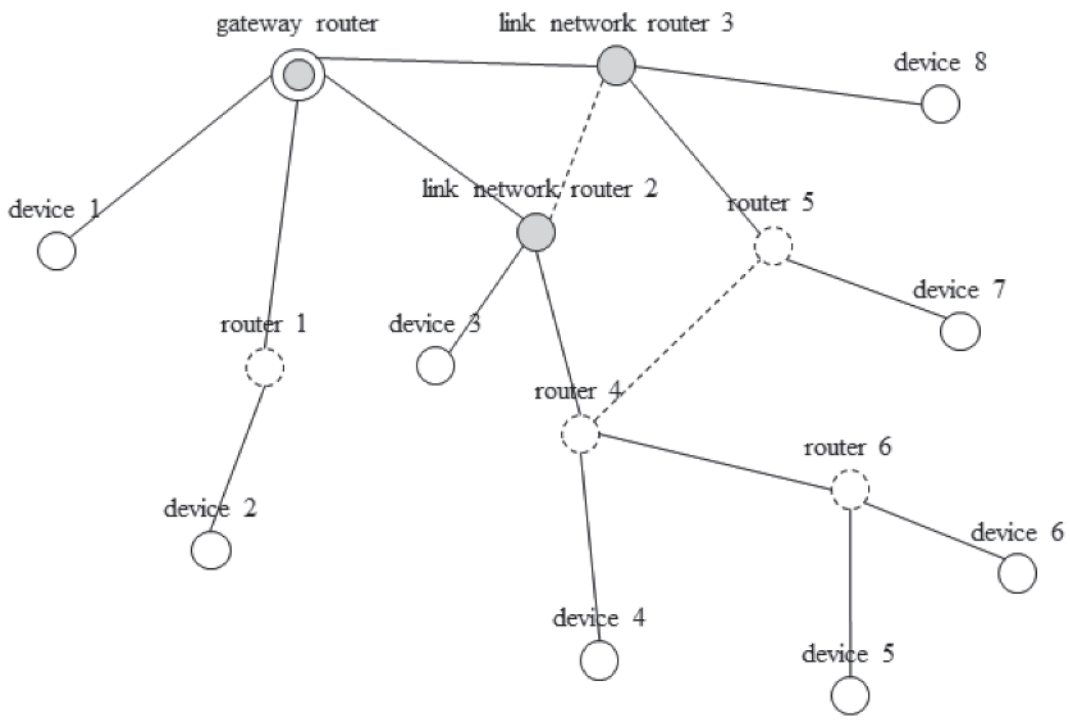

Figure 5.3 — Link, virtual link, routed link-path in the LPWMN

The link network formation of the LPWMN is performed in two stages: link connection and link network routing. In the link connection phase, the DLC sublayer entity of the LPWMN scans the neighbour devices, selects the links to the neighbour devices, establishes connections, and maintains the links. In the link network routing phase, according to the request of the next higher layer of the LPWMN, a set of virtual link is established and/or a set of routed path is established.

5.4.2 Link connection

The LPWMN is a link network that connects two devices by switching the time slots. The DSME MAC sublayer provides the contention access period (CAP) and guaranteed timeslots (GTS) in a beacon interval for communicating, as illustrated in Figure 5.4.

A CAP link is active periodically and is used for the bidirectional data transmission. A GTS link in the LPWMN is established by assigning the offset of channel hopping sequence and the DSME timeslots between two devices. To allocate the DSME timeslots between devices, the LPWMN issues MLME-DSME-GTS.request primitive with attribute values on the link which are the direction of DSME-GTSs, the number of slots to be allocated, preferred slots, and current information on the slot availability in one hop neighbourhood of the requesting device.

The LPWMN GTS link can be established not only between two directly connected devices, but also between two devices which can be connected with multi-hop routed links. The LPWMN provides a primitive for establishing a routed link connection. To form a link-path from a source device to a destination device, each device on the path requests to allocate DSME timeslots. As a result of the success of the routed link connection, the link connection identifier will be provided to the next higher layer of the source device.

The LPWMN GTS link can be used as shared link or dedicated link. The default shared link is established during joining a network. An inward rx timeslot and an inward tx timeslot of a link to the inner router are assigned as the default shared link and the default path to the gateway router is established. If the next higher layer of the LPWMN needs a dedicated link, it is required to setup a link connection before sending data. To establish a dedicated link connection, link network layer routing is performed through the routers on the routed link-path from a source device to a destination device. To establish a

© ISO/IEC 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

bidirectional dedicated link, it needs to establish an inward dedicated link and an outward dedicated link separately. The link setup procedure from the source device and the link setup procedure from the destination device are required.

The dedicated link transmits a frame received only at the source device of the link. The shared link may transmit a frame received at the routers on the link-path to the destination device of the link.

When the next higher layer of the LPWMN requests to transmit data, according to the required quality of transmission, it selects a type of data transmission, which specifies the type of link for communications, the recovery procedure, and flow control. The LPWMN provides six types of data transmission.

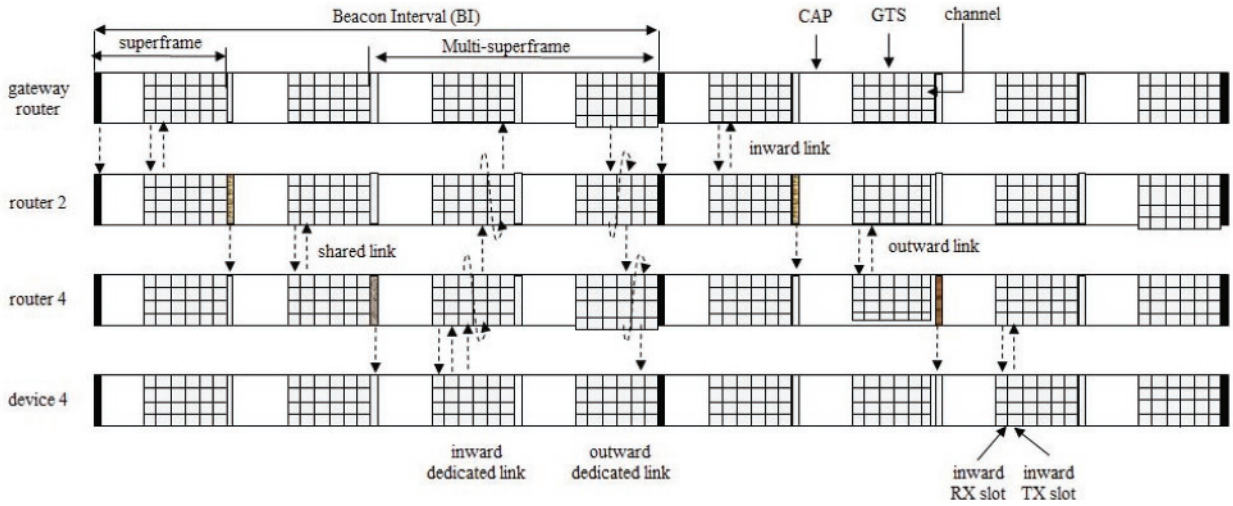

Figure 5.4 — CAP link, shared link, dedicated link of the LPWMN

5.4.3 Unbalanced cluster-tree addressing

To support the fast formation of a network and to provide address based tree routing, the distributed address allocation scheme with an unbalanced cluster-tree structure is designed as shown in Figure 5.5.

The 16-bit addressing space is divided two parts for identifying a cluster (cluster ID) and a device in the cluster (locator ID). The gateway router manages the cluster identifier space and assigns a cluster identifier when the root router of a cluster joins a link network. The root router of a cluster assigns an identifier to a device by using the distributed address allocation scheme with the maximum depth of the cluster (L), the maximum number of devices connected to a router (D), and the maximum number of routers among devices connected to a router (R) values. The locator identifier of the root router of a cluster is 0 and the locator identifier of a device connected to a router h-hopped from the root router of a cluster shall be assigned as follows. If the device is a router, the locator identifier is calculated as follows: *device identifier of a parent router + 1 + (sequential order of a router at cluster depth h - 1)*size of address block at cluster depth h*. If the device is an end device, the identifier is calculated as follows: *device identifier of a parent router + 1 + maximum number of a router at cluster depth h*size of address block at cluster depth h + sequential order of an end device at cluster depth h*. The sequential order of a device at each cluster depth is assigned from 1. The size of address block at cluster depth h, $B(h)$, is calculated as follows: If $R = 1$, $B(h) = 1 + D*(L - h - 1)$. If $R \neq 1$, $B(h) = (1+D-R-D*R^{L-h-1})/(1-R)$.

In case of running out of address on the cluster tree or enlarging the network topology dynamically, a router could request assignment of a cluster to the gateway router as a root router of the cluster. The gateway router maintains the connectivity matrix among the clusters. The router provides the cluster-tree routing table based on the cluster connectivity matrix.

© ISO/IEC 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

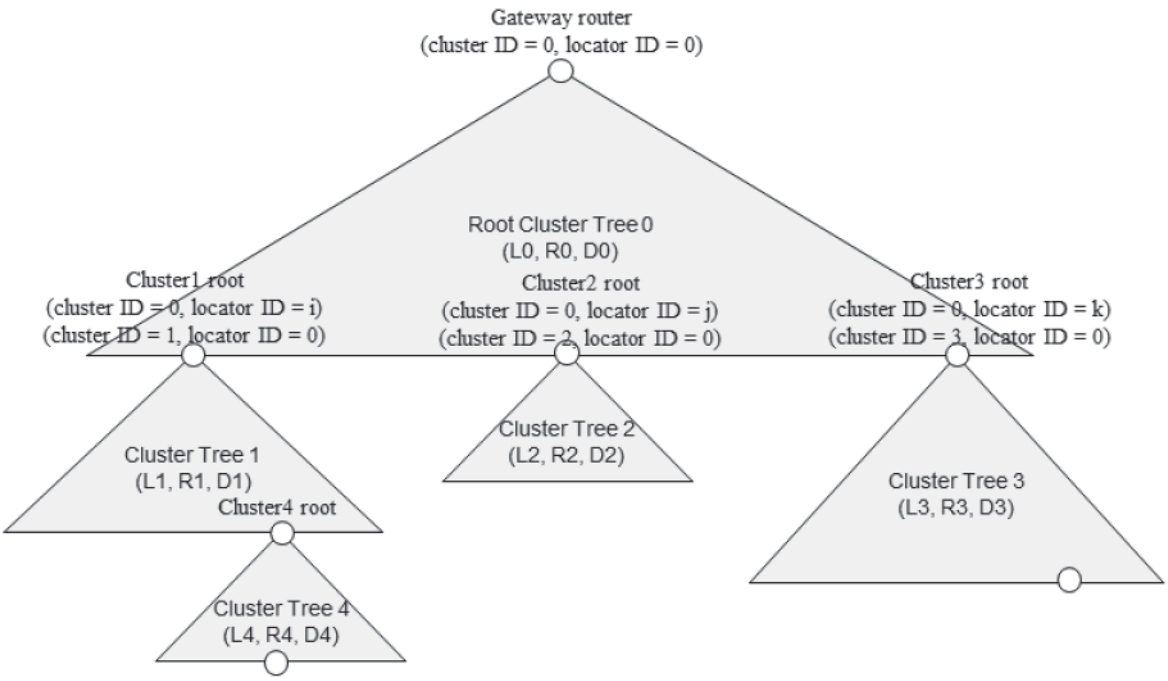

Figure 5.5 — Address assignment based on asymmetrical tree structure

5.4.4 Routing

The DSME MAC offers TDMA slots with two types of channel diversity function. The routing function concerns with not the only matter of connectivity, but considering a series of the time slot and channel number pairs which are allocated on the radio links in a path. To utilize the TDMA MAC optimally, the link network protocol has to offer the light-weight network protocol for reserving the time slots on a link from one end to the other end. The routing protocol has to support the fair load balancing among devices contended to reserve the time slots and channels.

The channels occupied by nodes within 2-hops range have to be excluded for avoiding the collision by hidden nodes. Based upon the neighbour device information, possible links to the inner router are searched by selecting time slot and channel number pairs.

When a device joins a link network, the cluster connectivity matrix is provided from the gateway router or the root router. The cluster connectivity matrix provides relations among the root routers of the clusters and inter-cluster mesh links. Selection of a route is performed based on the cluster identifier of reachable devices. The device of which the cluster level or cluster-tree level is closer to the destination is selected for forwarding a frame, as shown in Figure 5.6. A data packet is forwarded to the next hop on a reserved GTS link or a shared link, which is specified by a certain time slot and a hopping channel.

© ISO/IEC 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

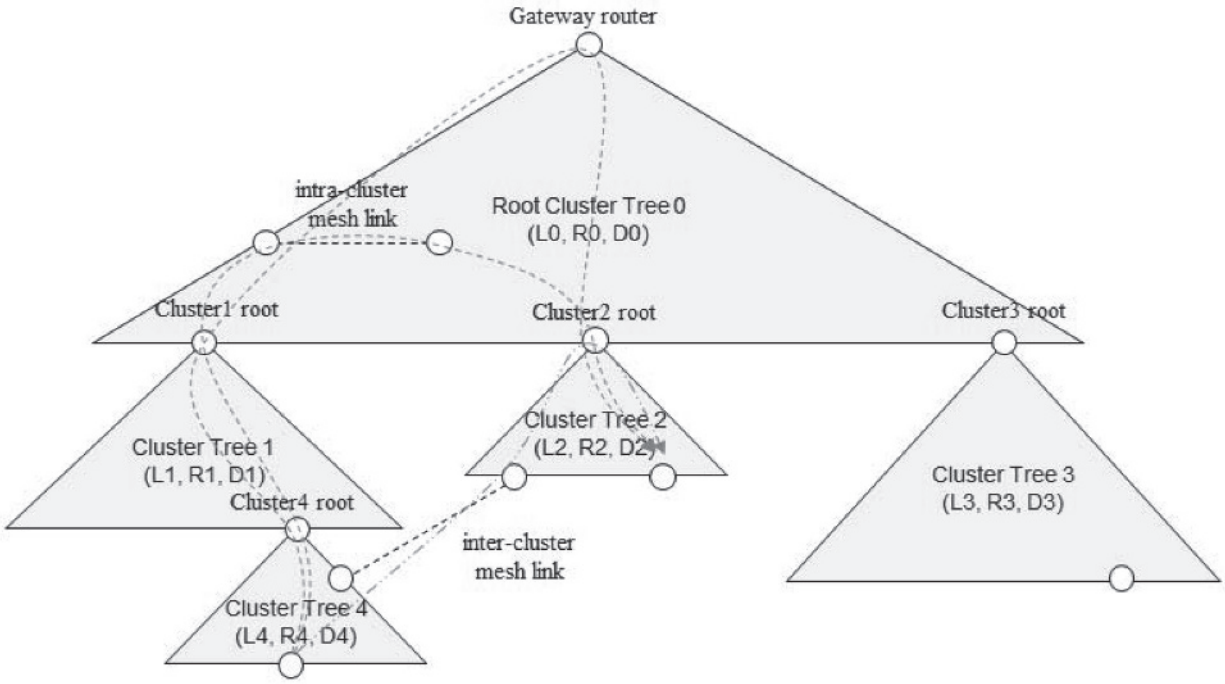

Figure 5.6 — Cluster-tree address based mesh routing

6 Functional description

6.1 Starting the LPWMN

6.1.1 Starting a link network

The gateway router which is not currently joined to a link network shall attempt to establish a new LPWMN. When the next higher layer of the device issues the DLN-START-NETWORK.request primitive, the procedure to establish a new LPWMN is initiated. If the device is not the gateway router or is joined to a link network, the DLNE shall terminate the procedure and notify the next higher layer of the illegal request by issuing the DLN-START-NETWORK.confirm primitive with the Status parameter set to INVALID_ REQUEST.

The DLNE shall reset the MAC sublayer by issuing the MLME-RESET.request primitive with the SetDefaultPIB parameter set to TRUE. The DLNE shall collect the data on the wireless environments and neighbour networks by requesting that the MAC sublayer performs an energy detection scan and an active scan in succession. The DLNE issues the MLME-SCAN.request primitive with the ScanType parameter set to ED and the ScanChannels parameter set to the ScanChannels parameter of the DLN-START-NETWORK.request primitive. On receipt of the results via MLME-SCAN.confirm primitive, the DLNE shall select the channels, whose energy levels are beyond an acceptable level, at most the number of channels specified in the HoppingSequenceLength parameter of the DLN-START-NETWORK. request primitive. The DLNE issues the MLME-SCAN.request primitive with the ScanType parameter set to ACTIVE and the ScanChannels parameter set to the ScanChannels parameter of the DLN-START-NETWORK.request primitive. On receipt of the results via MLME-SCAN.confirm primitive, the DLNE shall review the PANDescriptorList parameter. The DLNE collects the information on the neighbour IEEE 802.15.4-2011 PANs: the PAN identifier, channel number and channel page, superframe specification, and the time at which the beacon frame was received. The DLNE collects the information on the neighbour IEEE 802.15.4e-2012 PANs: the PAN identifier, superframe specification, DSME superframe specification, channel hopping specification, time synchronization specification, and beacon bitmap.

© ISO/IEC 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

The DLNE may infer whether the channel is occupied or not by superimposing all the superframes of the neighbour networks at a specific time. The DLNE shall select a link network start time and channels, and determine the order of hopping channels. The length of hopping sequence and the hopping sequence are written to the *dlHoppingSequenceLength* attribute and the *dlHoppingSequenceList* attribute of the DSME MAC Link network Information Base (DLIB), respectively. If no suitable channel is found, the DLNE shall terminate the procedure and notify the next higher layer of the startup failure by issuing the DLN-START-NETWORK.confirm primitive with the Status parameter set to STARTUP_FAILURE.

The DLNE shall select a PAN identifier for the new LPWMN by choosing a random PAN identifier less than 0xffff, if the PANId parameter of the DLN-START-NETWORK.request primitive is already in use. The selected PAN identifier is set to the *macPANID* attribute of the MAC sublayer PIB by issuing the MLME-SET.request primitive. Once a PAN identifier is selected, the DLNE shall select a 16-bit link network address equal to 0x0000 and set the *dlLinkNetworkAddress* attribute of the DLIB equal to the selected link network address. If no unique PAN identifier can be chosen, the DLNE shall terminate the procedure and notify the next higher layer of the startup failure by issuing the DLN-START-NETWORK.confirm primitive with the Status parameter set to STARTUP_FAILURE.

At a specific selected time, the DLNE shall begin operation of the new PAN by issuing the MLME-START.request primitive with the PANCoordinator parameter set to TRUE and the CoordRealigment parameter set to FALSE to the MAC sublayer. The parameters of the MLME-START.request primitive shall be set according to those passed in the DLN-START-NETWORK.request, the chosen channel hopping sequence, and the chosen PAN identifier. The Multi-superframeOrder, ChannelDiversityMode, CAPEnable, GACKEnable, and Deferred BeaconEnable are assembled into the parameter DSMESuperframeSpecificaiton. The HoppingSequenceID with set to one, ChannelOffset with set to zero, and value of *dlHoppingSequenceLength* attribute and the *dlHoppingSequenceList* attribute of DLIB are assembled into the parameter HoppingDescriptor.

The status of the PAN startup is communicated back via the MLME-START.confirm primitive. On receipt of the status of the PAN startup, the DLNE shall inform the next higher layer of the status of its request by issuing the DLN-START-NETWORK.confirm primitive with the Status parameter set to the primitive returned in the MLME-START.confirm from the MAC sublayer.

6.1.2 Starting a router

When the next higher layer of the device issues the DLN-START-ROUTER.request primitive, the procedure to join the LPWMN as a new router is initiated, as shown in Figure 6.1. If the device is not the FFD or is joined to a link network, the DLNE shall terminate the procedure and notify the next higher layer of the illegal request by issuing the DLN-START-ROUTER.confirm primitive with the Status parameter set to INVALID_ REQUEST.

The DLNE shall reset the MAC sublayer by issuing the MLME-RESET.request primitive with the SetDefaultPIB parameter set to TRUE and reset the DLN sublayer by issuing the DLN-RESET.request primitive. The DLNE shall collect the data on neighbour networks by requesting that the MAC sublayer performs an active scan. The DLNE issues the MLME-SCAN.request primitive with the ScanType parameter set to ACTIVE and the ScanChannels parameter set to the ScanChannels parameter of the DLN-START-ROUTER.request primitive. On receipt of the results via MLME-SCAN.confirm primitive, the DLNE shall review the PANDescriptorList parameter to collect the information on the neighbour IEEE 802.15.4e-2012 PANs: the PAN identifier, superframe specification, DSME superframe specification, channel hopping specification, time synchronization specification, and beacon bitmap. The information on the neighbour router of which a PAN identifier is the PANId parameter of the DLN-START-ROUTER. request primitive is captured in the *dlNeighborDeviceTable* attribute of the DLIB. If no neighbour router can be found, the DLNE shall terminate the procedure and notify the next higher layer of the startup failure by issuing the DLN-START-ROUTER.confirm primitive with the Status parameter set to STARTUP_FAILURE.

The DLNE shall search its neighbour device table for selecting a suitable primary inner router. The DLNE selects a device that the depth to the gateway router from this device is the smallest among devices which the link quality for frames received from this device are beyond an acceptable level.

© ISO/IEC 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

The DLNE shall associate the PAN through the primary inner router, as described in 6.2.

After completing the cluster connectivity matrix, the DLNE shall select the superframe duration to transmit the beacon by superimposing all beacon bitmaps of the neighbour routers.

The DLNE shall begin the router by issuing the MLME-START.request primitive with the router parameter set to the MAC sublayer. Upon receiving the MLME-START.confirm primitive, the DLNE shall notify the next higher layer by issuing the DLN-START-ROUTER.confirm primitive with the Status parameter. The MAC sublayer enters the operating mode to transmit its beacons and is ready to allow new devices to join the LPWMN.

If no superframe duration for the beacon can be chosen, the DLNE shall terminate the procedure and notify the next higher layer of the startup failure by issuing the DLN-START-ROUTER.confirm primitive with the Status parameter set to STARTUP_FAILURE.

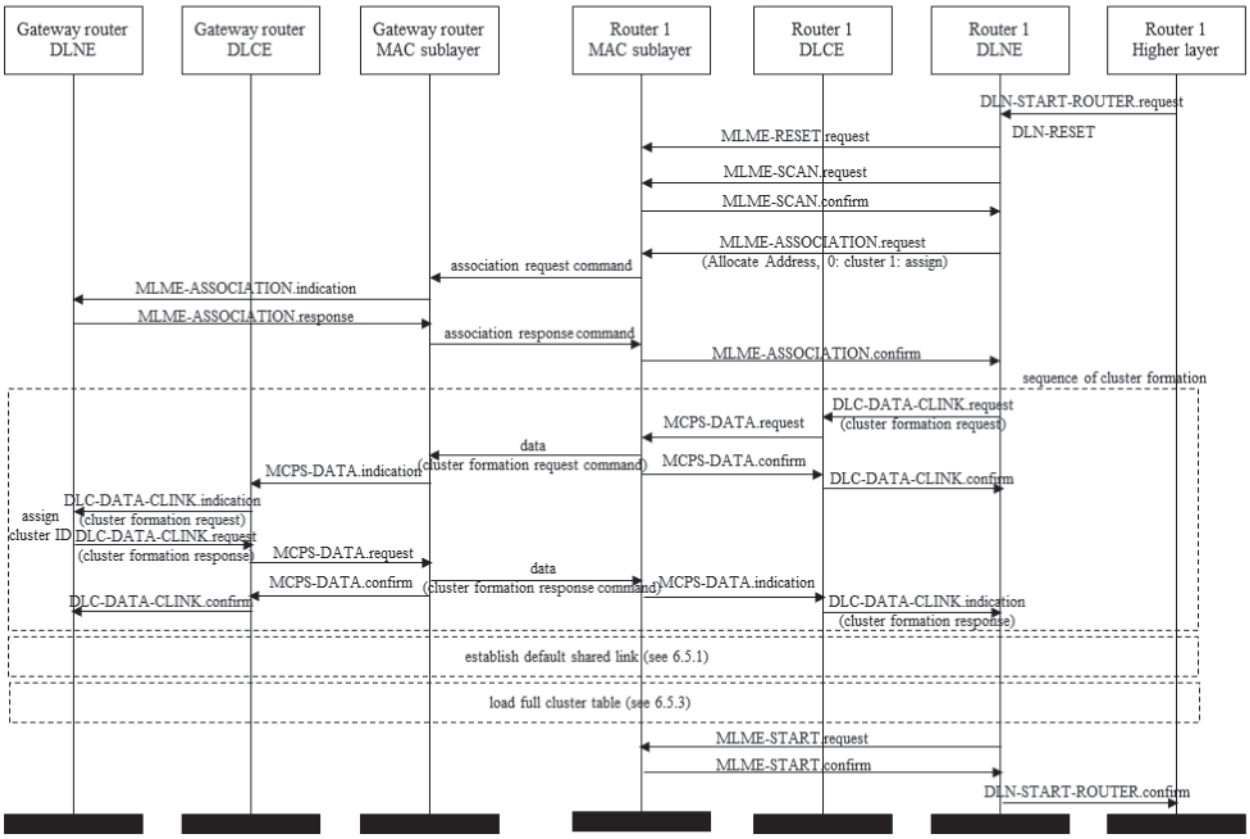

Figure 6.1 — Sequence of the starting a router

6.1.3 Starting a device

When the next higher layer of the device issues the DLN-START-DEVICE.request primitive, the procedure to join the LPWMN as a device is initiated. If the device is joined to a link network, the DLNE shall terminate the procedure and notify the next higher layer of the illegal request by issuing the DLN-START-DEVICE.confirm primitive with the Status parameter set to INVALID_ REQUEST.

The DLNE shall reset the MAC sublayer by issuing the MLME-RESET.request primitive with the SetDefaultPIB parameter set to TRUE and reset the DLN sublayer by issuing the DLN-RESET.request primitive. The DLNE shall collect the data on neighbour networks by requesting that the MAC sublayer performs an active scan. The DLNE issues the MLME-SCAN.request primitive with the ScanType parameter set to ACTIVE and the ScanChannels parameter set to the ScanChannels parameter of the DLN-START-DEVICE.request primitive. On receipt of the results via MLME-SCAN.confirm primitive,

© ISO/IEC 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

the DLNE shall review the PANDescriptorList parameter to collect the information on the neighbour IEEE 802.15.4e-2012 PANs.

The DLNE shall search its neighbour device table for a suitable inner router and select a device which the depth to the gateway router from this device is the smallest.

The DLNE shall associate the PAN through the primary inner router, as described in 6.2.

After completing the cluster connectivity matrix, the DLNE shall notify the next higher layer by issuing the DLN-START-DEVICE.confirm primitive with the Status parameter.

6.2 Joining a link network

For joining a link network, a device associates with the PAN through the MAC layer association procedure, requests a cluster formation, and establishes a shared link to the gateway router. The joining procedure is specified on the view of a device and on the view of the inner router.

6.2.1 Device procedure

When the device is designated as a root router of a cluster, the Allocate Address bit-field of the CapabilityInformation parameter set to zero. The capability information shall be stored as the value of the *dlCapabilityInformation* attribute of the DLIB.

The DLNE shall issue an MLME-ASSOCIATE.request primitive to the MAC sublayer. The CoordAddrMode is set to SHORT_ADDRESS, CoordPANId is set to the value of *dlPANId* of the DLIB, and CoordAddress is set to the address of the selected inner router. The bit-fields of the CapabilityInformation parameter shall have the values shown in Table 9.3. The Allocate Address bit-field of the CapabilityInformation parameter is always set to one.

The MLME-ASSOCIATE.confirm primitive with a status value of SUCESS received shall contain a 16-bit logical address unique to that network. The DLCE shall then update the value of *dlLinkNetworkAddress*, *dlHoppingSequenceLength*, *dlHoppingSequence*, *dlChannelOffset* attributes of the DLIB with the parameter of the MLME-ASSOCIATE.confirm primitive, and set the Device Type field of the corresponding neighbour device table entry to indicate that the neighbour is its parent.

When the device is designated as a root router of a cluster, on receipt of the MLME-ASSOCIATE.confirm primitive with a status value of SUCCESS, the DLNE shall request a cluster allocation by transmitting the link network management command frame containing the cluster formation request command payload by issuing the DLC-DATA-CLINK.request primitive, as shown in Figure 6.1.

Upon receiving the DLC-DATA-CLINK.confirm primitive, if the Length of Cluster Identifier Space field of the cluster formation response command payload is not zero, the cluster identifier is successfully assigned.

After allocating the link network address of the device, the DLNE shall request to establish default shared link to the inner router by issuing the DLC-LINK-SETUP.request primitive, as described in 6.5.1.

Upon receiving the DLC-LINK-SETUP.confirm primitive, the DLNE shall request to get the cluster table to the gateway by transmitting the link network management command frame containing the route update request command payload with the Route Update Request Type field set to full cluster connectivity matrix (0x00) by issuing the DLC-DATA-SLINK.request primitive.

When the DLNE receives the link network management command frame containing the route update response command payload by issuing the DLC-DATA-SLINK.indication primitive, the DLNE shall complete the cluster table.

6.2.2 Router procedure

On receipt of the MLME-ASSOCIATE.indication primitive, the DLNE shall assign a link network address as described in 6.4. The DLNE shall select the channel offset for the device requesting association. The DLNE shall notify the results by issuing the MLME-ASSOCIATE.response primitive to the MAC sublayer.

© ISO/IEC 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

If no address or channel offset can be chosen, the DLNE shall notify the joining a link network failure by issuing the MLME-ASSOCIATE.response primitive with the Status parameter set to OUT_OF_RESOURCE.

When the router receives the link network management command frame containing the cluster formation request command payload by issuing the DLC-DATA-CLINK.indication primitive, the router shall forward the link network management command to the gateway router through the DLC-DATA-SLINK.request primitive by changing the destination address of the link network management command to the link network address of the gateway router.

The gateway router assigns a cluster identifier to the device, and updates the cluster connectivity matrix. If there is run out of the cluster ID space, the gateway router shall send the link network management response command with the Length of Cluster Identifier Space field of the cluster formation response command payload set to zero.

Upon receiving the link network management command frame containing the cluster formation response command payload by issuing the DLC-DATA-SLINK.indication primitive, the DLNE shall update the cluster table and forward the link network management command frame by issuing the DLC-DATA-CLINK.request primitive.

When the router receives the link network management command frame containing the route update request command payload by issuing the DLC-DATA-SLINK.indication primitive, the router shall forward the link network management command to the root router of the cluster. Upon receiving the link network management command frame containing the route update response command payload by issuing the DLC-DATA-SLINK.indication primitive, the DLNE shall update the cluster table and forward the link network management command frame by issuing the DLC-DATA-SLINK.request primitive.

6.3 Leaving a link network

When the DLN sublayer receives the DLN-MANAGEMENT.request primitive with the Type parameter set to LEAVE, the procedure to remove a device from the link network is initiated.

When the device to be removed is an end device of a cluster, the device shall request to remove from the link network by sending a link network management command frame with the Link Network Management Command Type field set to LEAVE_REQ through the DLC-DATA-CLINK.request primitive to the inner router. The inner router shall reply by sending the link network management command frame with the Link Network Management Command Type field set to LEAVE_RESP through the DLC-DATA-CLINK.request primitive to the end device. The inner router shall release the dedicated links for the end device by deallocating the DSME-GTSs and updating link table, update the route table, and send the link network management command frame containing the route update request command payload by issuing the DLC-DATA-SLINK.request primitive to the root router of the cluster to update the route table.

When the device to be removed is a router of a cluster, the device shall send a link network management command frame with the Link Network Management Command Type field set to LEAVE_REQ through the DLC-DATA-SLINK.request primitive to each end devices of the router. The router shall release the shared links and the dedicated links for end devices by deallocating the DSME-GTSs and updating link table. After completing link release, the router shall send the link network management command frame with the Link Network Management Command Type field set to LEAVE_REQ to the inner router, as shown in Figure 6.2. The inner router shall send the link network management command frame containing the route update request command payload by issuing the DLC-DATA-SLINK.request primitive to the root router of the cluster. The inner router shall reply by sending link network management command frame with the Link Network Management Command Type field set to LEAVE_RESP through the DLC-DATA-CLINK.request primitive to the router. Upon receiving the link network management command frame with the Link Network Management Command Type field set to LEAVE_RESP, the router shall request to release the shared links and the dedicated links to the inner router as described in 6.5.2. If the inner router will not receive the link release request command within *dlMaxResponseTimeout*, the inner router shall release the shared links and the dedicated links for the router.

When the device to be removed is a root router of a cluster, the device shall send the link network management command frame with the Link Network Management Command Type field set to LEAVE_REQ through the DLC-DATA-SLINK.request primitive to each routers except the inner router. Upon

© ISO/IEC 2015 – All rights reserved

AVA Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

receiving the link release request command, the neighbour router shall initiate the procedure to remove the router from the link network. After completing the link release to the neighbour routers, the root router shall send the link network management command frame with the Link Network Management Command Type field set to LEAVE_REQ to the inner router. The inner router shall send the link network management command frame containing the route update request command payload by issuing the DLC-DATA-SLINK.request primitive to the gateway router. The inner router shall reply by sending link network management command frame with the Link Network Management Command Type field set to LEAVE_RESP through the DLC-DATA-CLINK.request primitive to the root router. Upon receiving the link release response command, the root router shall start to release the shared link and the dedicated links to the inner router.

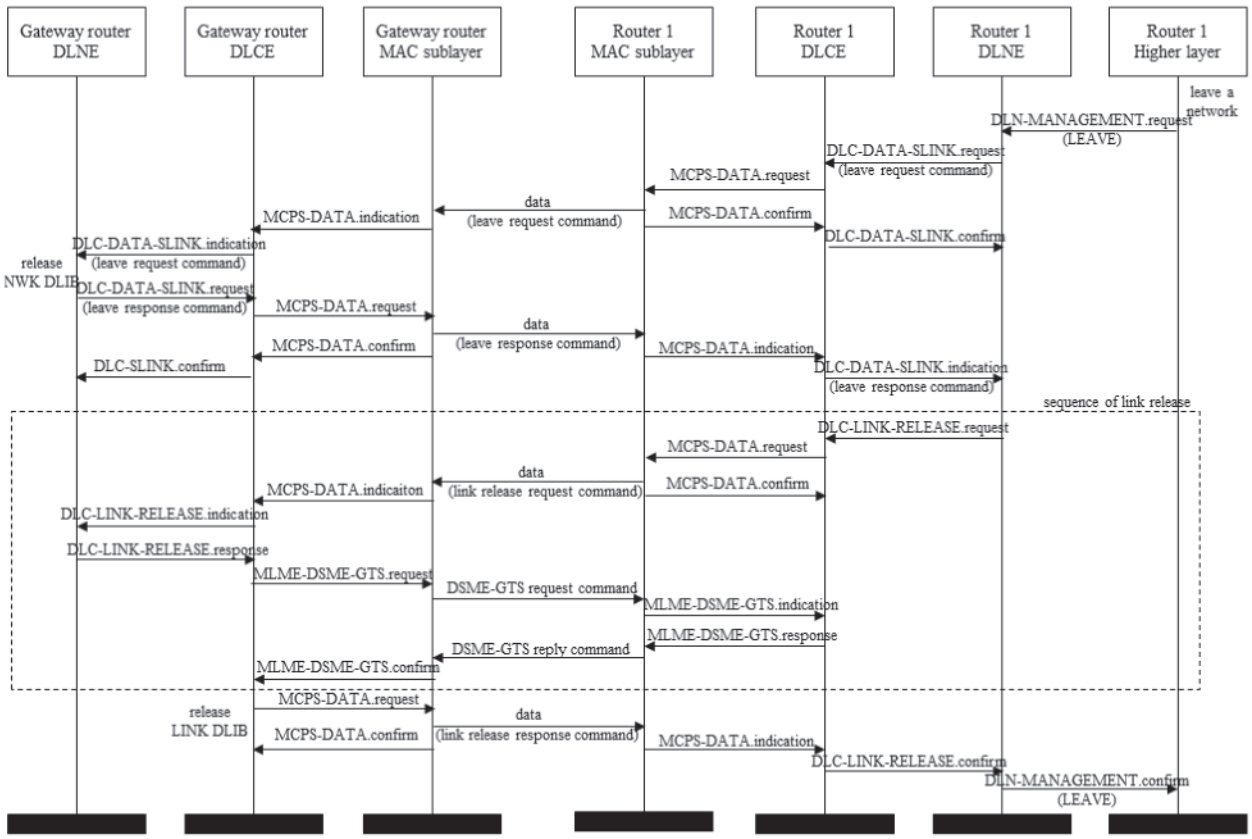

Figure 6.2 — Sequence of the leaving a network at a router

6.4 Address assignment with an unbalanced cluster-tree structure

The link network address of a device in the LPWMN is assigned during the startup procedure. The addressing of the LPWMN has the unbalanced cluster-tree structure. The link network address consists of the cluster identifier and the device locator in a cluster. The 16-bit addressing space is divided into *dlClusterAddrSpace* bits and (16-*dlClusterAddrSpace*) bits. The root of the cluster assigns a device locator by using the distributed address allocation scheme, as described in 5.4.3. The (16-*dlClusterAddrSpace*) bits of link network address shall be assigned to end devices in a sequential manner.

In a LPWMN the link network address can show the cluster in which the device is resided and where the device is located in the cluster. If the cluster is the root cluster, the cluster ID is set to 0. If the device is the root router of a cluster, the device locator is set to 0. The gateway router is the root router of the root cluster. Therefore, the link network address of the gateway router is 0x0000. If the length of cluster identifier is 8-bit and a router 1 in the root cluster becomes the root router of the cluster 1, the router has two link network addresses, the Router Address and Router Reflector Address of Table 9.6: the link network address in the root cluster, 0x0001, and the link network address in the cluster 1, 0x0100.

© ISO/IEC 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015

The gateway router shall maintain the cluster table and provide the information on the cluster. The cluster identifier is assigned by the gateway router. A new cluster can be formed, when a router joins a link network as a root of a cluster or when the address space is run out of. When receiving the DLN-START-ROUTER.request primitive with the non-zero maxDepth parameter, the DLNE shall request the cluster formation to the gateway router, after completing the MAC sublayer association procedure. The gateway router shall reply a cluster formation response command payload with the Cluster Identifier field.

6.5 DSME MAC link and link-path

6.5.1 Establishing a link-path

The LPWMN provides the capabilities to setup a link or link-path to the designated device. When the next higher layer of the DLC sublayer issues the DLC-LINK-SETUP.request primitive, the procedure to establish a shared link or a dedicated link to the designated device is initiated, as shown in Figure 6.3.

When the next higher layer of the DLC sublayer issues the DLC-LINK-SETUP.request primitive with the LinkType parameter set to IN-{SHARED/DEDICATED/PEER} or OUT-{SHARED /DEDICATED/PEER}, the procedure to establish a directional link is initiated. The DLCE shall search the neighbour device table or the route table for establishing a link or a link-path to the destined device. If a next hop to the destined device is found, the DLCE shall transmit the link setup request command to the next hop by issuing MCPS-DATA.request primitive on a CAP link or a default shared link to allocate time slots on a link to the next hop. If the DLCE fails to find a next hop to the destined device, the DLCE requests the DLNE to update the link-path routing information. If no router can be found to the destined device, the DLCE shall terminate the procedure and notify the next higher layer of the link setup failure by issuing the DLC-LINK-SETUP.confirm primitive with the Status parameter set to NOT_REACHABLE.

Upon receiving the MCPS-DATA.indication primitive at the router on the link-path to the destined device, the DLCE shall check the availability of the DSME-GTSs for the directional link. If the DSME-GTS is available, the DLCE shall allocate the DSME-GTSs and request to transmit DSME-GTS request command frame by issuing the MLME-DSME-GTS.request primitive with the PreferredSuperframID and PreferredSlotID parameter. When the DLCE receives the MLME-DSME-GTS.confirm primitive, the DLCE shall update the link table and forward the link setup request command to the next hop by issuing MCPS-DATA.request primitive. If the DSME-GTS is not available or the MLME-DSME-GTS.confirm primitive is not received, the DLCE shall discard the link setup request command and transmit the link setup response command with the Status field set to RESOURCE_FULL to the device requesting link setup.

When the destined device receives the link setup request command, the DLCE shall allocate the DSME-GTSs and request to transmit DSME-GTS request command frame to the previous hop device. When the DLCE receives the MLME-DSME-GTS.confirm primitive, the DLCE shall update the link table and notify the reception of the link setup request by issuing the DLC-LINK-SETUP.indication primitive. When the next higher layer of the DLC sublayer issues the DLC-LINK-SETUP.response primitive, the DLCE of the destined device shall transmit the link setup response command to the device requesting link setup by issuing MCPS-DATA.request primitive on a CAP link or a default shared link.

If no DSME-GTS is available or the MLME-DSME-GTS.confirm primitive is not received, the DLCE at the destined device shall discard the link setup request command and transmit the link setup response command with the Status field set to RESOURCE_FULL to the device requesting link setup. Upon receiving the link setup response command with the Status field set to RESOURCE_FULL at the router on the link-path to the device requesting link setup, the DLCE shall deallocate DSME-GTSs, update the link table by deleting the link, and forward the link setup response command to the device requesting link setup.

To establish a bi-directional dedicated link-path or a bi-directional shared link-path, the DLCE at the destined device shall start to establish a link-path to the device requesting link setup by transmitting the link setup request command, after completing the allocation of DSME-GTS on the link-path from the device requesting link setup to the destined device. When the device requesting link setup receives the MLME-DSME-GTS.confirm primitive, the DLCE shall transmit the link setup response command to the destined device. The link setup response command shall be relayed and the DLCE at the destined device shall notify the completion of bi-directional DSME-GTSs allocation by issuing the DLC-LINK-SETUP. indication primitive. When the next higher layer of the DLC sublayer issues the DLC-LINK-SETUP.response

© ISO/IEC 2015 – All rights reserved

AVA Documents
Document Sharing Hub
Full document details: BS ISO/IEC 17821:2015