

Information technology — Telecommunications and information exchange between systems — Use of X.25 to provide the OSI Connection-mode Network Service

ICS 35.100.30
UDC 681.3:621.39

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW



Document Sharing Hub

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Information Systems Technology Standards Policy Committee (IST/-) to Technical Committee IST/6, upon which the following bodies were represented:

- British Computer Society
- British Telecommunications plc
- CCTA (the Government Centre for Information Systems)
- Digital Equipment Co Ltd.
- IBM United Kingdom Ltd.
- Information Systems Committee of the Universities Funding Council
- Institute of Electrical Engineers
- International Computers Limited
- Logica UK Ltd.
- Ministry of Defence
- Rank Xerox Ltd.
- Swift Project Consortium

This British Standard, having been prepared under the direction of the Information Systems Technology Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 15 November 1993

© BSI 06-1999

The following BSI references relate to the work on this standard:
Committee reference IST/6
Draft for comment 90/65970 DC

ISBN 0 580 22608 5

Amendments issued since publication

Amd. No.	Date	Comments
9675	December 1997	Indicated by a sideline in the margin

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	v
Text of ISO/IEC 8878	1

National foreword

This British Standard reproduces verbatim ISO/IEC 8878:1992 (incorporating Technical Corrigendum 1:1993, Technical Corrigendum 2:1993 and Technical Corrigendum 3:1996) and implements it as the UK national standard. This British Standard supersedes BS 7224:1990 which is withdrawn.

This British Standard is published under the direction of the Information Systems Technology Standards Policy Committee whose Technical Committee IST/6 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from Customer Services, Publications, BSI, Linford Wood, Milton Keynes, MK14 6LE.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO/IEC title page, pages ii to vi, pages 1 to 80 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

**Information technology —
Telecommunications and information
exchange between systems — Use of X.25
to provide the OSI Connection-mode
Network Service**

*Technologies de l'information — Télécommunications et échange
d'informations entre systèmes — Utilisation du protocole X.25 pour
fournir le service de réseau OSI en mode connexion*



Ref. No. ISO/IEC 8878:1992/Cor.1:1993 (E)



Documents

Document Sharing Hub

Contents

	Page
Foreword	v
Introduction	1
1 Scope	2
2 Normative references	3
2.1 Identical Recommendations International Standards	3
2.2 Paired Recommendations International Standards equivalent in technical content	3
2.3 Additional references	3
3 Definitions	4
3.1 Reference Model definitions	4
3.2 Service Conventions definitions	4
3.3 Network Service definitions	4
3.4 X.25 definitions	4
3.5 X.96 definitions	4
4 Abbreviations	5
4.1 Network Service abbreviations	5
4.2 X.25 abbreviations	5
5 Overview	5
5.1 Elements of the X.25/PLP-1984 used to support the OSI CONS	5
5.2 General operation of the X.25/PLP-1984 for supporting the OSI CONS	7
6 Network connection establishment phase	8
6.1 Primitive/Parameter and packet/field relationships	8
6.2 Procedures	8
7 Network connection release phase	16
7.1 Primitive/Parameter and packet/field relationships	16
7.2 Procedures	16
8 Data transfer phase — Data transfer service	18
8.1 Primitive/Parameter and packet/field relationships	18
8.2 Procedures	18
9 Data transfer phase — Receipt confirmation service	19
9.1 Primitive and packet/field relationships	19
9.2 Procedures	19
10 Data transfer phase — Expedited data transfer service	19
10.1 Primitive/Parameter and packet/field relationships	19
10.2 Procedures	19
11 Data transfer phase — Reset service	20
11.1 Primitive/Parameter and packet/field relationships	20
11.2 Procedures	20
12 Response to protocol violations	21
13 Conformance	22
13.1 Conformance requirements	22
13.2 Optional features	23
Annex A (normative) X.25 (1980) Subnetwork Dependent Convergence Protocol	24
A.1 Introduction	24
A.2 Scope	24
A.3 Abbreviations	25
A.4 Overview of the protocol	25
A.5 Protocol mechanisms	27
A.6 Protocol description	37

	Page
A.7 Protocol encoding in X.25 packets	47
Annex B (normative) Classification	51
B.1 Classification of systems	51
B.2 Functionality of classes	52
B.3 Scenarios	52
B.4 Procedures for selecting class of operation	52
B.5 Interworking by relay system	52
Annex C (normative) Subnetwork Convergence Protocol for Use With X.25 Permanent Virtual Circuits	54
C.1 Introduction and scope	54
C.2 Overview	54
C.3 Abbreviations	55
C.4 Protocol mechanisms	55
C.5 Protocol encoding for NC establishment and release	56
Annex D (normative) Protocol Implementation Conformance Statement Proforma	58
D.1 Introduction	58
D.2 Scope	58
D.3 Normative references	58
D.4 Definitions	58
D.5 Abbreviations	58
D.6 Protocol Implementation Conformance Statement Proforma	59
D.7 Modified PICS requirements for ISO/IEC 8208	68
Annex E (informative) Additional Considerations of CONS Primitives	73
E.1 Introduction	73
E.2 Environment for X.25/PLP operation	73
Annex F (informative) Use of X.25/PLP NPAI	75
F.1 Introduction	75
F.2 Obtaining an SNPA address	75
F.3 Examples of Network Address encoding	75
Annex G (informative) Transit Delay Calculations	77
Annex H (informative) Example of Priority Negotiation	78
Annex I (informative) Differences between Recommendation X.223 and ISO/IEC 8878	79
Figure 1 — Relationship of the X.25 Packet Layer Protocol to the OSI Connection-Mode Network Service	2
Figure 2 — Operation of OSI Connection-Mode Network Service and X.25 Packet Layer Protocol (1984)	7
Figure A.1 — State transition diagram	38
Figure A.2 — Message sequence charts	43
Figure B.1 — Procedure for selecting class of operation	53
Figure B.2 — Operation of a relay system mapping between the X.25/PLP-1984 and the X.25/PLP-1980 with SNDGP	54
Figure C.1 — Call setup/clearing encoding	57
Table 1 — Packets and fields of the X.25/PLP-1984 used to support the OSI CONS	6
Table 2 — CONS:X.25/PLP-1984 mapping for the NC establishment phase	8

	Page
Table 3 — Mapping of Throughput QOS subparameters to X.25/PLP-1984 Facilities	11
Table 4 — CONS:X.25/PLP-1984 mapping for the NC release phase	16
Table 5 — CONS:X.25/PLP-1984 mapping for the data transfer service	18
Table 6 — CONS:X.25/PLP-1984 mapping for the Expedited Data Transfer Service	20
Table 7 — CONS:X.25/PLP-1984 mapping for the Reset Service	20
Table A.1 — Mapping for NC establishment phase	28
Table A.2 — Mapping for NC Release phase	29
Table A.3 — Mapping of NS Disconnect Reason to X.25 Diagnostic Code	31
Table A.4 — Mapping of X.25 Clearing/Restarting Cause to NS Reason	33
Table A.5 — Mapping for Data Transfer phase	34
Table A.6 — Mapping of NS Reset Reason to X.25 Diagnostic Code	34
Table A.7 — Mapping of X.25 Reset Cause to NS Reason	34
Table A.8 — Mapping of Throughput QOS subparameters to X.25 (1980) facility and SNDCP parameter	35
Table A.9 — State/Event table for NC establishment phase	39
Table A.10 — State/Event table for data transfer phase	41

Descriptors: Data processing, telecommunications, information interchange, network interconnection, open systems interconnection, data transmission, communication procedure, control procedures, network service.

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 8878 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

This second edition cancels and replaces the first edition (ISO 8878:1987), which has been technically revised. It consolidates Technical Corrigenda 1, 2 and 3, Addenda 1 and 2 and Amendment 1 as well as Technical Corrigendum 1 to Addendum 2.

NOTE ISO/IEC DIS 8878-2 as well as defect reports 8878-012, 013, 014 and 015 have also been included in this second edition.

Annex A, Annex B, Annex C and Annex D form an integral part of this International Standard. Annex E, Annex F, Annex G, Annex H and Annex I are for information only.

Introduction

This International Standard defines methods for providing the OSI Connection-Mode Network Service (CONS) through the use of the virtual circuit services of the X.25 Packet Layer Protocol (X.25 PLP). The method presented in the main body of this International Standard specifies a mapping between elements of the 1984 or later versions of the X.25/PLP (referred to as X.25/PLP-1984) using X.25 Virtual Call (VC) services and elements of the OSI CONS. Features associated with versions of X.25 later than 1984 are identified as to which version they relate. This International Standard is similar to CCITT Recommendation X.223; however, the two are currently published as separate documents.

Clause 13 contains the requirements for systems claiming conformance to this International Standard.

Other methods using other virtual circuit services and/or other versions of X.25 are also defined. In particular, a second method for VCs, which is presented in Annex A, defines a Subnetwork Dependent Convergence Protocol (SNDCP) that shall be used to provide the OSI CONS over subnetworks or with equipment using the 1980 or earlier versions of the X.25/PLP (referred to as X.25/PLP-1980). This SNDCP should only be used if the elements of the X.25/PLP-1984, as defined in 5.1 herein, are not available to support the OSI CONS. Annex B contains a classification of systems according to whether they implement the procedures defined in the main body of this International Standard, the procedures defined in Annex A, or both. In addition, it describes the possibilities and the rules for interworking between the classes of equipment identified.

Annex A and Annex B are integral parts of this International Standard. They are intended to provide a migration strategy towards the use of the 1984 version of X.25 in both subnetworks and DTEs. Because of the evolution of technology, the status of Annex A and Annex B will be reviewed in the future.

Annex C defines another method for providing the OSI CONS, in this case in conjunction with the PVC service of X.25.

Annex D provides the Protocol Implementation Conformance Statement (PICS) Proforma for this International Standard.

Annex C and Annex D are integral parts of this International Standard.

Annex E provides additional considerations on the relationship between the X.25 protocol procedures and the CONS primitives.

Annex F illustrates the use of X.25 Network Protocol Address Information (NPAI), i.e., the Address Field and the Address Extension Facilities.

Annex G illustrates the use of the X.25 transit delay facilities.

Annex H illustrates the use of the X.25 Priority Facility.

Annex I lists the differences between CCITT Rec. X.223 and ISO/IEC 8878.

Annex E through Annex I are not integral parts of this International Standard.

The relationship between the X.25/PLP-1984 and the OSI CONS is shown in Figure 1. This relationship is described only in terms of the Network Layer entities that provide the CONS. No discussion is given here to describe the actions of a Network Layer entity that only provides a relay function for a given network connection.


The OSI Network Service is defined in terms of

- a) the primitive actions and events of the Service;
- b) the parameters associated with each primitive action and event, and the form which they take;
- c) the interrelationship between, and the valid sequences of, these actions and events.

The OSI Network Service does not specify individual implementations or products nor does it constrain the implementation of entities and interfaces within a computer system.

The X.25/PLP-1984 is defined in terms of

- a) procedures for Virtual Calls and Permanent Virtual Circuits;
- b) formats of packets associated with these procedures;
- c) procedures and formats for optional user facilities and CCITT-Specified DTE facilities.

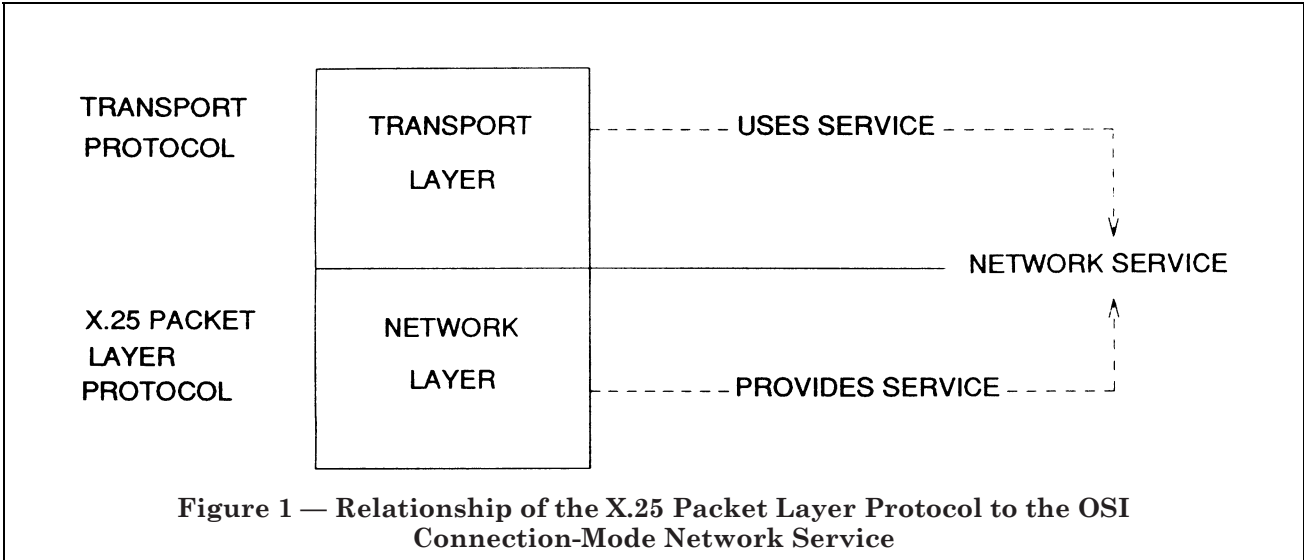

The use of the word “Network” to name the “Network” Layer of the OSI Reference Model should be distinguished from the use of the word “network” to denote a communications network as conventionally understood. To facilitate this distinction, the term “subnetwork” is used for a collection of physical equipment, commonly called a “network” (reference CCITT Rec. X.200 | ISO 7498). Subnetworks may be either public or private networks. In the case of public networks, their properties may be determined by separate CCITT Recommendations such as CCITT Rec. X.21 for a circuit-switched network or CCITT Rec. X.25 for a packet-switched network.

Throughout the set of OSI-related Recommendations | International Standards, the term “Service” refers to the abstract capability provided by one layer of the OSI Reference Model to the layer above it. Thus, the Network Service is a conceptual architectural Service, independent of administrative divisions.

NOTE It is important to distinguish the specialized use of the term “Service” within the set of OSI-related Recommendations | International Standards from its use elsewhere to describe the provision of a service by an organization (such as the provision of a service, as defined in CCITT Recommendations, by an Administration).

1 Scope

The OSI Connection-mode Network Service (CONS) is defined in terms of a set of primitive actions and events and associated parameters. For a protocol to support this service, there must be a mapping between the abstract primitives and parameters of the CONS and the real elements of the protocol. For the X.25 Packet Layer Protocol (PLP), the main body of this International Standard provides such a mapping for the X.25/PLP-1984 using Virtual Calls.

This International Standard also provides a mapping of the CONS primitives and parameters to the X.25/PLP-1980 plus an SNDCP (Annex A). These mappings apply to the X.25 VC service. In addition, the method of selecting the appropriate mapping, if any, for different combinations of end systems and Network Layer relay systems implementing one or more of the mappings is defined (Annex B).

For the PVC service for both the X.25/PLP-1984 and the X.25/PLP-1980, a mapping of CONS primitives and parameters to the X.25/PLP is given in Annex C.

This International Standard specifies two sets of procedures from which three classes of implementation are described. The requirements of these procedures are applicable both to end system operation and to half the operation of a Network Layer relay. Where relay operation is concerned, the two halves of the relay may be the same or different classes of implementation.

This International Standard specifies the requirements to be met by a **System-1984** implementation. Implementations in this class are designed to operate directly and efficiently with other System-1984 implementations, including cases of operation across an X.25(1984) subnetwork.

This International Standard also specifies the procedures to be operated by a **System-1980** implementation. Implementations in this class are designed to operate directly with other System-1980 implementations, including cases of operation across any form of X.25 subnetwork, but will operate less efficiently than System-1984 implementations.

This International Standard also specifies the requirements to be met by a **Compatible** implementation. Implementations in this class are designed to operate directly with all other implementation classes, including cases of operation across any type of X.25 subnetwork. They make efficient use of X.25(1984) when placed in this environment.

The X.25/PLP is usually regarded as operating between an end system (i.e., a “Data Terminal Equipment” in X.25 terminology) and a packet-switched public data subnetwork. However, the X.25/PLP can also be used in other environments to provide the OSI CONS. Examples of such other uses include

- a) an end system connected to an X.25 packet-switched private data subnetwork;
- b) an end system connected to a local area network;
- c) direct connection or circuit-switched connection (including connection across a circuit-switched data subnetwork) of two end systems without an intervening packet-switched public data subnetwork;
- d) an end system connected to an Integrated Services Digital Network.

2 Normative references

The following CCITT Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The CCITT Secretariat maintains a list of currently valid CCITT Recommendations.

2.1 Identical Recommendations | International Standards

— CCITT Recommendation X.213 (1992) | ISO/IEC 8348:1992, *Information Technology — Network Service Definition for Open Systems Interconnection*.

2.2 Paired Recommendations | International Standards equivalent in technical content

— CCITT Recommendation X.25 (1988), *Interface Between Data Terminal Equipment (DTE) and Data Circuit Terminating Equipment (DCE) for terminals operating in the packet-mode and connected to Public Data Networks by dedicated circuit*.

NOTE This Recommendation is referred solely with respect to its Packet Layer Protocol description. However, this Recommendation fully specifies the behaviour of the DCE while specifying only a minimum set of requirements for the DTE. Additional guidance for the design of DTEs is available in ISO/IEC 8208.

ISO/IEC 8208:1990, *Information technology — Data communications — X.25 Packet Layer Protocol for Data Terminal Equipment*.

— CCITT Recommendation X.200 (1988), *Reference model of Open Systems Interconnection for CCITT applications*.

ISO 7498:1984, *Information processing systems — Open Systems Interconnection — Basic Reference Model*.

— CCITT Recommendation X.210 (1988), *Open Systems Interconnection layer service definition conventions*.

ISO/TR 8509:1987, *Information processing systems — Open Systems Interconnection — Service conventions*.

2.3 Additional references

— CCITT Recommendation X.96 (1988), *Call progress signals in Public Data Networks*.

3 Definitions

For the purpose of this International Standard, the following definitions apply.

3.1 Reference model definitions

the following terms, developed and defined in the OSI Reference Model (CCITT Rec. X.200 | ISO 7498), are used:

- a) Network connection
- b) Network Layer
- c) Network Service
- d) Network Service Access Point
- e) Network Service Access Point address
- f) Subnetwork

3.2 Service conventions definitions

the following terms, as they apply to the Network Layer and as defined in the OSI Service Conventions (CCITT Rec. X.210 | ISO/TR 8509), are used:

- a) Network Service user
- b) Network Service provider
- c) primitive
- d) request
- e) indication
- f) response
- g) confirm

3.3 Network service definitions

the following terms, as defined in the Network Service (CCITT Rec. X.213 | ISO/IEC 8348), are used:

- a) Calling Network Service user
- b) Called Network Service user
- c) Subnetwork Point of Attachment address
- d) Network Protocol Address Information
- e) Initial Domain Part
- f) Authority and Format Identifier
- g) Initial Domain Identifier
- h) Domain Specific Part

3.4 X.25 definitions

the following terms, as developed in the X.25 Packet Layer Protocol (CCITT Rec. X.25 | ISO/IEC 8208), are used:

- a) virtual circuit
- b) Virtual Call
- c) logical channel
- d) Packet Layer
- e) Data Terminal Equipment
- f) Data Circuit-terminating Equipment
- g) DXE (either a DTE or a DCE)

3.5 X.96 definitions

the following terms, as defined in CCITT Rec. X.96, are used:

- a) Category C call progress signal
- b) Category D call progress signal

4 Abbreviations

4.1 Network Service abbreviations

AFI	Authority and Format Identifier
CONS	Connection-Mode Network Service
DSP	Domain Specific Part
IDI	Initial Domain Identifier
IDP	Initial Domain Part
N	Network
NC	Network-connection
NL	Network Layer
NPAI	Network Protocol Address Information
NS	Network Service
NSAP	Network Service Access Point
OSI	Open Systems Interconnection
QOS	Quality of Service
SNPA	Subnetwork Point of Attachment

4.2 X.25 abbreviations

AEF	Address Extension Facility
AF	Address Field
B-MTCN	Basic Minimum Throughput Class Negotiation (Facility)
B-TCN	Basic Throughput Class Negotiation (Facility)
D-bit	Delivery Confirmation bit
DCE	Data Circuit-terminating Equipment
DTE	Data Terminal Equipment
EDN	Expedited Data Negotiation (Facility)
EETDN	End-to-End Transit Delay Negotiation (Facility)
FPF	Facility Parameter Field
GFI	General Format Identifier
LC	Logical Channel
M-bit	More Data bit
MBS	M-bit Sequence
PLP	Packet Layer Protocol
P(R)	Packet receive sequence number
P(S)	Packet send sequence number
PVC	Permanent Virtual Circuit
Q-bit	Qualifier bit
TDSAI	Transit Delay Selection And Indication (Facility)
VC	Virtual Call

5 Overview

The Network Service (NS) provides for the transparent transfer of data between NS users. It makes invisible to these NS users the way in which supporting communications resources are utilized to achieve this transfer.

5.1 Elements of the X.25/PLP-1984 used to support the OSI CONS

The X.25/PLP-1984, as defined by CCITT Rec. X.25 | ISO/IEC 8208, provides a specific realization for the transparent transfer of data between NS users of the CONS. The elements of this protocol to be considered are

- a) the virtual-circuit types;

- b) the packet types and fields to be mapped to the primitives and parameters of the OSI CONS;
- c) the optional user facilities and CCITT-Specified DTE facilities.

Of the two types of virtual circuits defined in CCITT Rec. X.25 | ISO/IEC 8208, the use of Virtual Calls (VCs) is mapped to the network connection (NC) establishment and release phases of the OSI CONS in clauses 6 and 7 and to the data transfer phase in clauses 8–11. (The corresponding mapping for PVCs is given in Annex C.)

Table 1 lists the X.25/PLP-1984 packets and associated fields that shall be used when supporting the OSI CONS.

In addition, the following optional user facilities and CCITT-Specified DTE facilities shall be used and/or agreed to:

- a) optional user facilities:
 - 1) Fast Select (facility used; when operating in a DTE-to-DTE environment without an intervening packet-switched network, the use of the Fast Select Facility shall also be agreed to by the two DTEs);
 - 2) Fast Select Acceptance (facility agreed to if operating in a packet-switched network environment);
 - 3) Basic Throughput Class Negotiation (facility agreed to and used);
 - 4) Transit Delay Selection And Indication (facility used if operating in a packet-switched network environment).

Table 1 — Packets and fields of the X.25/PLP-1984 used to support the OSI CONS

Packet Types ¹⁾	Fields ²⁾
CALL REQUEST INCOMING CALL CALL ACCEPTED CALL CONNECTED	General Format Identifier ³⁾ , Address Field, Facility Field, Call and Called User Data Field ⁴⁾
CLEAR REQUEST CLEAR INDICATION	Clearing Cause Field, Diagnostic Code Field, Address Field, Facility Field, Clear User Data Field ⁴⁾
DATA	D-bit, M-bit, P(S) ⁵⁾ , P(R) ⁵⁾ , User Data Field ⁴⁾
INTERRUPT	Interrupt User Data Field ⁴⁾
RECEIVE READY ⁶⁾ RECEIVE NOT READY ⁶⁾ REJECT ⁶⁾ (if agreed to)	P(R) ⁵⁾
RESET REQUEST RESET INDICATION	Resetting Cause Field, Diagnostic Code Field
RESTART INDICATION	Restarting Cause Field, Diagnostic Code Field

NOTES

NOTE 1 The packets shown in the table are used in support of the primitives of the OSI CONS. Other packets not shown in the table (i.e., CLEAR CONFIRMATION, INTERRUPT CONFIRMATION, RESET CONFIRMATION, and RESTART CONFIRMATION packets) are essential to the use of the packets shown. Yet other packets (i.e., RESTART REQUEST, DIAGNOSTIC, REGISTRATION REQUEST, and REGISTRATION CONFIRMATION packets) have no relationship to the provision of the OSI CONS.

NOTE 2 The information in the fields shown in the table have a direct relationship to the parameters associated with the primitives of the OSI CONS. Other fields not shown in the table (e.g., the Logical Channel Identifier, the Packet Type Identifier, the Q-bit, the Address Length Fields, and the Facility Length Field) are essential to the use of the appropriate packets.

NOTE 3 Bit 7 of octet 1 of the General Format Identifier (GFI) in these packets is used to negotiate the overall availability of the Delivery Confirmation bit (D-bit) in support of the Receipt Confirmation Service. As such, this bit has no specific field-name as defined in the X.25/PLP-1984.

NOTE 4 All user data fields are octet aligned.

NOTE 5 The P(S) and P(R) fields are essential to the operation of the X.25/PLP-1984 in providing the Receipt Confirmation Service.

NOTE 6 The action implied by these packets has no relationship to the primitives of the OSI CONS. However, the P(R) field is essential to the operation of the X.25/PLP-1984 in providing the Receipt Confirmation Service.

- b) CCITT-Specified DTE facilities:
 - 1) Called Address Extension (facility used);


- 2) Calling Address Extension (facility used);
- 3) End-to-End Transit Delay Negotiation (facility used);
- 4) Expedited Data Negotiation (facility used);
- 5) Basic Minimum Throughput Class Negotiation (facility used);
- 6) Priority (facility used with 1988 or later versions of the X.25/PLP).

5.2 General operation of the X.25/PLP-1984 for supporting the OSI CONS

The X.25/PLP-1984 can be used to provide the OSI CONS in an end system connected to a public or private X.25 packet-switched subnetwork. It can also be used in environments where the end system is connected to a Local Area Network or where end systems are connected by a dedicated path or by a circuit-switched connection.

As shown in Figure 2, the NS provider (more particularly, the Network Layer (NL) entity in an end system) must provide a translation between

- a) the primitives and parameters of the OSI CONS;
- b) the packets and associated fields of the X.25/PLP-1984.

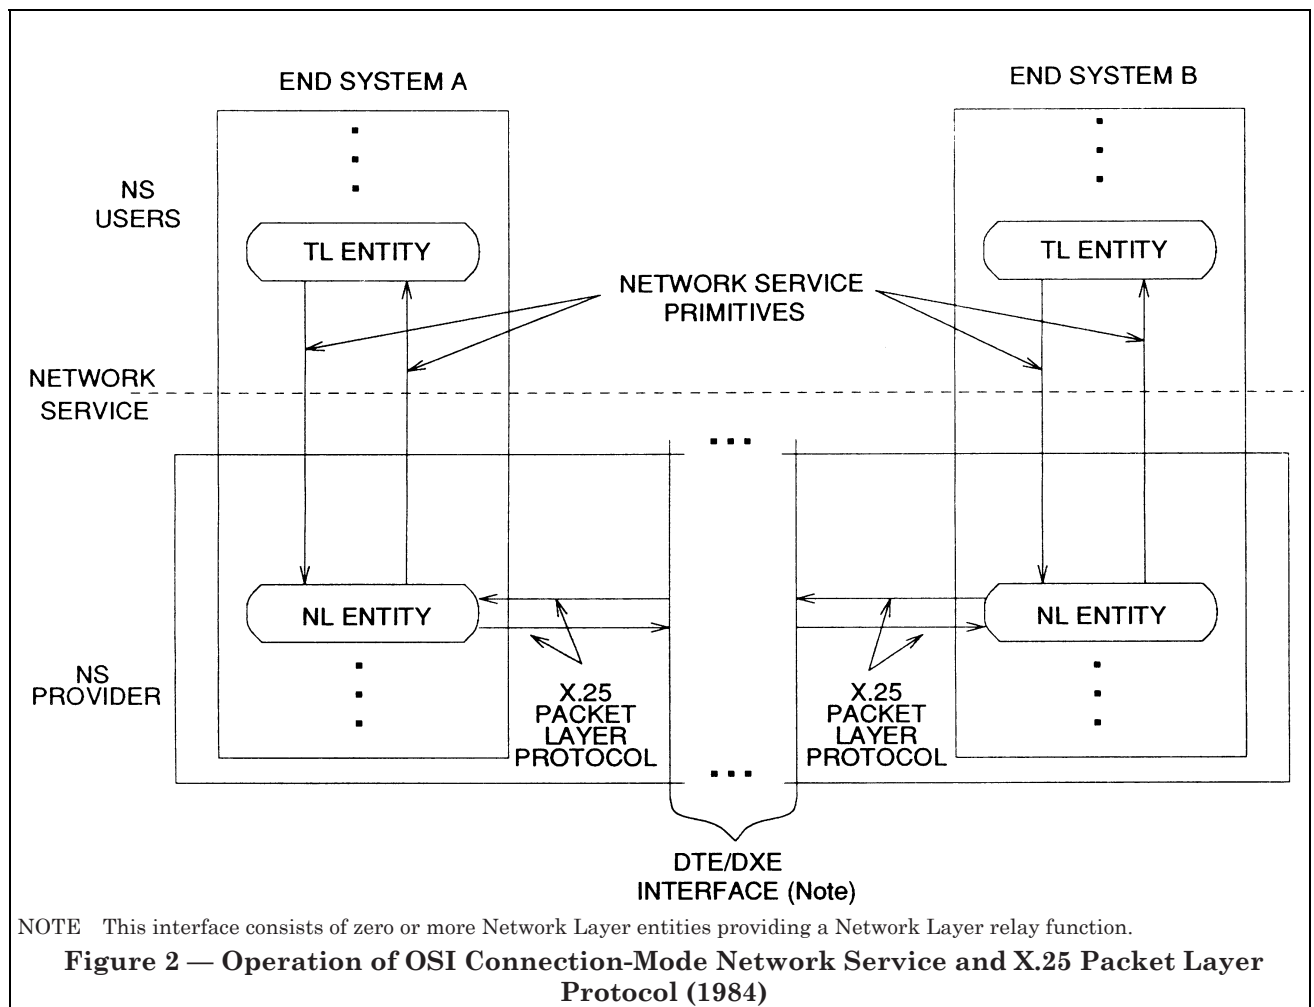

Request and response primitives are translated into packets to be transmitted across the DTE/DXE interface by the NL entity. Received packets, where appropriate, are translated by the NL entity into indication and confirm primitives.

Annex E provides additional considerations on the relationship between the X.25 protocol procedures and the CONS primitives.

NOTE The Network Service Definition specifies valid sequences of primitives at an NC endpoint and valid parameter responses at the called NC endpoint to Receipt Confirmation negotiation, Expedited Data negotiation, and Quality of Service (QOS) parameter negotiation. The necessity for the NL entity to monitor compliance and the actions to be taken on non-compliance are a local matter, and not subject to standardization.

There is also a relationship between some local mechanism used to identify a particular NC and a Logical Channel (LC) number used to identify a particular virtual circuit. This relationship is a local matter and is not discussed here.

6 Network connection establishment phase

6.1 Primitive/Parameter and packet/field relationships

Table 2 shows the relationships between the primitives/parameters used during the NC establishment phase and the packets/fields associated with the call setup procedures.

Table 2 — CONS:X.25/PLP-1984 mapping for the NC establishment phase

CONS	X.25/PLP-1984
PRIMITIVES: N-CONNECT request N-CONNECT indication N-CONNECT response N-CONNECT confirm	PACKETS: CALL REQUEST INCOMING CALL CALL ACCEPTED CALL CONNECTED
PARAMETERS: Called Address Calling Address Responding Address Receipt Confirmation Selection Expedited Data Selection QOS-Parameter Set NS-User-Data	FIELDS (INCLUDING FACILITIES): Called DTE Address Field Called Address Extension Facility Calling DTE Address Field Calling Address Extension Facility Called DTE Address Field Called Address Extension Facility General Format Identifier ¹⁾ Expedited Data Negotiation Facility Basic Throughput Class Negotiation Facility ²⁾ Basic Minimum Throughput Class Negotiation Facility Transit Delay Selection and Indication Facility ³⁾ End-to-End Transit Delay Negotiation Facility Priority Facility Call and Called User Data Field Fast Select Facility ⁴⁾
NOTES NOTE 1 Bit 7 of octet 1 of the GFI in call setup packets is used to negotiate the overall availability of the D-bit in support of the Receipt Confirmation Service. As such, this bit has no specific field-name as defined in the X.25/PLP-1984. NOTE 2 For proper operation, this optional user facility shall also be agreed to for use on the interface. NOTE 3 The Transit Delay Selection And Indication Facility shall be used only in a packet-switched network environment. NOTE 4 For proper operation, the Fast Select Acceptance Facility shall also be agreed to on the interface when accessing a packet-switched network.	

6.2 Procedures

6.2.1 Primitive/Package mapping

When an NL entity receives an N-CONNECT request or an N-CONNECT response primitive from an NS user, it transmits a CALL REQUEST or a CALL ACCEPTED packet, respectively, across the DTE/DXE interface.

When an NL entity receives an INCOMING CALL or a CALL CONNECTED packet, it signals an N-CONNECT indication or an N-CONNECT confirm primitive, respectively, to the NS user.

6.2.2 Network addresses

Local operation determines the contents of the Network Protocol Address Information (NPAI) and whether Network Addresses, where explicitly supplied, are mapped to and from the Address Field (AF) or the Address Extension Facilities (AEF) of X.25/PLP-1984 call setup packets. Annex F describes guidelines for the methods by which the required AF contents may be derived from the Network Address. The permitted techniques for the placement of Network Addresses in either the AF or AEF are given in this clause. The encoding techniques to be employed are those specified in CCITT Rec. X.25|ISO/IEC 8208 for the AF and AEF. The content of these fields shall be in the preferred binary encoding defined in CCITT Rec. X.213|ISO/IEC 8348. Examples of encoding Network Addresses in the NPAI of the X.25/PLP-1984 are also given in Annex F.

6.2.2.1 Encoding of Network addresses

6.2.2.1.1 Use of the Address Field (AF)

Under certain conditions, the Network Address, as defined in CCITT Rec. X.213|ISO/IEC 8348, may be conveyed entirely in the AF. These conditions are

- a) the Network Address consists solely of the Initial Domain Part (IDP) (i.e., the Domain Specific Part (DSP) is null);
- b) the Authority and Format Identifier (AFI) can be deduced from the contents of the AF (e.g., with knowledge of the subnetwork to which the DTE is attached);
- c) the Initial Domain Identifier (IDI) is the same as the Subnetwork Point of Attachment (SNPA) Address.

When all of the above conditions are satisfied, the AF may be used to convey the semantics of the entire Network Address (the AFI is implied and the contents of the AF are equivalent to the IDI). In these cases, the AEF may also be used (see 6.2.2.1.2).

NOTE The use of the preferred binary encoding results in binary-coded decimal digits in the AF, as required by CCITT Rec. X.25|ISO/IEC 8208.

6.2.2.1.2 Use of the AEF

If any of the conditions in 6.2.2.1.1 are not satisfied, the AEF shall be used. The Network Address, complete with AFI, is placed in the AEF (bits 8 and 7 of the first octet of the Facility Parameter Field (FPF) of the AEF are both set to zero). In this case, the contents of the AF are not defined by this International Standard. Guidelines for their derivation are given in Annex F.

6.2.2.2 Decoding of Network addresses

If, after decoding the Network address as specified in the subclauses below, the Network address does not exist, then the NL entity clears the call by transmitting a CLEAR REQUEST packet across the DTE/DXE interface with a clearing cause code of "DTE Originated." It is recommended that the diagnostic code value be set to 232 (or 224), "Connection Rejection — NSAP Unreachable (Permanent Condition)." The NL entity shall not signal any primitive to the NS User.

6.2.2.2.1 Absent AEF case

If the AEF is not present, then local knowledge is required by the receiving NL entity to determine whether a Network Address is to be deduced from the content of the AF. If this local knowledge indicates that a Network Address is present, its abstract syntax is as follows:

- a) the AFI is deduced from knowledge of the subnetwork from which the packet was received;
- b) the IDI is the same as the contents of the AF;
- c) the DSP is absent.

If insufficient local knowledge exists to derive a Network Address from a received AF-only Called Address in an INCOMING CALL packet, then the call is rejected by transmission of a CLEAR REQUEST packet across the DTE/DXE interface with a clearing cause code of "DTE Originated." The diagnostic code value is recommended to be set to 232 "Connection Rejection — NSAP Unreachable (Permanent Condition)".

6.2.2.2.2 AEF case

If the AEF is present and bits 8 and 7 of the leading octet of the FPF are both set to zero, then the Network Address is contained entirely within the AEF. The abstract syntax is as follows:

- a) the AFI is contained within the first two digits of the AEF;

- b) the IDI is the remainder of the IDP after any leading and trailing padding digits are discarded;
- c) the DSP, if present, constitutes the remainder of the AEF content after any trailing padding digits are discarded.

If a Network Address cannot be derived from the Called AEF in an INCOMING CALL packet, then the call is rejected by transmission of a CLEAR REQUEST packet across the DTE/DXE interface with a clearing cause code of "DTE Originated." It is recommended that the diagnostic code value be set to 232 (or 224) "Connection Rejection — NSAP Unreachable (Permanent Condition)."

6.2.3 Receipt Confirmation selection

Bit 7 of octet 1 in the GFI of X.25/PLP-1984 call setup packets is mapped to/from the Receipt Confirmation Selection parameter of N-CONNECT primitives.

If the Receipt Confirmation Selection parameter of the N-CONNECT request primitive indicates "use of Receipt Confirmation," then the NL entity, if it can support the D-bit procedure as defined in 8.2.3 and 9.2.1, sets bit 7 of the GFI to 1 to indicate use of receipt confirmation during the data transfer phase. If "no use of Receipt Confirmation" is indicated or the NL entity cannot support the D-bit procedure, then bit 7 is set to 0.

When an NL entity receives an INCOMING CALL packet with bit 7 of the GFI set to 1 but it cannot support the D-bit procedure, it indicates "no use of Receipt Confirmation" in the Receipt Confirmation Selection parameter of the N-CONNECT indication primitive signaled to the Called NS user. Otherwise, if bit 7 of the GFI is set to 1 (respectively, 0), then the NL entity indicates "use (respectively, no use) of Receipt Confirmation" in the Receipt Confirmation Selection parameter of the N-CONNECT indication primitive signaled to the Called NS user.

When an NL entity receives an N-CONNECT response primitive with the Receipt Confirmation Selection parameter indicating "use (respectively, no use) of Receipt Confirmation," it sets bit 7 of the GFI in the CALL ACCEPTED packet to 1 (respectively, 0).

When an NL entity receives a CALL CONNECTED packet with bit 7 of the GFI set to 1 (respectively, 0), it indicates "use (respectively, no use) of Receipt Confirmation" in the Receipt Confirmation Selection parameter of the N-CONNECT confirm primitive signaled to the Calling NS user.

6.2.4 Expedited Data selection

The Expedited Data Negotiation (EDN) Facility of the X.25/PLP-1984 is mapped to/from the Expedited Data Selection parameter of N-CONNECT primitives.

If the Expedited Data Selection parameter of the N-CONNECT request primitive indicates "use of Expedited Data," then the NL entity, if it can support the Interrupt procedure using 32-octet INTERRUPT packets, encodes the EDN Facility in the CALL REQUEST packet to indicate use of expedited data during the data transfer phase. If "no use of Expedited Data" is indicated or the NL entity cannot support 32-octet INTERRUPT packets, then the EDN Facility shall be either encoded to indicate no use of expedited data or omitted.

When an NL entity receives an INCOMING CALL packet with no EDN Facility or with the EDN Facility indicating use of expedited data but it cannot support 32-octet INTERRUPT packets, it indicates "no use of Expedited Data" in the Expedited Data Selection parameter of the N-CONNECT indication primitive signaled to the Called NS user. Otherwise, if the EDN Facility indicates use (respectively, no use) of expedited data, then the NL entity indicates "use (respectively, no use) of Expedited Data" in the Expedited Data Selection parameter of the N-CONNECT indication primitive signaled to the Called NS user.

When an NL entity receives an N-CONNECT response primitive with the Expedited Data Selection parameter indicating "use of Expedited Data," it encodes the EDN Facility in the CALL ACCEPTED packet to indicate use of expedited data. If the Expedited Data Selection parameter indicates "no use of Expedited Data," then the EDN Facility shall be either encoded to indicate no use of expedited data or omitted.

When an NL entity receives a CALL CONNECTED packet with the EDN Facility indicating use (respectively, no use) of expedited data, it indicates "use (respectively, no use) of Expedited Data" in the Expedited Data Selection parameter of the N-CONNECT confirm primitive signaled to the Calling NS user. If the CALL CONNECTED packet has no EDN Facility, then the NL entity indicates "no use of Expedited Data" to the Calling NS user.

6.2.5 QOS parameter set

The set of QOS parameters that are conveyed during the NC establishment phase consists of the following parameters:

- a) the throughput for the direction of data transfer from the Calling NS user to the Called NS user;
- b) the throughput for the direction of data transfer from the Called NS user to the Calling NS user;
- c) the transit delay that applies to both directions of data transfer;
- d) the priority of the data transferred on the NC (with respect to data transferred on other NCs);
- e) the priority of gaining an NC;
- f) the priority of keeping this NC.

For each of these parameters, a set of “subparameters” is defined as follows:

- a) a “Target” value, which is the QOS value desired by the Calling NS user;
- b) a “Lowest Quality Acceptable” value, which is the lowest QOS value agreeable to the Calling NS user;
- c) an “Available” value, which is the QOS value the NS provider is willing to provide;
- d) a “Selected” value, which is the QOS value to which the Called NS user agrees.

The set of values that can be specified for each subparameter is defined in every Network Service. This set includes the value “unspecified.” It may also include a value defined to be a “default value” that is mutually understood by the NS provider and an NS user as applying in the absence of particular values.

6.2.5.1 Throughput QOS parameters

The Basic Throughput Class Negotiation (B-TCN) Facility and the Basic Minimum Throughput Class Negotiation (B-MTCN) Facility of the X.25/PLP-1984 are mapped to/from both Throughput QOS parameters of N-CONNECT primitives. The specific mapping of these X.25/PLP-1984 facilities to/from both sets of Throughput subparameters is given in Table 3.

Table 3 — Mapping of Throughput QOS subparameters to X.25/PLP-1984 Facilities

CONS		X.25/PLP-1984	
Subparameter	Primitive	Facility	Packet
Target	N-CONNECT request	B-TCN	CALL REQUEST
Lowest Quality Acceptable	N-CONNECT request	B-MTCN	CALL REQUEST
Available	N-CONNECT indication	B-TCN	INCOMING CALL
Lowest Quality Acceptable	N-CONNECT indication	B-MTCN	INCOMING CALL
Selected	N-CONNECT response	B-TCN	CALL ACCEPTED
Selected	N-CONNECT confirm	B-TCN	CALL CONNECTED

The set of values that can be specified for each Throughput subparameter ranges from 75 bits per second through 19 2000¹⁾ bits per second, inclusive. This set consists of the following discrete values: 75, 150, 300, 600, 1 200, 2 400, 4 800, 9 600, 19 200, 48 000, 64 000, 128 000, and 192 000 bits per second. An NL entity supports either all of these values or a contiguous subset of them. The value “unspecified” is also allowed.

6.2.5.1.1 Processing an N-CONNECT request primitive

If an NL entity, when receiving an N-CONNECT request primitive, cannot support the Lowest Quality Acceptable throughput (i.e., the minimum throughput) when specified for either direction of data transfer, then it rejects the request. In this case, the NL entity does not transmit any X.25/PLP-1984 packet but it does signal an N-DISCONNECT indication primitive to the Calling NS user. The Originator parameter is “NS Provider.” The Reason parameter is “Connection Rejection — QOS Not Available/Transient Condition,” or “Connection Rejection — QOS Not Available/Permanent Condition” if the NL entity could never support the Lowest Quality Acceptable for either direction of data transfer.

If an NL entity, when receiving an N-CONNECT request primitive, can support the Lowest Quality Acceptable throughput when specified, for both directions of transfer, then for each direction of transfer it

- a) encodes the Lowest Quality Acceptable value in the B-MTCN facility;

¹⁾ For the 1984 X.25/PLP, only throughputs up to 48 000 bits per second are available. For the 1988 X.25/PLP, this set is extended to 64 000 bits per second. For the 1992 X.25/PLP, this set is extended to 192 000 bits per second.

b) encodes the lesser of the Target value and the highest value that the NL entity is prepared to support in the B-TCN facility (as shown in Table 3).

If the Target subparameter (of either or both of the Throughput QOS parameters) is “unspecified,” then the NL entity encodes the B-TCN Facility for the corresponding direction(s) of data transfer as the highest throughput rate supported by the NL entity. If the Lowest Quality Acceptable subparameter (of either or both of the Throughput QOS parameters) is “unspecified,” then the NL entity encodes the B-MTCN Facility for the corresponding direction(s) of data transfer as 75 bits per second. The B-TCN and B-MTCN Facilities are transmitted across the DTE/DXE interface in a CALL REQUEST packet.

6.2.5.1.2 *Processing an INCOMING CALL packet*

When receiving an INCOMING CALL packet with a B-MTCN Facility, an NL entity compares the minimum throughput value specified in the B-MTCN Facility for each direction of data transfer to the available throughput value specified in the B-TCN Facility. If, for either direction, the available throughput value is less than the minimum throughput value or if the NL entity cannot support the minimum throughput value, then the NL entity clears the call (i.e., transmits a CLEAR REQUEST packet). The cause is “DTE Originated” and the diagnostic is “Connection Rejection — QOS Not Available/Transient Condition,” or “Connection Rejection — QOS Not Available/Permanent Condition” if the NL entity could never support the lowest throughput value (these diagnostics have values 229 and 230, respectively). Otherwise, the NL entity indicates, for both directions of data transfer, the Available and Lowest Quality Acceptable throughput values in the Throughput QOS parameters of the N-CONNECT indication primitive signaled to the Called NS user. The Available and Lowest Quality Acceptable subparameters are mapped from the B-TCN and B-MTCN Facilities, respectively, as shown in Table 3.

If an NL entity receives an INCOMING CALL packet without the B-MTCN Facility, then the NL entity indicates the value “unspecified” for the Lowest Quality Acceptable subparameters of both the Throughput QOS parameters of the N-CONNECT indication primitive signaled to the Called NS user. The Available subparameters of both the Throughput QOS parameters are mapped from the B-TCN Facility.

NOTE From a practical standpoint, the value “unspecified” can be taken to be 75 bits per second due to restrictions concerning the discrete values that can be signaled in the CALL ACCEPTED packet, as listed in 6.2.5.1.

6.2.5.1.3 *Processing an N-CONNECT response primitive*

When an NL entity receives an N-CONNECT response primitive, it encodes the Selected throughput values for both directions of data transfer, as given in the Throughput QOS parameters, in the B-TCN Facility returned in the CALL ACCEPTED packet.

6.2.5.1.4 *Processing a CALL CONNECTED packet*

When an NL entity receives a CALL CONNECTED packet, it indicates the Selected throughput values for both directions of data transfer, as given in the B-TCN Facility, in the Throughput QOS parameters of the N-CONNECT confirm primitive signaled to the Calling NS user.

6.2.5.2 *Transit Delay QOS parameter*

The Transit Delay Selection And Indication (TDSAI) Facility and the End-to-End Transit Delay Negotiation (EETDN) Facility of the X.25/PLP-1984 are mapped to/from the Transit Delay QOS parameter of N-CONNECT primitives.

The set of values that can be specified for each Transit Delay subparameter ranges from 1 ms through 65 534 ms, inclusive, in increments of 1 ms. An NL entity supports either all of these values or a contiguous subset of them. The value “unspecified” is also allowed.

An NL entity in an end system shall be able to determine the cumulative transit delay attributable to the NS provider in that end system. This is the transit delay of the NL entity itself, all lower-layer entities, and the effects of the access line transmission rate.

Annex G illustrates the use of the X.25 TDSAI and EETDN Facilities in support of the end-to-end negotiation of the Transit Delay QOS parameter.

6.2.5.2.1 Processing an N-CONNECT request primitive

If an NL entity, when receiving an N-CONNECT request primitive, cannot support the Lowest Quality Acceptable transit delay (i.e., the maximum transit delay) when specified, then it rejects the request. In this case, the NL entity does not transmit any X.25/PLP-1984 packet but it does signal an N-DISCONNECT indication primitive to the Calling NS user. The Originator parameter is “NS Provider.” The Reason parameter is “Connection Rejection — QOS Not Available/Transient Condition,” or “Connection Rejection — QOS Not Available/Permanent Condition” if the NL entity could never support the Lowest Quality Acceptable transit delay.

If an NL entity, when receiving an N-CONNECT request primitive, can support the Lowest Quality Acceptable transit-delay (i.e., the maximum transit delay) when specified, or when the Target transit delay is specified and the Lowest Quality Acceptable transit delay is unspecified, then

- a) the NL entity encodes the cumulative transit delay attributable to the NS provider in the calling end system in the “cumulative-transit-delay subfield” (i.e., octets 1 and 2) of the EETDN Facility;
- b) if a Target transit delay is specified, then the NL entity encodes this value in the “target-transit-delay subfield” (i.e., octets 3 and 4) of the EETDN Facility (otherwise, this subfield is not used);

NOTE 1 According to CCITT Rec. X.213|ISO/IEC 8348, the case where the Target transit delay is unspecified and the Lowest Quality Acceptable transit delay has a value other than unspecified is not permitted; logically, this case can be represented by the permitted assignment where an identical value is specified for both the Target and Lowest Quality Acceptable transit delays.

- c) if a Lowest Quality Acceptable transit delay is specified, then the NL entity encodes this value in the “maximum-acceptable-transit-delay subfield” (i.e., octets 5 and 6) of the EETDN Facility (otherwise, this subfield is not used);

- d) when operating in a DTE/DCE environment: if the Target transit delay is specified, then the NL entity encodes the value of the TDSAI Facility as being less than the Target transit delay minus the cumulative transit delay for the calling end system; otherwise, the TDSAI Facility is encoded with any value (i.e., it is not constrained by this International Standard); when operating in a DTE/DTE environment: the TDSAI Facility shall not be used.

NOTE 2 Given a “routing management information base,” the NL entity can refine the value encoded in the TDSAI Facility. For example, the value of the TDSAI Facility could take into account whether networks other than packet-switched networks are traversed in reaching the called end system or whether the called end system is reachable directly in a point-to-point configuration.

If both the Target and Lowest Quality Acceptable transit delays are unspecified, then the NL entity shall omit the TDSAI Facility (if applicable) and encode the EETDN Facility as given in a) above. The TDSAI (if present) and EETDN Facilities are transmitted across the DTE/DXE interface in a CALL REQUEST packet.

NOTE 3 The value of the TDSAI Facility in a CALL REQUEST packet in a DTE/DCE environment provides a guideline to the DCE for allocating resources. The final transit-delay value applicable to the Virtual Call may be less than, equal to, or greater than the value in the CALL REQUEST packet.

6.2.5.2.2 Processing an INCOMING CALL packet

When receiving an INCOMING CALL packet, an NL entity determines whether the TDSAI Facility and the “cumulative-transit-delay subfield” (i.e., octets 1 and 2) of the EETDN Facility are present. If either is absent, then the NL entity shall derive a value to use for the missing value from its local “routing management information base.” It then computes the total NC transit delay as given below.

The total NC transit delay is determined by summing the values of

- a) the TDSAI Facility;
- b) the “cumulative-transit-delay subfield” (i.e., octets 1 and 2) of the EETDN Facility;
- c) the transit delay attributable to the NS provider in the called end system.

NOTE The procedure suggested here for computing the value of the total NC transit delay is the best an NL entity can do in the absence of any “external information.” However, given a “routing management information base,” the NL entity can refine this value. For example, the transit delay attributable to the effects of the access line transmission rate is not included when the called end system is connected to the calling end system in a point-to-point configuration (these effects have been accounted for by the calling end system).

If the “maximum-acceptable-transit-delay subfield” (i.e., octets 5 and 6) of the EETDN Facility is present, then the NL entity compares the value in this “subfield” to the total NC transit delay computed above. If the total NC transit delay is greater than the maximum-acceptable transit delay, then the NL entity dears the call (i.e., transmits a CLEAR REQUEST packet). The cause is “DTE Originated” and the diagnostic is “Connection Rejection — QOS Not Available/Transient Condition,” or “Connection Rejection — QOS Not Available/Permanent Condition” if the NL entity could never support the maximum-acceptable transit delay (these diagnostics have values 229 and 230, respectively). Otherwise, if either

- a) the total NC transit delay is less than or equal to the maximum-acceptable transit delay, or
- b) the “maximum-acceptable-transit-delay subfield” of the EETDN Facility is not present,

then the NL entity indicates the Available transit-delay value (as given by the total NC transit delay computed above) in the Transit Delay QOS parameter of the N-CONNECT indication primitive signaled to the Called NS user.

6.2.5.2.3 Processing an N-CONNECT response primitive

When an NL entity receives an N-CONNECT response primitive, it encodes the total NC transit-delay value (as computed above) in the “cumulative-transit-delay subfield” (octets 1 and 2) of the EETDN Facility returned in the CALL ACCEPTED packet.

NOTE 1 There is no Transit Delay QOS Parameter in an N-CONNECT response primitive.

NOTE 2 The EETDN Facility returned in a CALL ACCEPTED packet only contains the “cumulative-transit-delay subfield.”

6.2.5.2.4 Processing a CALL CONNECTED packet

When an NL entity receives a CALL CONNECTED packet, it indicates the Selected transit-delay value, as given by the “cumulative-transit-delay subfield” of the EETDN Facility, in the Transit Delay QOS parameter of the N-CONNECT confirm primitive signaled to the Calling NS user.

6.2.5.3 Priority QOS parameters

The Priority Facility of the X.25/PLP is mapped to/from the three Priority QOS parameters of N-CONNECT primitives.

The set of values that can be specified for each Priority subparameter ranges from 0 (lowest priority) to 14 (highest priority). An NL entity supports all of these values. The value “unspecified” is also allowed (encoded as 255 in the X.25/PLP).

Annex H illustrates the use of the X.25 Priority Facility in support of the end-to-end negotiation of the Priority QOS parameter.

6.2.5.3.1 Processing an N-CONNECT request primitive

An NL entity that supports a choice of priority levels shall proceed as specified in 6.2.5.3.1.1. An NL entity that does not support a choice of levels shall proceed as specified in 6.2.5.3.1.2.

6.2.5.3.1.1 Processing with choice of levels supported

If an NL entity, when receiving an N-CONNECT request primitive, cannot support the Lowest Quality Acceptable priority for any of the three Priority QOS parameters, when specified, then it rejects the request. In this case, the NL entity does not transmit any X.25/PLP packet but it does signal an N-DISCONNECT indication primitive to the Calling NS user. The Originator parameter is “NS Provider.” The Reason parameter is “Connection Rejection — QOS Not Available/Transient Condition,” or “Connection Rejection — QOS Not Available/Permanent Condition” if the NL entity could never support the Lowest Quality Acceptable priority for one or more of the Priority QOS parameters.

If an NL entity, when receiving an N-CONNECT request primitive, can support the Lowest Quality Acceptable priority for all three Priority QOS parameters, when specified, or any of the Lowest Quality Acceptable Priority QOS parameters is unspecified, then the NL entity encodes the Priority Facility as follows:

- a) if the Lowest Quality Acceptable of a Priority QOS parameter is specified, its value is encoded in the subfield of the X.25/PLP Priority Facility designated to contain this subparameter; otherwise, this subfield of the facility is encoded as 255 (unspecified);
- b) if the Target of a Priority QOS parameter is specified, its value is encoded in the subfield of the X.25/PLP Priority Facility designated to contain this subparameter; otherwise, this subfield of the facility is encoded as 255 (unspecified).

If either the Target or the Lowest Quality Acceptable priority is specified for any of the Priority QOS parameters, then the resulting Priority Facility is transmitted across the DTE/DXE interface in a CALL REQUEST packet. Any subfield of the Priority Facility that contains the “unspecified” value (i.e., 255) may be omitted if, and only if, it is not followed by a subfield containing a value other than “unspecified.” If both the Target and Lowest Quality Acceptable priority are unspecified for all Priority QOS parameters, then no Priority Facility is transmitted.

6.2.5.3.1.2 *Processing with choice of levels not supported*

When an NL entity receives an N-CONNECT request primitive, it shall encode the Lowest Quality Acceptable and Target priority level for each Priority QOS parameter in the X.25/PLP Priority Facility for transmission across the DTE/DXE interface in a CALL REQUEST packet, unless both values of all parameters are unspecified, in which case it shall not transmit a Priority Facility.

6.2.5.3.2 *Processing an INCOMING CALL packet*

An NL entity that supports a choice of priority levels shall proceed as specified in 6.2.5.3.2.1. An NL entity that does not support a choice of levels shall proceed as specified in 6.2.5.3.2.2.

6.2.5.3.2.1 *Processing with choice of levels supported*

When receiving an INCOMING CALL packet, an NL entity determines the Available and Lowest Quality Acceptable subparameters to be used in the N-CONNECT indication primitive for each Priority QOS parameter as follows:

- a) if the packet contains no Priority Facility, then both subparameters for each Priority QOS parameter are unspecified;
- b) if the subfield of the Priority Facility designated to contain the Available subparameter for a Priority QOS parameter is present, then the value of this subparameter is as given in the subfield; otherwise, the value is unspecified;
- c) if the subfield of the Priority Facility designated to contain the Lowest Quality Acceptable subparameter for a Priority QOS parameter is present, then the value of this subparameter is as given in the subfield; otherwise, the value is unspecified.

If, for any of the three Priority QOS parameters, the NL entity cannot support the Lowest Quality Acceptable priority, then the NL entity clears the call (i.e., transmits a CLEAR REQUEST packet). The cause is “DTE Originated” and the diagnostic is “Connection Rejection — QOS Not Available/Transient Condition,” or “Connection Rejection — QOS Not Available/Permanent Condition” if the NL entity could never support the Lowest Quality Acceptable priority (these diagnostics have values 229 and 230, respectively). Otherwise, the NL entity indicates, for each Priority QOS parameter, the Available and Lowest Quality Acceptable priority values in the Priority QOS parameters of the N-CONNECT indication primitive signaled to the Called NS user.

6.2.5.3.2.2 *Processing with choice of levels not supported*

When an NL entity receives an INCOMING CALL packet, the values of the Available and Lowest Quality Acceptable priority-level subparameters for use in the N-CONNECT indication primitive for each Priority QOS parameter shall be the values signified by the Priority Facility in the packet (if present). The absence of a subfield in the Priority Facility corresponds to the value “unspecified.” If the Priority Facility is not present in the INCOMING CALL packet, then the values of both subparameters of each Priority QOS parameter shall be “unspecified.”

6.2.5.3.3 *Processing an N-CONNECT response primitive*

When an NL entity receives an N-CONNECT response primitive, it encodes the Selected priority value, if specified, as given for each Priority QOS parameter, in the Priority Facility returned in the CALL ACCEPTED packet. Any subfield of the Priority Facility that contains the “unspecified” value (i.e., 255) may be omitted if, and only if, it is not followed by a subfield containing a value other than “unspecified.” If the Selected priority value is unspecified for all Priority QOS parameters, then no Priority Facility is returned in the CALL ACCEPTED packet.

6.2.5.3.4 Processing a CALL CONNECTED packet

When an NL entity receives a CALL CONNECTED packet, it indicates the Selected priority value, as given in the Priority Facility (if present), for each Priority QOS parameter of the N-CONNECT confirm primitive signaled to the Calling NS user. The absence of a subfield in the Priority Facility corresponds to the value “unspecified.” If the Priority Facility is not present in the CALL CONNECTED packet, then the Selected value of each Priority QOS parameter shall be “unspecified.”

6.2.6 NS-User-Data

The Call User Data Field of X.25/PLP-1984 CALL REQUEST and INCOMING CALL packets is used to transfer the NS-user-data of N-CONNECT request and indication primitives, respectively. The Called User Data Field of X.25/PLP-1984 CALL ACCEPTED and CALL CONNECTED packets is used to transfer the NS-user-data of N-CONNECT response and confirm primitives, respectively. In addition, the Fast Select Facility shall be indicated in the CALL REQUEST packet sent by the Calling NL entity.

7 Network connection release phase

7.1 Primitive/Parameter and packet/field relationships

Table 4 shows the relationships between the primitives/parameters used during the NC release phase and the packets/fields associated with the call clearing procedures.

Table 4 — CONS:X.25/PLP-1984 mapping for the NC release phase

CONS	X.25/PLP-1984
PRIMITIVES N-DISCONNECT request N-DISCONNECT indication	PACKETS: CLEAR REQUEST CLEAR INDICATION, RESTART INDICATION ¹⁾ , CLEAR REQUEST ²⁾
PARAMETERS: Originator and Reason NS-User-Data Responding Address	FIELDS (INCLUDING FACILITIES): Cause and Diagnostic Code Fields ³⁾ Clear User Data Called DTE Address Field Called Address Extension Facility
NOTES NOTE 1 Receipt of a RESTART INDICATION packet should be treated as receipt of a CLEAR INDICATION packet for every logical channel and then mapped to an N-DISCONNECT indication primitive for every active NC associated with the Packet Layer Protocol being restarted. The Restarting Cause and Diagnostic Code Fields are then treated in the same manner as the Clearing Cause and Diagnostic Code Fields. NOTE 2 See 7.2.1, Paragraph 2. NOTE 3 The combination of Cause and Diagnostic Code Fields is mapped to/from the combination of Originator and Reason parameters.	

7.2 Procedures

7.2.1 Primitive/Package mapping

When an NL entity receives an N-DISCONNECT request primitive from an NS user, it transmits a CLEAR REQUEST packet across the DTE/DXE interface. If, however, the NL entity had previously transmitted a CLEAR REQUEST packet and signaled an N-DISCONNECT indication primitive to the NS user (because of a protocol error; see below), then it does not transmit another CLEAR REQUEST packet.

If an NL entity detects an error in the operation of the X.25/PLP-1984 for which its action is to clear the VC (e.g., a format error in an INCOMING CALL packet or a timeout condition), then it transmits a CLEAR REQUEST packet across the DTE/DXE interface. If the virtual circuit is associated with an NC, then it also signals an N-DISCONNECT indication primitive to the NS user.

If an NL entity, upon receipt of an INCOMING CALL packet, is to deflect the call, then it should include, in its CLEAR REQUEST packet, any necessary CCITT-Specified DTE facilities and user data that are to be present in the INCOMING CALL packet transmitted to the alternate DTE. It shall also include the Call Deflection Selection Facility.

When an NL entity receives a CLEAR INDICATION packet (or a RESTART INDICATION packet), it signals an N-DISCONNECT indication primitive to the NS user. It also transmits a CLEAR CONFIRMATION packet (or a RESTART CONFIRMATION packet) across the DTE/DXE interface. If, however, the NL entity had previously transmitted a CLEAR REQUEST packet for the NC (i.e., a clear collision), then it does not signal an N-DISCONNECT indication primitive to the NS user nor transmit a CLEAR CONFIRMATION packet.

NOTE If the received CLEAR INDICATION packet is in response to a previously-transmitted CALL REQUEST packet, the NL entity may retry the call if the Network Connection Establishment Delay has not been exceeded rather than immediately signaling an N-DISCONNECT indication primitive to its NS user. The NL entity may also use the clearing cause code (see 7.2.2) in the CLEAR INDICATION packet to determine whether to retry the call. That is, the reattempt may be successful if the clearing cause code is classified as Category C (see CCITT Rec. X.96); on the other hand, a Category D code indicates a problem of a more permanent nature. The time interval between and number of reattempted calls is a local matter. If multiple attempts at establishing the NC are all unsuccessful, then the Originator-parameter and Reason-parameter values finally signaled in the N-DISCONNECT indication primitive are a local matter.

If either NL entity wishes to disconnect an NC, it signals an N-DISCONNECT indication primitive to its NS user and transmits a CLEAR REQUEST packet across the DTE/DXE interface. If, however, the NL entity in the calling DTE cannot, for example, support the QOS parameters specified in an N-CONNECT request primitive or does not have an LC available to set up a VC, then it signals an N-DISCONNECT indication primitive to the Calling NS user but does not transmit a CLEAR REQUEST packet across the DTE/DXE interface.

7.2.2 Originator/Reason

The combination of Originator and Reason parameters of the N-DISCONNECT primitives is mapped to/from the combination of Clearing Cause (or Restarting Cause) and Diagnostic Code Fields.

The combination of the cause code "DTE Originated" (coded as all zeros) with a diagnostic in the set 241, 242, and 244-248 corresponds to an Originator-parameter value of "NS User." In this case, there is a one-to-one relationship between the values of the Reason parameter and these diagnostic codes.

The cause code "DTE Originated" (coded as all zeros) used in combination with diagnostic codes other than those listed above corresponds to an Originator-parameter value of "NS Provider." There is a one-to-one relationship between the values of the Reason parameter and diagnostic codes 225-232 and 235.

In other cases, the Originator-parameter and Reason-parameter values depend on

- a) the cause and/or diagnostic codes;
- b) whether the NC is in the NC establishment phase or in the data transfer phase.

The values of the Originator and Reason parameters are derived as given below.

- a) The Originator-parameter value is "NS Provider" and the Reason-parameter value is "Disconnection — Permanent Condition" when the NC is in the data transfer phase and any of the following applies:
 - 1) cause codes "Out Of Order," "Local Procedure Error," "Remote Procedure Error," or "RPOA Out Of Order;"
 - 2) diagnostic code 122.
- b) The Originator-parameter value is "NS Provider" and the Reason-parameter value is "Disconnection — Transient Condition" when the NC is in the data transfer phase and any of the following applies:
 - 1) cause code "Network Congestion;"
 - 2) diagnostic codes 113 or 115;
 - 3) cause code "DTE Originated" (coded as all zeros) with diagnostic codes 162 or 163.
- c) The Originator-parameter value is "NS Provider" and the Reason-parameter value is "Connection Rejection — NSAP Address Unknown (Permanent Condition)" when the NC is in the NC establishment phase and any of the following applies:
 - 1) cause codes "Not Obtainable" or "Ship Absent."

d) The Originator-parameter value is “NS Provider” and the Reason-parameter value is “Connection Rejection — Reason Unspecified/Permanent Condition” when the NC is in the NC establishment phase and any of the following applies:

- 1) cause codes “Access Barred,” “Fast Select Acceptance Not Subscribed,” “Incompatible Destination,” “Invalid Facility Request,” “Out Of Order,” “Local Procedure Error,” “Remote Procedure Error,” “Reverse Charging Acceptance Not Subscribed,” or “RPOA Out Of Order;”
- 2) diagnostic codes 121 or 122;
- 3) cause code “DTE Originated” (coded as all zeros) with diagnostic code 164.

e) The Originator-parameter value is “NS Provider” and the Reason-parameter value is “Connection Rejection — Reason Unspecified/Transient Condition” when the NC is in the NC establishment phase and any of the following applies:

- 1) cause codes “Network Congestion” or “Number Busy;”
- 2) diagnostic codes 112-120;
- 3) cause code “DTE Originated” (coded as all zeros) with a diagnostic code other than 162-164, 225-232, 235, 241, 242, and 244-248.

f) The Originator-parameter and Reason-parameter values are both “Undefined” for any other combination of cause and diagnostic codes.

7.2.3 NS-User-Data

The Clear User Data Field of X.25/PLP-1984 CLEAR REQUEST and CLEAR INDICATION packets is used to transfer the NS-user-data between NS users.

7.2.4 Responding address

Local operation determines the contents of the Called Address Field and whether the responding Network Address, where explicitly supplied, is mapped to/from the AF or the AEF in X.25/PLP-1984 call clearing packets. Rules for encoding and decoding the responding Network Address are given in 6.2.2.

8 Data transfer phase — Data transfer service

8.1 Primitive/Parameter and packet/field relationships

Table 5 shows the relationships between the primitives/parameters used for the data transfer service and the packets/fields associated with the data transfer procedures.

8.2 Procedures

8.2.1 Primitive/Package mapping

When an NL entity receives an N-DATA request primitive from an NS user, it transmits a sequence of one or more DATA packets, known as an M-bit Sequence (MBS), across the DTE/DXE interface. The number of DATA packets needed in an MBS depends on the amount of NS-user-data and on the maximum “packet size” (i.e., the maximum User Data Field Length of DATA packets) permitted on the DTE/DXE interface. All DATA packets but the last one of an MBS contain the maximum number of octets, have their M-bit set to 1, and have their D-bit set to 0. The last DATA packet has its M-bit set to 0. The D-bit setting of the last DATA packet is dependent on the Confirmation Request parameter (see 8.2.3 below). All DATA packets shall have the Q-bit set to zero.

Table 5 — CONS:X.25/PLP-1984 mapping for the data transfer service

CONS	X.25/PLP-1984
PRIMITIVES: N-DATA request N-DATA indication	PACKETS: DATA DATA
PARAMETERS: NS-User-Data Confirmation Request	FIELDS: User Data, M-bit D-bit, P(S)

When an NL entity receives an MBS with the Q-bit set to zero in each DATA packet, it signals an N-DATA indication primitive to the NS user.