



DPC: 24/30498328 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 02 August 2024

Origin: European

Latest date for receipt of comments: 25 September 2024

Project No. 2024/02220

Responsible committee: GEL/9/1 Railway Electrotechnical Applications - Signalling and communications

Interested committees:

Title: Draft BS EN 50736 BS Railway application - Communication, signalling and processing system - Test requirements for signalling and telecommunication equipment.

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD. THIS DRAFT IS NOT CURRENT BEYOND 25 September 2024

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <https://standardsdevelopment.bsigroup.com/>.

Responsible Committee Secretary: William Westcott (BSI)

Direct tel: 020 3142 5692

E-mail: william.westcott@rssb.co.uk

Full document details: 24/30498328 DC

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/ Figure/Table/Note	Type of comment	Comment (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	

English Version

**Railway application - Communication, signalling and processing
system - Test requirements for signalling and telecommunication
equipment**

Applications ferroviaires - Systèmes de signalisation, de
télécommunication et de traitement - Exigences de test
pour les équipements de signalisation et de
télécommunication

Bahnanwendungen - Telekommunikationstechnik,
Signaltechnik und Datenverarbeitungssysteme -
Prüfanforderungen für Signal- und
Telekommunikationsgeräte

This draft European Standard is submitted to CENELEC members for enquiry.
Deadline for CENELEC: 2024-10-25.

It has been drawn up by CLC/SC 9XA.

If this draft becomes a European Standard, CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CENELEC in three official versions (English, French, German).
A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents

Page

1	European foreword.....	5
2	Introduction	6
3	1 Scope	7
4	2 Normative references	7
5	3 Terms and definitions	8
6	3.1 Terms and definitions	8
7	3.2 Symbols and abbreviations	10
8	4 Relation between environmental conditions and test requirements	10
9	5 Test requirements for type test	12
10	5.1 General test requirements	12
11	5.1.1 Test levels	12
12	5.1.2 Standard atmospheric conditions	12
13	5.1.3 Performance criteria.....	12
14	5.1.4 Visual Inspection	12
15	5.1.5 Performance test	13
16	5.2 Insulation tests	13
17	5.2.1 General	13
18	5.2.2 Insulation resistance test	14
19	5.2.3 Impulse test.....	14
20	5.2.4 Voltage withstand test	15
21	5.3 Temperature tests.....	15
22	5.3.1 General	15
23	5.3.2 Dry heat test.....	16
24	5.3.3 Cold test	18
25	5.4 Humidity test	21
26	5.4.1 General	21
27	5.4.2 Damp heat test	21
28	5.5 Vibration and shock tests	26
29	5.5.1 General	26
30	5.5.2 Initial vibration response investigation.....	27
31	5.5.3 Fatigue vibration test	28
32	5.5.4 Shock test.....	29
33	5.5.5 Final vibration response investigation.....	30
34	5.6 Electromagnetic compatibility tests	30
35	5.7 Surge test	30
36	5.8 Test for protection against water ingress	31
37	5.8.1 General	31
38	5.8.2 Test requirements	31
39	5.8.3 Test setup.....	31
40	5.8.4 Test acceptance criteria.....	31
41	5.9 Solar radiation tests	31
42	5.9.1 General	31
43	5.9.2 Simulated solar radiation tests	32
44	5.9.3 Solar dry heat test	34
45	5.10 Test for protection against dust and sand ingress	35
46	5.10.1 General	35
47	5.10.2 Test requirements	35
48	5.10.3 Test setup.....	36
49	5.10.4 Test acceptance criteria.....	36
50	5.11 Test for protection against external mechanical impacts	36

51	5.11.1	General	36
52	5.11.2	Test requirements	37
53	5.11.3	Test setup.....	37
54	5.11.4	Test acceptance criteria	37
55	6	Documentation	38
56	6.1	General	38
57	6.2	Type test specification.....	38
58	6.3	Type test report	39
59	6.4	Type test compliance summary sheet	39
60	Annex A (informative)	Analysis of the environmental conditions	40
61	A.1	General	40
62	A.2	Pressure	40
63	A.2.1	Altitude	40
64	A.2.2	Pulse pressure.....	42
65	A.3	Temperature.....	42
66	A.4	Humidity	42
67	A.5	Wind	44
68	A.6	Rain	44
69	A.7	Snow and hail	44
70	A.7.1	Snow	44
71	A.7.2	Hail	45
72	A.8	Ice.....	45
73	A.9	Solar radiation	46
74	A.10	Lightning	46
75	A.11	Pollution	47
76	A.11.1	General	47
77	A.11.2	Chemically and biologically active substances	47
78	A.11.3	Mechanically active substances	47
79	A.12	Fire protection	48
80	A.13	Vibrations and shocks	48
81	A.14	Electromagnetic compatibility	49
82	A.15	Power supply	49
83	Annex B (informative)	Type test specification	50
84	B.1	General	50
85	B.2	Type test specification clauses	50
86	B.2.1	Introduction.....	50
87	B.2.2	Terms, definition and abbreviation.....	50
88	B.2.3	Reference documents	50
89	B.2.4	General description.....	50
90	B.2.5	Equipment under test.....	51
91	B.2.6	Installation environment.....	51
92	B.2.7	Ports identification	52
93	B.2.8	Performance test	55
94	B.2.9	Visual inspection	56
95	B.2.10	Correlation between performance test and the performance criteria.....	56
96	B.2.11	Summary of all type tests to be performed on the EUT	57
97	B.2.12	Insulation tests	59
98	B.2.13	EMC tests	59
99	B.2.14	Climatic tests	60

100	B.2.15	Vibration and shock tests	60
101	B.2.16	Tests for protection against external agents	60
102	B.2.17	Tests for protection against external mechanical impacts	61
103	B.2.18	Power supply tests	61
104	B.2.19	Additional tests	61
105	Annex C (informative)	Additional and not mandatory tests	62
106	C.1	General	62
107	C.2	Storage and transport temperature tests	62
108	C.2.1	General	62
109	C.2.2	Test setup	62
110	C.2.3	Test requirements	62
111	C.2.4	Test acceptance criteria	64
112	C.3	Shock tests for transversal and longitudinal axis	65
113	C.4	Impulse test for equipment without earth connection	65
114	Annex D (informative)	Tests selection guideline	66
115	D.1	General	66
116	D.2	Definition of equipment installation conditions	66
117	D.3	Equipment for installation in locations protected from the weather	67
118	D.4	Equipment for installation in locations not protected from the weather	68
119	Annex E (informative)	Examples for type test compliance summary sheet	70
120	E.1	General	70
121	E.2	Example 1	70
122	E.3	Example 2	71
123	Bibliography		74

124 **European foreword**

125 This document (prEN 50736:2024) has been prepared by CLC/SC 9XA "Communication, signalling and
126 processing systems" of CLC/TC 9X "Electrical and electronic applications for railways".

127 This document is currently submitted to the Enquiry

128 The following dates are proposed:

- latest date by which the existence of this document has to be announced at national level (doa) dor + 6 months
- latest date by which this document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) dor + 12 months
- latest date by which the national standards conflicting with this document have to be withdrawn (dow) dor + 36 months (to be confirmed or modified when voting)

129 This document has been prepared according to Decision 57/5 taken during the SC 9XA meeting.

Introduction

The environmental conditions for signalling and telecommunication equipment are specified by EN 50125-3:2003, without defining test requirements and their related performance/acceptance criteria.

This document contains test requirements and performance/acceptance criteria for most of the mentioned environmental conditions likely to be experienced in the railway applications and published in EN 50125-3:2003. Furthermore, it clearly indicates for which environmental conditions no test methods are known and therefore no meaningful test requirements can be defined.

Test requirements for the type test defined in this document consider the severity of the environmental parameters provided for by EN 50125-3:2003, but those test requirements remain applicable even if the severity levels requested by the customer differ.

This document has been prepared in the form of a Product Standard.

Where possible direct references are given to other existing standards to obtain a high degree of acceptance and to reduce additional effort for testing.

1 Scope

This document applies to railway signalling and telecommunication trackside equipment.

This document does not cover signalling and telecommunication equipment mounted in vehicles; these are covered by EN 50155:2021.

This document covers the type testing phases of the equipment for signal and telecommunication (S&T) system (including power supply systems belonging to S&T), in order to ensure compliance with specified requirements already defined in the customer specifications or by the involved parties.

In particular this document intends to define test requirements with related performance / acceptance criteria, considering only the environmental conditions stated by the EN 50125-3:2003, and considering the severities of the environmental parameters herein defined.

Safety considerations are not covered by this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 50121-4:2016,¹ *Railway applications - Electromagnetic compatibility - Part 4: Emission and immunity of the signalling and telecommunications apparatus*

EN 50124-1:2017, *Railway applications - Insulation coordination - Part 1: Basic requirements - Clearances and creepage distances for all electrical and electronic equipment*

EN 50125-3:2003,² *Railway applications - Environmental conditions for equipment - Part 3: Equipment for signalling and telecommunications*

EN 60068-1:2014, *Environmental testing - Part 1: General and guidance*

EN 60068-2-1:2007, *Environmental testing - Part 2-1: Tests - Test A: Cold*

EN 60068-2-2:2007, *Environmental testing - Part 2-2: Tests - Test B: Dry heat*

EN 60068-2-27:2009, *Environmental testing - Part 2-27: Tests - Test Ea and guidance: Shock*

EN 60068-2-30:2005, *Environmental testing - Part 2-30: Tests - Test Db: Damp heat, cyclic (12 h + 12 h cycle)*

EN 60068-2-47:2005, *Environmental testing - Part 2-47: Tests - Mounting of specimens for vibration, impact and similar dynamic tests*

EN IEC 60068-2-5:2018, *Environmental testing - Part 2-5: Tests - Test S: Simulated solar radiation at ground level and guidance for solar radiation testing and weathering*

EN 60068-2-64:2008,³ *Environmental testing - Part 2: Tests - Test Fh: Vibration, broadband random and guidance*

EN 60068-2-75:2014, *Environmental testing - Part 2-75: Tests - Test Eh: Hammer tests*

¹ As impacted by EN 50121-4:2016/A1:2019.

² As impacted by EN 50125-3:2003/corrigendum May 2010.

³ As impacted by EN 60068-2-64:2008/A1:2019.

EN 60529:1991,⁴ *Degrees of protection provided by enclosures (IP Code)*

EN 61180:2016, *High-voltage test techniques for low-voltage equipment - Definitions, test and procedure requirements, test equipment*

EN 62262:2002,⁵ *Degrees of protection provided by enclosures for electrical equipment against external mechanical impacts (IK code)*

3 Terms and definitions

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 50124-1:2017, EN 60068-2-64:2008 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp/>

— IEC Electropedia: available at <https://www.electropedia.org/>

3.1.1

enclosure

case, housing, or other part to protect the equipment against certain external influences

Note 1 to entry: The enclosure can offer protection to personnel, e.g. from electric shock.

Note 2 to entry: In this document insulating compound (e.g. potting, encapsulation and vacuum impregnation) used to protect the equipment against external influences is considered as enclosure.

3.1.2

environmental condition

physical, chemical or biological condition, external to a product, to which it is subjected at a certain time

[SOURCE: EN 60721-1:1995, 3.1]

3.1.3

environmental factor

physical, chemical or biological influence which, either singly or in combination with other influences, produces an environmental condition (e.g. heat, vibration)

[SOURCE: EN 60721-1:1995, 3.2]

3.1.4

environmental parameter

one or more physical, chemical or biological properties characterizing an environmental factor (e.g. temperature, acceleration)

Note 1 to entry: For example, the environmental factor vibration is characterized by the parameters: type of vibration (sinusoidal, random), acceleration and frequency.

[SOURCE: EN 60721-1:1995, 3.3, modified – The second part of the definition was moved to Note 1 to entry]

⁴ As impacted by EN 60529:1991/corrigendum May 1993, EN 60529:1991/A1:2000, EN 60529:1991/A2:2013, EN 60529:1991/AC:2016-12 and EN 60529:1991/A2:2013/AC:2019-02.

⁵ As impacted by EN 62262:2002/A1:2021.

3.1.5**equipment**

single apparatus or set of devices or apparatuses, or the set of main devices of an installation, or all devices necessary to perform a specific task.

EXAMPLES a power transformer, the equipment of a substation, measuring equipment

[SOURCE: IEC 60050-151:2001, 151-11-25]

3.1.6**operating temperature**

<of equipment> temperature range in which the equipment is operating as specified.

Note 1 to entry: Outside of the operating temperature range there can be temporary or permanent degradation of the equipment performances.

3.1.7**performance**

characteristics defining the ability of an equipment to achieve the intended functions

[SOURCE: IEC 60050-311:2001, 311-06-11, modified – The terminological entry “measuring instrument” has been replaced by “equipment”]

3.1.8**port**

<for signalling and telecommunications apparatus> particular interface of the specified apparatus with the external environment

EXAMPLES AC power port, DC power port, I/O (input/output) port, earth port.

[SOURCE: IEC 60050-821:2017, 821-11-37]

3.1.9**resonance frequency**

<in vibration tests> frequency at which resonance exists and the acceleration measured in the response point is more than three times respect the acceleration measured in the reference point

3.1.10**severity of environmental parameter**

value of each quantity, characterizing the environmental parameter

EXAMPLE The severity of sinusoidal vibration is defined by values of the acceleration (in m/s^2) and frequency (in Hz).

[SOURCE: EN 60721-1:1995, 3.4]

3.1.11**specified requirements**

need or expectation that is stated

Note 1 to entry: Specified requirements can be stated in normative documents such as regulations, standards and technical specifications.

Note 2 to entry: When the severity of an environmental parameter is chosen considering the environment where the equipment has to be installed, this becomes a specified requirement. This is the target that the equipment has to fulfil. Specified requirements can be defined by generic or product standards, by the customer in his specifications, or also by the supplier, for example when don't exist specifications or standards, considering the environment where he intends to install his components (e.g. the value of the environmental high temperature to which equipment can operate has to be 70 °C.).

[SOURCE: IEC 60050-902:2013, 902-02-01, modified – The Note 2 to entry has been added]

3.1.12

system

set of interrelated elements considered in a defined context as a whole and separated from their environment

[SOURCE: IEC 60050-351:2013, 351-42-08, modified – The Notes to entry have been omitted.]

3.1.13

test fixture

apparatus to fix the equipment on the test device during testing

[SOURCE: ISO 19594:2017, 3.7, modified – The terminological entry “specimen” has been replaced by “equipment”]

3.1.14

test requirements

prescriptions to be used during the tests

Note 1 to entry: These prescriptions are usually defined in generic or product standards. These prescriptions, that regulate the parameters not properly defined by the basic standards, are necessary to make the test effective to ensure that the specified requirements are met.

Note 2 to entry: e.g. the duration of the dry heat test has to be 10 h.

3.1.15

test procedure

set of instructions in order to obtain a test result

Note 1 to entry: Test procedures are usually defined in basic standards (e.g. the test procedures for dry heat test are described in EN 60068-2-2:2007)

3.1.16

type test

conformity test made on one or more items representative of the production.

[SOURCE: IEC 60050-581:2008, 581-21-08]

3.2 Symbols and abbreviations

For the purposes of this document, the following abbreviations apply.

AC	Alternating Current
ASD	Acceleration Spectral Density
DC	Direct Current
EMC	Electro Magnetic Compatibility
EUT	Equipment Under Test
PBA	Printed Board Assembly
PCB	Printed Circuit Board
SPD	Surge Protection Device

4 Relation between environmental conditions and test requirements

The following clause define the relation between environmental conditions and the test requirements for type test.

Informative Annex A is added for a better understanding of the document. It shows the analysis of the environmental conditions defined in EN 50125-3:2003 and their influence on the functioning of the EUT, and also the relation with the test requirements for type tests defined in this document.

Table 1 shows the relationship between the environmental conditions considered by EN 50125-3:2003, the preparatory and additional information reported in Annex A, and the test requirements defined in this document. The structure of Table 1, and also of the informative Annex A, has been deliberately left the same as EN 50125-3:2003, to allow a better readability of the document, even if for some environmental conditions no test requirements have been defined.

Table 1 — List of environmental conditions and related test requirements

Environmental condition	Subclause in EN 50125-3:2003	Preparatory and additional information in Annex A	Test requirements subclause in this document
Pressure	4.2	A.2	5.2 Insulation tests
Temperature	4.3	A.3	5.3 Temperature tests
Humidity	4.4	A.4	5.4 Humidity test
Wind	4.5	A.5	No test requirements defined in this document
Rain	4.6	A.6	5.4 Humidity test 5.8 Test for protection against water ingress
Snow and Hail	4.7	A.7	5.4 Humidity test 5.11 Test for protection against external mechanical impacts
Ice	4.8	A.8	5.4 Humidity test
Solar Radiation	4.9	A.9	5.9 Solar radiation tests
Lightning	4.10	A.10	5.2 Insulation tests 5.7 Surge test
Pollution	4.11	A.11	5.2 Insulation tests 5.10 Test for protection against dust and sand ingress 5.11 Test for protection against external mechanical impacts
Fire Protection	4.12	A.11	No test requirements defined in this document
Vibrations and Shocks	4.13	A.13	5.5 Vibration and shock tests
Electromagnetic compatibility	4.14	A.14	5.6 Electromagnetic compatibility tests
Power supplies	4.15	A.15	No test requirements defined in this document

As previously explained, Table 1 relates each environmental condition with the relevant tests requirements defined in this document; this is to allow to the user of this document, considering the environmental conditions to be taken into account, to identify which tests shall be performed to the equipment. Due to this approach and the structure of the Table 1, some test requirements have been repeated on several rows, because the tested characteristics are related to different environmental conditions.

To directly identify which tests shall be performed on an equipment for a complete execution of the type tests, in order to take into account all environmental conditions stated in EN 50125-3:2003 for which test requirements have been defined in this document, informative Annex D provides a guide.

5 Test requirements for type test

5.1 General test requirements

5.1.1 Test levels

EN 50125-3:2003 specifies the environmental conditions, with the related severity of environmental parameters, encountered within Europe for railway signalling and telecommunication trackside equipment.

The test levels defined in this document are derived from the severity of the environmental parameters defined in EN 50125-3:2003.

5.1.2 Standard atmospheric conditions

As defined in EN 60068-1:2014, 4.3, the standard range of atmospheric conditions for carrying out measurements and tests are (inclusive values):

Temperature:	15 °C to 35 °C
Relative humidity:	from 25 % to 75 %
Air pressure:	86 kPa to 106 kPa

These standard atmospheric conditions shall be maintained during the execution of all tests defined in this document, unless specifically defined in the respective basic standard. If it is impracticable to carry out measurements in standard atmospheric conditions, a note stating the actual conditions shall be added to the test report.

5.1.3 Performance criteria

5.1.3.1 General

The expected performance (i.e. the equipment is functioning as specified), from the equipment under test, shall be specified for all operational conditions.

No damage to any connected equipment is allowed when the equipment does not operate as intended during or after the test.

5.1.3.2 Performance criterion A

The EUT shall continue to operate as intended. No change of operational state is allowed. No loss or unintentional change in stored data shall occur.

5.1.3.3 Performance criterion B

Degradation of the performance below the level described in criterion A is permitted, provided the EUT self-recovers to the condition established prior to the application of the test. No loss of stored data is allowed.

5.1.3.4 Performance criterion C

Degradation of performance as described in criteria A and B is permitted provided that the EUT self-recovers to the condition established prior to the application of the test within a maximum defined time, or can be restored after the test by the operator.

5.1.4 Visual Inspection

The visual inspection verifies the mechanical, dimensional and appearance conformance of the equipment, considering the drawings and requirements defined by the manufacturer in its specifications.

5.1.5 Performance test

The performance test verifies that the functional requirements of the equipment are met; consists of a comprehensive series of measurements of the functional characteristics to verify that the equipment operates as specified.

The performance test shall be well defined in the type test specification.

5.2 Insulation tests

5.2.1 General

The insulation tests herein defined are based on the provision of EN 50124-1:2017.

The insulation tests, defined below, verify that the design of the equipment (mounted components, metal connections and enclosures, routing of printed circuit board tracks and wire) meets the requirements for galvanic isolation necessary for proper operation in the railway environment.

The tests should be carried out on fully assembled equipment and no alteration of the original settings is permitted (e.g. component removal). If components have to be removed during the tests, that specific test configuration shall be agreed between the involved parties and defined in the type test specification.

The manufacturer shall define in the type test specifications the maximum altitude at which the equipment can operate and all ports interfacing the EUT with other equipment or in general with the railway signalling and telecommunication system. For each port shall be defined, in accordance with EN 50124-1:2017:

— Nominal voltage U_n

— Rated insulation voltage U_{Nm}

— Overvoltage category

— Rated impulse voltage U_{Ni}

— Insulation type (see 3.6 of EN 50124-1:2017)

In accordance with EN 50124-1:2017, the rated input voltage U_{Ni} shall be corrected with the altitude correction factor defined in Table A.9 of EN 50124-1:2017. If the insulation type of the port is double or reinforced, the rated impulse voltage shall be 160 % of the rated impulse voltage required for basic insulation.

Earth connection, if present, and the enclosure of the equipment shall be considered as ports in order to verify the insulation barrier. For these ports the information written above (U_n , U_{Nm} , etc..) cannot be defined.

Ports related to the same equipotential section (see 3.3 of EN 50124-1:2017) shall be considered as a single port for the scope of these tests and all their terminals shall be short-circuited together during all the insulation tests (e.g. metallic enclosure connected to the earth connection, and the earth port shall be considered as a single port).

The insulation tests consist in four parts that shall be done in sequence:

— Initial insulation resistance test (see 5.2.2)

— Impulse test (see 5.2.3)

— Voltage withstand test (see 5.2.4)

— Final insulation resistance test (see 5.2.2)

During the tests the equipment shall be switched OFF. After the insulation tests the equipment shall work as intended and within its specified limits. All measured values shall be recorded in the test report

Tests shall be performed for all isolated ports of the EUT in order to verify the isolation with the other ports.

NOTE If the insulation type from the port under test to the other ports is the same (all with basic insulation or all with reinforced insulation), the other ports, which are not subjected to test, can be connected together and to the reference of the test instrument in order to reduce the number of the tests. With this strategy it is possible to verify multiple insulations during the same test.

If an equipment has an insulating enclosure, this shall be covered with a metal foil in contact with the insulating surface so that it can be electrically connected for the purpose of the insulation tests.

5.2.2 Insulation resistance test

5.2.2.1 General

The insulation resistance test shall be carried out at DC 500 V $\pm$ 10 % if U_{Ni} defined for the port is more, or equal, than 0,8 kV, otherwise at DC 250 V $\pm$ 10 %, between each isolated port and all the other ports connected together and to the reference of the test instrument.

The test shall be performed by connecting the test generator directly to the two measuring points without interposing networks or coupling devices.

The test voltage shall be applied for at least 5 s to have a stabilized value of the insulation resistance. The resistance values measured, for each port, shall be recorded in the test report.

Any suitable test equipment can be used. The measuring device shall be capable of determining the insulation resistance with an overall accuracy of at least $\pm$ 10 %.

AC voltage components, possibly present in the DC output voltage of the test equipment, should be reduced in order to minimize the influence that high value capacitors, installed between the test circuits, can have on the insulation resistance measurement. The test defined in 6.8 of EN IEC 61557-2:2021 should be used to validate the measuring device.

5.2.2.2 Test acceptance criteria for initial insulation resistance test

For each measurement, the value of the insulation resistance shall be higher than 10 M Ω .

5.2.2.3 Test acceptance criteria for final insulation resistance test

For each measurement, the value of the insulation resistance shall be higher than 10 M Ω .

Significant differences between the results obtained during the initial and the final insulation resistance tests shall be analysed and justified in the test report.

5.2.3 Impulse test

5.2.3.1 General

The impulse test shall be carried out with a voltage having a front time of 1,2 μ s $\pm$ 30 % and a time to half-value of 50 μ s $\pm$ 20 % and described as a 1,2/50 impulse (see Figure 6 of EN 61180:2016), and is intended to simulate overvoltages of atmospheric origin. It also covers overvoltages due to switching of low-voltage equipment.

The pulse test generator, shall comply with the following parameters:

- source output impedance: 500 Ω $\pm$ 50 Ω ;
- test impulse voltage level U_{imp} : derived from the rated impulse voltage U_{Ni} defined for each port
- test voltage tolerance (voltage peak value) : $\pm$ 10 %.

The test impulse voltage level U_{imp} , for each port, shall be derived from the rated impulse voltage U_{Ni} , and shall fall into the series of preferred values that are listed in the first column of Table A.3 of EN 50124-1:2017 by rounding up the rated impulse voltage value.

NOTE E.g. if the rated impulse voltage is 4,1 kV, the test impulse voltage level U_{imp} is 4,5 kV.

The test impulse voltage level U_{imp} shall be the open-circuit voltage of the generator before connection to the ports of the equipment.

For each isolation barrier that has to be verified, five impulses of the specified shape and of each polarity shall be applied at the test impulse voltage level U_{imp} . The test shall be performed by connecting the test generator directly to the two testing points without interposing networks or coupling devices.

The result of the impulse test, for each port, shall be recorded in the test report.

An additional, and not mandatory, impulse test should be executed for equipment that can be installed along the railway in the overhead contact line zone OCLZ as defined in EN 50122-1:2022 and designed to operate without the earth connection (class II or class III equipment). The test requirements are defined in informative Annex C, Clause C.4.

5.2.3.2 Test acceptance criteria

There shall be no disruptive discharge (spark-over, flashover or puncture) during test.

5.2.4 Voltage withstand test

5.2.4.1 General

The voltage withstand test shall be carried out with an alternating voltage with a frequency in the range 45 Hz to 65 Hz, normally referred to as power-frequency of the equipment.

The test voltage value U_a is derived from the test impulse voltage level U_{imp} of the impulse test (see 5.2.3), according to Table B.1 of EN 50124-1:2017.

NOTE E.g. if the test impulse voltage level of the impulse test U_{imp} is 4,0 kV, the test voltage value U_a is 1,9 kV_{RMS}.

Testing with alternating voltage is generally preferable, but if some ports under test have high capacitance values to other ports, such that cause a current draw by the test generator equal to or greater than 20 mA at the test voltage value U_a , the test can be performed by applying a continuous voltage with a value equal to the rms value of the alternating voltage test multiplied by $\sqrt{2}$.

The voltage withstand test generator (AC or DC), and the test voltage, shall comply with the provisions defined in 5.2 and 6.1 of EN 61180:2016.

The test shall be performed by connecting the test generator directly to the two testing points without interposing networks or coupling devices.

For each isolation barrier that has to be verified, the test voltage shall be raised uniformly from 0 V to the test voltage value U_a within not more than 5 s, and then maintained at this level for 60 s.

The value of the leakage current measured by the test generator, for each isolation barrier, shall be recorded in the test report.

5.2.4.2 Test acceptance criteria

During the test, no breakdown or flashover shall occur. Partial internal discharges (e.g. caused by floating circuits inside the equipment) which do not cause a significative variation of the leakage current measured by the test generator, shall be disregarded.

5.3 Temperature tests

5.3.1 General

In the following subclauses are defined the test requirements for verifying that the equipment is able to withstand the extreme temperatures to which it can be subjected during operation.

No temperature tests are required, and no test requirements are defined, for equipment with an operating temperature range specified from 15 °C to 35 °C and intended to be used only in environments with continuous climatic control.

Considering the severity of the environmental parameter defined in EN 50125-3:2003, the test level values shall be chosen in Table 2 below and clearly defined in type test specification.

Table 2 — Test level values for temperature tests

Test levels	Acronyms	Value
$T_{O_MAX_test}$ = High temperature for dry heat test	HT1	45 °C
	HT2	55 °C
	HT3	70 °C
	HT4	85 °C
$T_{O_min_test}$ = Low temperature for cold test	LT1	-5 °C
	LT2	-25 °C
	LT3	-40 °C
	LT4	-55 °C

Tests passed with the test levels defined above, and the test requirements defined below, assure that the equipment is able to operate, as specified, in an environment with a temperature range between low and high test levels.

To verify that the equipment can be stored and transported within the storage and transport temperature range defined by the manufacturer, see informative Annex C, Clause C.2 for additional information.

It is not recommended to use test level values other than those defined in Table 2. However, considering special technological arrangements used in the equipment (i.e. LCD screen) or particular installation environments, different values may be used by prior agreement between the involved parties. Test requirements defined in the following subclauses remain anyway applicable.

5.3.2 Dry heat test

5.3.2.1 General

Dry heat test shall be carried out for equipment not directly exposed to sun rays or when the enclosure is not a part of the equipment, designed or chosen by the manufacturer.

Dry heat test doesn't cover the heating effects due to solar radiation.

NOTE For equipment directly exposed to sun rays and when the enclosure is a part of the equipment, designed or chosen by the manufacturer, dry heat test can be performed in order to verify the functioning of the equipment in an environment with a defined temperature.

This test shall be carried out in accordance with EN 60068-2-2:2007 (test Be) using a low-air velocity climatic chamber.

5.3.2.2 Test setup

The EUT shall be placed in the climatic chamber with the same orientation as at which it will be installed. If forced ventilation, or any other type of equipment cooling other than natural convection, is used in the normal installation, this shall be replicated inside the climatic chamber. The Ancillary Equipment (AE), needed to execute the performance tests, shall be placed outside of the climatic chamber and connected to the equipment through the technical panel of the chamber.

5.3.2.3 Test requirements

The test requirements are defined in Table 3 and the test cycle is shown graphically in the Figure 1.

Table 3 — Test requirements for dry heat test

Initial measurement
The performance test and the visual inspection shall be executed before the test at the standard atmospheric conditions; then the equipment shall be left switched ON for all the duration of the test.
Preconditioning
The environmental condition inside the test chamber shall be set to 25 °C of temperature with 50 % of relative humidity and shall remain at these values for 1 hour.
Test cycle
The temperature of the climatic chamber shall reach the $T_{O_MAX_test}$ value with a temperature change rate between 0,5 K/min and 1 K/min.
When the temperature of the climatic chamber has reached the $T_{O_MAX_test}$ value, the temperature shall remain at this value for 16 hours; during this time period the absolute humidity shall not exceed 20 g/m ³ and the relative humidity shall not exceed 50 % as required by EN 60068-2-2:2007.
During the period at $T_{O_MAX_test}$ the functionality of the equipment shall be monitored as specified in type test specification.
At the end of the period at $T_{O_MAX_test}$ value a performance test shall be executed.
The temperature of the climatic chamber shall reach 25 °C with a temperature change rate between 0,5 K/min and 1 K/min.
Recovery
Reached the target temperature the test chamber shall remain to 25 °C of temperature with 50 % of relative humidity for 1 hour.
Final measurement
After the test, at the standard atmospheric conditions, the performance test and the visual inspection shall be executed.
Additional information for the test execution
With test temperatures higher than 70 °C the climatic chamber needs to maintain a relative humidity below 10 % in order to fulfil the required absolute humidity below 20 g/m³; this can be difficult for the majority of the climatic chambers present in the market. Therefore, the following precautions should be used to execute the test easily: — Pay particular attention to sealing the technical panels of the climatic chamber, so as not to let in air and humidity from the outside. — Deactivate the humidity control of the climatic chamber at the end of the preconditioning phase, and keep it off until the recovery phase. With these precautions it is guaranteed that the absolute humidity, set during the preconditioning phase at approximately 11,5 g/m³, does not increase because there are no sources of water or steam in the climatic chamber. During the cycle the absolute humidity can only decrease due to the effect of condensation on refrigerated coil, installed inside the chamber, that is controlled at a temperature very close to the freezing point. Moisture in the chamber is attracted to the cold surface and condense, but not freeze. The accumulated water is drained out of the chamber thereby lowering the humidity. The above is certainly valid for climatic chambers that use humidity systems as boiler/steam generators or atomizing systems, but remain valid for climatic chambers that use humidity systems with water bath if the water container is automatically emptied when the humidity control is switched off.

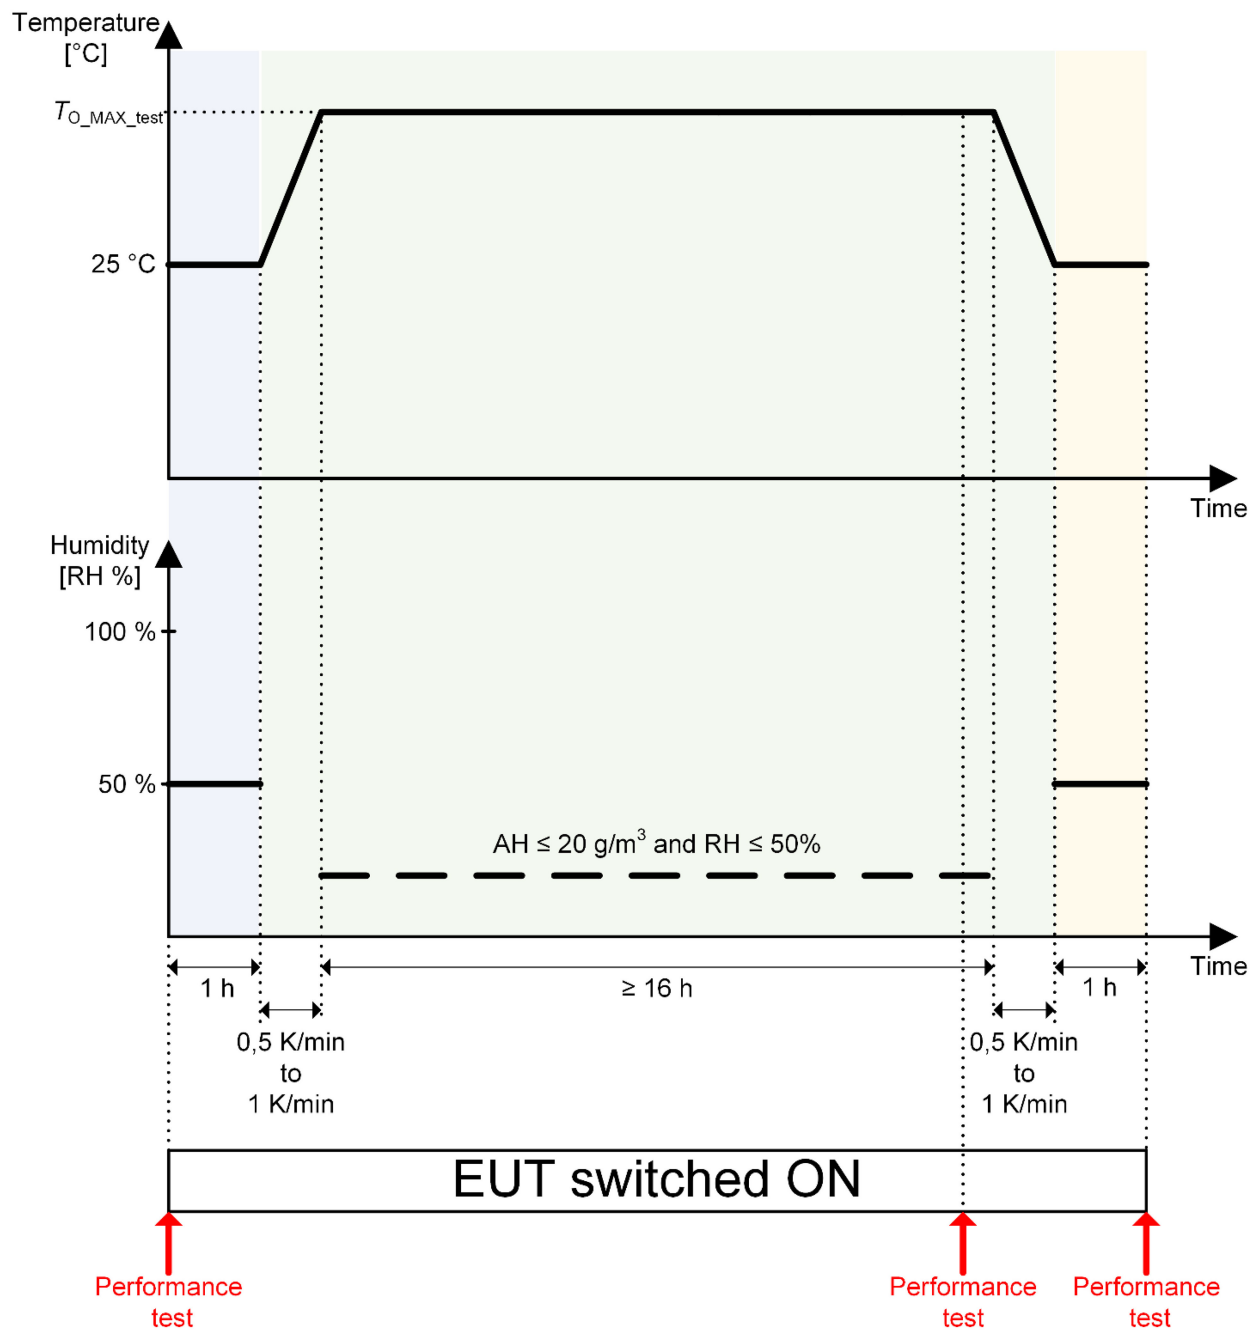


Figure 1 — Dry heat test cycle

5.3.2.4 Test acceptance criteria

During the test and after the recovery period, the equipment shall work as intended within its specified limits (performance criterion A), and the visual inspection, executed at the end of the test, shall not reveal any anomalies.

5.3.3 Cold test

5.3.3.1 General

This test shall be carried out in accordance with EN 60068-2-1:2007 (test Ad) using a low-air velocity climatic chamber.

5.3.3.2 Test setup

The EUT shall be placed in the climatic chamber with the same orientation as at which it will be installed. The Ancillary Equipment (AE), needed to execute the performance tests, shall be placed outside of the climatic chamber, and connected to the equipment through the technical panel of the chamber.

5.3.3.3 Test requirements

The test requirements are defined in Table 4 and the test cycle is shown graphically in Figure 2.

Table 4 — Test requirements for cold test

Initial measurement
The performance test and the visual inspection shall be executed before the test at the standard atmospheric conditions; then the equipment shall be switched OFF.
Preconditioning
The environmental condition inside the test chamber shall be set to 25 °C of temperature with 50 % of relative humidity and shall remain at these values for 1 hour.
Test cycle
The temperature of the climatic chamber shall reach the $T_{O_min_test}$ value with a temperature change rate between 0,5 K/min and 1 K/min.
When the temperature of the climatic chamber has reached the $T_{O_min_test}$ value, the temperature shall remain at this value for 16 hours.
At the end of the period at $T_{O_min_test}$ the equipment shall be switched ON and the performance test shall be executed. Then the equipment shall be switched OFF.
The temperature of the climatic chamber shall reach 25 °C with a temperature change rate between 0,5 K/min and 1 K/min.
Recovery
Reached the target temperature the test chamber shall remain to 25 °C of temperature with 50 % of relative humidity for 1 hour.
Final measurement
After the test, at the standard atmospheric conditions, the performance test and the visual inspection shall be executed
Additional information for the test execution
Deactivate the humidity control of the climatic chamber at the end of the preconditioning phase, and keep it off until the recovery phase.

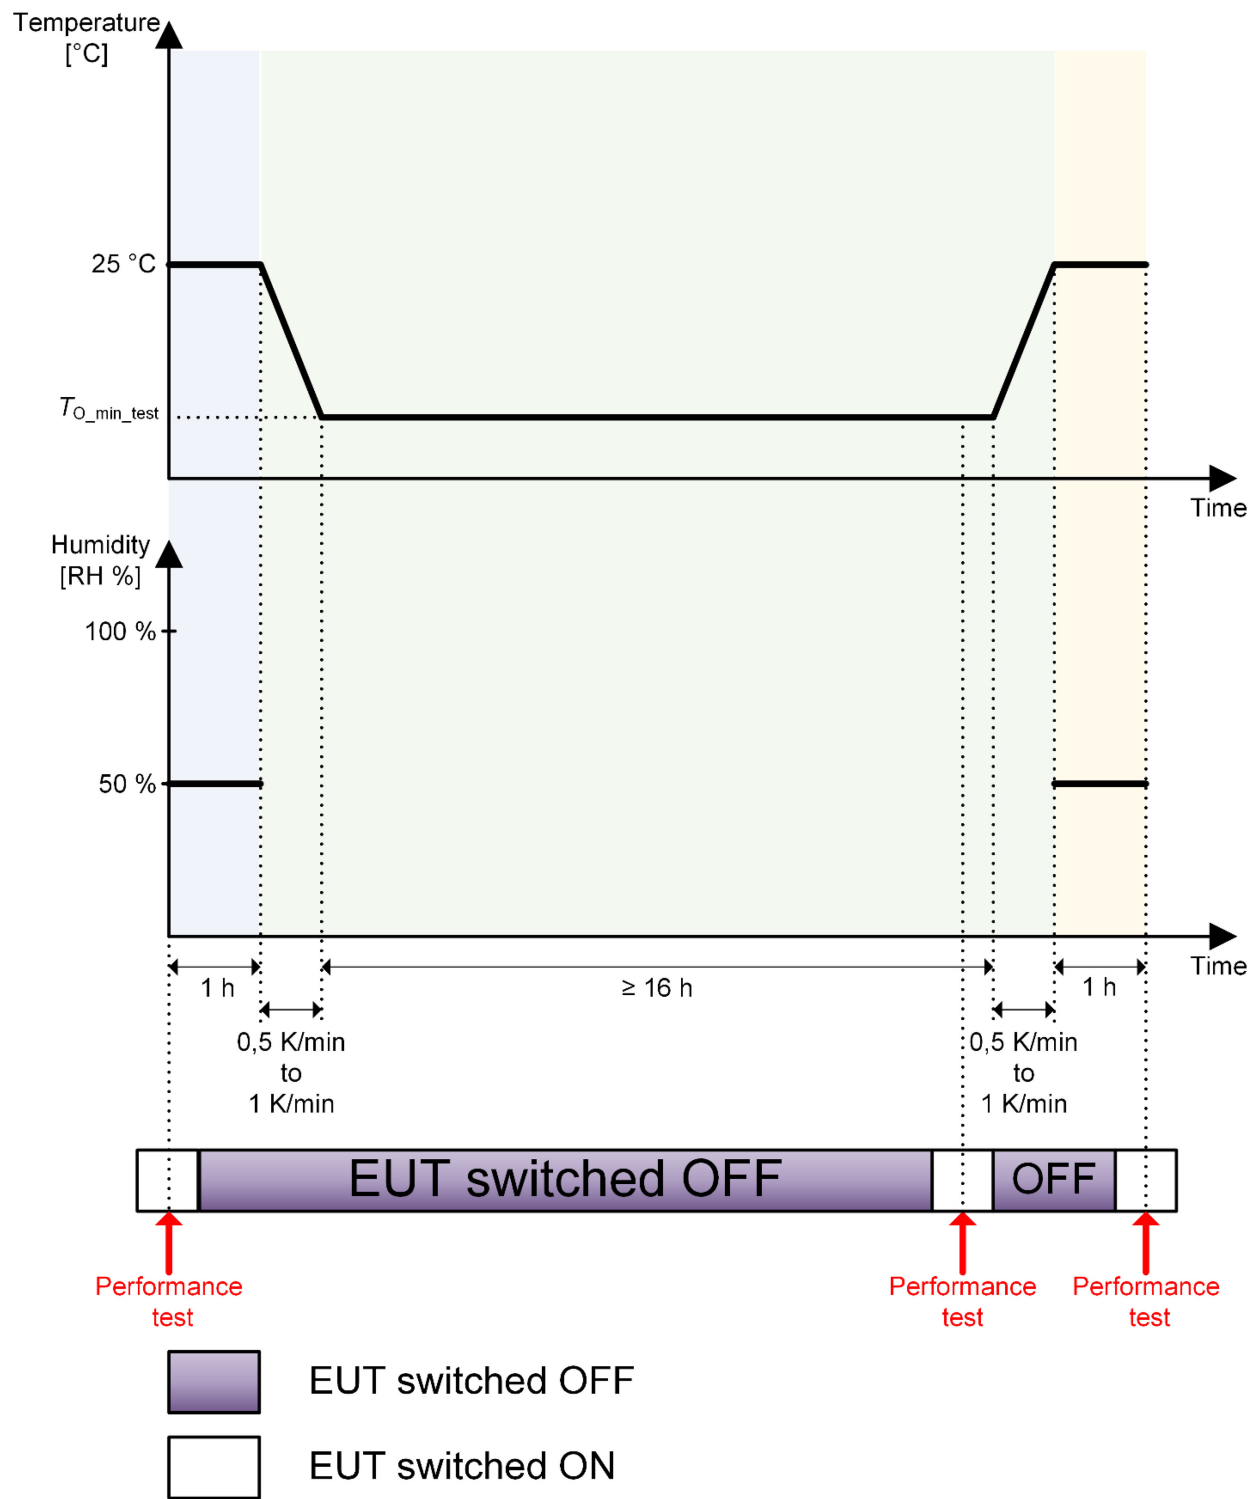


Figure 2 — Cold test cycle

5.3.3.4 Test acceptance criteria

During the test and after the recovery period, the equipment shall work as intended within its specified limits (performance criterion A), and the visual inspection, executed at the end of the test, shall not reveal any anomalies.

5.4 Humidity test

5.4.1 General

In the following subclauses are defined the test requirements for verifying that the equipment is able to withstand the high humidity levels to which it can be subjected during operation.

No humidity tests are required, and no test requirements are defined, for equipment intended to be used only in enclosed locations, as shelters or buildings, with a maximum expected value of relative humidity less than 85 % where can be considerate negligible the phenomenon of condensation.

Considering the operating temperature range of the EUT (in particular the maximum operating temperature), the test level values shall be chosen in Table 5 below and clearly defined in type test specification.

Table 5 — Test level values for temperature tests

Test levels	Acronyms	Value
$T_{RH_MAX_test}$ = High temperature for damp heat test	RHT1	40 °C
	RHT2	55 °C

The test level shall be the highest value of the Table 5 less than, but not equal, the maximum value of the operating temperature. For equipment intended to be used in areas not protected from the weather, the test level RHT2 shall be applied.

NOTE e.g. for an equipment with a maximum operating temperature of 55 °C the test value shall be RHT1; for an equipment with a maximum operating temperature of 70 °C shall be RHT2.

Tests passed with the test levels defined above and the test requirements defined below assure that the equipment is able to operate, as specified, in an environment with high values of relative humidity and with the possibility of condensation.

5.4.2 Damp heat test

5.4.2.1 General

This test shall be carried out in accordance with EN 60068-2-30:2005 (test Db variant 2) performing 2 damp heat 24 h cycles.

5.4.2.2 Test setup

The EUT shall be placed in the climatic chamber with the same orientation as at which it will be installed. The Ancillary Equipment (AE), needed to execute the performance tests, shall be placed outside of the climatic chamber, and connected to the equipment through the technical panel of the chamber.

Special attention shall be given to allow humidity to reach all the parts of the equipment that in the normal installation can be exposed to air humidity (directly or due to breathing effects). See informative Annex A, Clause A.4 for further information.

5.4.2.3 Test requirements

The test requirements are defined in Table 6 and the test cycle is shown graphically in Figure 3, Figure 4 and Figure 5.

Table 6 — Test requirements for damp heat test

Initial measurement
The performance test and the visual inspection shall be executed before the test at the standard atmospheric conditions; then the equipment shall be switched OFF.
Preconditioning
The environmental condition inside the test chamber shall be set to $25\text{ °C} \pm 3\text{ K}$ of temperature with $60\% \pm 15\%$ of relative humidity and shall remain at these values for at least 1 hour.
In less than 1 hour, the relative humidity shall be increased to not less than 95 %.
Test cycle – 1 st 24 h cycle
The temperature of the chamber shall be raised to the $T_{RH_MAX_test}$ value. The upper temperature shall be achieved in a period of $3\text{ h} \pm 30\text{ min}$.
During this period, the relative humidity shall not be less than 95 %. During the last 15 min it shall not be less than 90 %.
Condensation can occur on the specimen during this temperature rise period
The temperature shall then be maintained within $T_{RH_MAX_test} \pm 2\text{ K}$ until $12\text{ h} \pm 30\text{ min}$ from the start of the cycle.
During this period, the relative humidity shall be $93\% \pm 3\%$. During the first and last 15 min it shall be between 90 % and 100 %.
The temperature shall then be lowered to $25\text{ °C} \pm 3\text{ K}$ within 3 h to 6 h.
During this temperature fall period and during the last 15 min the relative humidity shall be not less than 80 %.
The temperature shall then be maintained at $25\text{ °C} \pm 3\text{ K}$ with a relative humidity of not less than 95 % until the 24 h cycle is completed.
Test cycle – 2 nd 24 h cycle
Shall be followed the same test requirements defined for the 1 st 24 h cycle, with the exception that during the temperature rise period, at 35 °C of temperature (during the possible condensation), the EUT shall be switched ON for the time required to execute a performance test. Then the EUT shall be switched OFF.
Recovery
After the 2 nd 24 h cycle, the relative humidity shall be decreased at $60\% \pm 15\%$ in less than 1 h.
The environmental condition inside the test chamber shall be maintain to $25\text{ °C} \pm 3\text{ K}$ of temperature with $60\% \pm 15\%$ of relative humidity for a time of 1 h to 2 h.
With the same environmental condition of the last period, the equipment shall be switched ON (for maximum 30 min) and a performance test shall be executed. Then the equipment shall be switched OFF.
Final measurement
The EUT shall be removed from the chamber and one single insulation resistance test shall be executed (see 5.2.2 for test requirements) at the standard atmospheric conditions.
After the insulation resistance tests the equipment shall be switched ON and a performance test shall be executed.