



DPC: 25/30483281 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 05 June 2025

Origin: International

Latest date for receipt of comments: 29 July 2025

Project No. 2023/02786

Responsible committee: MCE/18/-/3 Cylinders

Interested committees:

Title: Draft BS ISO 7986 Hydraulic fluid power — Sealing devices — Standard test methods to assess the performance of rod seals used in oil hydraulic reciprocating applications.

Please notify admin.start@bsigroup.com if you are aware of any keywords that might assist in clarifying or identifying the standard or of the content of this standard:

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD. THIS DRAFT IS NOT CURRENT BEYOND 29 July 2025

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <https://standardsdevelopment.bsigroup.com/>.

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/ Figure/Table/Note	Type of comment	Comment (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



DRAFT International Standard

ISO/DIS 7986

Hydraulic fluid power — Sealing devices — Standard test methods to assess the performance of rod seals used in oil hydraulic reciprocating applications

Transmissions hydrauliques — Dispositifs d'étanchéité — Méthodes d'essai normalisées d'évaluation des performances des joints utilisés dans des applications alternatives à l'huile hydraulique

ICS: 23.100.60; 83.140.50

ISO/TC 131/SC 7

Secretariat: JISC

Voting begins on:
2025-06-05

Voting terminates on:
2025-08-28

This document is circulated as received from the committee secretariat.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENTS AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

Reference number
ISO/DIS 7986:2025(en)

Full document details: 25/30483281 DC

© ISO 2025  **Documents**
Document Sharing Hub



COPYRIGHT PROTECTED DOCUMENT

© ISO 2025

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative References	1
3 Terms and definitions	1
4 Letter symbols	2
5 Test installation	3
5.1 General	3
5.2 Mechanical details	7
5.2.1 Test rig rod	7
5.2.2 Test rig stroke	7
5.2.3 Test seal housing dimensions	8
5.2.4 Leakage collection and drain	8
6 Test parameters	10
6.1 Test environment	10
6.2 Test fluid	10
6.3 Test fluid temperature	11
6.4 Test housing rod bearings	11
6.5 Test fluid pressure	11
6.6 Speed of linear actuator	11
6.7 Pressure and stroke cycle for dynamic test	11
7 Assembly and dismantling of seals	13
8 Methods of measurement and measuring apparatus	13
8.1 Seal leakage	13
8.2 Seal friction	14
8.2.1 Load cell	14
8.2.2 Determination of dynamic seal friction	14
8.2.3 Procedure for determining breakout friction	15
8.3 Pressure measurement	16
8.3.1 Pressure gauge	16
8.3.2 Pressure transducer	16
8.4 Surface roughness	16
8.5 Temperature measurement	16
9 Calibration	17
10 Test procedure	17
10.1 Test programme	17
10.2 Repeat series	18
11 Presentation of results	18
12 Identification statement (reference to this document)	18
Annex A (normative) Seal and seal housing dimension data forms	19
Annex B (normative) Test results	21
Annex C (normative) Seal performance report	23
Bibliography	26

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards are normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electro-technical Commission (IEC) on all matters of electro-technical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document is drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical barriers to Trade (TBT), see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 131, Fluid power systems and components, Subcommittee SC 7, Sealing Devices.

This second edition cancels and replaces the first edition (ISO 7986:1997), which has been technically revised.

The main changes compared to the previous edition are as follows:

—

Introduction

1. General

It is widely recognised that the results from reciprocating seal testing can be unpredictable. The background research carried out in support of the preparation of document has demonstrated that this unpredictability is primarily a function of lack of control of critical variables affecting seal installation and operation.

In order to carry out direct comparisons of seal performance, it is necessary to control these variables to closer limits than may be normal in industrial practice. The major variables that can affect seal performance, often even within normal manufacturing tolerance ranges, are listed in [clause 3](#) below.

2. Purpose

The purpose of the test is to provide comparative data on individual reciprocating rod seal designs and to provide a basis for the preliminary selection of seals based upon their relative performance. To achieve this, it is necessary to carry out the tests under strictly defined operating conditions. This document, therefore, defines standard values of speed, pressure, temperature and surface finish. This will permit comparison of seal test results from sources worldwide.

To make the test results as useful as possible, a range of operating conditions has been provided so that the most appropriate conditions can be selected as a basis for comparison for initial seal selection.

The pressures are standard working pressures, selected from ISO 2944:1974

- 6,3 MPa (63 bar)
- 16 MPa (160 bar)
- 31,5 MPa (315 bar)

The speeds have been selected to include slow speed (where stick-slip and high wear may be issues), medium speed for general purpose hydraulics and a representative high speed.

The constraints on installation and operation in this procedure have been proved by research, primarily carried out at BHR Group in the United Kingdom, under sponsorship from European companies) and international round robin seal tests to be necessary to achieve repeatable results. Any departure from the standard operating condition and installation criteria cannot be considered a standard test.

3. Factors affecting seal performance

a) Installation

- sealing system, i.e. design of bearing(s), seal(s) and leakage collection seal
- installation tolerances including seal groove, rod and bearings, extrusion gap
- rod material and hardness
- surface finish of the rod, variations of surface finish outside the range of Ra 0,08 μm to Ra 0,15 μm , or greater than Rz 1,2 μm or greater than Rt 1,5 μm , can significantly affect seal performance. Different seal materials also have significantly varying requirements for the optimum surface finish
- surface finish of the groove surfaces must be less than Ra 0,8 μm , or Rz 3,2 μm , to avoid static leakage and wear of the seal during pressure cycles
- bearing material including its effects on rod texture and boundary layer
- assembly cleanliness

b) Operation

- fluid, i.e. viscosity, lubricity, compatibility with seal material including additives and contamination level

- pressure including pressure cycle
- speed, especially speed cycle
- speed/pressure cycle, i.e. stop-start conditions
- stroke, especially short strokes (2 x the seal contact widths or less) which prevent formation of a lubricant film
- temperature, i.e. its effect on viscosity and seal material properties
- external environment

It is necessary to consider all the above factors and their potential effect on seal performance when comparing potential seal performance in an actual application to results obtained from the standard test

Hydraulic fluid power — Sealing devices — Standard test methods to assess the performance of rod seals used in oil hydraulic reciprocating applications

1 Scope

This document defines the text conditions and methods for assessing the performance of seals used in oil hydraulic reciprocating applications.

The resulting specified characteristics may be published in manufacturer's literature to enable a direct comparison of seal performance.

The seal under test may be a single seal or a combination seal package.

2 Normative References

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 286-2:2010, *Geometrical product specifications (GPS) — ISO code system for tolerances on linear sizes — Part 2: Tables of standard tolerance classes and limit deviations for holes and shafts*

ISO 683-2:2016, *Heat-treatable steels, alloy steels and free-cutting steels — Part 2: Alloy steels for quenching and tempering*

ISO 1629:2013, *Rubber and latices – Nomenclature*

ISO 2944:2000, *Fluid power systems and components — Nominal pressures*

ISO 3274:1998, *Geometric product specifications (GPS) – Surface texture – Profile method – Nominal characteristics of contact (stylus) instruments*

ISO 21920-2:2021, *Geometrical product specifications (GPS) — Surface texture: Profile — Part 2: Terms, definitions and surface texture parameters*

ISO 21920-3:2021, *Geometrical product specifications (GPS) — Surface texture: Profile — Part 3: Specification operators*

ISO 5598:2020, *Fluid power systems and components — Vocabulary*

ISO 6743-4:2015, *Lubricants, industrial oils and related products (class L) — Classification — Part 4: Family H (Hydraulic systems)*

ISO 10766:2014, *Hydraulic fluid power — Cylinders — Housing dimensions for rectangular-section-cut bearing rings for pistons and rods*

3 Terms and definitions

3 terms and definitions for the purpose of this document, the terms and definitions given in ISO 5598 apply.

4 Letter symbols

Letter symbols used in this document are as follows:

<i>Symbol</i>	<i>Quantity</i>	<i>Unit</i>
d	rod diameter	mm
d_h	seal heel inside diameter	mm
d_l	seal lip inside diameter	mm
D	bore diameter (outside diameter of the seal housing)	mm
E	seal length	mm
F	friction force	N
l	leakage	ml
L	seal housing length	mm
P_{return}	return pressure (return stroke)	MPa
P_{test}	test pressure (forward stroke)	MPa
cp	inverse material ratio at a material ratio p (see ISO 21920-2:2021)	
Ra	rod surface texture, arithmetical mean deviation (see ISO 21920-3:2021)	μm
dc	relative level of intersection (see ISO 21920-2:2021, ISO 21920-3:2021)	
$Rmr(p, d_c)$	Relative material ratio (see ISO 21920-3:2021)	
R_t	rod surface texture, total height of the surface profile (see ISO 21920-3:2021)	μm
R_z	rod surface texture, maximum height of the surface profile (see ISO 21920-3:2021)	μm
S_h	radial seal section - heel	mm
S_l	radial seal section - lip	mm
v	test speed	m/s
W	leakage collection zone	mm

5 Test installation

5.1 General

5.1.1 A typical test seal, a single acting rod seal, is shown in [Figure 1](#). The tests described in this document shall be conducted using a suitable test rig possessing the features shown in [Figure 2](#).

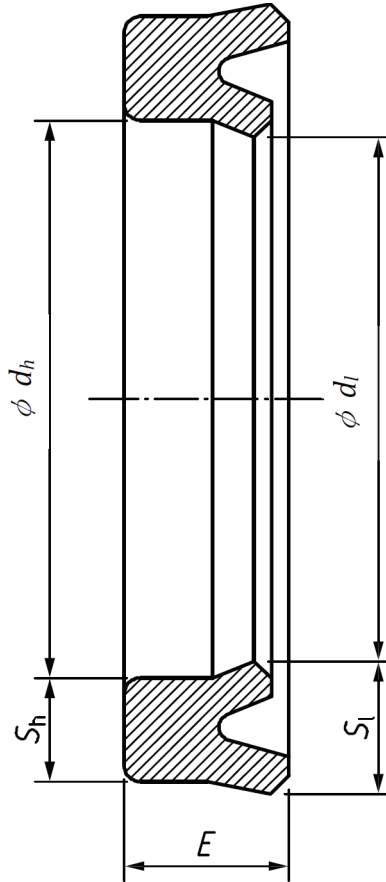


Figure 1 — Dimensions of Typical test seal