



IEC 60519-1

Edition 6.0 2020-03
REDLINE VERSION

INTERNATIONAL STANDARD



Safety in installations for electroheating and electromagnetic processing – Part 1: General requirements





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.



IEC 60519-1

Edition 6.0 2020-03
REDLINE VERSION

INTERNATIONAL STANDARD



Safety in installations for electroheating and electromagnetic processing – Part 1: General requirements

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 25.180.10

ISBN 978-2-8322-7974-8

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	7
INTRODUCTION	9
1 Scope and object	10
2 Normative references	11
3 Terms, definitions and abbreviated terms	16
3.1 General concepts	16
3.2 Equipment and state of equipment	18
3.3 Parts and accessories	19
3.4 Safety related concepts	21
3.5 Abbreviated terms	23
4 Classification and subdivision of equipment and installations	24
4.1 Classification by processing frequency	24
4.2 Classification by voltage	25
4.3 Subdivision of installation and equipment	25
4.3.1 Subdivision into parts	25
4.3.2 Hierarchy and structure of requirements	28
4.4 Classification of hazards and risks	28
4.4.1 Classification of hazards	28
4.4.2 Classification of risks	29
4.4.3 Limits	
5 Risk assessment	30
6 General provisions	30
6.1 Basic considerations	30
6.2 Significant hazards	32
6.3 Physical environment and operating conditions for the installation as such and electrical equipment outside the processing equipment	32
6.4 Physical environment and operating conditions for electrical equipment inside caused by operation of the processing equipment	33
6.5 Power supply	34
6.6 Access	34
6.7 Ergonomic aspects	35
6.8 Transport and storage	35
6.9 Provisions for handling	36
6.10 Consumables and replaceable parts	36
7 Protection against hazards from electric shock	36
7.1 General	36
7.2 Fundamental rule of protection	36
7.3 General provisions	37
7.4 Basic protection	38
7.5 Provisions for protection in electric single fault condition	39
7.6 Protective equipotential bonding	40
7.7 Additional provisions for fault protection for frequencies above 200 Hz	42
7.8 Protective conductor currents Currents in protective conductors	43
7.9 Touch current and touch voltage	44
7.10 Conductors and insulations at high temperature	44
7.11 Non-electric faults	45

8	Protection against hazards caused by from electric or magnetic nearfields fields	45
8.1	General	45
8.2	Magnetic fields	45
8.3	Magnetic fields below 1 Hz	45
8.4	Local electric fields	46
8.5	Requirements related to barriers and screens	46
8.6	Requirements related to objects worn, carried or held by persons	47
9	Protection against hazards from radiation	48
9.1	General	48
9.2	Installation or equipment generating ionizing radiation	48
9.3	Ultraviolet radiation	49
9.4	Visible and infrared radiation	50
9.5	Laser sources	50
10	Protection against hazards from thermal influences	50
10.1	General	50
10.2	Surface temperature limits for protection against burn	51
10.3	Hazards caused by working conditions	51
10.4	Heat Temperature resistance of components	52
10.5	Cooling	52
10.6	Over-temperature protection	53
11	Protection against hazards from fire	54
12	Protection against hazards from fluids	55
12.1	General	55
12.2	Poisonous and injurious gases and substances fluids	56
12.3	Explosion and implosion of pressurised parts or vacuum equipment	56
13	Specific requirements for components and subassemblies	56
13.1	General	56
13.2	Electrical equipment and conductors	56
13.3	Connection to the electrical supply network and internal connections	57
13.4	Isolation and switching	58
13.5	Sensors and actuators safeguarding moving parts	59
13.6	Motors	59
13.7	Non electric-heating means	59
13.8	Lighting	59
13.9	Structural parts and stability	59
13.10	Doors, windows and other openings	59
13.11	Transformers, inductors, capacitors	59
13.12	Handheld applicators	60
13.13	Vacuum system	60
13.14	Protective and reactive gas generator	60
14	Control of the installation or equipment	60
14.1	General	60
14.2	Operator control unit	61
14.3	Emergency stop	61
14.4	Control systems and their safety functions	62
14.5	Controlgear	63
14.6	Protective devices	64
14.7	Over-temperature protective device protection devices and systems	64

14.8	Overpressure safety device.....	65
15	Protection against mechanical hazards.....	66
16	Protection against hazards resulting from use	67
16.1	Particular hazards in processing of food, feed, cosmetics and similar intended for human or animal consumption	67
	Radio frequency interference.....	
	Particular hazards in electroheating and electromagnetic processing.....	
16.2	Combination equipment	67
	Protection against other hazards	
	General.....	
	Sonic, infra- and ultra-sonic pressure.....	
17	EMC	68
17.1	Radio frequency interference	68
17.2	Immunity	68
18	Verification and testing	68
18.1	General.....	68
18.2	Performing measurements and tests	72
18.3	Verification of conformity with limits for electric or magnetic fields requirements from references	73
18.4	Examination of drawings or calculations.....	73
18.5	Visual inspection.....	73
18.6	Measurements	74
18.6.1	Environment and operating conditions inside the processing equipment	74
18.6.2	Impedance of protective bonding	74
18.6.3	Insulation resistance measurement up to 200 Hz	74
18.6.4	Measurement of electric or magnetic fields	74
18.6.5	Touch current measurement	74
18.6.6	Measurement of ionising radiation	75
18.6.7	Measurement of non-coherent optical irradiation measurement	75
18.6.8	Measurement of coherent optical radiation including emission from LEDs	76
18.6.9	Surface temperature measurement.....	76
	Sound level measurement	
18.6.10	Temperature of structural components subject to heat.....	76
18.7	Functional tests	76
18.7.1	Protection by automatic disconnection of supply	76
18.7.2	Voltage test	76
18.7.3	Dielectric test	76
18.7.4	Accessibility of live parts	76
18.7.5	Protective devices and systems	77
18.8	Numerical calculations and modelling	77
18.8.1	General	77
18.8.2	Numerical assessment of short circuit currents	77
18.8.3	Numerical assessment of electric or magnetic fields emission	77
18.8.4	Numerical assessment of optical radiation emission	78
19	Information for use	79
19.1	General requirements	79
19.2	Location and nature of the information for use	79
19.3	Signalling and warning devices	79

19.4	Markings, pictograms, written warnings.....	80
19.5	Instruction handbook(s) / installation, commissioning, operation, maintenance, and decommissioning manual(s)	81
Annex A (informative) List of significant hazards.....		
Annex B (informative) Electric and magnetic fields, touch currents — limits of exposure hazards		
Annex C (informative) Optical radiation — limits of exposure hazards.....		
Annex D (informative) Limits for exposure hazards — noise and vibration.....		
Annex E (normative) Provisions concerning EMC.....		
Annex F (normative) Marking and warning.....		
Annex G (informative) Guidelines on using this standard.....		
Annex H (informative) Connection with ISO 13577 series.....		
Annex A (normative)	List of significant hazards.....	108
Annex B (normative)	Limits to touch currents	114
B.1	General.....	114
B.2	Risk classes.....	115
B.3	Body model.....	115
Annex C (normative)	Non coherent optical radiation – Limits and risk classes.....	117
C.1	General.....	117
C.2	Boundary of the installation or equipment and assessment	117
C.3	Non-coherent optical radiation – Risk classes	118
C.3.1	Approach.....	118
C.3.2	Optical radiation – Risk class 0.....	118
C.3.3	Risk class 1 (low risk).....	118
C.3.4	Risk class 2 (moderate risk).....	119
C.3.5	Risk class 3 (high risk)	119
C.3.6	Pulsed equipment.....	119
C.3.7	Radiation from laser sources	119
Annex D (normative)	Electric and magnetic fields	120
D.1	General.....	120
D.2	Boundary of the installation or equipment and assessment	120
D.3	Risk classes.....	120
D.3.1	General	120
D.3.2	Risk class 0	121
D.3.3	Risk class 1 (low risk).....	121
D.3.4	Risk class 2 (moderate risk).....	121
D.3.5	Risk class 3 (high risk)	121
Annex E (normative)	Surface temperature limits	122
Annex F (normative)	EH, EPM and fire.....	123
F.1	Occurrence of fire	123
F.2	Inherently safe design measures.....	123
F.3	Safeguarding and/or complementary protective measures	123
F.4	Information for use.....	124
Annex G (normative)	Marking and warning.....	125
G.1	Electromagnetic field hazards	125
G.2	Touch currents and surfaces.....	125
G.3	Optical radiation hazards	126

G.4	Symbols and signs used for markings and warnings.....	126
Annex H (informative)	Guidelines on using this document.....	128
H.1	Guidelines	128
H.2	Examples of EH and EPM equipment.....	129
Annex I (informative)	Connection with ISO 13577 (all parts).....	130
Annex J (informative)	Requirements specific to the EU and associated countries.....	131
J.1	General.....	131
J.2	Connection with ISO 13577 series	131
Bibliography		132
Figure 1	– Block diagram of a typical EH or EPM installation	26
Figure B.1	– Maximum allowed touch and contact currents between 1 kHz to 100 kHz.....	114
Figure B.2	– Complex impedances of various parts of the body, 1 kHz to 6 MHz.....	116
Figure G.1	– Examples of marking for magnetic and electric fields.....	125
Figure G.2	– Examples of marking for touch current.....	125
Figure G.3	– Examples of marking for optical radiation	126
Figure J.1	– Hierarchy of standards applicable to thermoprocessing machinery	131
Table 1	– Equipment, processing frequency and safety-relevant frequency limits.....	24
Table 2	– Typical EH or EPM installation – Listing of parts and references	27
Table 3	– Safety classification scheme for exposure risks to humans.....	29
Table 4	– Classification of thermal protective measures.....	53
Table 5	– Methods for the verification of requirements	69
Table A.1	– List of hazards dealt with in this document	108
Table B.1	– Risk classification for hazards from touch currents.....	115
Table C.1	– Risk classification for optical radiation (UV, VIS, IR)	117
Table E.1	– Surface temperature limits in normal operation	122
Table G.1	– Examples of symbols and signs for use in EH or EPM installations	126

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SAFETY IN INSTALLATIONS FOR ELECTROHEATING
AND ELECTROMAGNETIC PROCESSING –****Part 1: General requirements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

International Standard IEC 60519-1 has been prepared by IEC technical committee 27: Industrial electroheating and electromagnetic processing.

This sixth edition cancels and replaces the fifth edition published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) removal of noise from the scope;
- b) clarification of EMC requirements;
- c) risk classification of hazards based on emission for all processing frequencies;
- d) clarification of boundaries between IEC 60519 (all parts) and ISO 13577 (all parts).

The text of this International Standard is based on the following documents:

FDIS	Report on voting
27/1121/FDIS	27/1123/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

In this document, the following print types are used:

- requirements and definitions: in roman type;
- NOTES: in smaller roman type;
- **terms** used throughout this standard which have been defined in Clause 3: **in bold type**.

A list of all parts in the IEC 605019 series, published under the general title *Safety in installations for electroheating and electromagnetic processing*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

~~This fifth edition of IEC 60519-1 is a product safety publication and is intended to:~~

- ~~— include all types of installations or equipment that are in the scope of IEC TC 27 dealing with industrial **electroheating (EH)** and **electromagnetic processing of materials (EPM)**;~~
- ~~— cover in these General Requirements all hazards that are relevant for more than one type of equipment or installation individually dealt with in Particular Requirements;~~
- ~~— give requirements on electrical safety, touch currents, electric fields, magnetic fields and radiation, thus mirroring the broad scope of installations covered and their processing frequency;~~
- ~~— give means for verification of the requirements;~~
- ~~— make extensive use of the standards developed by IEC committees with horizontal or group safety functions and of relevant ISO standards by reference, including publications developed by ISO/TC 244 (more information is given in Annex H), in compliance with IEC Guide 104;~~
- ~~— be useable like a type C standard in the sense of ISO 12100;~~
- ~~— include all material, references and requirements suitable for risk assessment and list significant hazards.~~

~~This standard addresses mainly **manufacturers** making made-to-order equipment on a single project base. The **manufacturer** is well aware that it is his responsibility to make equipment safe through adequate risk reduction and it is the responsibility of the **user** to assess exposure of the **operator** in line with applicable health and safety regulations. Looking at projects providing single pieces of equipment or single installations, this clear division of responsibilities tends to blur, caused by inter alia~~

- ~~— development of the process (**normal operation**) through the **manufacturer** and **user**,~~
- ~~— shared definition of working procedures for the **operator** by the **manufacturer** and **user**,~~
- ~~— the scope of delivery often including all protective means,~~
- ~~— individual sales contracts where **users** require an assessment of exposure through the **manufacturer**.~~

~~Thus this standards provides information on exposure hazards and limits where relevant, well aware that this is exceeding the scope of a product standard.~~

These general requirements apply to all industrial **EH** and **EPM equipment**, unless an exception is given in the Particular requirements dealing with specific equipment in other parts of the IEC 60519 series. The provisions of other parts of the IEC 60519 series that directly apply to specific types of equipment take precedence over the provisions of this document.

Annex I and Annex J provide orientation with respect to the application of ISO 13577-1 in combination with this document.

This document presumes that the installation or equipment is operated and maintained only by personnel consisting of **skilled** or **instructed persons**.

This document is intended for verifying whether the **EH** or **EPM installation** or **equipment** meets the safety requirements of this document through design, site acceptance tests, routine tests or inspection.

Annex H provides a guide on the use of this document and a list of typical industrial **EH** and **EPM** processes.

SAFETY IN INSTALLATIONS FOR ELECTROHEATING AND ELECTROMAGNETIC PROCESSING –

Part 1: General requirements

1 ~~Scope and object~~

~~1.1 Scope~~

This part of IEC 60519 specifies the general safety requirements for industrial installations or equipment intended for **electroheating (EH)** and **electroheating** based treatment technologies as well as for **electromagnetic processing of materials (EPM)**. This document deals with the significant hazards, hazardous situations or hazardous events relevant to industrial **EH** and **EPM equipment**, as listed in Annex A, for **normal operation** and for **single fault condition** as well as under conditions of reasonably foreseeable misuse.

~~The requirements are applicable to industrial installations or equipment with the possible use as:~~

- ~~— equipment for direct and indirect resistance heating,~~
- ~~— equipment for electric resistance trace heating,~~
- ~~— equipment for induction heating,~~
- ~~— equipment using the effect of electromagnetic forces on materials,~~
- ~~— equipment for arc heating, including submerged arc heating,~~
- ~~— equipment for electrosag remelting,~~
- ~~— equipment for plasma heating and plasma surface treatment,~~
- ~~— equipment for microwave heating,~~
- ~~— equipment for dielectric heating,~~
- ~~— equipment using electron guns,~~
- ~~— equipment for infrared radiation heating,~~
- ~~— equipment for laser heating.~~

~~NOTE The list presents typical examples of equipment and its applications and is not exhaustive.~~

~~The overall safety requirements for the various types of **EH** or **EPM equipment** and **installations** result from the joint application of the General Requirements specified in this standard and Particular Requirements covering specific types of installations or equipment (guidelines are given in Annex G). If no Particular Requirement is covering a specific installation or equipment, the General Requirements are applicable as such.~~

This document specifies the requirements intended to be met by the **manufacturer** to ensure the safety of persons and property during the complete life cycle of the equipment from design through commissioning, operation, maintenance, inspection, to decommissioning, as well as in the event of foreseeable **single fault condition** that can occur in the equipment.

The rated voltage of **EH** and **EPM equipment** can be in the range of low voltage; details are given in 4.2.

This document does not apply to equipment and appliances within the scope of

- IEC 60079 (all parts) – i.e. equipment ~~or installations~~ intended for use in potentially explosive atmospheres;

- IEC 60335 (all parts) – i.e. household, commercial and similar electrical appliances, including room heating;
- IEC 60601 (all parts) – i.e. medical electrical equipment;
- IEC 60974 (all parts) – i.e. arc welding equipment;
- IEC 61010 (all parts) – i.e. equipment for laboratory use.

1.2—Object

~~The requirements refer to the complete life cycle of the installation or equipment from design through commissioning, operation, maintenance, inspection, to decommissioning. They cover the safety of persons and protection of the environment during normal operation and under single fault condition.~~

~~This standard presumes that the installation or equipment is operated and maintained only by personnel consisting of skilled or instructed persons.~~

~~This standard is intended for verifying that the EH or EPM equipment or installation meets the requirements of this standard through design, site acceptance tests, routine tests or inspection.~~

This document does not provide requirements for type testing.

NOTE Industrial equipment covered by this document is typically produced as a single unit or a very small number of units; such unit usually has a very high value and can cause severe harm at disintegration.

This document does not address data security and hazards arising from neglect of security.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60071-1:2006¹, *Insulation co-ordination – Part 1: Definitions, principles and rules*
IEC 60071-1:2006/AMD1:2010

IEC 60204-1:2005~~2016~~, *Safety of machinery – Electrical equipment of machines – Part 1: General requirements*
~~IEC 60204-1:2005/AMD1:2008~~

IEC 60204-11:2000~~2018~~, *Safety of machinery – Electrical equipment of machines – Part 11: Requirements for ~~HV~~ equipment for voltages above 1 000 V AC or 1 500 V DC and not exceeding 36 kV*

IEC 60228:2004, *Conductors of insulated cables*

IEC 60335-1:2010², *Household and similar electrical appliances – Safety – Part 1: General requirements*
IEC 60335-1:2010/AMD1:2013
IEC 60335-1:2010/AMD2:2016

¹ A consolidated version of this publication exists, comprising IEC 60071-1:2006 and IEC 60071-1:2006/AMD1:2010.

² A consolidated version of this publication exists, comprising IEC 60335-1:2010, IEC 60335-1:2010/AMD1:2013 and IEC 60335-1:2010/AMD2:2016.

IEC 60335-2-24, *Household and similar electrical appliances – Safety – Part 2-24: Particular requirements for refrigerating appliances, ice-cream appliances and ice makers*

IEC 60335-2-89, *Household and similar electrical appliances – Safety – Part 2-89: Particular requirements for commercial refrigerating appliances with an incorporated or remote refrigerant unit or compressor*

IEC 60364-1:2005, *Low-voltage electrical installations – Part 1: Fundamental principles, assessment of general characteristics, definitions*

IEC 60364-4-41:2005³, *Low-voltage electrical installations – Part 4-41: Protection for safety – Protection against electric shock*
IEC 60364-4-41:2005/AMD1:2017

IEC 60364-4-42:2010⁴, *Low-voltage electrical installations – Part 4-42: Protection for safety – Protection against thermal effects*
IEC 60364-4-42:2010/AMD1:2014

IEC 60364-4-44:2007⁵, *Low-voltage electrical installations – Part 4-44: Protection for safety – Protection against voltage disturbances and electromagnetic disturbances*
IEC 60364-4-44:2007/AMD1:2015
IEC 60364-4-44:2007/AMD2:2018

IEC 60364-5-53:2001⁶, *Electrical installations of buildings – Part 5-53: Selection and erection of electrical equipment – Isolation, switching and control*
IEC 60364-5-53:2001/AMD1:2002
IEC 60364-5-53:2001/AMD2:2015

IEC 60364-5-54:2011, *Low-voltage electrical installations – Part 5-54: Selection and erection of electrical equipment – Earthing arrangements and protective conductors*

IEC 60398:2015⁷, *Installations for electroheating and electromagnetic processing – General performance test methods*

IEC 60417, *Graphical symbols for use on equipment* (available at <http://www.graphical-symbols.info/equipment>)

IEC 60445:2017, *Basic and safety principles for man-machine interface, marking and identification – Identification of equipment terminals, conductor terminations and conductors*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*

IEC 60664-1:2007, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

³ A consolidated version of this publication exists, comprising IEC 60364-4-41:2005 and IEC 60364-4-41:2005/AMD1:2017.

⁴ A consolidated version of this publication exists, comprising IEC 60364-4-42:2010 and IEC 60364-4-42:2010/AMD1:2014.

⁵ A consolidated version of this publication exists, comprising IEC 60364-4-44:2007, IEC 60364-4-44:2007/AMD1:2015 and IEC 60364-4-44:2007/AMD2:2018.

⁶ A consolidated version of this publication exists, comprising IEC 60364-5-53:2001, IEC 60364-5-53:2001/AMD1:2002 and IEC 60364-5-53:2001/AMD2:2015.

⁷ ~~To be published.~~

IEC 60825-1:2014, *Safety of laser products – Part 1: Equipment classification and requirements*

IEC 60865-1:2011, *Short-circuit currents – Calculation of effects – Part 1: Definitions and calculation methods*

IEC 60909-0:2016, *Short-circuit currents in three-phase a.c. systems – Part 0: Calculation of currents*

IEC 60990:1999/2016, *Methods of measurement of touch current and protective conductor current*

~~IEC 61000-3-3, Electromagnetic compatibility (EMC) – Part 3-3: Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection~~

~~IEC TS 61000-3-5, Electromagnetic compatibility (EMC) – Part 3-5: Limits – Limitation of voltage fluctuations and flicker in low-voltage power supply systems for equipment with rated current greater than 75 A~~

~~IEC TR 61000-3-6, Electromagnetic compatibility (EMC) – Part 3-6: Limits – Assessment of emission limits for the connection of distorting installations to MV, HV and EHV power systems~~

~~IEC 61000-3-11, Electromagnetic compatibility (EMC) – Part 3-11: Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems – Equipment with rated current ≤ 75 A and subject to conditional connection~~

IEC 61000-6-2:2016, *Electromagnetic compatibility (EMC) – Part 6-2: Generic standards – Immunity standard for industrial environments*

~~IEC 61000-6-4, Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emission standard for industrial environments~~

IEC 61000-6-7:2014, *Electromagnetic compatibility (EMC) – Part 6-7: Generic standards – Immunity requirements for equipment intended to perform functions in a safety-related system (functional safety) in industrial locations*

IEC 61010-1:2010, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 1: General requirements*

IEC 61082-1:2014, *Preparation of documents used in electrotechnology – Part 1: Rules*

~~IEC 61310 (all parts), Safety of machinery – Indication, marking and actuation~~

IEC 61310-1:2007, *Safety of machinery – Indication, marking and actuation – Part 1: Requirements for visual, acoustic and tactile signals*

IEC 61310-2:2007, *Safety of machinery – Indication, marking and actuation – Part 2: Requirements for marking*

IEC 61310-3:2007, *Safety of machinery – Indication, marking and actuation – Part 3: Requirements for the location and operation of actuators*

~~IEC 61326-3-1, Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 3-1: Immunity requirements for safety-related systems and for equipment~~

~~intended to perform safety-related functions (functional safety) — General industrial applications~~

IEC 61439 (all parts), *Low-voltage switchgear and controlgear assemblies*

~~IEC 61508 (all parts), Functional safety of electrical/electronic/programmable electronic safety-related systems~~

IEC 61508-1:2010, *Functional safety of electrical/electronic/programmable electronic safety-related systems – Part 1: General requirements*

~~IEC 61672-1, Electroacoustics — Sound level meters — Part 1: Specifications~~

~~IEC 61672-2, Electroacoustics — Sound level meters — Part 2: Pattern evaluation tests~~

IEC 61786-1:2013, *Measurement of DC magnetic, AC magnetic and AC electric fields from 1 Hz to 100 kHz with regard to exposure of human beings – Part 1: Requirements for measuring instruments*

IEC 61786-2:2014⁸, *Measurement of DC magnetic ~~fields~~, AC magnetic and AC electric fields from 1 Hz to 100 kHz with regard to exposure of human beings – Part 2: ~~Guidance~~ Basic standard for measurements*

IEC 61936-1:2010⁹, *Power installations exceeding 1 kV a.c. – Part 1: Common rules*
IEC 61936-1:2010/AMD1:2014

IEC 62061:2005¹⁰, *Safety of machinery – Functional safety of safety-related electrical, electronic and programmable electronic control systems*
IEC 62061:2005/AMD1:2012
IEC 62061:2005/AMD2:2015

IEC 62271 (all parts), *High-voltage switchgear and controlgear*

IEC 62471:2006, *Photobiological safety of lamps and lamp systems*

IEC 82079-1:2012, *Preparation of instructions for use – Structuring, content and presentation – Part 1: General principles and detailed requirements*

CISPR 11:2015¹¹, *Industrial, scientific and medical equipment – Radio-frequency disturbance characteristics – Limits and methods of measurement*
CISPR 11:2015/AMD1:2016
CISPR 11:2015/AMD2:2019

~~IEC Guide 104, The preparation of safety publications and the use of basic safety publications and group safety publications~~

~~ISO/IEC Guide 51, Safety aspects — Guidelines for their inclusion in standards~~

⁸ ~~To be published.~~

⁹ A consolidated version of this publication exists, comprising IEC 61936-1:2010 and IEC 61936-1:2010/AMD1:2014.

¹⁰ A consolidated version of this publication exists, comprising IEC 62061:2005, IEC 62061:2005/AMD1:2012 and IEC 62061:2005/AMD2:2015.

¹¹ A consolidated version of this publication exists, comprising CISPR 11:2015, CISPR 11:2015/AMD1:2016 and CISPR 11:2015/AMD2:2019.

~~ISO 3746, Acoustics – Determination of sound power levels and sound energy levels of noise sources using sound pressure – Survey method using an enveloping measurement surface over a reflecting plane~~

IEEE C95.1:2005, *IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz*

IEEE C95.6:2002, *IEEE Standard for Safety Levels with Respect to Human Exposure to Electromagnetic Fields, 0–3 kHz*

ISO 3864-1:2011, *Graphical symbols – Safety colours and safety signs – Part 1: Design principles for safety signs and safety markings*

ISO 6385:2016, *Ergonomics principles in the design of work systems*

ISO 7000, *Graphical symbols for use on equipment* – ~~Registered symbols~~ (available at <http://www.graphical-symbols.info/equipment>)

ISO 7010, *Graphical symbols – Safety colours and safety signs – Safety signs used in workplaces and public areas*

ISO 12100:2010, *Safety of machinery – General principles for design – Risk assessment and risk reduction*

ISO 13577-1:2016, *Industrial furnaces and associated processing equipment – Safety – Part 1: General requirements*

ISO 13577-2:2014, *Industrial furnaces and associated processing equipment – Safety – Part 2: Combustion and fuel handling systems*

ISO 13577-3:2016, *Industrial furnaces and associated processing equipment – Safety – Part 3: Generation and use of protective and reactive atmosphere gases*

ISO 13732-1:2006, *Ergonomics of the thermal environment – Methods for the assessment of human responses to contact with surfaces – Part 1: Hot surfaces*

~~ISO 13849 (all parts), Safety of machinery – Safety-related parts of control systems~~

ISO 13849-1:2015, *Safety of machinery – Safety-related parts of control systems – Part 1: General principles for design*

ISO 13850:2015, *Safety of machinery – Emergency stop function – Principles for design*

ISO 13855:2010, *Safety of machinery – Positioning of safeguards with respect to the approach speeds of parts of the human body*

ISO 13857:2008, *Safety of machinery – Safety distances to prevent hazard zones being reached by upper and lower limbs*

ISO 14119:2013, *Safety of machinery – Interlocking devices associated with guards – Principles for design and selection*

ISO 14120:2015, *Safety of machinery – Guards – General requirements for the design and construction of fixed and movable guards*

ISO 14159:2002, *Safety of machinery – Hygiene requirements for the design of machinery*

ISO 19353:2019, *Safety of machinery – Fire prevention and fire protection*

3 Terms, definitions and abbreviated terms

~~For the purposes of this document, the terms and definitions given in IEC Guide 104, ISO/IEC Guide 51 and ISO 12100, as well as the following apply.~~

~~NOTE General definitions are given in IEC 60050, the International Electrotechnical Vocabulary. Terms relating to industrial electroheating are defined in IEC 60050-841.~~

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 General concepts

3.1.1

electroheating

EH

DEPRECATED: electroheat

conversion of electric energy into ~~thermal energy~~ heat for useful purposes

Note 1 to entry: This note applies to the French language only.

~~[SOURCE: IEC 60050-841:2004, 841-21-22, modified — **electroheating** is the preferred term instead of electroheat, new synonym **EH** has been added and the definition has been shortened.]~~

3.1.2

electromagnetic processing of materials

EPM

interaction between electromagnetic energy or forces and materials for useful purposes

Note 1 to entry: **EPM** can ~~or cannot~~ include but is not limited to heating.

Note 2 to entry: This note applies to the French language only.

3.1.3

electromagnetic field

EMF

electric or magnetic field or a combination of electric and magnetic time varying field

~~Note 1 to entry: In the context of this standard, **EMF** is caused by a source being part of the installation or equipment.~~

Note ~~2~~1 to entry: This note applies to the French language only.

3.1.4

electromagnetic radiation

propagating **electromagnetic field** transporting energy

EXAMPLE Microwave radiation or optical radiation (infrared, visible and ultraviolet).

~~3.1.5~~

~~electromagnetic nearfield~~

~~non-propagating electromagnetic field~~

3.1.5

near-field region

<of an electromagnetic field> region near an antenna where non-propagating **electromagnetic field** effects dominate

Note 1 to entry: The **near-field region** is further subdivided into the reactive **near-field region**, which is closest to the radiating structure and that contains most or nearly all of the stored energy, and the radiating **near-field region** where the radiation field predominates over the reactive field, but lacks substantial plane-wave character and is complex in structure.

Note 2 to entry: The non-radiating part of the **electromagnetic fields** dominates significantly in a region up to about a distance of 0,5 wavelengths from the antenna.

3.1.6

manufacturer

producer of the **EH** or **EPM equipment** or **installation** responsible for compliance with this document

Note 1 to entry: The **manufacturer** in the sense of this document can also be a supplier, distributor, importer or **agent** authorised representative.

~~Note 2 to entry: From the perspective of the user, the **manufacturer** is a party responsible for the design, manufacture, supply and commissioning of the equipment or installation.~~

3.1.7

user

party responsible for the operation and maintenance of the **EH** or **EPM equipment** or **installation**, from putting into service to de-commissioning

3.1.8

skilled person

trained person

person with suitable education, knowledge and experience to perceive risks and to avoid hazards which can be relevant for the type of installation or equipment, including supervision of the **instructed persons**

Note 1 to entry: The term **trained person** is used in ISO 13577 (all parts).

3.1.9

instructed person

person advised or supervised by **skilled persons**, able to perceive risks and to avoid hazards which an installation or equipment can create

3.1.10

operator

skilled person or **instructed person** performing one or more tasks during operation, adjustment, maintenance, repair or disassembly of an installation or equipment

3.1.11

ordinary person

person not ~~able~~ **trained** or **skilled** to perceive risks and avoid hazards, who can be harmed by **exposure** to lower limits than **operators**

EXAMPLE A member of the general public including pregnant, elderly or disabled persons, but not children.

3.1.12

vacuum

pressure lower than 30 000 Pa

Note 1 to entry: Defined as a pressure lower than any environmental pressure on the land surface of earth.

Note 2 to entry: **Vacuum** is divided into the following pressure ranges:

– rough **vacuum** from 100 Pa to 10 000 Pa;

- fine **vacuum** from 0,1 Pa to 100 Pa;
- high **vacuum** from 10^{-5} Pa to 0,1 Pa;
- ultra high **vacuum** below 10^{-5} Pa.

3.2 Equipment and state of equipment

3.2.1

electrical equipment

set of items used to generate, convert, transmit, distribute or utilize electric energy, such as converters, transformers, capacitors, switchgear and control gear, measuring instruments, **protective devices** and wiring systems

~~{SOURCE: IEC 60050-826:2004, 826-16-01, modified — The word "electrical" is used instead of "electric"; the definition has been editorially improved.}~~

3.2.2

electroheating equipment

EH equipment

DEPRECATED: electroheat equipment

equipment in which electric ~~energy~~ work is converted into ~~thermal energy~~ heat for useful purposes

~~{SOURCE: IEC 60050-841:2004, 841-22-01, modified — **electroheating equipment** is the preferred term instead of electroheat equipment becoming its synonym, new synonym **EH equipment** has been added, in the definition heat has been replaced by thermal energy}~~

Note 1 to entry: This note applies to the French language only.

3.2.3

equipment for electromagnetic processing of materials

EPM equipment

equipment in which electromagnetic energy or electromagnetic force is provided for the **electromagnetic processing of materials**

Note 1 to entry: This note applies to the French language only.

3.2.4

electroheating installation

EH installation

DEPRECATED: electroheat installation

installation composed of **EH equipment**, **electrical equipment** and mechanical equipment needed for its operation and use

~~{SOURCE: IEC 60050-841:2004, 841-22-02, modified — **electroheating installation** is the preferred term instead of electroheat installation becoming its synonym, and a new synonym, **EH installation**, has been added.}~~

Note 1 to entry: This note applies to the French language only.

3.2.5

installation for electromagnetic processing of materials

EPM installation

installation composed of **EPM equipment**, **electrical equipment** and mechanical equipment needed for its operation and use

Note 1 to entry: This note applies to the French language only.

3.2.6

normal operation

operation of the installation or equipment as specified by the **manufacturer** and agreed with the **user**

3.2.7

workload

object or material being processed

Note 1 to entry: The term "load" has a different meaning. Load is used and defined accordingly in ~~some~~ the Particular requirements of IEC 60519 (all parts), if available.

3.2.8

single fault condition

condition in which there is a fault of a single protection (but not a reinforced protection) or of a single component or a device

Note 1 to entry: If a **single fault condition** results in one or more other fault conditions, all are considered as one single fault condition.

Note 2 to entry: A **single fault condition** may or may not affect the process or the intended operation of the **EH** or **EPM installation** or **equipment**.

Note 3 to entry: An incident that stops the **normal operation**, that directly causes hazards or that leads to direct disintegration of the **EH** or **EPM installation** or **equipment** or parts of it is not a **single fault condition** in the understanding of this definition, it is then a major damage, an average, an accident.

[SOURCE: IEC Guide 104:2019, 3.8, modified – Notes 2 and 3 have been added.]

3.2.9

electric single fault condition

condition in which one means for protection against electric shock is defective or one fault is present which could cause a hazard

Note 1 to entry: **Electric single fault condition** is identical to **single fault condition** as defined in IEC 61140:2016.

[SOURCE: IEC 61140:2016, 3.1.4, modified – The original term "single fault condition" has been changed to "**electric single fault condition**" and the note has been replaced by a new one.]

3.2.10

processing frequency

DEPRECATED: output frequency

operating frequency of the **EH** or **EPM equipment** or **installation** at which the current or field is applied to the **workload**

Note 1 to entry: Specific ranges of **processing frequencies** are defined in Table 1.

3.3 Parts and accessories

3.3.1

enclosure

housing affording the type and degree of protection suitable for the intended application

[SOURCE: IEC 60050-195:1998, 195-02-35]

3.3.2

window

part of an **enclosure** that allows passage of some kind of radiation

3.3.3

barrier

~~protective barrier~~

physical object limiting access to equipment or the **enclosure** of that equipment, which can only be removed with the use of a tool or is interlocked

Note 1 to entry: A **barrier** can be physically separated from the equipment, but is a part of the installation.

Note 2 to entry: **Barriers** are usually transparent to the processing electric, magnetic field or radiation.

3.3.4

guard

barrier that is a part of the equipment

3.3.5

obstacle

item impeding access, which is secured to prevent unintentional removal but is removable without a tool or key

3.3.6

protective device

<electrical>

electrical device ~~other than a guard or enclosure~~ that reduces a risk

EXAMPLE Two-hand control, pressure sensitive mat or edge, trip bar and wire, light curtain, laser scanner.

3.3.7

screen

~~shield, en-US~~

device intended to reduce the penetration of an electric, magnetic or **electromagnetic field** into a given region

[SOURCE: IEC 60050-151:2001, 151-13-09, modified – The second term "shield" has been omitted.]

3.3.8

interlock

mechanical or electrical **protective device** or system that prevents an action which can create a hazard

3.3.9

thermal cut-out

temperature protector

device switching off the equipment when the pre-determined temperature is exceeded

Note 1 to entry: **Thermal cut-outs** are ~~resettable; temperature protectors are~~ not resettable and are replaced each time they have operated; **temperature protectors** are resettable.

~~3.3.10~~

~~photocoupler~~

~~optocoupler~~

~~optoelectronic device designed for the transfer of electrical signals by utilizing optical radiation to provide coupling while the output is isolated from the input~~

~~Note 1 to entry: This device can provide immunity against electromagnetic influences as well as independence of the distance of two voltage system levels.~~

~~[SOURCE: IEC 60050-521:2002, 521-04-45, modified – The note has been added.]~~

3.3.10

handheld applicator

easily movable device providing an electric or magnetic field or **electromagnetic radiation** to a **workload**

EXAMPLE Contacting applicators being in direct contact with the **workload** to be treated; insertion applicators, to be inserted into the **workload**; coil applicators, like hand held induction coils; lamp and luminaire units, irradiating a **workload**.

Note 1 to entry: "Easily movable" implies lightweight.

3.3.11

means of access

all features of the **EH** or **EPM installation** or **equipment** which can be opened or removed and enable access to a hazard or hazard zone

Note 1 to entry: **Means of access** can be part of the **enclosure**, **obstacles** or **doors**.

Note 2 to entry: **Means of access** can be secured by an **interlock**.

3.4 Safety related concepts

3.4.1

functional test

way to test specified functions of a system without regard to its internal structure

[SOURCE: IEC TR 62059-11:2002, 3.6, modified – The note has been removed.]

3.4.2

live part

conductor or conductive part intended to be energized in **normal operation**, including a neutral conductor, but by convention not a PEN conductor or PEM conductor or PEL conductor

Note 1 to entry: This concept does not necessarily imply a risk of electric shock.

[SOURCE: IEC 60050-195:1998, 195-02-19]

3.4.3

hazardous-live-part

live part which, under certain conditions, can give a harmful electric shock

[SOURCE: IEC 60050-195:1998, 195-06-05]

3.4.4

high-voltage hazard zone

~~HV-hazard-zone~~

~~area~~ zone limited by the minimum clearance around **hazardous-live-parts** of high voltage equipment without complete protection against direct contact

Note 1 to entry: Entering the **high-voltage hazard zone** is considered the same as touching **hazardous-live parts**.

3.4.5

touch voltage

voltage between conductive parts when touched simultaneously by a person or an animal

Note 1 to entry: The value of the effective **touch voltage** may be appreciably influenced by the impedance of the person or the animal in electric contact with these conductive parts.

[SOURCE: IEC 60050-195:1998, 195-05-11, modified – The other term "(effective) touch voltage" is not used in this document.]

3.4.6

touch current

electric current flowing through the body of a person or an animal when a **touch voltage** is present and a conductive path available

3.4.7

leakage current

~~DEPRECATED: earth current~~

electric current in an unwanted conductive path under normal operating conditions

3.4.8

induced electric shock

physiological effect caused by an induced electric field inside the human body

~~Note 1 to entry: The electric field is usually induced by an **electromagnetic nearfield** and does not necessitate contact to a conductor.~~

~~Note 2 to entry: The effects of **induced electric shock** are essentially the same as those of electric shock caused through contact to a conductor, for example burn or nerve reaction. Conditions for ventricular fibrillation are in practice excluded.~~

Note 1 to entry: Effect usually observed in the **near-field region** of an **electromagnetic field**; it does not necessitate contact to a conductor. The effects are essentially the same as those of electric shock caused through contact to a conductor, for example burn or nerve reaction.

3.4.7

emergency switching-off

~~operation intended to switch off any electric power from an electrical installation to avert or alleviate a hazardous situation~~

~~Note 1 to entry: Some power can remain in function if that provides a less hazardous outcome than a complete switching-off.~~

~~[SOURCE: IEC 60050-826:2004, 826-17-03, modified — The words "opening operation of a switching device intended to remove electric power" have been replaced by "operation intended to switch off any electric power" and a note has been added.]~~

3.4.9

insulation

insulating materials ensuring proper operation of the equipment and protection against electric shock

Note 1 to entry: **Insulation** also refers to the action of insulating.

Note 2 to entry: Under certain circumstances, thermal insulating material can equally perform the function of the electrical **insulation**.

3.4.10

basic insulation

insulation of hazardous-live-parts which provides basic protection

Note 1 to entry: This concept does not apply to **insulation** used exclusively for functional purposes.

[SOURCE: IEC 60050-195:1998, 195-06-06]

3.4.11

galvanic separation

prevention of electric conduction between two electric circuits intended to exchange power and/or signals

Note 1 to entry: **Galvanic separation** can be provided for example by an isolating transformer or ~~a photocoupler~~ an opto-coupler.

[SOURCE: IEC 60050-151:2001, 151-12-26]

3.4.12

emission

<as a concept> energy sent out from a source in the form of a field, particles, a chemical agent, pressure or other physical agent

3.4.13

emission

<for assessment> detectable energy emitted from and detectable outside the boundary of an **EH** or **EPM installation** or equipment in the absence of a human or animal disturbing the field or flow of energy

3.4.14

exposure

receiving or absorbing emitted energy by a person or an animal

Note 1 to entry: The determination of absorbed energy may necessitate the presence of the exposed person or animal in the **emission**.

3.4.15

accessible emission

level of radiation or field determined at a certain distance from the **EH** or **EPM installation** or equipment and being accessible in **normal operation** or **single fault condition**

3.4.16

emission limit

maximum **accessible emission** permitted for a particular risk class

3.5 Abbreviated terms

EH **electroheating**

ELV extra low voltage (below 50 V at mains frequency)

EMC electromagnetic compatibility

~~**EMF** electromagnetic field~~

EPM **electromagnetic processing of materials**

HV high voltage (above 1 000 V at mains frequency)

IR infrared ~~(radiation)~~

LED light-emitting diode

LV low voltage (the range between 50 V and 1 000 V at mains frequency)

MW microwave

PE protective earthing conductor

PEL protective earthing conductor being a line conductor as well

PEM protective earthing conductor being a mid-point conductor as well

PEN protective earthing conductor being a neutral conductor as well

SAR specific absorption rate ~~(of energy)~~

UV ultraviolet ~~(radiation)~~

VIS visible ~~(radiation)~~

4 Classification and subdivision of equipment and installations

4.1 Classification by processing frequency

EH and **EPM installation** and **equipment** is classified by its **processing frequency**, ~~i.e. the frequency of the voltage, current or electromagnetic field used for the process~~. Table 1 lists the equipment types and their **processing frequency** ranges as well as safety relevant frequency limits. An **EH** or **EPM installation** may include more than one type of **EH** or **EPM** equipment.

Table 1 – Equipment, processing frequency and safety-relevant frequency limits

Equipment type	Frequency ^a range defining equipment type	Frequency range ^b used for safety limits	EMF relevant frequency range	Hazards associated with the frequency range
direct current ^c or stationary field	0 Hz	0 Hz or no change in polarity		electric shock, neural stimulus
low frequency	≥0 Hz to <60 Hz		0,1 Hz to 200 Hz	electric shock, burn, not let-go, neural stimulus
mains frequency	50 Hz or 60 Hz			
medium frequency	≥60 Hz to 100 kHz	≥60 Hz to 200 Hz		
		≥200 Hz to 100 kHz		
high frequency	≥100 kHz to 0,3 GHz	≥100 kHz to 6 MHz	≥100 kHz to 0,3 GHz	burn, bodypart heating
		≥6 MHz to 0,3 GHz		bodypart heating
microwave	≥0,3 GHz to 300 GHz			
infrared	(≥300 GHz to 400 THz) 1 mm to 780 nm	1 mm to 3 000 nm	not applicable	burn of skin and cornea
		3 000 nm to 1 400 nm		burn of skin and cornea, retina
		1 400 nm to 780 nm		
visible	(≥400 THz to 790 THz), 780 nm to 380 nm			burn of skin and cornea, skin cancer
ultraviolet	(≥790 THz to 30 PHz), 380 nm to 10 nm			burn of skin and cornea, retina
laser	(≥300 GHz to 30 PHz), 1 mm to 10 nm			
^a — Rated process frequency.				
^b — Values of the corresponding free space wavelengths are also given in case of optical radiation.				
^c — Direct current type— equipment with no intended change of polarity, but including switch-on and switch-off.				

Equipment type	Frequency range ^a defining equipment type	Frequency range ^b used for safety limits	Hazards associated with the frequency range
Direct current ^c or stationary field	0 Hz	0 Hz or no change in polarity	Electric shock, neural stimulus, dizziness
Low frequency	> 0 Hz to < 60 Hz		Electric shock, burn, not let-go, neural stimulus
Mains frequency	50 Hz or 60 Hz		
Medium frequency	> 60 Hz to 100 kHz	> 60 Hz to 100 kHz	Burn, bodypart heating
High frequency	> 100 kHz to 0,3 GHz	> 100 kHz to 6 MHz > 6 MHz to 0,3 GHz	
Microwave	> 0,3 GHz to 300 GHz		Bodypart heating
Infrared	780 nm to 1 mm	IR-C 3 000 nm to 1 mm	Burn of skin and cornea

		IR-B 1 400 nm to 3 000 nm	
		IR-A 780 nm to 1 400 nm	Burn of skin and cornea, burn of retina
Visible	400 nm to 780 nm		
Ultraviolet ^d	10 nm to 400 nm	UV-A 315 nm to 400 nm	Burn of skin and cornea, skin cancer
		UV-B 280 nm to 315 nm	
		UV-C 100 nm to 280 nm	
		EUV 10 nm to 100 nm	
Laser	10 nm to 1 mm (> 300 GHz to 30 PHz)		Burn of skin, cornea and retina
^a Rated processing frequency . ^b Values of the corresponding free space wavelengths are also given in case of optical radiation. ^c Direct current type – equipment with no intended change of polarity, but including switch-on and switch-off. ^d The definition of UV follows IEC 62471:2006; radiation between 380 nm and 400 nm is usually sensed.			

4.2 Classification by voltage

~~Throughout all **electrical equipment** for industrial applications a division between~~

The supply voltage of an installation or equipment is classified as

- extra low voltage (ELV) ~~and low voltage (LV) is made at~~ below 50 V (RMS) at mains frequency or 120 V direct current,
- low voltage (LV) between 50 V (RMS) at mains frequency or 120 V direct current and 1 000 V (RMS) at mains frequency or 1 500 V direct current, and
- high voltage (HV) ~~is made at~~ above 1 000 V (RMS) at mains frequency or 1 500 V direct current.

NOTE The definitions of ELV and voltage band 1, LV and voltage band 2 and HV and voltage band 3 are identical. Voltages below 25 V mains frequency or 60 V direct current are seen as without risk for any **ordinary person** in most circumstances (exception is possible in wet conditions).

This distinction shall be made for the installation and for parts as defined in 4.3.1 and

- depending on the supply and the output voltage, whichever is the higher value (internal voltages inside the **electrical equipment** may be higher), ~~but~~
- ~~independently of~~ not depending on the process voltage or internal voltage of the installation or equipment.

Different parts of one installation may be classified as ELV, LV or HV.

4.3 Subdivision of installation and equipment

4.3.1 Subdivision into parts

An **EH** or **EPM installation** consists of diverse and specific parts. Figure 1 presents a block diagram of a typical installation for reference. It determines the boundary of installations and equipment. Not all parts are found in every kind of an **EH** or **EPM installation**.

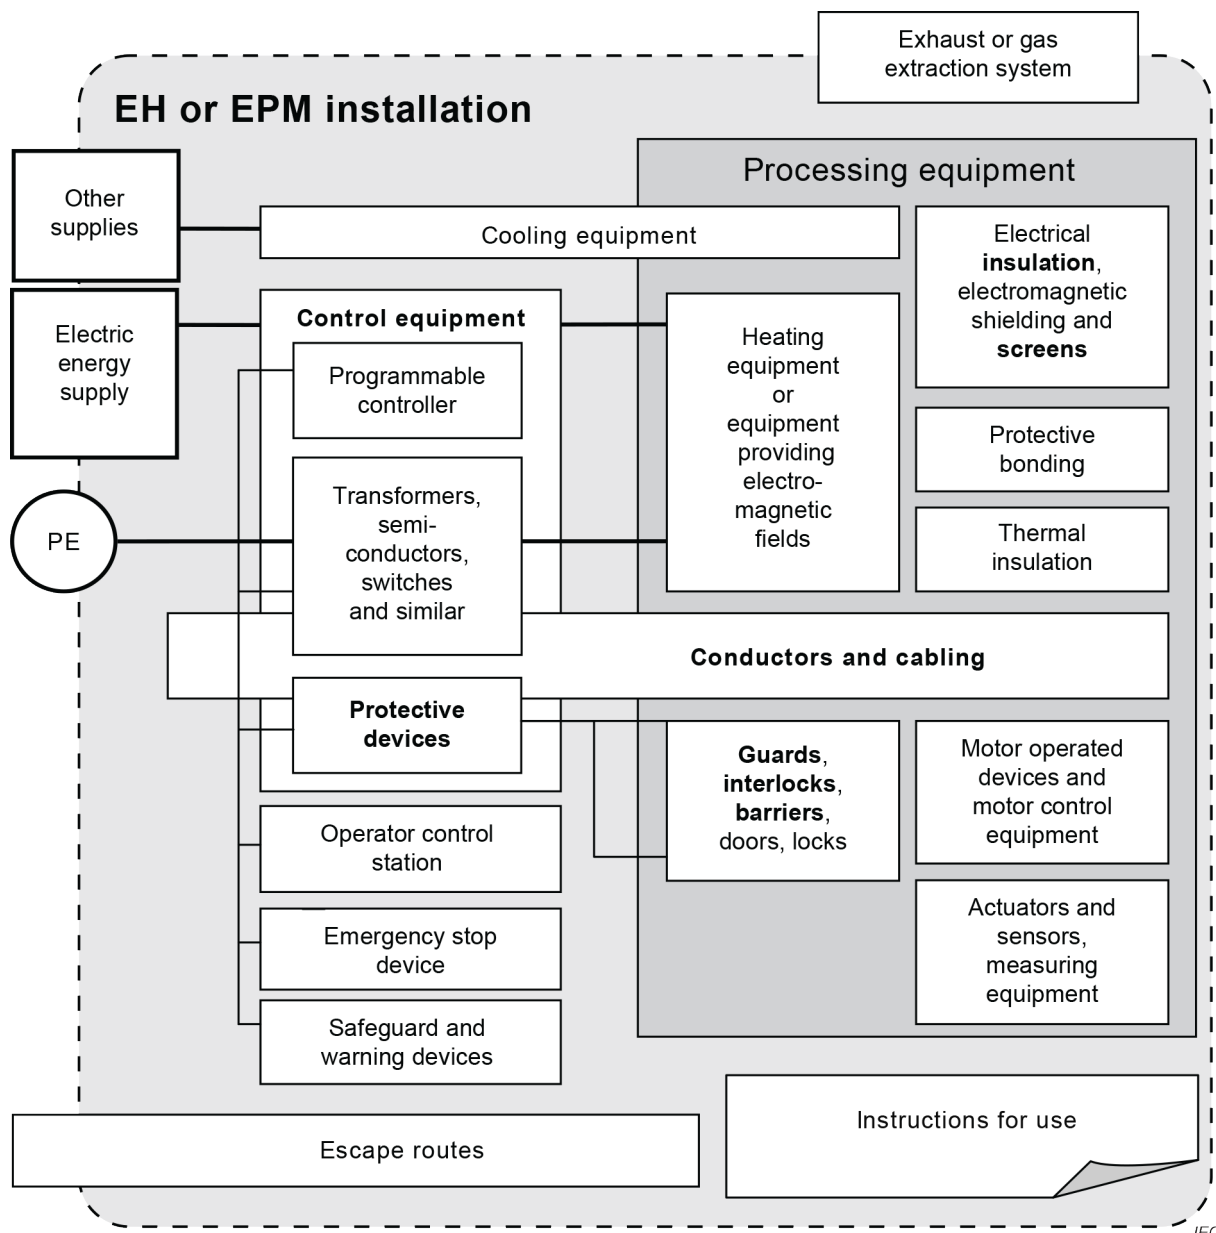


Figure 1 – Block diagram of a typical EH or EPM installation

Table 2 provides references to clauses of this document or to other standards relevant to the parts identified in Figure 1. The requirements for ~~electrical~~ equipment outside the processing equipment are covered by IEC or ISO standards specified in Table 2. The basic sources of safety provisions for **electrical equipment** of EH or EPM installations and **equipment** are IEC 60204-1:2005 and IEC 60204-1:2005/AMD1:2008 for LV and IEC 60204-11:2000 for HV.

The safety requirements for the processing equipment **itself** are specific because of its extraordinary environment and of conditions inside or near, where

- extreme temperatures can interact with ~~electrical~~ **the** equipment,
- strong electric, magnetic or **electromagnetic fields** can interact with the ~~electrical~~ equipment, **and**
- thermal energy or electromagnetic forces can endanger the structural integrity of the equipment or of **insulation** and of protective means.

Table 2 – Typical EH or EPM installation – Listing of parts and references

Part of installation or equipment – See Figure 1		Condition for which the reference is valid	Reference/source of provisions
Part	Component/item		
Electric energy supply		LV, ≤ 200 Hz	IEC 60364-4-41, IEC 60364-4-42, IEC 60364-4-44, IEC 60364-5-53, IEC 60364-5-54, IEC 60445, IEC 60664-1
Protective earth, PE			
Protective bonding			
conductors and cabling at standard environment			
Electric energy supply		HV, ≤ 200 Hz	IEC 61936-1, IEC 60071-1
Protective earth, PE			
Protective bonding			
conductors and cabling at standard environment			
Electric energy supply		all other, ≤ 36 kV	Clause 7
Protective earth, PE			
Protective bonding			
Conductors and cabling at standard environmental conditions		< 40 °C	IEC 60228
Conductors and cabling exposed to non-standard environmental conditions		> 40 °C	6.4.2 and 13.32
Control equipment	Switchgear and controlgear	LV, ≤ 200 Hz	IEC 60204-1
		HV, ≤ 36 kV, ≤ 200 Hz	IEC 60204-11
		> 36 kV, ≤ 200 Hz	Particular requirements
		> 200 Hz	Clause 7
	Programmable controller	all	IEC 61508 series IEC 61508-1, IEC 62061, ISO 13849 series ISO 13849-1
	Protective device		
Operator control station (same as switchgear and controlgear)		< 1 000 V, ≤ 200 Hz	IEC 60204-1
		> 1 000 V, ≤ 200 Hz	IEC 60204-11
		all other	Clauses 7 and 8
Emergency stop device (same as switchgear and controlgear)		< 1 000 V, ≤ 200 Hz	IEC 60204-1
		> 1 000 V, ≤ 200 Hz	IEC 60204-11
		all other	ISO 13850
Safeguard and warning devices (same as switchgear and controlgear)		< 1 000 V, ≤ 200 Hz	IEC 60204-1
		> 1 000 V, ≤ 200 Hz	IEC 60204-11
		all other	ISO 13850
Other supplies –for example fluids, fuel , compressed air		all	Clause 12; ISO 13577-3
Gaseous or liquid fuels		all	ISO 13577-2
Fluid extraction system		all	Clause 12; ISO 13577-1
Exhaust		all	ISO 13577-1

Part of installation or equipment – See Figure 1		Condition for which the reference is valid	Reference/source of provisions
Part	Component/item		
Escape routes		all	IEC 60364-4-42
Processing equipment	electrical heating equipment, usually Electroheating equipment	see 6.4	Clauses 7, 8, 9, 10; Particular requirements
	Non-electric heating equipment		ISO 13577-1 ISO 13577-2
	Equipment providing electromagnetic fields		Clauses 7, 8, 9, 10; Particular requirements
	Thermal insulation		Clause 10; ISO 13577-1
	Electrical insulation		Clauses 7, 8, 9, 10
	Electromagnetic shielding		Clauses 7, 8, 9, 10
	Actuators and sensors		IEC 61310-series IEC 61310-1 IEC 61310-2 IEC 61310-3
	Measuring equipment		IEC 61010-1 Particular requirements
	Motor operated devices and motor control equipment		IEC 60204-1
	Guards, interlocks, barriers, doors, locks		ISO 14119 ISO 14120 Particular requirements
	Cooling		Clauses 10 and 12

4.3.2 Hierarchy and structure of requirements

The following rules are a guideline especially with respect to the requirements on electromagnetic safety, which comprises electric shock, **induced electric shock**, **touch currents** and other effects of **electromagnetic fields**.

- For all parts of an installation that fall under the scope of one of the standards listed in Table 2, that standard shall be used.
- For equipment or parts outside the scope of any of the standards listed in Table 2, Clauses 7 and 8 apply, i.e. for equipment with frequencies above 200 Hz or intended to be used at temperatures higher than 40 °C.
- Equipment exceeding the voltage limit of 36 kV is dealt with in the Particular requirements.
- Further guidance on the references given in Table 2 is provided in the respective clauses of this document.

4.4 Classification of hazards and risks

4.4.1 Classification of hazards

Hazards are differentiated ~~according to the following criteria~~ as

- hazards where the harm is immediate – i.e. any accident ~~which~~ directly results in harm, and
- hazards where the harm depends on the **exposure**, accumulation or dose – for example on intensity, a field strength, an **exposure** time.

EXAMPLE 1 Immediate hazards are electric shock, the ejection of objects, explosion, mechanical hazards like cutting or falling, toxic substances of potentially lethal dose.

EXAMPLE 2 **Exposure** related hazards are **exposure** to optical or microwave radiation, **exposure** to electric or magnetic fields, **exposure** to sound or noise, **exposure** to ionizing radiation, toxic or radioactive substances.

NOTE Contact with hot surfaces or hot substances can be dose-related at low temperatures, or immediate, for example direct contact to liquid metals.

Hazards are differentiated as

- a) sensed hazards – i.e. hazards creating adverse body reactions, and
- b) non-sensed hazards or non-perceivable hazards.

EXAMPLE 3 Sensed hazards are temperature of material or of environment, intense visible radiation, fast moving parts, acceleration, vibration or noise.

EXAMPLE 4 Non-sensed or non-perceivable hazards are UV radiation, ionising radiation or radioactive substances, toxic substances, microwave, magnetic or electric fields.

4.4.2 Classification of risks

~~Risks depending~~ A specific risk depends on ~~exposure level~~ **emission**, duration, intensity of the agent, but also ~~depending~~ on the exposed bodypart, awareness or sensing of the agent, experience or information about the type of hazard, and behavioural factors such as aversion or withdrawal. ~~Risks~~ are treated through a level categorisation ~~of the risk~~, with non-perceivable hazards being categorised as requiring particular protective measures. ~~The manufacturer reduces emissions of possibly hazardous agents or informs the user about residual risks. A classification scheme guides this action. Table 3 summarises this as a general approach~~ the classification of residual **emissions** used in this document.

Table 3 – Safety classification scheme for ~~exposure~~ risks to humans

Risk Group class		Restrictions and protective measures	Information and training
0	exempt	No restriction or protective measures necessary	No information needed.
1	low risk	Restrictions like limitation of access or protective measures may be indicated depending on the result of a risk assessment done by the user	Information about hazards, risks and secondary effects to be provided by the manufacturer .
2	moderate risk	Special restrictions and protective measures essential	Information about hazards, risks and secondary effects to be provided by the manufacturer . The manufacturer shall indicate to the user , if specific training of the operator is deemed necessary by the manufacturer, he shall indicate this.
3a	high risk	Access possible when protected by personal protective equipment	Information about hazards, risks and secondary effects to be provided by the manufacturer . The manufacturer shall indicate to the user , the necessary specific training of the operator and the personal protective equipment.
3	high risk	No access	Information about hazards, risks and secondary effects to be provided by the manufacturer .

Each spatial position or hazard zone shall be considered individually. **Normal operation** and **single fault condition** shall be taken into account. ~~Annex B and Annex C provide examples of risk group classifications.~~

~~4.4.3 Limits~~

~~Limits for significant hazards dealt with in this standard concern the following:~~

- ~~— electric, magnetic and **electromagnetic fields** including touch currents — information on hazards and applicable limits is provided in Annex B;~~
- ~~— optical radiation in the infrared, visible and ultraviolet — information on internationally recognised limits is provided in Annex C;~~
- ~~— acoustic fields — information on limits is provided in Annex D;~~
- ~~— hot ambient environment and objects — limits are given in ISO 13732-1, which corresponds to IEC Guide 117 (see also Clause 10).~~

~~It is in the responsibility of the **manufacturer** or **user**, as relevant, to take into account limit values specified by national regulations, if such exist. If not, the limits defined in this standard can be used.~~

5 Risk assessment

~~The risks associated with hazards relevant to the installation shall be assessed. This determines the adequate reduction of identified risks and the necessary protective measures, while still maintaining an appropriate performance of the installation.~~

~~This standard, in combination with the applicable Particular Requirements, assists the **manufacturer** during the process of risk assessment and risk reduction. This standard addresses the hazards specific and typical for **EH** and **EPM installations**. Annex A provides a list of significant hazards considered in this standard.~~

~~Implementation and methods of risk assessment and risk reduction are specified in ISO 12100 and apply.~~

This document is based on the risk assessment provided in Annex A.

This risk assessment shall be expanded and specified accordingly throughout the development of the Particular requirements of IEC 60519 (all parts).

The risk assessment in Annex A covers a very broad cluster of equipment and installations, therefore it is quite generic and may not cover specific origins, particular hazardous situations or events, or potential consequences in the details deemed necessary by the **manufacturer**. The **manufacturer** shall then add to this risk assessment the specifics of his technical solution as specified in ISO 12100:2010.

If the **manufacturer** intends to make an equipment or installation not fully under the scope of this document and its risk assessment, or if the Particular requirement is outdated and not referring to this document or no Particular requirement exists, he is advised to reconsider the risk assessment in Annex A. This document then assists with the risk assessment and risk reduction procedure as specified in ISO 12100:2010.

6 General provisions

6.1 Basic considerations

6.1.1 ~~Any~~ The **EH** or **EPM installation** or **equipment** shall be suitable for its intended use, it shall be designed to be operated, adjusted and maintained without putting persons at risk ~~during **normal operation** or **single fault condition**~~. Design and construction shall ensure adequate reduction of the risks during **normal operation** or in **single fault condition**, at the state of the art and ~~for~~ considering the foreseeable lifetime of the **EH** or **EPM installation** or **equipment**.

~~It shall not cause~~ Any risk through the **workload** when the **workload** is processed as intended in the **EH** or **EPM installation** and that is foreseeable to the **manufacturer** shall be adequately reduced.

6.1.2 ~~Any~~ The **EH** or **EPM installation** or **equipment** shall be designed to prevent or to reduce the possibility of ~~any~~ misuse or fault condition.

6.1.3 ~~Any~~ The **EH** or **EPM installation** or **equipment** shall not pose a risk of the immediate or non-perceivable types, unless the intended use is otherwise impossible to achieve. Additional protective measures, warnings and instructions shall be provided in such cases.

6.1.4 The **manufacturer** shall, in the following order,

- a) eliminate risks to achieve an inherent safe installation or equipment,
- b) provide protective measures for those risks that are not eliminated, and
- c) provide all necessary information to the **user** about residual risks, indicate necessary training and personal protective equipment.

~~Even though an inherently safe design seems out of reach for most EH or EPM installations or equipment, the manufacturer shall attempt to achieve this where possible.~~

6.1.5 Protective measures are a combination of measures incorporated at the design stage and measures being indicated as to be implemented by the **user**. The **manufacturer** shall incorporate all measures identified to be necessary according to Clauses 5 through 17 when applicable.

6.1.6 If a specific hazard is in risk ~~group~~ class 1 or 2 as defined in Table 3 and cannot be reduced further by the **manufacturer**, the **manufacturer** shall provide detailed information for the **user**, including

- a) a graphical description or plan of the installation indicating the position and extent of areas belonging to zones with risk ~~group~~ class 1 or 2,
- b) information on signalling and warning devices – see 19.3,
- c) necessary marking and written warning – see 19.4,
- d) indication of necessary restrictions and protective measures to be taken by the **user** – see 19.5,
- e) indication of the necessary information for the **operators** – see 19.5, and
- f) indication of working procedures that are safe or reduce the risk.

6.1.7 If a specific hazard is in risk class 3a as defined in Table 3 and cannot be reduced further by the **manufacturer**, the **manufacturer** shall provide detailed information for the **user**, including

- a) a graphical description or plan of the installation indicating the position and extent of areas belonging to zones with risk class 3a,
- b) information on signalling and warning devices – see 19.3,
- c) necessary marking and written warning – see 19.4,
- d) indication of necessary restrictions and protective measures to be taken by the **user** – see 19.5,
- e) indication of the necessary information for the **operators** – see 19.5,
- f) indication of the necessary personal protective equipment to be worn by the **operator** when attending, and
- g) indication of working procedures that are safe or reduce the risk.

6.1.8 If a specific hazard is in risk ~~group~~ class 3 as defined in Table 3 and cannot be reduced further by the **manufacturer**, the **manufacturer** shall provide detailed information for the **user**, including

- a) a graphical description or plan of the installation indicating the position and extent of areas belonging to zones with risk ~~group~~ class 3,
- b) information on signalling and warning devices – see 19.3,
- c) necessary marking and ~~written~~ warning – see 19.4, and
- d) indication of the necessary information for the **operators** – see 19.5.

6.1.9 Adequate risk reduction shall not be confused with the reduction of **exposure** to levels near **exposure** limits. Adequate risk reduction eliminates a hazard, or if this is impossible, reduces **exposure** to the technical limit. The adequate use of **exposure** limits is the responsibility of the **user**.

6.2 Significant hazards

Provisions for protection against ~~various types of~~ the identified significant hazards defined in Annex A are specified in Clauses 6 to 17. ~~Annex A provides a list of significant hazards relevant for the application of this standard.~~

Verification of compliance with the provisions of this document shall be done according to Clause 18.

6.3 Physical environment and operating conditions for the installation as such and electrical equipment outside the processing equipment

6.3.1 The **EH** or **EPM installation** or **equipment** and its **electrical equipment** not placed inside the processing equipment shall be suitable for the physical environment and operating conditions of its intended use.

When special conditions apply or the limits specified in 6.3 are exceeded, an agreement between the **manufacturer** and **user** may be necessary. ~~In this case, 4.1 and Annex B of IEC 60204-1:2005 and IEC 60204-1:2005/AMD1:2008 are applicable for LV installations and 4.1 and Annex B of IEC 60204-11:2000 are applicable for HV installations.~~ Subclause 4.1 of IEC 60204-1:2016 is applicable for LV installations and 4.1 of IEC 60204-11:2018 is applicable for HV installations.

6.3.2 The **EH** or **EPM installation** or **equipment** shall not generate electromagnetic disturbances above levels that are appropriate for its intended operating environment. ~~In addition, the equipment shall have a level of immunity to electromagnetic disturbances so that it can operate in its intended environment. Requirements are identified in Annex E.~~

6.3.3 The **EH** or **EPM installation** or **equipment** shall be capable of operating safely in the intended ambient air temperature. The minimum requirement for all **electrical equipment** is safe operation at air temperatures between 5 °C and 40 °C.

6.3.4 The **EH** or **EPM installation** or **equipment** shall be capable of operating safely when the relative humidity does not exceed 50 % at a maximum temperature of 40 °C. Higher relative humidity is permitted at lower temperatures (e.g. less than 90 % at 20 °C). The **EH** or **EPM installation** or **equipment** shall either be able to operate safely if condensation happens occasionally or the **manufacturer** shall avoid condensation by design ~~of the equipment~~ or, where necessary, by additional measures (e.g. built-in heaters, air conditioners or drain holes).

6.3.5 The **EH or EPM installation or equipment** shall be capable of operating safely at air pressure expected at up to 1 000 m altitude and under a wide range of climate and weather conditions. The lower ambient pressure limit shall be 85 % of normal sea-level atmospheric pressure, unless agreed differently between the **manufacturer** and the **user** and specified in the instructions for use.

For equipment intended to be used at higher altitudes or lower air pressure, it is necessary to take into account the reduction of the dielectric strength, the switching capability of the devices and the reduction of the cooling effect of the air caused by reduced density.

6.3.6 The **electrical equipment** of the **EH or EPM installation or equipment** shall be adequately protected against the ingress of solids and liquids according to 11.3 of IEC 60204-1:2005/2016 for LV equipment. It shall be adequately protected against contaminants (e.g. dust, acids, corrosive gases or salts) that can be present in the physical environment for which it is intended.

6.3.7 When the **EH or EPM installation or equipment** ~~is~~ or parts of it are exposed to radiation (e.g. MW, UV, laser or X-ray), additional measures shall be taken to avoid malfunctioning of the equipment, accelerated deterioration of the **insulation**, metal degradation or corrosion due to radiation induced effects.

6.3.8 Undesirable effects on the **EH or EPM installation or equipment** caused by vibration, shock and bump (including those generated by the installation and its associated equipment and those created by the physical environment) shall be avoided by the selection of suitable equipment, by mounting it away from the equipment creating the vibration or shock, or by provision of anti-vibration or anti-shock mountings.

6.3.9 When the **EH or EPM installation or equipment** or parts of it are exposed to plasma, corrosive chemicals or other adverse agents, additional measures shall be taken to avoid malfunctioning, accelerated deterioration of the **insulation**, metal degradation or corrosion due to radiation induced effects.

6.4 Physical environment and operating conditions for electrical equipment ~~inside~~ caused by operation of the processing equipment

6.4.1 The **electrical equipment** of the **EH or EPM installation or equipment** placed inside or near the processing equipment shall be suitable for the physical environment and operating conditions of its intended use. Physical conditions inside or near the processing equipment cover ~~an extremely~~ a wide range of different environments; it may be necessary for the **manufacturer** and **user** to agree on these conditions.

6.4.2 The **electrical equipment** shall be capable of operating correctly under **normal operation** and **single fault condition**

- a) at the intended temperature levels inside ~~or near~~ and outside the processing equipment,
- b) at the humidity levels inside ~~or near~~ and outside the processing equipment (extreme humidity levels or strong condensation can be expected as well as total immersion),
- c) at intended atmospheric conditions ~~and pressures~~ inside ~~or near~~ and outside the processing equipment,
- d) under prevalent electric and magnetic fields inside ~~or near~~ and outside the processing equipment, and
- e) at intended pressure differences between the outside and inside of the equipment.

6.4.3 **Electrical equipment** shall be adequately protected against the ingress of solids and liquids, in particular against contaminants (e.g. dust, acids, corrosive gases or salts) that are expected to be present inside ~~or near~~ and outside the processing equipment.

6.4.4 When **electrical equipment** inside the processing equipment is exposed to radiation (e.g. MW, UV, laser or X-ray), additional measures shall be taken to avoid malfunctioning of the equipment ~~and~~ or accelerated deterioration of the **insulation** ~~caused by the radiation~~.

6.4.5 Undesirable effects on the **EH** or **EPM installation** or **equipment** caused by vibration, shock and bump generated by the processing equipment and those created by the physical environment shall be avoided by selection of suitable **electrical equipment**, by mounting it away from the processing equipment, or by provision of anti-vibration mountings.

6.4.6 When **electrical equipment** inside the processing equipment is exposed to plasma, corrosive chemicals or other adverse agents, additional measures shall be taken to avoid malfunctioning of the equipment, accelerated deterioration of the **insulation**, metal degradation or corrosion due to radiation induced effects. This includes effects from arcing in **vacuum** caused by voltage locally or temporarily exceeding breakthrough voltage.

NOTE Breakthrough can happen over a very broad pressure range and whenever voltage exceeds the minimum breakthrough voltage of the atmosphere inside the equipment. Arcs can become self-sustaining once ignited.

6.5 Power supply

6.5.1 The installation shall be designed to operate correctly under **normal operation** with the conditions of the supply network

- as specified below, or
- as otherwise specified by the **user** and acknowledged by the **manufacturer**, or
- as specified by the **manufacturer** in the case of a special source of supply such as an onboard generator.

For mains frequency supplies, the following, according to IEC 60204-1:2016, applies, unless otherwise explicitly agreed ~~on by~~ between the **manufacturer** and the **user**:

- a) steady state voltage in the range of 90 % to 110 % of nominal voltage;
- b) frequency in the range of 0,99 to 1,01 of nominal frequency continuously; ~~according to IEC 60204-1~~, 0,98 to 1,02 short time (no excessive temperature rise in components due to an abnormal current).

For special supply systems such as onboard generators, the limits given may be exceeded provided that the equipment is designed to operate correctly under those conditions.

6.5.2 In case of failure or fault of the electric supply, the installation or equipment shall

- a) ~~shall not~~ go into ~~unsafe~~ a **safe** mode of operation ~~or~~ – it shall not go into **single fault condition**, especially shall not start unexpectedly, shall not be prevented from stopping if the stop command has been given, shall not eject or let fall any part or **workload** unless protection is provided for this case,
- b) ~~shall~~ not lose the setting of the switchgear, controlgear or programmable controller necessary for safe operation,
- c) ~~shall~~ be able to keep all **protective devices** fully operational or let them give a stop command, ~~and~~
- d) ~~shall~~ be able to cool down without causing a hazard; this can require the prolonged operation of cooling equipment.

6.6 Access

6.6.1 The **EH** or **EPM installation** or **equipment** shall allow safe access to all areas where intervention is necessary during operation or maintenance. The equipment shall be so designed and installed that all devices and components that are intended to be accessible, observed or seen by the **operator** are accessible or visible to the **operator**.

6.6.2 Risks shall be reduced by limiting or preventing the access to ~~the~~ any hazard or to ~~the~~ any hazard zone. Limitation of access to surfaces or parts that can cause a hazard or of access for entering a hazard zone depends on the hazard itself, its type (immediate or **exposure** dependent) and the strength of the source of the hazard (e.g. the temperature of a surface or the voltage of a **live part**).

6.6.3 The **EH** or **EPM installation** or **equipment** shall provide protection against unintentional access to **hazardous-live parts** or against unintentional entering the **high-voltage hazard zone** ~~shall be provided~~ in all cases where either there is no **barrier** or **enclosure**, or where **barrier** or **enclosure** are to be removed to gain access to devices requiring manual operation or to components requiring replacement.

6.6.4 The access path to the device and the space needed for its operation shall be such that protection against unintentional contact with **hazardous-live parts** or against unintentionally entering the **high-voltage hazard zone** is provided by an appropriate distance.

Obstacles protecting against unintentional contact shall be provided if the access path or space has less than the appropriate distance from **hazardous-live parts**.

6.6.4 The degree of protection shall be not less than IPXXB (also complied with by IP2X) of IEC 60529:1989, IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013 from the direction of approach to the ~~device or component~~ **hazardous-live part**, and not less than IPXXA (also complied with by IP1X) of IEC 60529:1989, IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013 from other directions.

6.7 Ergonomic aspects

The physical and physiological stress faced by the **operator** during **normal operation** and intended environmental conditions shall be reduced to a possible minimum. In this regard, the main objectives are the following:

- a) avoid a work rate determined by the installation only;
- b) avoid monitoring of the installation or its control unit that demands lengthy concentration;
- c) allow for the variation in the strength, stamina or physical dimensions of different **operators**;
- d) allow for sufficient space for the movements of the **operator**;
- e) adapt the control unit and other interfaces to the foreseeable variation in characteristic of **operators**.

The provisions of ISO 6385:2016 apply.

6.8 Transport and storage

6.8.1 ~~Electrical~~ The **EH** or **EPM installation** or **equipment** shall be designed to withstand the effects of transport and storage at temperatures within a range from –25 °C to 55 °C and for short periods not exceeding 24 h at up to 70 °C. Otherwise, suitable precautions shall be taken to protect the **electrical equipment** against such effects. Suitable means shall be provided to prevent damage from humidity, vibration and shock.

6.8.2 The **EH** or **EPM installation** or **equipment** shall be designed for simple removal and refilling of working fluids, if these working fluids may freeze or otherwise harm the equipment during storage or transport. The **manufacturer** shall inform the **user** about procedures for removal and refilling of any working fluids in the instructions for use.

NOTE ~~Electrical~~ Equipment susceptible to damage at low temperatures includes PVC insulated cables, certain electrolytic capacitors or equipment using cooling ~~water~~ liquids that can freeze.

6.9 Provisions for handling

6.9.1 Any **EH** or **EPM installation** or **equipment** shall be capable of being handled and assembled safely.

6.9.2 Any part of an **EH** or **EPM installation** or **equipment** that cannot be moved by hand shall be ~~fitted with attachments~~ enabled for lifting by adequate equipment. The manufacturer shall supply instructions for lifting or handling when applicable.

6.9.3 All parts shall be easily assembled by use of appropriate provisions or lifting gear.

6.10 Consumables and replaceable parts

Consumable or replaceable parts that are intended to be replaced by the **operator** shall be integrated or mounted in a way that replacement is uncomplicated and safe with regard to correct and unambiguous mounting and to electrical connection.

7 Protection against hazards from electric shock

7.1 General

Clause 7 applies for **EH** or **EPM installation** or **equipment** that is not covered by the scope of IEC 60204-1 or IEC 60204-11, i.e.

~~a) for the processing equipment, if this is not covered by the scope and the environmental limits of the IEC 60204 series, i.e. exceeding 40 °C and~~

~~b) for equipment of **EH** or **EPM installations** with an electrical frequency exceeding 200 Hz.~~

a) exceeding 40 °C environmental temperature, or

b) having an electrical **processing frequency** exceeding 200 Hz.

Clause 7 does neither apply for equipment covered by ~~the IEC 60204 series~~ IEC 60204-1 or IEC 60204-11, nor for **installations** or equipment with a voltage exceeding 36 kV, which ~~is~~ are covered by the Particular requirements.

~~NOTE – Electrical hazards are associated with electric charges and currents between frequencies of 0 Hz and up to about 100 kHz. Conventional electric shock phenomena gradually change or disappear at the upper limit; protective means like equipotential bonding cease to operate reliably.~~

7.2 Fundamental rule of protection

7.2.1 Hazardous-live parts shall not be accessible and accessible conductive parts shall not be hazardous-live ~~either~~ during **normal operation**, or under **electric single fault condition**.

7.2.2 For HV installations or equipment, entering the ~~HV~~ **high-voltage hazard zone** is considered the same as touching a **hazardous-live part**.

7.2.3 Non-accessible parts are ~~all~~ such **hazardous-live parts** or **high-voltage hazard zones** which are beyond the limits of reach – i.e. contact is not possible as defined in ISO 13857:2008 during **normal operation** or in **electric single fault condition**.

7.2.4 Protection during **normal operation** is provided by basic protection (see 7.4), and protection in **electric single fault condition** is provided by fault protection (see 7.5). Protection by enhanced protective provisions as defined in 5.34 of IEC 61140:2004/2016 is not sufficient for any installations or equipment under the scope of this document.

7.3 General provisions

7.3.1 All conductive parts, which are not separated from **hazardous-live parts** by at least **basic insulation**, shall be treated as if they were **hazardous-live parts**. This also applies to conductive parts, which are separated by **basic insulation** but are connected to **hazardous-live parts** through components, which are not designed to sustain the same electric stress as specified for **basic insulation**.

7.3.2 Exposed conductive parts of the installation or equipment shall be connected to the protective bonding terminal. This includes all parts, which are covered only by **coatings like** paints, varnishes, lacquers and similar products. Not included are conductive parts, which can be touched but are separated from **hazardous-live parts** by protective separation.

7.3.3 If the installation or equipment is not completely covered with conductive parts, the following applies to accessible parts of insulating material. **In the following cases**, accessible surfaces of parts of insulating material **which shall be separated from hazardous-live parts**:

- **if they** are designed to be gripped; or
- **if they** are likely to come into contact with conductive surfaces which can distribute hazardous potential; or
- **if they** can come into significant contact (area more than 50 mm × 50 mm) with a part of the human body; or
- **if they** are to be used in areas where the pollution is highly conductive.

In this case, they shall be separated from **hazardous-live parts** by

- a) double or reinforced **insulation**, or
- b) **basic insulation** and protective screening, or
- c) a combination of these provisions.

All other accessible surfaces of parts of insulating material shall be separated from **hazardous-live parts** by at least **basic insulation**. For all equipment intended to be part of the installation, the **basic insulation** shall be provided during assembly and installation either by the **manufacturer** or by the **user** as indicated by the **manufacturer** in the information for use.

The requirements are deemed to be complied with if

- a) the accessible parts of insulating material provide the required **insulation** and their temperature does not exceed the limits defined in Clause 10, and
- b) the switchboard is made from metal and driving axles of switches, turn-knobs or similar are effectively brought to earth potential in all positions.

7.3.4 The design of the installation or equipment shall restrict access to **high-voltage hazard zones**. The need for operational and maintenance access by **operators** shall be taken into account. Where safe distances cannot be achieved, permanent protective shielding shall be installed. **Access through doors or obstacles shall only be possible with the use of a tool.**

Applicable warning labels shall be displayed on all access doors, **guards, barriers**, and be in compliance with 19.4.

7.3.5 If it is not feasible for operating reasons to prevent the following LV parts being both accessible and hazardous-live, they are permitted to be accessible by an **operator** during **normal operation**:

- a) parts of lamps and lamp sockets after lamp removal;

- b) parts intended to be replaced and which can be hazardous-live during the replacement or other **operator's** action, but only if they are accessible with a tool and have a warning marking – see 19.4.

~~If any of the parts mentioned in a) and b) receive a charge from an internal capacitor, they shall not be hazardous-live 10 s after interruption of the supply.~~

7.4 Basic protection

7.4.1 All installations or equipment under the scope of this document shall be provided with basic protection.

- a) For LV installations or equipment, in the absence of a specific standard listed in Table 2, all basic protection shall be in compliance with IEC 60364-4-41:2005 and IEC 60364-4-41:2005/AMD1:2017.
- b) For HV installations or equipment, in the absence of a specific standard listed in Table 2, all basic protection shall be in compliance with 7.4.

7.4.2 Basic protection shall consist of one or more provisions that at least during **normal operation** prevent contact with **hazardous-live parts**.

7.4.3 Where solid **basic insulation** is used, it shall prevent contact with **hazardous-live parts**.

In case of HV installations and equipment, a voltage can be present on the surface of solid **insulation** and further precautions may be necessary.

Where **basic insulation** is provided by air, access to **hazardous-live parts** or entering the **high-voltage hazard zone** shall be prevented by **obstacles, barriers or enclosures** as specified in 7.4.4 and 7.4.5, or by placing them out of arm's reach according to ISO 13857:2008.

Where a conductive **obstacle** is separated from **hazardous-live parts** by **basic insulation** only, it is an exposed conductive part and measures for fault protection shall be applied.

7.4.4 **Barriers or enclosures** preventing access to **hazardous-live parts** or entering the **high-voltage hazard zone** shall provide a degree of protection of at least IPXXB (also complied with by IP2X) of IEC 60529:1989, IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013.

Barriers or enclosures shall have sufficient mechanical strength, stability and durability to maintain the specified degree of protection, taking account of all relevant influences from the environment and from inside the **enclosure** – ~~ISO 14119 and~~ ISO 14120:2015 shall be used for their design.

Where the design or construction allows for the removal of **barriers**, the opening of **enclosures** or the removal of parts of **enclosures**, access to **hazardous-live parts** or entering the hazard zone shall only be possible

- with the use of a key or tool, or
- after isolation of **hazardous-live parts** from the supply network where the **enclosure** would no longer provide protection, restoration of the supply ~~shall become~~ being possible only after replacement of **barriers** or parts of **enclosures** or after the closing of doors, or
- where an intermediate **barrier** still maintains the required degree of protection, such **barrier** being removable only by the use of a key or tool, or
- in case no tool or key is required, if an **interlock** according to ISO 14119:2013 that cuts out the hazard immediately is used.

Barriers or **enclosures** shall be **designed or** made from such material that no hazardous induced currents can be created in them.

7.4.5 In the case of HV installations and equipment, substantial inequalities of electric field strength in or along an insulator or **insulation** shall be reduced to a safe level, or avoided through constructional measures, or through potential grading. This shall prevent the **operator** from hazardous step and **touch voltages**.

NOTE Potential grading is typically used for electrical installations, where high earth currents occur.

7.4.6 At frequencies exceeding 200 Hz, potential grading of the circuit shall be controlled by the following means.

- a) If earthing is necessary for reasons of equipment design, any constructional parts of the installation shall not be relied upon. A separate low reactance conductor forming a **direct** path between the generator and the processing applicator shall be provided instead.
- b) The voltage drop shall not exceed 5 V RMS over any distance of the installation that can be **touched bridged** by a person at once, if the conductor currents exceed 500 A, unless access is hindered to the installation by sufficient **barriers** or **enclosures** (refer to 7.4.4).

NOTE This limitation of the geometric extent is due to electromagnetic waves and their propagation resulting in unreliable earthing continuity at frequencies above approximately 100 kHz.

7.5 Provisions for **protection in electric single fault**protection condition****

7.5.1 Fault protection shall consist of one or more provisions independent of and additional to those for basic protection. Individual provisions for fault protection are specified in 7.5.2 to 7.5.7.

7.5.2 Electric single fault condition shall be considered, if it can cause

- a) an accessible, non-hazardous-live **part** to become a **hazardous-live part**, or
- b) an accessible conductive part which is not live during **normal operation** to become a **hazardous-live part**, or
- c) a **hazardous-live part** to become accessible.

7.5.3 To meet the fundamental rule under **electric single fault condition**, fault protection shall be achieved by a further protective provision, independent of that for basic protection (7.3.4). The independent single fault protection shall be provided

- for LV installations or equipment, in the absence of a specific standard listed in Table 2, in compliance with IEC 60364-4-41:2005 and IEC 60364-4-41:2005/AMD1:2017, and
- for HV installations or equipment, in the absence of a specific standard listed in Table 2, in compliance with 7.5.

7.5.4 Each of the two independent protective provisions (**fault protection and basic protection**) shall be designed so that a failure is unlikely under environmental conditions specified in 6.3 or 6.4 and under **normal operation** or **electric single fault condition**.

The two independent protective provisions shall have no influence on each other.

NOTE Simultaneous failure of the two independent protective provisions is unlikely and is not normally taken into consideration. Reliance is placed on one of the protective provisions remaining effective.

7.5.5 Requirements for protective equipotential bonding are defined in 7.6 and apply independently.

7.5.6 Protective screening shall consist of a conductive **screen** interposed between **hazardous-live parts** of an **EH or EPM installation** or **equipment** and the part being protected. The protective **screen** shall be connected to the protective equipotential bonding system of the installation or equipment; it shall itself comply with the requirements for protective equipotential bonding according to 7.6.

7.5.7 Simple separation between a circuit and other circuits or earth shall be achieved by **basic insulation** throughout, rated for the highest voltage present.

If any component is connected between the separated circuits, that component shall withstand the electric stresses specified for the **insulation** which it bridges and its impedance shall limit the prospective current flow through the component to the steady-state **touch current** values indicated in Annex B.

7.5.8 Supplementary **insulation** shall be dimensioned to withstand the same stresses as specified for **basic insulation**.

7.6 Protective equipotential bonding

7.6.1 The protective equipotential bonding system shall consist of one or a suitable combination of two or more of the following elements:

- a) means for protective equipotential bonding in equipment;
- b) earthed protective equipotential bonding in the installation;
- c) protective **earthing** conductor (PE);
- d) protective **earthing** conductor being a neutral conductor as well (PEN);
- e) protective screening;
- f) earthed point of the source;
- g) earth electrode (including earth electrodes for potential grading);
- h) earthing conductor.

Specific considerations apply for frequencies well above mains frequency and are given in the Particular requirements.

7.6.2 All parts of the protective bonding circuits shall be so designed that they are able to withstand the highest thermal and mechanical stresses, which can be caused by earth-fault currents, flowing in any part of the protective bonding circuits. ~~For the assessment of short circuit currents IEC 60909-0 shall be used, for effects of short circuit currents IEC 60865-1 is applicable.~~

Any structural part of the electrical installation or equipment may be used as part of the protective bonding circuit, in case an earth fault monitoring system is installed.

7.6.3 The equipotential bonding system of an HV installation or equipment shall be connected to earth because of the special risks, which can be present, for example the danger of high **touch** and step **voltage** and of exposed conductive parts becoming live due to an electrical discharge. The impedance to earth of the earthing arrangement shall be rated so that no hazardous **touch-voltage current** can occur (refer to Clause 18 in connection with Annex B). Exposed conductive parts, which can become live under fault conditions, shall be connected to the earthing arrangement.

7.6.4 Accessible conductive parts which could acquire a hazardous effective **touch voltage** in the event of a failure of basic protection, i.e. exposed conductive parts and any protective **screen**, shall be connected to the protective equipotential bonding system.

7.6.5 The protective equipotential bonding system shall be of sufficiently low impedance to avoid hazardous potential difference between parts in case of an **insulation** failure and, if necessary, be used in association with a **protective device** operated by the fault current.

This can necessitate consideration of the relative impedance values of the different elements of a protective equipotential bonding system. The difference in potential need not be considered if the impedance of the circuit limits the steady-state **touch current** in the case of an **electric single fault condition** so that it cannot exceed 3,5 mA RMS for frequencies up to 100 Hz or 10 mA for direct current applications when measured in accordance with Clause 18. In some environments or situations, for example highly conductive locations or wet areas, the limiting values shall be lower.

~~NOTE—IEC TS 60479-1 can provide relevant data on impedance.~~

7.6.6 All parts of the protective equipotential bonding shall be so dimensioned that thermal and dynamic stresses, which are likely to occur due to a fault current, do not impair the characteristics of the protective equipotential bonding system as a consequence of a failure or bridging of **basic insulation**. Some local damage, not impairing safety, for example of a sheet metal part of an **enclosure**, may be accepted at the place where the fault occurs.

7.6.7 All parts of the protective equipotential bonding shall be capable of withstanding all internal and external influences (including mechanical, thermal and corrosive) which can occur during the expected lifetime of the installation.

If parts need to be checked regularly or maintained, the **manufacturer** shall indicate this in the information for use.

Movable conductive connections, for example hinges and slides, shall not be considered to be parts of a protective equipotential bonding system unless compliance with the requirements in 7.6 is maintained.

Where a component of an installation or equipment is intended to be removed, the protective equipotential bonding for any other part of the installation or equipment shall not be interrupted when removing the component unless the electrical supply to the other part is disconnected first.

No element of the protective equipotential bonding shall contain any device which could reasonably be expected to break the electrical continuity or to introduce significant impedance, with the exception of components intended to be removed. This requirement may be dispensed only temporarily for the verification of the continuity of protective conductors or for the measure of the current of the protective conductor – see Clause 18.

7.6.8 Where elements of the protective equipotential bonding can be interrupted by the same coupler or plug-and-socket-outlet device as the relevant supply conductors, the protective equipotential bonding shall not be interrupted earlier than the supply conductors. The protective equipotential bonding shall be re-established not later than when the supply conductors are reconnected. These requirements do not apply when interruption and reconnection are only possible with the equipment in de-energized condition.

7.6.9 In HV installations and equipment, the protective equipotential bonding shall not be interrupted before the main contact has reached an isolating distance which can withstand the equipment rated impulse withstand voltage.

7.6.10 Conductors of the protective equipotential bonding, whether insulated or bare, shall be readily distinguishable by shape, location, marking or colour, except those conductors which cannot be disconnected without destruction, for example in wire-wrap and similar wiring in electronic equipment and tracks on printed wiring boards. If identification by colour is used, it shall be in accordance with IEC 60445:2017.

7.6.11 In LV equipment, the protective conductors or the continuity of the protective bonding system shall be in accordance with 8.2 of IEC 60204-1:20052016. This includes the requirements on the exclusion of switching devices, parts that need not be connected, and interruption.

Protective connector connection points, protective bonding in installations with earth **leakage current** exceeding 10 mA, and functional bonding shall be in accordance with 8.2 and 8.4 of IEC 60204-1:20052016.

7.6.12 In LV equipment, track rails may be used as a return circuit, provided that under fault conditions, the impedance of the circuit is sufficiently low to limit the step and contact voltages between the rails and the adjacent earth to values not exceeding 25 V RMS or 60 V DC.

7.6.13 The earth, protective conductors, sheaths and structures shall not be used as part of an active circuit, unless specified otherwise in the Particular requirements.

7.6.14 Earthing of secondary circuits shall be avoided unless improving overall safety of the installation. If secondary circuits are earthed, they shall only be accessible if the voltage of the secondary circuit is so low that the **touch current** limits are met – refer to 7.9 for details.

7.6.15 The means of connection, except for plug-and-socket connections, shall be clearly identified either using symbol IEC 60417-5019:2006-08 (see Annex G), or with the letters PE, or by the bicolour combination of green and yellow. The indication shall not be placed on or fixed by screws, washers or other parts, which could be removed when conductors are being connected.

For cord-connected equipment, the protective conductor in the cord shall be the last conductor to be interrupted in the case of failure of the strain-relief mechanism,

7.6.16 All conductively sheathed cables, conduits or pipes passing through those parts of an **enclosure** containing high-voltage circuits in the voltage band 3 shall be earthed at the point where they pass through the **enclosure**.

7.7 Additional provisions for fault protection for frequencies above 200 Hz

7.7.1 Fault protection shall consist of one or more of the measures in 7.7.2 to 7.7.5 independent of and additional to those for basic protection.

7.7.2 Parts of **electrical equipment** operating at higher frequencies than 200 Hz shall be capable of operating correctly in consideration of skin and proximity effects under **normal operation** and **electric single fault condition**.

7.7.3 Any supplementary **insulation** shall be dimensioned to withstand the same stresses as specified for the **basic insulation**. In addition, insulating materials shall have sufficiently low dielectric loss factors at the working temperature and frequency so that the **insulation** is not impaired by dielectric heating of the materials.

7.7.4 All high frequency circuits shall be galvanically separated from the mains frequency earthing system. Failure of the **galvanic separation** between the circuit and the mains frequency earthing system which could result in accessible parts acquiring a hazardous effective **touch voltage** shall be detected by a **protective device** operated by the fault voltage and result in disconnecting and de-energising the circuits.

High frequency earthing may be directly connected to the mains frequency earthing system, if this reduces the associated risks compared with a **galvanic separation**; details are provided in the Particular requirements.

7.7.5 The separated low resistance conductors constituting the main current path from the circuit frequency source to the processing applicator or similar shall comply with the following.

- a) They shall be capable of withstanding all internal and external influences (including mechanical, thermal, corrosive, glow discharge) which can be expected.
- b) They shall comply with the highest occurring voltage under any **electric single fault condition**, if the conductors are accessible during maintenance; their electric **insulation**, and their current-carrying capacity shall be such that they do not overheat during any foreseeable **single fault condition**; if excessive currents can occur with such duration under any foreseeable **electric single fault condition** that overheating occurs, a current-sensing device that permanently switches off the equipment before the conductor properties are compromised shall be installed.
- c) They shall not be removable without the use of a tool.
- d) If it is necessary for reasons of equipment design to include a separable disconnection of the main circuit conductor for maintenance, its plug and socket shall be mechanically combined with a safety circuit preventing energising of the main circuit during disconnection and there shall be a latching or similar device incorporated in the plug and socket system, as well as sufficient **insulation** to the exterior for non-hazardous disconnection; these requirements do not apply if separation is needed only during installation and decommissioning and is then **only possible** with the use of tools.
- e) The connection of the separable circuit conductor shall be re-established not later than when the supply conductors are reconnected; this requirement does not apply when interruption and reconnection are possible only with the equipment in de-energized condition.
- f) The circuit electrical connections at the ends shall be separated and thus not be combined with any other electrical connection or the protective equipotential bonding for any other part of the installation or equipment.

7.8 ~~Protective-conductor currents~~ Currents in protective conductors

7.8.1 Measures shall be taken in the installation or equipment to prevent excessive protective conductor currents impairing safety or **normal operation** of the installation. Compatibility shall be ensured for currents of all frequencies supplied to and produced by the equipment.

7.8.2 The following limits are applicable to equipment supplied at mains frequency:

- a) for plug-in current using equipment fitted with a single or multiphase plug and socket-outlet system rated up to and including 32 A: less than 2 mA for rated current below 4 A, less than 5 mA for rated current exceeding 10 A and 0,5 mA/A in between.
- b) for current-using equipment for permanent connection and current-using stationary equipment, both without special measures for the protective conductor, or plug-in current using equipment fitted with a single phase or multiphase plug and socket-outlet system, rated more than 32 A: less than 3,5 mA for rated current below 7 A, less than 10 mA for rated current exceeding 20 A and 0,5 mA/A in between.

If residual current devices are provided in the installation, the protective conductor current shall be compatible with the protective measures provided.

In **normal operation**, mains frequency equipment shall not generate current with a DC component in the protective conductor which could affect the proper functioning of residual current devices or other equipment, **unless a residual current device is chosen, that allows for DC current in the mains circuit.**

7.8.3 For current-using equipment intended for permanent connection and having a protective conductor current higher than 10 mA, provision shall be made for a secure and reliable connection with earth such as described in IEC 60364-5-54:2011.

7.9 Touch current and touch voltage

~~7.9.1 Touch current hazards are caused by currents flowing through the human body (this current is not necessarily equal to the current flowing through a protective conductor). The effect of electric current on a human body is causing some distinct responses which need to be considered. These are~~

- ~~a) perception of a current or a spark up to pain;~~
- ~~b) a physical reaction caused by the perception or pain, this physical reaction can be uncontrolled;~~
- ~~c) hindering of let-go;~~
- ~~d) electric burn, either small scale at the touch point or large scale due to overheating of bodyparts of high resistivity.~~

~~Each of these body responses has a unique threshold level and there are significant differences in the manner in which some of these thresholds vary with frequency.~~

7.9.1 Touch currents causing harm shall be avoided. No part or surface that can cause harm when touched shall be ~~within arm's reach. Annex B informs about limits for touch currents and touch voltages~~ accessible. Limits to maximum allowable **touch currents** depending on the frequency of the generating field are provided in Annex B together with applicable risk classes.

~~NOTE IEC TS 60479-1 and IEC TS 60479-2 provide additional information for risk assessment as well as Annex A of EN 50445:2008.~~

7.9.2 If **touch currents** can be perceived either in **normal operation** or **electric single fault condition**, the **manufacturer** shall indicate this to the **user** in the instructions for use.

7.9.3 If parts that can cause non-harmful **touch currents** need to be touched in **normal operation**, the **manufacturer** shall

- a) apply warnings and markings according to AnnexG, and
- b) indicate in the information for use specific handling procedures for the **operator** if appropriate; such procedures may include grasping to avoid harm for **touch currents** below the let-go threshold.

7.10 Conductors and insulations at high temperature

7.10.1 The effect of decreasing conductivity with temperature of conductor materials and thus increasing Joule heating of undersized conductors shall be taken into account ~~when dimensioning conductors. IEC 60364-4-42:2010 and IEC 60364-4-42:2010/AMD1:2014 apply.~~

7.10.2 All conductors shall be able to operate at their maximum expected environmental temperature without overheating. They shall be made from conductive material that does not degrade at the stationary conductor temperature over the intended lifetime. Their **insulation** shall be made from material that does not degrade or disintegrate over the intended lifetime.

The **manufacturer** shall indicate to the **user** if conductors or **insulations** have an intended lifetime less than that of the **EH** or **EPM installation** or equipment and need replacement; he shall indicate inspection and maintenance intervals.

7.10.3 The effect of increasing conductivity with temperature of most insulating materials shall be considered as this can lead to hazardous **leakage currents**.

7.10.4 If the insulating material at the maximum expected temperature does not provide sufficient **insulation**, secondary insulating means shall be introduced.

~~NOTE Conductivity of all insulating materials increases with temperature.~~

7.11 Non-electric faults

Such **single fault condition** shall be taken into account where a fault of mechanical or thermal origin leads to parts becoming live – for example the destruction of non-conducting **insulation**, the flow of liquid metals into non-conductive **insulation**, or a dislocated conducting charge connecting conductive elements.

8 Protection against hazards ~~caused by~~ from electric or magnetic ~~nearfields~~ fields

8.1 General

8.1.1 Clause 8 specifies provisions for frequencies between 0 Hz and 6 MHz concerning hazards caused by magnetic, electric or **electromagnetic** ~~nearfields~~ fields. Provisions for higher frequencies and for propagating fields are provided in the Particular requirements.

8.1.2 The **EH** and **EPM** processing **equipment** shall be designed and operated so as to protect the **operator** and the environment from harmful effects ~~of caused by~~ magnetic ~~or~~, electric ~~nearfields and from EMF~~ or **electromagnetic fields**. Secondary phenomena such as the creation of ozone by discharges, induced currents or induced voltages shall also be taken into account.

~~**8.1.3** Direct contact between the hand or fingers and live conductors shall be hindered, as for protection against electric shock in Clause 7.~~

~~**8.1.4** Access by hands, arms, head and torso to regions with field intensities exceeding the limits or characteristics resulting in efficient induction of electric fields shall be prevented by the same geometric restrictions as for live parts – refer to Clause 7.~~

8.1.3 Annex D provides the relevant risk classes and limits for electric and magnetic fields.

8.2 Magnetic fields

8.2.1 The equipment shall be so designed that the maximum accessible magnetic field level and characteristics do not cause a risk. **Barriers** or **screens** shall hinder **exposure** to hazardous fields and be designed as defined in 8.5.

8.2.2 All **hazard** zones where risk ~~group~~ class 1 conditions exist during **normal operation** or in **electric single fault condition** shall be indicated by the **manufacturer** in the information for use and a warning symbol defined in Annex G shall be provided outside the zone.

8.3 Magnetic fields below 1 Hz

8.3.1 In case of static magnetic fields, the **manufacturer** shall indicate in the information for use safe behaviour for maximum allowed accessible B value level exceeding the limit for risk ~~group~~ class 1. This includes specifying slow bodypart movement in and out of the field – time for full entry into the static magnetic field shall exceed a time of 1 s.

8.3.2 Exceptional **exposure** can be allowed for an **operator** not carrying or wearing any metal objects and not having implants of any kind, if ~~optical or audible warning devices are in place and the following requirement is met~~ the **manufacturer** ~~shall indicate~~ indicates to the **user** ~~if applicable~~

- a) the need for slow movements in static magnetic fields, especially to slow the bodypart movement into and out of the field to a time being longer than 1 s, if the maximum accessible B value level exceeds 200 mT, and

- b) the necessity to instruct and warn persons carrying any metal objects or having metallic implants of any kind not to enter regions exceeding occupational limits.

8.4 Local electric fields

8.4.1 Clause 7, especially 7.9, applies. **High-voltage hazard zones** shall be non-accessible by any body parts.

8.4.2 The continuity of the earthing of all conductive accessible parts shall be provided in **normal operation** and **electric single fault condition**.

8.4.3 Ionization phenomena, which can occur at high temperatures under high electric fields, shall be taken into account in the design of **insulation** distances along surfaces or in air. Particular care shall be taken in case of metallic vapour **emission**, splashes, pollution, or similar, ~~according to IEC 60664-1.~~

8.4.4 Corona discharges at high field intensities can create hazardous ozone concentrations and shall be limited. The **manufacturer** shall indicate to the **user** if relevant ozone is generated in **normal operation** or **single fault condition**.

~~NOTE Limits of maximum ozone concentrations over time can be found in national regulations.~~

NOTE At a given field intensity, the corona effect increases with frequency.

~~**8.3.5** If fires or explosions can result from ignition of flammable materials by sparks caused by induced fields, contact currents, or spark discharges, Clause 11 applies.~~

8.5 Requirements related to barriers and screens

8.5.1 A non-conductive, non-magnetic **barrier** is not considered as protective **measure** other than hindering access, like an **obstacle**.

8.5.2 Conductive **screens** guiding or absorbing the field and being protected from direct touch shall have sufficient conductivity and be located in a way that they cannot overheat in **normal operation** or in **electric single fault condition**. They shall ~~under these conditions~~ neither ~~cause a hazard due to excessive heat~~ exceed the temperature limit for touchable surfaces as defined in Clause 10 nor shall their integrity of protection be compromised. ~~If heating exceeding the limits for safe touch is expected, Clause 10 applies.~~

8.5.3 Conductive **screens** which are accessible for direct touch shall have sufficient conductivity and be located in such a manner that they cannot overheat in **normal operation** or in **electric single fault condition**. They shall ~~under these conditions~~ neither exceed the temperature limit for touchable surfaces as defined in Clause 10 nor shall their integrity of protection be compromised.

8.5.4 All conductive **screens** shall have a material thickness d that exceeds the energy penetration depth by a factor of 3 and thus fulfil the following formula:

$$d = \frac{3}{\sqrt{4\pi \times f \times \sigma(f) \times \mu_0 \times \mu_r}} \quad (1)$$

where

μ_0 = $4\pi \times 10^{-7}$ and is the magnetic constant in $\Omega \text{ s m}^{-1}$;

μ_r is the relative permeability;

f is the frequency in Hz;

$\sigma(f)$ is the material and temperature dependent conductivity in $\Omega^{-1} \text{ m}^{-1}$.

NOTE Some magnetic field leaks through if the plate is thinner. It can be difficult to fulfil the requirement for frequencies below 100 kHz and it is typically impossible below about 10 kHz.

8.5.5 The geometric extent of a conductive **screen** shall be such that no hazardous field extends over its reach.

8.5.6 Other measures for stray field control may be indicated; these can be

- a field filtering **window** for visible access to the working area, or
- an array of well-placed magnetic objects of sufficient permeability.

8.6 Requirements related to objects worn, carried or held by persons

8.6.1 Metallic objects near the processing equipment can be heated by strong induced currents, even if the requirements of 8.4 and 8.5 are complied with. Ferromagnetic materials such as in tools can be strongly heated by the magnetic field.

8.6.2 The hazard of heated up metallic or semiconducting parts shall be considered. Information on relevant fields is provided in Annex **BD**. The **manufacturer** shall indicate hazard zones to the **user** and proper **written** warning for this region shall be provided in the information for use and proper warning signs shall be provided outside the zone.

8.6.3 Magnetic objects can be exposed to strong mechanical forces and cause a hazard in or near strong ~~static~~ magnetic fields and field gradients **of static fields or low frequency fields**. ~~Annex B provides information for static fields.~~ All zones where such risk can exist during **normal operation** or in **electric single fault condition** shall be indicated by the **manufacturer** in the information for use and proper warning signs shall be provided outside the zone.

8.6.4 Hazards related to ~~pacemakers~~ **implanted active medical devices** in strong static or time-variable magnetic fields as well as nuisance related to watches and other electronic equipment such as radios are inevitable. Information on relevant fields is provided in Annex **BD**. The **manufacturer** shall indicate this ~~problem~~ to the **user** and proper cautions for this region shall be provided in the information for use.

8.6.5 The **manufacturer** shall indicate, in the information for use, with respect to static magnetic fields

- a) if very strong forces are expected when fields are varied, especially when the field is switched on or off,
- ~~b) that operators or ordinary persons carrying any metal objects or having implants of any kind (i.e. metallic or medical electronic devices) or wearing any metal objects shall only attend any zone of risk group 1, if they are instructed about the need of slow movements and if a special optical or audible warning device is in operation indicating the existence of such a field.~~

- b) that **operators** or **ordinary persons** having implants of any kind (for example metallic, semiconducting or medical electronic devices) or wearing any objects made from metal or semiconducting material shall only attend any zone of risk class 1, and
- c) that **operators** or **ordinary persons** carrying any metal objects be instructed about the need of slow movements and that a special optical or audible warning device is in operation indicating the existence of such a field.

8.6.6 The **manufacturer** shall indicate in the information for use with respect to static and alternating magnetic fields

- a) that ~~operators or ordinary persons~~ carrying any metal objects or having implants of any kind (i.e. metallic or medical electronic devices) or wearing any metal objects shall not attend any zone of risk ~~group 2~~ class 1 or higher – sufficient marking and proper warning signs shall be provided outside the zone, and
- b) that **operators** or **ordinary persons** attending any zone of risk ~~group 1 or higher~~ class 2 shall never wear objects like metal necklaces, bracelets, rings, objects that are magnetisable or objects made from silicon, carbon or similar.

9 Protection against hazards from radiation

9.1 General

9.1.1 The **EH** or **EPM installation** or **equipment** shall provide protection against effects of internally generated ultraviolet, ionizing, visible, infrared, and microwave radiation, including radiation from laser sources.

This document does not differentiate between ~~different~~ the possible sources of radiation (e.g. emitter, **workload** or ~~wall~~ furnace lining) with respect to classification or **emission**. Different phases of the life cycle of the **EH** or **EPM installation** or **equipment** can cause different levels of radiation **emission** and shall be treated separately.

9.1.2 The following effects ~~shall be taken into account as they~~ can lead to unintended hazardous ~~exposure~~ **emission** and shall be taken into account:

- **emission** of radiation through openings for entrance and exit of **workload** belonging to continuously operating processing equipment;
- **emission** of radiation through doors of batch processing equipment which are either opened or stay open during the process;
- **emission** of radiation when doors of the processing equipment are opened and the inside of the processing equipment, the **workload**, **furnace lining** or heating elements have not cooled down in advance;
- **emission** of radiation ~~by a very hot~~ from a **workload** after leaving the installation;
- **emissions** becoming accessible during ~~access for~~ maintenance, commissioning or testing;
- **if emission** from heating elements **that** are operated outside the processing equipment;
- **if** reflectors, refractors or reflective walls inside the **EH** or **EPM installation** ~~cause~~ or **equipment** causing zones of intense irradiation outside ~~the installation~~;
- ~~– if hot walls inside the processing equipment cause zones of intense irradiation outside the installation.~~

9.2 Installation or equipment generating ionizing radiation

9.2.1 In the case of **EH** or **EPM installation** or **equipment** not intended to emit ionizing radiation, the effective dose rate of unintended stray radiation at any accessible point 100 mm from the outer surface of the equipment shall not exceed 1 µSv/h unless a national regulation stipulates a different dose.