

INTERNATIONAL STANDARD



Electrical measuring transducers for converting AC and DC electrical quantities to analogue or digital signals



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.



IEC 60688

Edition 4.0 2021-09
REDLINE VERSION

INTERNATIONAL STANDARD



**Electrical measuring transducers for converting AC and DC electrical quantities
to analogue or digital signals**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 17.220.20

ISBN 978-2-8322-1029-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	9
INTRODUCTION.....	11
1 Scope.....	12
2 Normative references.....	13
3 Terms and definitions	13
3.1 General terms	14
3.2 Terms describing transducers according to the measurand	17
3.3 Terms describing transducers according to their output load	18
3.4 Nominal values	18
3.5 ~~User adjustment~~ Terms describing transducers with provisions to be adjusted by users.....	19
3.6 Influence quantities and reference conditions.....	20
3.7 Errors and variations	20
3.8 Accuracy, accuracy class, class index	21
4 ~~Class index, permissible limits of intrinsic error, auxiliary supply and reference conditions~~ General.....	21
4.1 Transducer general architecture	21
4.2 Classification of transducers (TRD)	22
5 Requirements for TRD1	22
5.1 Safety requirements: clearances and creepage distances	22
5.2 EMC requirements	22
5.2.1 Immunity.....	22
5.2.2 Emission.....	23
5.3 Class index requirements	23
5.3.1 Class index.....	23
5.3.2 Class index for transducer used with sensors	23
5.3.3 Intrinsic error	23
5.4 Conditions for the determination of intrinsic error	23
5.5 Auxiliary supply.....	25
5.5.1 General	25
5.5.2 DC supply.....	25
5.5.3 AC supply	25
5.6 Input values	26
5.6.1 General	26
5.6.2 Adjustment ranges	26
5.6.3 Preferred nominal values.....	26
5.7 Analogue output signals	26
5.7.1 General	26
5.7.2 Output current.....	26
5.7.3 Compliance voltage.....	26
5.7.4 Maximum output voltage	26
5.7.5 Interference risk of output current.....	27
5.7.6 Output voltage	27
5.8 Output transfer function.....	27
5.9 Digital output signals.....	30
5.10 Ripple (for analogue outputs)	30

5.11	Response time	30
5.12	Variation due to over-range of the measurand.....	30
5.13	Limiting value of the output signal.....	30
5.14	Limiting conditions of operation	31
5.15	Limits of the measuring range.....	31
5.16	Limiting conditions for storage and transport.....	31
5.17	Sealing	31
5.18	Stability	31
6	Tests for TRD1	31
6.1	General.....	31
6.1.1	Determination of variations.....	31
6.1.2	Environmental conditions	32
6.1.3	Computations.....	32
6.2	Variations due to auxiliary supply voltage	32
6.2.1	Application.....	32
6.2.2	Procedure.....	32
6.2.3	Computation	33
	Permissible variations	33
6.3	Variations due to auxiliary supply frequency	33
6.3.1	Application.....	33
6.3.2	Procedure.....	33
6.3.3	Computation	33
6.3.4	Permissible variations	34
6.4	Variations due to ambient temperature	34
6.4.1	Application.....	34
6.4.2	Procedure.....	34
6.4.3	Computation	34
6.4.4	Permissible variations	34
6.5	Variations due to the frequency of the input quantity(ies)	35
6.5.1	Application.....	35
6.5.2	Procedure.....	35
6.5.3	Computation	35
6.5.4	Permissible variations	35
6.6	Variations due to the input voltage.....	35
6.6.1	Application.....	35
6.6.2	Procedure.....	35
6.6.3	Computation	36
6.6.4	Permissible variations	36
6.7	Variations due to the input current.....	36
6.7.1	Application.....	36
6.7.2	Procedure.....	36
6.7.3	Computation	36
6.7.4	Permissible variations	36
6.8	Variations due to power factor	37
6.8.1	Application.....	37
6.8.2	Procedure.....	37
6.8.3	Computation	37
6.8.4	Permissible variations	37
6.9	Variation due to output load.....	38

6.9.1	Application.....	38
6.9.2	Procedure.....	38
6.9.3	Computation	38
6.9.4	Permissible variations	38
6.10	Variations due to distortion of the input quantity(ies)	38
6.10.1	Application.....	38
6.10.2	Procedure.....	38
6.10.3	Computation	39
6.10.4	Permissible variations	39
6.11	Variation due to magnetic field of external origin	39
6.11.1	Application.....	39
6.11.2	Procedure.....	39
6.11.3	Computation	39
6.11.4	Permissible variations	40
6.12	Variation due to unbalanced currents.....	40
6.12.1	Application.....	40
6.12.2	Procedure.....	40
6.12.3	Computation	40
6.12.4	Permissible variations	40
6.13	Variation due to interaction between measuring elements	40
6.13.1	Application.....	40
6.13.2	Procedure.....	41
6.13.3	Computation	41
6.13.4	Permissible variations	41
6.14	Variation due to self-heating.....	41
6.14.1	Application.....	41
6.14.2	Method	41
6.14.3	Computation	41
6.14.4	Permissible variations	41
6.15	Variation due to continuous operation.....	42
6.15.1	Application.....	42
6.15.2	Procedure.....	42
6.15.3	Computation	42
6.15.4	Permissible variation	42
6.16	Variation due to common mode interference	42
6.16.1	Application.....	42
6.16.2	Procedure.....	42
6.16.3	Computation	42
6.16.4	Permissible variations	42
6.17	Variation due to series mode interference.....	43
6.17.1	Application.....	43
6.17.2	Procedure.....	43
6.17.3	Computation	43
6.17.4	Permissible variations	43
6.18	Permissible excessive inputs.....	43
6.18.1	General	43
6.18.2	Continuous excessive inputs	43
6.18.3	Excessive inputs of short duration	44
6.19	Voltage test, insulation tests and other safety requirements	44

6.20	Impulse voltage tests	44
6.21	High frequency disturbance test	44
6.22	Test for temperature rise	44
6.23	Other tests	45
7	Marking and information for TRD1	45
7.1	Marking on the case	45
7.2	Markings relating to the reference conditions and nominal ranges of use for transducers	46
7.3	Identification of connections and terminals	46
7.4	Information to be given in a separate document	46
Annex A	(normative) Requirements for TRD2	50
A.0	General	50
A.1	Scope	50
A.2	Normative references	50
A.3	Terms and definitions	50
A.4	Environmental conditions	50
A.4.1	General	50
A.4.2	Normal environmental conditions	50
A.4.3	Special environmental conditions	50
A.5	Ratings for TRD2	50
A.5.1	General	50
A.5.2	Input ratings	51
A.5.3	Output ratings	52
A.5.4	General ratings	53
A.6	Requirements for design of TRD2	54
A.6.1	General	54
A.6.2	Safety requirements	54
A.6.3	EMC requirements	57
A.6.4	Climatic requirements	59
A.6.5	Mechanical requirements	59
A.6.6	Interface requirements	60
A.6.7	Accuracy requirements	60
A.6.8	Marking requirements	64
A.6.9	Documentation requirements	65
A.7	Tests for TRD2	66
A.7.1	Type tests	66
A.7.2	Routine tests	75
Annex B	(normative) Interface coding	77
B.1	General	77
B.2	Characteristics of interface connection	77
B.3	Coding of rated output values for transducers	77
B.4	Coding of auxiliary power supply for transducers	79
B.5	Coding of transfer function curves for transducers	80
B.6	Interface full coding for output of transducers	80
B.6.1	General	80
B.6.2	Examples of interface codes and most common interface codes	81
Annex C	(informative) Anti-aliasing requirements	83
Annex D	(informative) Requirements for the measurement of harmonics and low frequencies	83

D.1	General.....	85
D.2	Measuring accuracy classes with harmonics	85
D.3	Accuracy class extensions of transducers for high bandwidth applications	86
Annex E	(normative) Markings terminals of TRD2	87
E.1	Marking of terminals for TRD2 monitoring AC current.....	87
E.2	Marking of terminals for TRD2 monitoring voltage	87
Annex F	(informative) Guidance related to cables, busbars and bare conductors within an installation	89
F.1	Insulation of cables	89
F.2	Temperature of cables and busbars	89
F.2.1	Cables	89
F.2.2	Busbars	89
Annex G	(informative) Guidance related to overvoltage categories and measurement categories	90
G.1	Concept of overvoltage category	90
G.2	Approach of IEC 60664-1 for primary circuits of TRD2	90
G.2.1	General	90
G.2.2	Examples with IEC 60664-1:2020, for primary measuring circuits, OVC III, PD 2, altitude under 2 000 m, inhomogeneous field.....	90
G.3	Approach of IEC 61010 for primary circuits of TRD2.....	91
G.3.1	General	91
G.3.2	Example with IEC 61010-2-030:2017, for primary measuring circuits, OVC III, PD 2, altitude under 2 000 m, inhomogeneous field	91
G.4	Approach for secondary circuits of TRD2	92
Bibliography		93
Figure 1	– Transducer (TRD) architecture.....	22
Figure 2	– Transfer function curve A.....	27
Figure 3	– Transfer function curve B.....	28
Figure 4	– Transfer function curve C	28
Figure 5	– Transfer function curve D	29
Figure 6	– Transfer function curve E.....	29
Figure A.1	– Relationship between ambient air temperature and relative humidity	54
Figure A.2	– Accuracy limits of a TRD2-IDC	62
Figure A.3	– Measurement of the step response time.....	70
Figure A.4	– Temperature cycle accuracy test	72
Figure C.1	– Digital data acquisition system example	83
Figure C.2	– Frequency response mask for metering accuracy class 1 ($f_r = 60$ Hz, $f_s = 4\,800$ Hz).....	84
Table 1	– Functional classification of transducers with minimal required functions	22
Table 2	– Relationship between the limits of intrinsic error, expressed as a percentage of the fiducial value, and the class index	23
Table 3	– Pre-conditioning	24
Table 4	– Reference conditions of the influence quantities and tolerances or testing purposes	24
Table 5	– Reference conditions relative to the measurand	24

Table 6 – Usage groups	32
Table 7 – Permissible variations due to AC auxiliary supply	33
Table 8 – Permissible variations due to DC auxiliary supply	33
Table 9 – Permissible variations due to auxiliary supply frequency	34
Table 10 – Permissible variations due to ambient temperature	34
Table 11 – Permissible variations due to the frequency of input quantity	35
Table 12 – Permissible variations due to the input voltage	36
Table 13 – Permissible variations due to the input current	37
Table 14 – Permissible variations due to power factor	37
Table 15 – Permissible variations due to output load	38
Table 16 – Permissible variations due to distortion of input quantities	39
Table 17 – Permissible variations due to magnetic field of external origin	40
Table 18 – Permissible variations due to unbalance currents	40
Table 19 – Permissible variations due to interactions between measuring elements	41
Table 20 – Permissible variations due to self-heating	42
Table 21 – Permissible variations due to continuous operation	43
Table 22 – Permissible variations due to series mode interference	43
Table 23 – Examples of marking relating to the reference conditions and nominal range of use for temperature	46
Table 24 – Symbols for marking transducers	47
Table A.1 – Rated burden for TRD2 with an AC or DC voltage output, or a frequency output	52
Table A.2 – Rated burden for TRD2 with an AC or DC current output	53
Table A.3 – Rated temperatures for TRD2	53
Table A.4 – Rated humidity classes	54
Table A.5 – Definition of ports	58
Table A.6 – Performance criteria for EMC immunity tests	59
Table A.7 – RJ45 connector pinout	60
Table A.8 – Limits for error and phase error for TRD2-IAC	61
Table A.9 – Limits of ratio error for TRD2-IDC	62
Table A.10 – Limits of ratio error for TRD2-UAC	63
Table A.11 – Limits of ratio error for TRD2-UDC	63
Table A.12 – Burden values for basic accuracy tests	68
Table B.1 – Coding of interface connection	77
Table B.2 – Rated AC RMS voltage output	78
Table B.3 – Rated DC voltage output	78
Table B.4 – Rated range of DC voltage output	78
Table B.5 – Rated AC RMS current output less than 1A	78
Table B.6 – Rated range of DC current output	79
Table B.7 – Rated frequency output	79
Table B.8 – Rated pulse density output	79
Table B.9 – Coding of power supply for transducers supplied from measuring instrument via the connector	80
Table B.10 – Coding of external power supply for transducers	80

Table B.11 – Coding of transfer function curves for transducers.....	80
Table B.12 – Interface full coding for output of transducers.....	81
Table B.13 – Examples of interface codes and most common interface codes	81
Table C.1 – Anti-aliasing filter	83
Table D.1 – Limits of error for harmonics – Accuracy classes.....	85
Table D.2 – Limits of error for harmonics – Accuracy class extensions WB1 and WB2.....	86
Table E.1 – Marking of terminals for TRD2 monitoring current.....	87
Table E.2 – Marking of terminals for TRD2 monitoring voltage	88
Table G.1 – Clearances according to IEC 60664-1:2020	90
Table G.2 – Creepage distances according to IEC 60664-1:2020	91
Table G.3 – Clearances according to IEC 61010-2-030:2017	92
Table G.4 – Creepage distances according to IEC 61010-2-030:2017	92

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**ELECTRICAL MEASURING TRANSDUCERS FOR CONVERTING AC AND DC
ELECTRICAL QUANTITIES TO ANALOGUE OR DIGITAL SIGNALS****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 60688:2012. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

IEC 60688 has been prepared by IEC technical committee 85: Measuring equipment for electrical and electromagnetic quantities. It is an International Standard.

This fourth edition cancels and replaces the third edition published in 2012. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) updating normative references;
- b) additional requirements for specific transducers used for LV monitoring applications;
- c) creation of interface coding to ease selection by the end-user.

The text of this International Standard is based on the following documents:

CDV	Report on voting
85/748/CDV	85/781/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

In this document, the following print types are used:

- requirements and definitions: in roman type;
- NOTES: in smaller roman type;
- *compliance*: in italic type.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

New transducers can now be equipped with microprocessors that utilise digital data processing, communication methods and auxiliary sensors. This makes them more complex than conventional analogue transducers and gives them considerable added value.

The class index system of classification used in this document is based upon IEC 60051 (all parts). Under this system, the permitted variations of the output signal due to varying influence quantities – ambient temperature, voltage, frequency, etc. – are implicit in the classification.

For those unfamiliar with the class index system, a word of warning is necessary. If, for example, a transducer is classified as class 1, it does not mean that the error under practical conditions of use will be within ± 1 % of the actual value of the output or ± 1 % of the full output value. It means that the error should not exceed ± 1 % of the fiducial value under closely specified conditions. If the influence quantities are varied between the limits specified by the nominal ranges of use, a variation of amount comparable with the value of the class index may be incurred for each influence quantity.

The permissible error of a transducer under working conditions is the sum of the permissible intrinsic error and of the permissible variations due to each of the influence quantities. However, the actual error is likely to be much smaller because not all of the influence quantities are likely to be simultaneously at their most unfavourable values and some of the variations may cancel one another. It is important that these facts be taken into consideration when specifying transducers for a particular purpose.

Furthermore, some of the terms used in this document are different from those used in IEC 60051 (all parts) due to the fundamental differences between indicating instruments and measuring transducers.

All statements of performance are related to the output which is governed by two basic terms:

- "the nominal value", which may have a positive or a negative sign or both;
- "the span", which is the range of values of the output signal from maximum positive to maximum negative, if appropriate.

ELECTRICAL MEASURING TRANSDUCERS FOR CONVERTING AC AND DC ELECTRICAL QUANTITIES TO ANALOGUE OR DIGITAL SIGNALS

1 Scope

This document applies to transducers with electrical inputs and outputs for making measurements of AC or DC electrical quantities. The output signal ~~may~~ can be in the form of an analogue direct current, an analog direct voltage or in digital form. ~~In this case, that part of the transducer utilized for communication purposes will need to be compatible with the external system.~~

This document applies to measuring transducers used for converting electrical quantities such as

- current,
- voltage,
- active power,
- reactive power,
- power factor,
- phase angle,
- frequency,
- harmonics or total harmonic distortion, and
- apparent power

to an output signal.

This document is not applicable for

- instrument transformers that comply with ~~IEC 60044 series~~ IEC 61869 (all parts);
- transmitters for use in industrial process application that comply with IEC 60770 (all parts), and
- performance measuring and monitoring devices (PMD) that comply with IEC 61557-12:2018.

Within the measuring range, the output signal is a function of the measurand. An auxiliary supply ~~may~~ can be needed.

This document applies

- a) if the nominal frequency of the input(s) lies between 0 Hz and 1 500 Hz,
- b) ~~if a measuring transducer is part of a system for the measurement of a non-electrical quantity, this standard may be applied to the electrical measuring transducer, if it otherwise falls within the scope of this standard~~
to the electrical measuring transducer if it is part of a system for the measurement of a non-electrical quantity, and if it otherwise falls within the scope of this document, and
- c) to transducers for use in a variety of applications such as telemetry and process control and in one of a number of defined environments.

This document is intended:

- to specify the terminology and definitions relating to transducers whose main application is in industry,

- to unify the test methods used in evaluating transducer performance, and
- to specify accuracy limits and output values for transducers.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~IEC 60051-1:1997, Direct acting indicating analogue electrical measuring instruments and their accessories – Part 1: Definitions and general requirements common to all parts~~

IEC 60068-2-6, *Environmental testing - Part 2-6: Tests - Test Fc: Vibration (sinusoidal)*

IEC 60068-2-27, *Environmental testing - Part 2-27: Tests - Test Ea and guidance: Shock*

IEC 60255-151, *Measuring relays and protection equipment - Part 151: Functional requirements for over/under current protection*

~~IEC 60417, Graphical symbols for use on equipment~~

IEC 61010 (all parts), *Safety requirements for electrical equipment for measurement, control and laboratory use*

IEC 61010-1:2010, *Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements*
IEC 61010-1:2010/AMD1:2016

IEC 61010-2-030:2017, *Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 2-030: ~~Special~~ Particular requirements for equipment having testing and or measuring circuits*

~~IEC 61326 (all parts), Electrical equipment for measurement, control and laboratory use – EMC requirements~~

IEC 61326-1:2020, *Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 1: General requirements*

IEC 61557-12:2018, *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC - Equipment for testing, measuring or monitoring of protective measures - Part 12: ~~Performance measuring~~ Power metering and monitoring devices (PMD)*

IEC 61558-1:2017, *Safety of transformers, reactors, power supply units and combinations thereof - Part 1: General requirements and tests*

~~NOTE – Please refer to the Bibliography for the list of informative references.~~

3 Terms and definitions

For the purpose of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>

- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 General terms

3.1.1

electrical measuring transducer

TRD

device for converting an AC or DC measurand to a direct or alternating current, a direct or alternating voltage or a digital signal for measurement purposes

3.1.2

electrical measuring transducer type 1

transducer type 1

TRD1

conventional transducer

Note 1 to entry: Transducers type 1 use conventional interface outputs and are generally single-function devices.

3.1.3

electrical measuring transducer type 2

transducer type 2

TRD2

single-function transducer used in low voltage (LV) monitoring applications

Note 1 to entry: Transducers type 2 are using specific interface outputs and are generally more accurate than transducers type 1.

3.1.4

single-function device

device performing the measurement of a single electrical quantity (e.g. current, power factor, THD) in a single form (e.g. RMS or peak or average) but not both

3.1.5

analogue transducer

device for converting an AC or DC measurand to a direct or alternating current, a direct or alternating voltage for measurement purposes

3.1.6

digital transducer

device for converting an AC or DC measurand to a digital signal for measurement purposes

3.1.7

auxiliary supply

AC or DC electrical supply, other than the measurand, which is necessary for the correct operation of the transducer

3.1.8

auxiliary circuit

circuit which is usually energized by the auxiliary supply

Note 1 to entry: The auxiliary circuit is sometimes energized by one of the input quantities.

~~transducer with offset zero~~

~~transducer that gives a predetermined output signal other than zero when the measurand is zero~~

3.1.9**transducer with suppressed zero**

transducer for which zero output signal corresponds to a measurand greater than zero

~~**total distortion factor**~~

~~ratio of the r.m.s. value of the total distortion content to the r.m.s. value of an alternating quantity~~

~~Note 1 to entry: The total distortion factor depends on the choice of the fundamental component. If it is not clear from the context which one is used, an indication should be given.~~

3.1.10**output load**

<analogue signal> total resistance of the circuits and apparatus connected externally across the output terminals of the transducer

3.1.11**ripple content**

<analogue output signal> ratio of the peak-to-peak value of the fluctuating component of an analogue output signal, expressed in percentage, to the fiducial value, with steady-state input conditions

3.1.12**output signal**

analogue or digital representation of the measurand

3.1.13**output power**

power at the transducer output terminals

~~**output current**~~~~**output voltage**~~

~~for analogue signals, the current (voltage) produced by the transducer which is an analogue function of the measurand~~

3.1.14**output current**

<analogue signal> current produced by the transducer which is an analogue function of the measurand

3.1.15**output voltage**

<analogue signal> voltage produced by the transducer which is an analogue function of the measurand

~~**reversible output current**~~~~**reversible output voltage**~~

~~for analogue signals, the output current (voltage) that reverses polarity in response to a change of sign or direction of the measurand~~

3.1.16**measuring element**

<transducer> unit or module of a transducer that converts the measurand, or part of the measurand, into a corresponding signal

~~single-element transducer~~
~~transducer having one measuring element~~

multi-element transducer
transducer having two or more measuring elements

Note 1 to entry: The signals from the individual elements are combined to produce an output signal corresponding to the measurand.

~~combined transducer~~
~~transducer having two or more measuring circuits for one or more functions~~

3.1.18

response time

time from the instant of application of a specified change of the measurand until the output signal reaches and remains at its final steady value or within a specified interval centred on this value

3.1.19

compliance voltage

accuracy limiting output voltage

<variable output load transducers having a current output> value of the voltage appearing across the output terminals up to which the transducer complies with the requirements of this document

~~output series mode interference voltage~~

~~unwanted alternating voltage appearing in series between the output terminals and the load~~

~~output common mode interference voltage~~

~~unwanted alternating voltage that exists between each of the output terminals and a reference point~~

~~storage conditions~~

~~conditions, defined by means of the ranges of the influence quantities, such as temperature or any other special condition, within which the transducer may be stored (non-operating) without damage~~

3.1.20

stability

ability of a transducer to keep its performance characteristics unchanged during a specified time, all influence quantities remaining within their specified ranges

~~3.1.22.1~~

~~short-term stability~~

~~stability over a period of 24 h~~

~~3.1.22.2~~

~~long-term stability~~

~~stability over a period of one year~~

3.1.21

usage group

group of transducers capable of operating under a specified set of environmental conditions

3.1.22**pulse density output**

digital representation of the measurand, where the relative density of the output pulses corresponds to the analog signal amplitude

3.2 Terms describing transducers according to the measurand**3.2.1****voltage transducer**

transducer used for the measurement of AC or DC voltage

3.2.2**current transducer**

transducer used for the measurement of AC or DC current

3.2.3**apparent power transducer**

transducer that is used for the measurement of the apparent power

3.2.4**active power transducer**

transducer used for the measurement of active electrical power

3.2.5**reactive power transducer**

transducer used for the measurement of reactive electrical power

3.2.6**frequency transducer**

transducer used for the measurement of the frequency of an AC electrical quantity

3.2.7**phase angle transducer**

transducer for the measurement of the phase angle between two AC electrical quantities having the same frequency

3.2.8**power factor transducer**

transducer used for the measurement of the power factor of an AC circuit

3.2.9**harmonics transducer**

transducer that is used for the measurement of the harmonics or the total harmonic distortion of an AC circuit

3.2.10**TRD2-PFA**

power factor (arithmetic method) transducer for LV monitoring applications

3.2.11**TRD2-PFV**

power factor (vector method) transducer for LV monitoring applications

3.2.12**TRD2-THDU**

voltage THD transducer for LV monitoring applications

3.2.13

TRD2-THDI

current THD transducer for LV monitoring applications

3.2.14

TRD2-UAC

voltage transducer for LV monitoring applications that is used for the measurement of AC voltage

3.2.15

TRD2-UDC

voltage transducer for LV monitoring applications that is used for the measurement of DC voltage

3.2.16

TRD2-IAC

current transducer for LV monitoring applications that is used for the measurement of AC current

3.2.17

TRD2-IDC

current transducer for LV monitoring applications that is used for the measurement of DC current

3.3 Terms describing transducers according to their output load

3.3.1

fixed output load transducer

transducer that complies with this document only when the output load is at its nominal value, within specified limits

3.3.2

variable output load transducer

transducer that complies with this document when the output load has any value within a given range

3.4 Nominal values

3.4.1

nominal value

value, or one of the values, indicating the intended use of a transducer

Note 1 to entry: The lower and upper nominal values of the measurand are those which correspond to the lower and upper nominal values of the output signal.

3.4.2

span

output span

algebraic difference between the upper and lower nominal values of the output signal

3.4.3

fiducial value

value to which reference is made in order to specify the accuracy of a transducer

Note 1 to entry: The fiducial value is the span, except for transducers having a reversible and symmetrical output signal when the fiducial value may be half the span if specified by the manufacturer.

~~circuit insulation voltage~~

~~highest circuit voltage to earth of a transducer that determines its voltage test~~



Documents

Document Sharing Hub

nominal power factor

factor by which it is necessary to multiply the product of the nominal voltage and nominal current to obtain the nominal power

$$\text{Nominal power factor} = \frac{\text{nominal power}}{\text{nominal voltage} \times \text{nominal current}}$$

Note 1 to entry: When the current and voltage are sinusoidal quantities, the nominal power factor is $\cos \varphi$ where φ is the phase difference between the current and the voltage. For reactive power transducers, the nominal power factor is $\sin \varphi$.

~~**maximum permissible values of input current and voltage**~~

~~values of current and voltage assigned by the manufacturer as those which the transducer will withstand indefinitely without damage~~

3.4.5**limiting value of the output signal**

<current or voltage> upper limit of output signal which cannot, by design, be exceeded under any conditions

3.4.6**measuring range**

range defined by two values of the measurand within which the performance complies with the requirements of this document

~~(SOURCE: IEC 60051-1:1997, 2.4.3, modified — the wording of the definition has been changed.)~~

Note 1 to entry: See 3.4.3 of IEC 60051-1:2016.

3.4.7**nominal value of the measured voltage**

nominal value of the voltage of the external circuit (e.g. the secondary winding of a voltage transformer) to which the voltage input circuit of the transducer is to be connected

3.4.8**nominal value of the measured current**

nominal value of the current in the external circuit (e.g. the secondary winding of a current transformer) to which the current input circuit of the transducer is to be connected

~~**nominal value of the measurand**~~

~~for active power and reactive power transducers, the value of the measured quantity corresponding to the nominal values of the measured voltage and current, and the power factor~~

3.5 User adjustment Terms describing transducers with provisions to be adjusted by users

~~Transducers can be supplied with provision to be adjusted by the user. (It should be noted that power sources and measuring equipment having adequate stability and accuracy are required). The following definitions apply to these transducers~~

calibration value

value of a quantity to which the nominal value is changed by user adjustment for a specific application

~~calibration value of the measured voltage~~

~~value of the voltage applied to the voltage input circuit of the transducer~~

~~calibration value of the measured current~~

~~value of the current applied to the current input circuit of the transducer~~

~~calibration value of the measurand~~

~~value of the measurand resulting from user adjustment~~

~~calibration value of the output signal~~

~~value of the output signal of the transducer corresponding to the calibration value of the measurand after adjustment~~

3.5.2

adjustment range

possible range of adjustment values of the measured current or voltage

~~conversion coefficient~~

~~relationship of the value of the measurand to the corresponding value of the output signal~~

3.6 Influence quantities and reference conditions

3.6.1

influence quantity

quantity (other than the measurand) that may affect the performance of a transducer

3.6.2

reference conditions

specified conditions under which the transducer complies with the requirements concerning intrinsic errors

Note 1 to entry: These conditions may be defined by either a reference value or a reference range.

3.6.2.1

reference value

specified single value of an influence quantity at which the transducer complies with the requirements concerning intrinsic errors

3.6.2.2

reference range

specified range of values of an influence quantity within which the transducer complies with the requirements concerning intrinsic errors

nominal range of use

specified range of values over which it is intended that an influence quantity can assume without the output signal of the transducer changing by amounts in excess of those specified

3.7 Errors and variations

error

actual value of the output signal minus the intended value of the output signal, expressed algebraically

~~error expressed as a percentage of the fiducial value~~
~~one hundred times the ratio of the error and the fiducial value~~

intrinsic error

error determined when the transducer is under reference conditions

variation due to an influence quantity

difference between the two values of the output signal for the same value of the measurand when an influence quantity assumes successively two different specified values

3.7.4**variation due to an influence quantity**

<expressed as a percentage of the fiducial value> one hundred times the ratio of the variation due to an influence quantity and the fiducial value

3.8 Accuracy, accuracy class, class index**accuracy**

~~value~~ accuracy of a transducer is defined by the limits of intrinsic error and by the limits of variations

3.8.2**accuracy class**

class of transducers for which the accuracy of all can be designated by the same number if they comply with all the requirements of this document

3.8.3**class index**

number which designates the accuracy class

Note 1 to entry: The class index is applicable to the intrinsic error as well as to the variations.

Note 2 to entry: Throughout this document, the phrase "x % of the class index" denotes "x % of the limits of error relating to the class index".

4 ~~Class index, permissible limits of intrinsic error, auxiliary supply and reference conditions~~ General**4.1 Transducer general architecture**

Organisation of the measurement chain: the electrical quantity to be measured may be either directly accessible, as it is generally the case in low-voltage systems, or accessible via measurement sensors like voltage sensors (VS) or current sensors (CS).

Figure 1 shows the common organisation of a transducer (TRD).

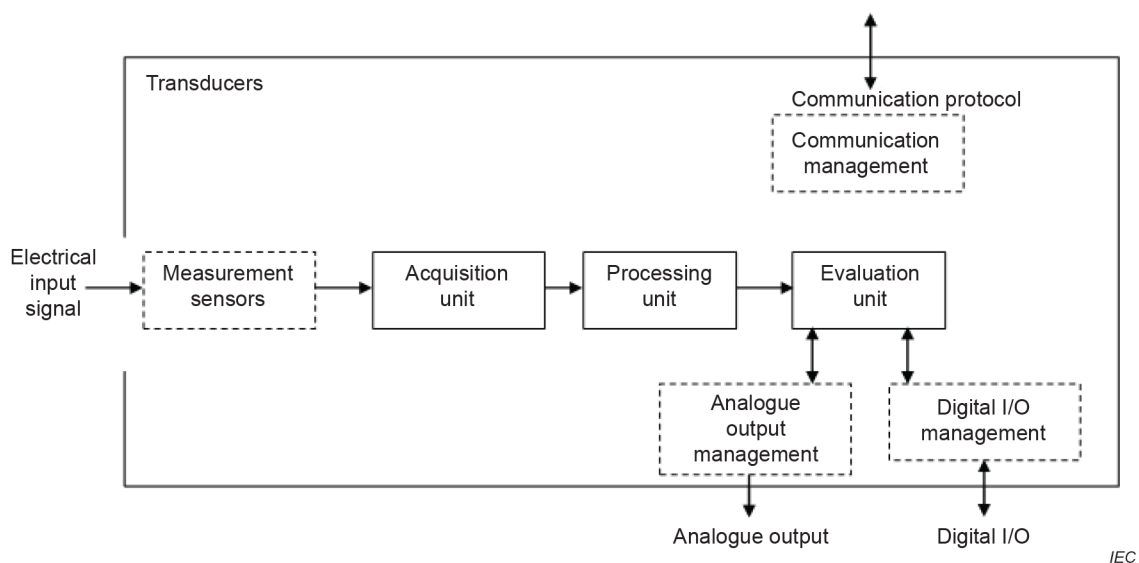


Figure 1 – Transducer (TRD) architecture

4.2 Classification of transducers (TRD)

Transducers are classified according to the applications as defined in Table 1.

Table 1 – Functional classification of transducers with minimal required functions

Requirements	Transducers type	
	TRD1 (transducer type 1)	TRD2 (transducer type 2)
See Clause 5	■	
See Annex A		■
NOTE For more information about differences between TRD1 and TRD2, see also Annex B		

5 Requirements for TRD1

5.1 Safety requirements: clearances and creepage distances

Transducers shall comply with safety requirements of IEC 61010 (all parts), and in addition with the following requirements of:

Clearances and creepage distances shall be selected at least in accordance with

- pollution degree 2,
- measurement category III for measuring input circuits, and
- overvoltage category III for mains circuits.

NOTE Measurement category is defined in IEC 61010-2-030.

5.2 EMC requirements

5.2.1 Immunity

For high frequency disturbance test, see IEC 61326 (all parts).

If, by agreement, other tests are required, then TRD1 with active electronic components may comply with Clause 6 of IEC 61326-1:2020.

NOTE These requirements are consistent with those of 6.21 and 6.23.

5.2.2 Emission

If, by agreement, other tests are required, then TRD1 with active electronic components may comply with either class A or class B limits as defined in Clause 7 of IEC 61326-1:2020.

NOTE This requirement is consistent with the one of 6.23.

5.3 Class index requirements

5.3.1 Class index

The class index for a transducer shall be chosen from those given in Table 2.

This class index definition only applies for the analogue output of the transducers.

Table 2 – Relationship between the limits of intrinsic error, expressed as a percentage of the fiducial value, and the class index

Class index	0,2	0,5	1	2	2,5	3	5	10	20
Limits of error	±0,2 %	±0,5 %	±1 %	±2 %	±2,5 %	±3 %	±5 %	±10 %	±20 %
NOTE — Class indices of 0,3 and 1,5, although non-preferred, ~~may~~ can be used.									

5.3.2 Class index for transducer used with sensors

If the transducers are used with sensors, the manufacturer shall specify the accuracy class of the whole system transducer and sensor.

In some cases when a transducer does not include the sensors, their associated uncertainties are not considered. When a transducer includes the sensors, their associated uncertainties are considered.

5.3.3 Intrinsic error

When the transducer is under reference conditions, the error at any point between the upper and lower nominal values of the output signal shall not exceed the limits of the intrinsic error given in Table 2 expressed as a percentage of the fiducial value.

Values stated in a table of corrections, if any, supplied with the transducer shall not be taken into account in determining the errors.

5.4 Conditions for the determination of intrinsic error

Prior to pre-conditioning and before determination of the intrinsic error, preliminary adjustments shall be carried out in accordance with the manufacturer's instructions. The transducer shall be at the reference temperature.

The transducer shall be left in circuit under the conditions specified in Table 3.

Table 3 – Pre-conditioning

Conditions	Values
Voltage (including any auxiliary supply)	Nominal value
Current	Nominal value
Frequency	Reference value
Power factor	Reference value
Time between connection into circuit and start of determination of errors	30 min

After the specified pre-conditioning, transducers having adjustments available to the user shall be adjusted in accordance with the manufacturer's instructions.

The reference conditions relative to each of the influence quantities are given in Table 4. The reference conditions relative to the measurand are given in Table 5.

Table 4 – Reference conditions of the influence quantities and tolerances or testing purposes

Influence quantity	Reference conditions unless otherwise marked	Tolerances permitted for testing purposes applicable to a single reference value ^a
Ambient temperature	To be marked in the type test report	± 1 °C
Usage group (see 6.1.2)		
I	K55	–
II	K70	–
III	Kx ^b	–
Frequency of the input quantity		
Non-frequency sensitive	Nominal value	± 2 %
Frequency sensitive	To be marked in the type test report	$\pm 0,1$ %
Waveform of the input quantity	Sinusoidal, except for harmonics transducers	The distortion factor $\times 100$ shall not exceed the class index, unless otherwise specified by the manufacturer
Output load		
Fixed output load transducers	Nominal value	± 1 %
Variable output load transducers	Mean value of the nominal range	± 1 %
Auxiliary supply		
Voltage AC	Nominal value	± 2 %
Voltage DC	Nominal value	± 1 %
Frequency	Nominal value	± 1 %
Distortion factor	0,05 maximum	–
Magnetic field of external origin	Total absence	40 A/m at frequencies from DC to 65 Hz in any direction ^c
^a When a reference range is marked, no tolerance is allowed. ^b "Kx" stands for extended conditions. ^c 40 A/m is approximately the highest value of the earth's magnetic field.		

Table 5 – Reference conditions relative to the measurand

Measurand	Reference conditions		
	Voltage	Current	Power factor, active or reactive
Apparent power	Nominal voltage $\pm 2\%$	Any current up to the nominal current	$ \cos \varphi $ or $ \sin \varphi = 1,0$ to $0,8$ lagging or leading
Active power	Nominal voltage $\pm 2\%$	Any current up to the nominal current	$ \cos \varphi = 1,0$ to $0,8$ lagging or leading
Reactive power	Nominal voltage $\pm 2\%$	Any current up to the nominal current	$ \sin \varphi = 1,0$ to $0,8$ lagging or leading ^a
Phase angle or power factor	Nominal voltage $\pm 2\%$	40 % to 100 % of the nominal current	–
Frequency	Nominal voltage $\pm 2\%$	–	–
Polyphase quantities	Symmetrical voltages ^b	Symmetrical currents ^b	–
^a Apparent, active power and reactive power transducers are normally used together and are connected to the same current and voltage transformers. It must be noted that $\sin \varphi = 1,0$ to $0,8$ is used here for ease of testing only. ^b The difference between any two line-to-line voltages and between any two line-to-neutral voltages shall not exceed 1 % of the average (line-to-line and line-to-neutral voltages respectively). Each of the currents in the phases shall differ by not more than 1 % from the average of the currents. The angles between each of the currents and the corresponding phase-to-neutral (star) voltages shall differ by not more than 2° . Where interactions between the separate measuring elements of a multi-element transducer are adequately characterized, single-phase testing of the transducer is acceptable.			

5.5 Auxiliary supply

5.5.1 General

Some transducers dealt with in this document may need an auxiliary supply. This is specified in two separate categories, DC and AC supplies.

5.5.2 DC supply

- The value of the voltage of the DC supply shall be as specified in 5.6.3.
- The battery supply may be earthed or floating. Suitable means shall be provided in the transducer to ensure isolation between the power supply and the input/output circuits of the transducer (for details of voltage tests, see 6.19).
- The transducer shall withstand any voltage ripple up to a maximum of 10 % peak to peak superimposed on the DC power supply.
- The noise fed back to the battery from the transducer shall be limited to 100 mV peak to peak when measured with a specified source resistance at all frequencies up to 100 MHz.

In addition, when the battery feeding the transducer is also used for telephone equipment, the noise shall not exceed 2 mV psophometric.

NOTE The psophometric weighting characteristic is specified in ITU-T Recommendation O.41.

5.5.3 AC supply

For the nominal value of the voltage of the AC supply, see 5.6. This voltage may be provided by a separate supply or may be derived from the measured voltage or current.

5.6 Input values

5.6.1 General

The nominal values of voltage, current, frequency and auxiliary supply shall be specified by the manufacturer.

5.6.2 Adjustment ranges

Adjustment range for transducers that can be adjusted by the user:

- a) for the input voltage: 80 % to 120 % of the nominal value;
- b) for the input current: 60 % to 130 % of the nominal value.

This means that the nominal value of the output signal can be obtained for any adjusted value of the measurand within the ranges given above.

5.6.3 Preferred nominal values

The preferred nominal value of DC auxiliary supplies shall be 24 V, 48 V or 110 V.

5.7 Analogue output signals

5.7.1 General

The lower and upper nominal values of the output signal and the compliance voltage shall be chosen from those given in 5.7.2 and 5.7.3 or 5.7.6.

5.7.2 Output current

The signal 4 mA to 20 mA is preferred.

NOTE The condition "0 mA" has a special meaning (IEC 60381-1).

Other permissible values are

- 0 mA to 20 mA,
- 0 mA to 1 mA,
- 0 mA to 10 mA,
- –1 mA to 1 mA,
- –5 mA to 5 mA,
- –10 mA to 10 mA, and
- –20 mA to 20 mA.

5.7.3 Compliance voltage

- 10 V;
- 15 V.

5.7.4 Maximum output voltage

The manufacturer shall state the maximum value of the output voltage occurring under any conditions of output load and input. This voltage shall not exceed the limit of safety extra-low voltage.

5.7.5 Interference risk of output current

Attention is drawn to the interference problems which may result if the output current has a low value.

5.7.6 Output voltage

- 0 V to 1 V;
- 0 V to 10 V;
- –1 V to 1 V;
- –10 V to 10 V.

NOTE Transducers having a voltage output are non-preferred.

5.8 Output transfer function

For analogue transducers, the used transfer function shall be one of the following curves.

For analogue transducers, variables x , y , ~~y_1~~ , ~~y_2~~ can be adjustable.

Curve A is described in Figure 2.

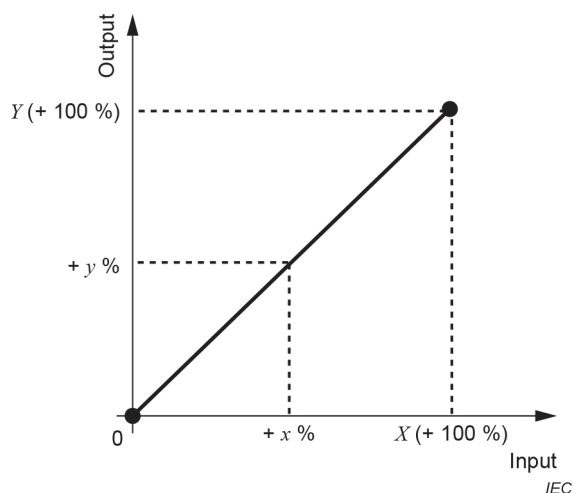


Figure 2 – Transfer function curve A

Curve B is described in Figure 3.

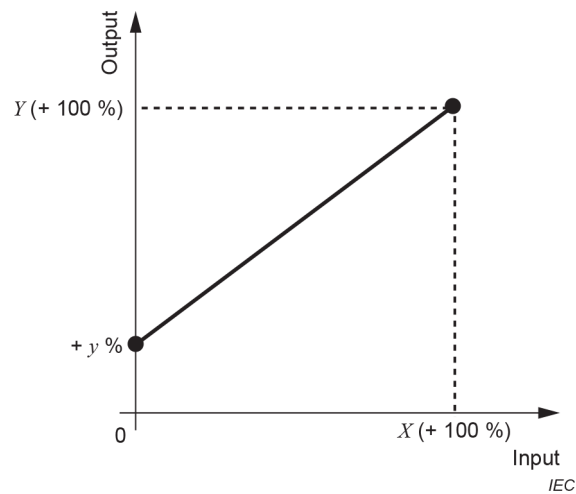


Figure 3 – Transfer function curve B

Curve C is described in Figure 4.

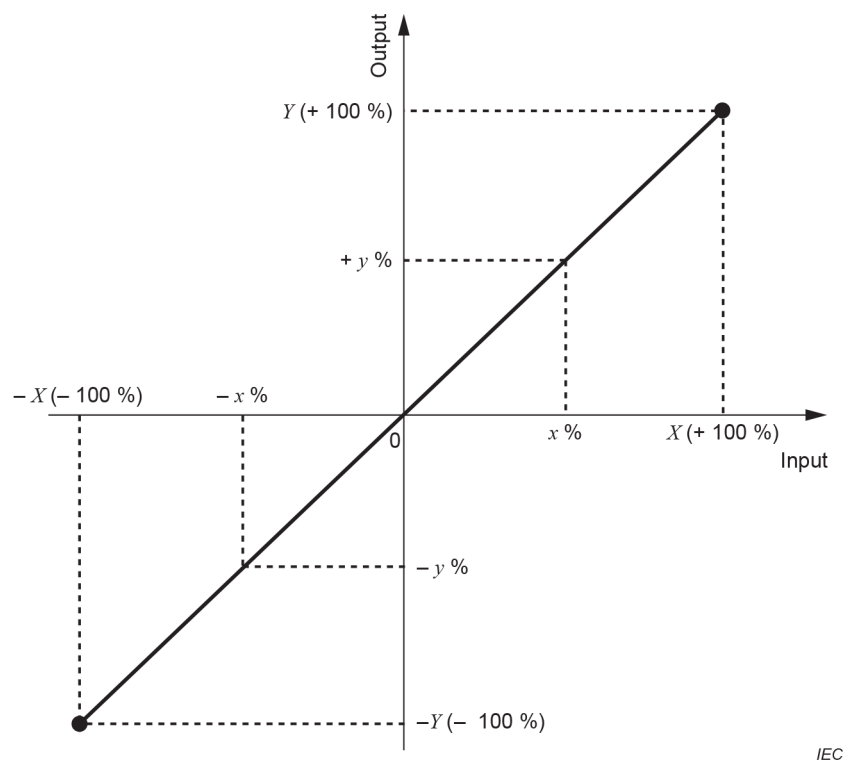


Figure 4 – Transfer function curve C

Curve D is described in Figure 5.

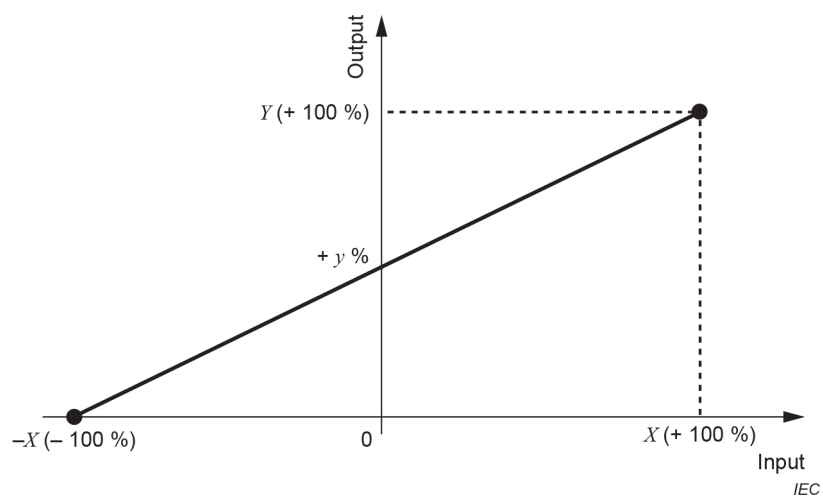


Figure 5 – Transfer function curve D

Curve E is described in Figure 6.

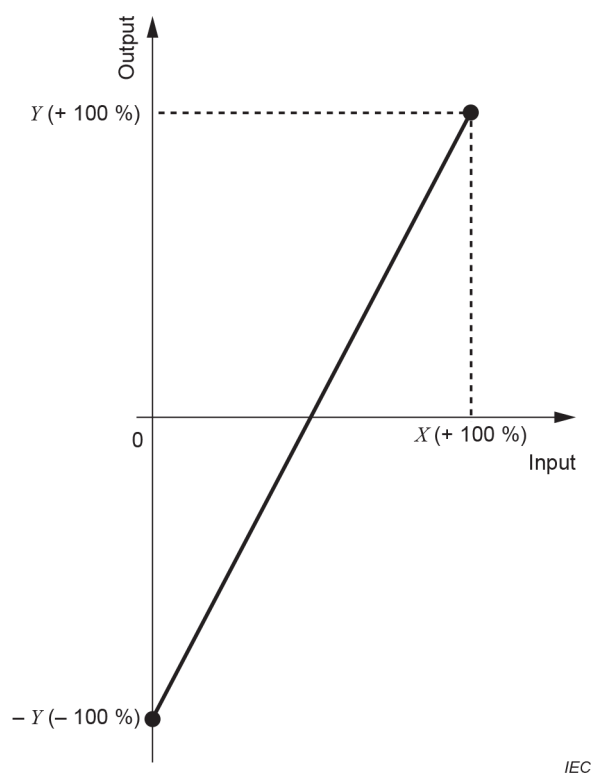


Figure 6 – Transfer function curve E

Curve F (all other kind of curves):

The accuracy class ~~has to~~ shall be checked for each point of the transfer function according to the formula:

$$\frac{Y - R}{R} \times 100$$

where

R is the value of the output signal under reference conditions;

Y is the value of the output signal measured at one extreme of the influence quantity.

NOTE For the curves F, replace in 6.1 to 6.23 F by R .

5.9 Digital output signals

The digital output signals chosen shall correspond with the requirements for transducers concerning accuracy and response time as well as with the requirements of the communication system.

For the digital output, the class index shall be in conformity with the performance class described in IEC 61557-12:2018.

If outputs relays are provided, they shall comply with IEC 60255-151.

5.10 Ripple (for analogue outputs)

The maximum ripple content in the output signal shall not exceed twice the class index.

5.11 Response time

5.11.1 Before determining the response time, the transducer shall be under reference conditions and the auxiliary circuit shall be energized for at least the pre-conditioning time unless it is energized from one of the input quantities and is not separately accessible.

5.11.2 The response time shall be stated by the manufacturer and shall be determined for an input step such that it would produce a change in output signal from 0 % to 90 % of the fiducial value.

5.11.3 If a test for decreasing input is required, the input step should produce a change in output signal from 100 % to 10 % of the fiducial value.

5.11.4 The interval (see 3.1.24) shall be ± 1 % of the upper nominal value of the output signal.

5.11.5 Methods of test for frequency transducers and transducers with suppressed zero shall be stated by the manufacturer.

5.12 Variation due to over-range of the measurand

If, by agreement, a transducer is required to operate with an input up to 150 % of the nominal value, the difference between the intrinsic error at 100 % and the error at 150 % (under reference conditions) of the nominal value of the input shall not exceed 50 % of the class index.

For active power and reactive power transducers, 150 % of the nominal value is achieved by increasing the current while retaining the voltage at the nominal value.

5.13 Limiting value of the output signal

The output signal shall be limited to a maximum of twice the upper nominal value.

When the measurand is not between its lower and upper nominal values, the transducer shall not, under any conditions, for example over-current or under-voltage, produce an output having a value between its lower and upper nominal values.

5.14 Limiting conditions of operation

The limits of the nominal ranges of use given in Clause 6 are those within which the transducer will comply with the requirements of this document. It is possible to operate transducers beyond these limits but the user should note that

- the accuracy may not be maintained, and/or
- the designed operational lifetime may be reduced.

As an example, many transducers will operate in ambient temperatures as low as $-25\text{ }^{\circ}\text{C}$ and as high as $+70\text{ }^{\circ}\text{C}$ but the manufacturer should be consulted as to the degradation to be expected in both accuracy and operational lifetime.

5.15 Limits of the measuring range

When the limits of the measuring range do not coincide with the lower and upper nominal values of the output, the limits of the measuring range shall be marked – see 7.1 i).

5.16 Limiting conditions for storage and transport

Unless otherwise stated by the manufacturer, transducers shall be capable of withstanding, without damage, exposure to temperatures within the range $-40\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$.

After returning to reference conditions, they shall meet the requirements of this document.

The manufacturer shall specify any additional limiting condition required to ensure the integrity of the transducer.

5.17 Sealing

When the transducer is sealed to prevent unauthorized adjustment, access to the internal circuit and to the components within the case shall not be possible without destroying the seal.

5.18 Stability

Transducers shall comply with the relevant limits of intrinsic error specified for their respective accuracy classes for a period specified by the manufacturer, provided that the conditions of use, transport and storage specified by the manufacturer are complied with.

NOTE Usually, the period will be below one year.

6 Tests for TRD1

6.1 General

6.1.1 Determination of variations

The variations shall be determined for each influence quantity. During the tests, all other influence quantities shall be maintained at reference conditions.

All the influence quantities are given in 6.1 to 6.23, together with the appropriate testing procedure, computations and the permissible variations for each usage group expressed as a percentage of the class index. None of the variations determined shall exceed the permissible values.

Variations shall be determined at the upper nominal value of the output and, at least, at one other point. For apparent power, active power and reactive power transducers, these values shall be obtained by maintaining the voltage and power factor at their reference conditions and varying the value of the current.

When a reference range is specified, the influence quantity shall be varied between each of the limits of the reference range and any value in that part of the nominal range of use which is adjacent to the chosen limit of the reference range.

6.1.2 Environmental conditions

The conditions of temperature and humidity are classified according to the severity dictated by the usage group in accordance with Table 6.

Table 6 – Usage groups

	K55 class of transducer	K70 class of transducer	Kx ^b class of transducer
Usage group	I	II	III
Rated operating range (with specified uncertainty)	–5 °C to +55 °C	–25 °C to +70 °C	Above +70 °C and/or under –25 °C ^a
Limit range of operation (no hardware failures)	–5 °C to +55 °C	–25 °C to +70 °C	Above +70 °C and/or under –25 °C ^a
Limit range for storage and shipping	–25 °C to +70 °C	–40 °C to +85 °C	According to manufacturer specification ^a
^a Limits ~~are to~~ shall be defined by manufacturer according to the application.			
^b Kx stands for extended conditions.			

For the purpose of this document, ambient temperature shall be the temperature measured at a single representative point with the transducer operating normally. This measuring point shall be adjacent to the transducer, exposed to free air circulation and not significantly affected by heat from the transducer or by direct solar radiation and other sources of heat.

Humidity is not considered to be an influence quantity provided that the environmental conditions are within the limits specified.

6.1.3 Computations

In 6.2 to 6.22, a computation is required according to a formula. The terms in the formulae follow a general principle:

- R is the value of the output signal under reference conditions;
- X (or Y) is the value of the output signal measured at one extreme of the influence quantity;
- F is the fiducial value.

NOTE For curves F (see 5.8) replace in all the following formula F by R .

6.2 Variations due to auxiliary supply voltage

6.2.1 Application

All transducers requiring a DC or an AC auxiliary supply except where this is obtained from the input voltage or current and the connections cannot be separated for testing purposes.

6.2.2 Procedure

Apply the nominal value of auxiliary supply voltage and record the value of the output signal (R).

At a constant value of the measurand, reduce the auxiliary supply voltage to the lower limit given in 6.2.4 and record the value of the output signal (X). Increase the auxiliary supply voltage to the upper limit given in 6.2.4 and record the value of the output signal (Y).

6.2.3 Computation

The variations are: $\frac{X-R}{F} \times 100$

and: $\frac{Y-R}{F} \times 100$

Permissible variations

For AC auxiliary supplies, Table 7 applies.

Table 7 – Permissible variations due to AC auxiliary supply

Usage group	Nominal range of use %	Variation % of class index
I	90 to 110	50
II	80 to 120	50
III	80 to 120	50

For DC auxiliary supplies, Table 8 applies.

Table 8 – Permissible variations due to DC auxiliary supply

Usage group	Nominal range of use %	Variation % of class index
I	85 to 125	50
II	85 to 125	50
III	85 to 125	50

6.3 Variations due to auxiliary supply frequency

6.3.1 Application

All transducers requiring an AC auxiliary supply except where this is obtained from the input voltage or current and the connections cannot be separated for testing purposes.

6.3.2 Procedure

Apply the nominal value of auxiliary supply frequency and record the value of the output signal (R). At a constant value of the measurand, reduce the auxiliary supply frequency to the lower limit given in 6.3.4 and record the value of the output signal (X).

Increase the auxiliary supply frequency to the upper limit given in 6.3.4 and record the value of the output signal (Y).

6.3.3 Computation

The variations are: $\frac{X-R}{F} \times 100$

and:
$$\frac{Y-R}{F} \times 100$$

6.3.4 Permissible variations

Table 9 applies.

Table 9 – Permissible variations due to auxiliary supply frequency

Usage group	Nominal range of use %	Variation % of class index
I	90 to 110	50
II	90 to 110	50
III	90 to 110	50

6.4 Variations due to ambient temperature

6.4.1 Application

All transducers.

6.4.2 Procedure

At a constant value of the measurand and at reference temperature, record the value of the output signal (R).

Increase the ambient temperature to the upper limit given in 6.4.4 and allow sufficient time for conditions to stabilize (30 min is usually adequate). Record the value of the output signal (X).

Reduce the ambient temperature to the lower limit given in 6.4.4 and allow the same stabilization to take place. Record the **stabilization time** and the value of the output signal (Y).

6.4.3 Computation

The variations are:
$$\frac{X-R}{F} \times 100$$

and:
$$\frac{Y-R}{F} \times 100$$

6.4.4 Permissible variations

Table 10 applies.

Table 10 – Permissible variations due to ambient temperature

Usage group	Nominal range of use °C	Variation % of class index
I	10 to 35	100
II	0 to 45	100
III	–10 to 55	100

6.5 Variations due to the frequency of the input quantity(ies)

6.5.1 Application

All transducers except frequency transducers. Frequency sensitive transducers (e.g. those employing phase shifting circuits) are exceptions and the nominal range of use shall always be marked.

6.5.2 Procedure

Apply the nominal value of the input frequency and record the value of the output signal (R).

At a constant value of the measurand, reduce the frequency to the lower limit given in 6.5.4 and record the value of the output signal (X).

Increase the frequency to the upper limit given in 6.5.4 and record the value of the output signal (Y).

6.5.3 Computation

The variations are: $\frac{X-R}{F} \times 100$

and: $\frac{Y-R}{F} \times 100$

6.5.4 Permissible variations

Table 11 applies.

Table 11 – Permissible variations due to the frequency of input quantity

Usage group	Nominal range of use %	Variation % of class index
I	90 to 110	100
II	90 to 110	100
III	90 to 110	100
Frequency sensitive	As marked	100

6.6 Variations due to the input voltage

6.6.1 Application

All transducers except voltage and current transducers.

6.6.2 Procedure

Apply the nominal value of the input voltage and record the value of the output signal (R).

At a constant value of the measurand, reduce the voltage to the lower limit given in 6.6.4 and record the value of the output signal (X).

Increase the voltage to the upper limit given in 6.6.4 and record the value of the output signal (Y).

6.6.3 Computation

The variations are: $\frac{X-R}{F} \times 100$

and: $\frac{Y-R}{F} \times 100$

6.6.4 Permissible variations

Table 12 applies.

Table 12 – Permissible variations due to the input voltage

Usage group	Nominal range of use %	Variation % of class index
I	90 to 110	50
II	80 to 120	50
III	80 to 120	50

6.7 Variations due to the input current

6.7.1 Application

Phase angle and power factor transducers.

6.7.2 Procedure

Apply the nominal value of the input current and record the value of the output signal (R).

At a constant value of the measurand, reduce the input current to the lower limit given in 6.7.4 and record the value of the output signal (X).

Increase the input current to the upper limit given in 6.7.4 and record the value of the output signal (Y).

6.7.3 Computation

The variations are: $\frac{X-R}{F} \times 100$

and: $\frac{Y-R}{F} \times 100$

6.7.4 Permissible variations

Table 13 applies.

Table 13 – Permissible variations due to the input current

Usage group	Nominal range of use %	Variation % of class index
I	20 to 120	100
II	20 to 120	100
III	20 to 120	100

6.8 Variations due to power factor

6.8.1 Application

Apparent, active and reactive power transducers.

6.8.2 Procedure

Apply respectively 50 % (5 %) of the nominal value of the input current at a power factor of 1,0 and record the two values of the output signal (R). At a constant value of the measurand, increase the input current to 100 % (10 %) of the nominal value and reduce the power factor to 0,5 lag/lead, respectively. Record the two values of the output signal (X).

For convenience, when testing the reactive power transducers, it is usual to apply the equivalent values of $\sin \varphi$.

Active power transducers shall also be tested for error at a power factor of zero and reactive power transducers at a $\sin \varphi = 0$.

6.8.3 Computation

The variations are: $\frac{X - R}{F} \times 100$

and: $\frac{Y - R}{F} \times 100$

6.8.4 Permissible variations

Table 14 applies.

Table 14 – Permissible variations due to power factor

Usage group	Nominal range of use	Variation % of class index
I	Cos (sin) $\varphi = 0,5 \dots 1 \dots 0,5$	50
II	Cos (sin) $\varphi = 0,5 \dots 1 \dots 0,5$	50
III	Cos (sin) $\varphi = 0,5 \dots 1 \dots 0,5$	50

For all transducers, the error at a power factor of zero (or $\sin \varphi = 0$) shall not exceed 100 % of the class index.

6.9 Variation due to output load

6.9.1 Application

All variable output load transducers.

6.9.2 Procedure

Apply a value of output load equal to the mean value of the nominal range and record the value of the output signal (R).

At a constant value of the measurand, reduce the resistance of the output load to the lower limit given in 6.9.4 and record the value of the output signal (X).

Increase the resistance of the output load to the upper limit given in 6.9.4 and record the value of the output signal (Y).

6.9.3 Computation

The variations are: $\frac{X - R}{F} \times 100$

and: $\frac{Y - R}{F} \times 100$

6.9.4 Permissible variations

Table 15 applies.

Table 15 – Permissible variations due to output load

Usage group	Nominal range of use %	Variation % of class index
I	10 to 100	50
II	10 to 100	50
III	10 to 100	50

6.10 Variations due to distortion of the input quantity(ies)

6.10.1 Application

All transducers characterized by the manufacturer for use on systems having distorted waveforms, except harmonics transducers.

6.10.2 Procedure

Apply the chosen value of input quantity with no distortion and record the value of the output signal (R). Introduce third harmonic distortion at the level given in 6.10.4, maintaining the RMS values constant, and record the value of the output signal (X). The phase relationship between the harmonic and the fundamental should be varied so as to determine the most unfavourable conditions.

For apparent, active and reactive power transducers, the test is performed with distorted current waveform and then repeated with distorted voltage waveform.

For apparent active and reactive power transducers not employing phase shifters, the permissible variations are given in 6.10.4.

For reactive power transducers employing phase shifters, the permissible variations shall be specified by the manufacturer.

6.10.3 Computation

The variation is: $\frac{X-R}{F} \times 100$

6.10.4 Permissible variations

Table 16 applies.

Table 16 – Permissible variations due to distortion of input quantities

Usage group	Nominal range of use	Variation % of class index
I	Distortion factor 0,2	200
II	Distortion factor 0,2	200
III	Distortion factor 0,2	200

6.11 Variation due to magnetic field of external origin

6.11.1 Application

All transducers.

6.11.2 Procedure

The transducer is placed in the centre of a coil of 1 m mean diameter, of square cross section and of radial thickness small compared with the diameter ~~(see Note)~~. Other devices which produce an adequate homogeneous magnetic field in the absence of the transducer under test are also permissible. 400 ampere-turns in this coil will produce, at the centre of the coil, in the absence of the transducer under test, a magnetic field strength of 0,4 kA/m. The magnetic field shall be produced by a current of the same kind and frequency as that which energizes the measuring circuit and shall be such as to have the most unfavourable combination of phase and orientation. The values of AC fields are expressed in RMS values.

Any transducer having an external dimension exceeding 250 mm shall be tested in a coil of mean diameter not less than four times the maximum dimensions of the transducer. The magnetic field strength being the same as that given above.

~~NOTE – Other devices which produce an adequate homogeneous magnetic field in the absence of the transducer under test are also permissible.~~

In the absence of the external field, record the value of the output signal (R).

At a constant value of the measurand, apply the external field and record the value of the output signal (X).

6.11.3 Computation

The variation is: $\frac{X-R}{F} \times 100$

6.11.4 Permissible variations

Table 17 applies.

Table 17 – Permissible variations due to magnetic field of external origin

Usage group	Variation % of class index
I	100
II	100
III	100

6.12 Variation due to unbalanced currents

6.12.1 Application

Multi-element apparent, active and reactive power transducers.

6.12.2 Procedure

The currents shall be balanced and adjusted so that the output signal is approximately in the middle of the span or, if zero output signal is within the span, half-way between zero and the upper nominal value of the output signal. Record the value of the output signal (R).

Disconnect one current, maintaining the voltages balanced and symmetrical, and adjust the other currents, maintaining them equal, so as to restore the initial value of the measurand.

Record the value of the output signal (X).

6.12.3 Computation

The variation is: $\frac{X - R}{F} \times 100$

6.12.4 Permissible variations

Table 18 applies.

Table 18 – Permissible variations due to unbalance currents

Usage group	Variation % of class index
I	100
II	100
III	100

6.13 Variation due to interaction between measuring elements

6.13.1 Application

All multi-element apparent, active power and reactive power transducers except those employing two measuring elements for measuring three-phase four-wired unbalanced power with three current circuits (sometimes known as "two and a half elements") and those reactive power transducers using cross-connection methods.

6.13.2 Procedure

The voltage input of one measuring circuit alone shall be energized at nominal voltage. The current input of each of the other measuring circuits shall be energized in turn at nominal current. The maximum departure of the output signal (X) from that corresponding to zero of the measurand shall be noted whilst the phase angle between the voltage and currents is changed through 360°.

If the auxiliary supply is common to one of the voltage input circuits, this circuit shall be the one to which the voltage is applied.

6.13.3 Computation

The variation is: $\frac{X}{F} \times 100$

6.13.4 Permissible variations

Table 19 applies.

Table 19 – Permissible variations due to interactions between measuring elements

Usage group	Variation % of class index
I	50
II	50
III	50

6.14 Variation due to self-heating

6.14.1 Application

All transducers.

6.14.2 Method

The transducer shall be at ambient temperature and shall have been disconnected for at least 4 h. Energize the transducer in accordance with ~~4.5.4 (except for the condition of "30 min" as specified in Table 2)~~ reference conditions defined in Table 4 and Table 5.

After 1 min and before the third minute, determine the value of the output signal (X). Repeat this procedure between the 30th and 35th minute after energization (R).

6.14.3 Computation

The variation is: $\frac{X - R}{F} \times 100$

6.14.4 Permissible variations

Table 20 applies.

Table 20 – Permissible variations due to self-heating

Usage group	Variation % of class index
I	100
II	100
III	100

6.15 Variation due to continuous operation

6.15.1 Application

All transducers.

6.15.2 Procedure

Energize the transducer under reference conditions for at least the preconditioning period. Record the value of the output (R). After a convenient period of continuous operation, for example 6 h, note the value of the output (X).

6.15.3 Computation

The variation is: $\frac{X-R}{F} \times 100$

6.15.4 Permissible variation

A variation is allowed but the transducer shall continue to comply in all respects with the requirements appropriate to its accuracy class.

6.16 Variation due to common mode interference

6.16.1 Application

All transducers having an analogue output signal.

6.16.2 Procedure

At a constant value of the measurand near the upper nominal value, record the value of the output signal (R). Apply a voltage of 100 V RMS, at 45 Hz to 65 Hz, between either output terminal and earth. Record the value of the output signal (X).

6.16.3 Computation

The variation is: $\frac{X-R}{F} \times 100$

6.16.4 Permissible variations

Table 21 applies.

Table 21 – Permissible variations due to continuous operation

Usage group	Variation % of class index
I	100
II	100
III	100

6.17 Variation due to series mode interference

6.17.1 Application

All transducers having an analogue current output signal.

6.17.2 Procedure

At a constant value of the measurand near the upper nominal value and with the compliance voltage at 80 % of the maximum value, record the value of the output signal (R).

Apply a voltage of 1 V RMS at 45 Hz to 65 Hz, in series with the output signal. Record the value of the output signal (X).

NOTE The internal DC resistance of the source of the series-mode interference, if excessive, ~~may~~ can influence the test results, especially for the fixed output load transducers.

6.17.3 Computation

The variation is: $\frac{X - R}{F} \times 100$

6.17.4 Permissible variations

Table 22 applies.

Table 22 – Permissible variations due to series mode interference

Usage group	Variation % of class index
I	100
II	100
III	100

6.18 Permissible excessive inputs

6.18.1 General

After completion of the tests described in 6.18.2 and 6.18.3 and after having regained equilibrium with the reference value of the ambient temperature, the transducer shall comply with the requirements appropriate to its class index.

6.18.2 Continuous excessive inputs

The transducer shall withstand the application of excessive inputs simultaneously for 24 h.

- Voltage inputs, including auxiliary supplies, shall be subjected to 120 % of the nominal value of the voltage.

b) Current inputs shall be subjected to 120 % of the nominal value of the current.

6.18.3 Excessive inputs of short duration

The tests shall be made under reference conditions. The excessive input amplitudes of short duration which shall be applied to transducers are:

- a) for voltage inputs: 200 % of the nominal value of the measured voltage applied for 1 s and repeated 10 times at 10 s intervals;
- b) for current inputs: 20 times the nominal value of the measured current applied for 1 s and repeated 5 times at 300 s intervals.

The test circuit shall be substantially non-reactive.

After testing, the intrinsic characteristics of the transducer shall be unchanged.

6.19 Voltage test, insulation tests and other safety requirements

The requirements for the voltage test and other safety requirements are included in IEC 61010-1:2010 to which reference shall be made.

6.20 Impulse voltage tests

6.20.1 A peak test voltage of 5 kV in both positive and negative senses, having the standardized impulse waveform of 1,2/50 μ s, shall be applied to transducers as follows:

- between the earth terminal and all the other terminals connected together;
- between the terminals of each circuit in turn, all other circuits being earthed.

Three positive and three negative impulses shall be applied at intervals of not less than 5 s. Any flashover (capacitance discharge) shall be considered a criterion of failure unless occurring in a component designed for such.

For further details of the impulse voltage test, reference ~~shall~~ should be made to IEC 61010-1:2010 and IEC 61010-2-030:2017.

6.20.2 After completion of the impulse voltage test, the transducer shall comply with the requirements appropriate to its class index.

6.20.3 Auxiliary circuits with a reference voltage of over 40 V shall be subjected to the impulse voltage test under the same conditions as those already given for the other circuits.

6.21 High frequency disturbance test

See IEC 61326 (all parts).

6.22 Test for temperature rise

The transducer shall be energized as follows:

- each current circuit shall carry a current of 1,1 times the nominal current;
- each voltage circuit shall be supplied with a voltage of 1,2 times the nominal voltage.

These conditions shall be maintained for at least 2 h. During the test, the transducer shall not be exposed to forced ventilation nor to direct solar radiation.

The temperature rise of the following parts of the transducer shall not exceed:

- for input circuits: 60 K;

- for the exterior surface: 25 K.

6.23 Other tests

If, by agreement, other tests are required, ~~refer to~~ the following publications shall apply:

- for vibration: IEC 60068-2-6;
- for shock: IEC 60068-2-27;
- for electromagnetic compatibility: IEC 61326-1:2020.

7 Marking and information for TRD1

7.1 Marking on the case

Transducers shall bear, on (or visible through) one of the external surfaces of the case, the markings listed below. The markings shall be legible and indelible. The symbols referred to below are specified in Table 24.

- Manufacturer's name or mark.
- Manufacturer's type designation.
- Serial number or date code.
- Software version (version of software that reside in the transducer – if any for digital transducers only).
- Class index (symbol E-10 or E-11).
- Nature of the measurand and number of circuits (symbol B-2, B-4 or B-6 to B-10).
- Lower and upper nominal values of the measurand.
- Ratios of current transformers and voltage transformers, if any, with which the transducer is intended to be used.
- Range of values of the output current (voltage) and output load within which specified operation is obtained (analogue signals only).
- Limits of the measuring range, if appropriate (see 5.9).
- Serial number(s) of the associated equipment, if applicable.
- Value(s) of the auxiliary supply, if relevant.
- Symbol showing that some other essential information is given in a separate document (symbol F-33).
- Space for adjustment data (if appropriate).
- Nominal range of use for temperature, symbolized as usage group I, II or III.
- Common mode voltage.
- Overvoltage category (see IEC 61010 (all parts).
- Pollution degree according to IEC 61010 (all parts).
- Other required safety symbols according to IEC 61010-1:2010.

If the markings and symbols are on an easily removable part, such as a cover, the transducer shall have a serial number which shall also be marked on the body of the transducer.

Transducers having a non-linear relationship between input and output shall be marked with the symbol F-33, and actual relationship between input and output shall be given in a separate document.

NOTE To be given if there is sufficient space on the case, otherwise to be given in a separate document.

7.2 Markings relating to the reference conditions and nominal ranges of use for transducers

7.2.1 The reference values (or ranges) and nominal ranges of use, if different from those given in Table 3 and Table 4 and Clause 6, shall be marked on the transducer or given in a separate document.

7.2.2 When a reference value or a reference range is marked, it shall be identified by underlining.

Table 23 shows the significance of the various markings, for example for temperature.

Table 23 – Examples of marking relating to the reference conditions and nominal range of use for temperature

Example	Meaning
-5 ... <u>23</u> ... 55 °C	Conforms to group I
-25 ... <u>15</u> ... <u>30</u> ... 70 °C	Conforms to group II
-35 ... <u>0</u> ... <u>45</u> ... 75 °C	Conforms to group III
0 ... <u>25</u> ... 40 °C	Reference value: 25 °C Nominal range of use: 0 °C to 40 °C
-5 ... <u>20</u> ... <u>30</u> ... 35 °C	Reference range: 20 °C to 30 °C Nominal range of use: -5 °C to 35 °C
Three or four numbers shall always be used.	

7.3 Identification of connections and terminals

If so required for the correct use of the transducer, a diagram or table of connections shall be supplied and the terminals shall be clearly marked to show the proper method of connection.

If a terminal of a measuring circuit is intended to be kept at, or near to earth (ground) potential (for example, for safety or functional reasons), it shall either be marked with a capital N if it is intended to be connected to the neutral conductor of an AC supply circuit, or it shall be marked with symbol F-45 (see Table 24) in all other circumstances.







The earthing terminal(s) shall be marked using symbol(s) F-31 and/or F-42 to F-45, as appropriate.

7.4 Information to be given in a separate document

The following information shall be given in the document supplied with the transducer:

- response time;
- the variation due to a magnetic field of external origin;
- the actual relationship between input and output (see required indications according type of curves given in 5.3 for output current transfer functions).

Table 24 – Symbols for marking transducers

No.	Item	Symbol
B Nature of input quantity(ies) and number of measuring circuits		
B-1	~~IEC 60417-5031: Direct current; D.C. circuit (for auxiliary supply only)~~	
B-2	~~IEC 60417-5032: Alternating current; A.C. circuit (single phase)~~	
B-3	~~D.C. and a.c. circuit~~	
B-4	~~IEC 60417-5032-1: Three phase alternating current; Three phase a.c. circuit (general symbol)~~	
B-6	~~One measuring element for three wire network~~	
B-7	~~IEC 60417-5032-2: Three phase alternating current with neutral conductor; One measuring element for four wire network~~	
B-8	~~Two measuring elements for three wire network with unbalanced load~~	
B-9	~~Two measuring elements for four wire network with unbalanced load~~	
B-10	~~Three measuring elements for four wire network with unbalanced load~~	
C Safety (see IEC 61010-1)		
E Accuracy class		
E-10	~~Class index (e.g. 1) when the fiducial value corresponds to the span~~	
E-11	~~Class index (e.g. 0,5) when the fiducial value corresponds to half the span~~	
F General symbols		
F-31	~~IEC 60417-5017: Earth; ground; Earth (ground) terminal (general symbol)~~	
F-33	~~ISO 7000-0434A: Caution; Caution~~	
F-42	~~IEC 60417-5020: Frame or chassis; Frame or chassis terminal~~	
F-43	~~IEC 60417-5019: Protective earth; protective ground; Protective earth (ground) terminal~~	
F-44	~~IEC 60417-5018: Functional earthing; functional grounding (US); Functional earth terminal~~	
F-45	~~Measuring circuit earth (ground) terminal~~	

F-46	~~IEC 60417-5005: Plus; positive polarity;~~ ~~Positive terminal~~	
F-47	~~IEC 60417-5006: Minus; negative polarity;~~ ~~Negative terminal~~	