

INTERNATIONAL STANDARD



Optical fibres – Part 1-22: Measurement methods and test procedures – Length measurement



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2024 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.



IEC 60793-1-22

Edition 2.0 2024-06
COMMENTED VERSION

INTERNATIONAL STANDARD



**Optical fibres –
Part 1-22: Measurement methods and test procedures – Length measurement**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.10

ISBN 978-2-8322-9346-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	5
INTRODUCTION	7
1 Scope	8
2 Normative references	8
3 Terms, definitions, and abbreviated terms	8
3.1 Terms and definitions	8
3.2 Abbreviated terms	8
4 Overview of method	9
4.1 General	9
4.2 Method A – Delay measuring	9
4.3 Method B – Backscattering	9
4.4 Method C – Fibre elongation	9
4.5 Method D – Mechanical length	10
4.6 Method E – Phase shift	10
4.7 Reference test method	10
5 Apparatus	10
6 Sampling and specimens	10
7 Procedure	10
8 Calculations	10
9 Results	10
10 Specification information	11
Annex A (normative) Requirements specific to method A – Delay measuring	12
A.1 General	12
A.2 Principle	12
A.3 Apparatus	12
A.3.1 Two techniques	12
A.3.2 Optical source	13
A.3.3 Optical detector	14
A.4 Procedure	14
A.4.1 Calibration	14
A.4.2 Average group index value	14
A.4.3 Length measurement	14
A.5 Calculations	15
A.5.1 General	15
A.5.2 Transmitted-pulse technique	15
A.5.3 Reflected-pulse technique	16
A.6 Results	16
Annex B (normative) Requirements specific to method B – Backscattering	17
B.1 General	17
B.2 Apparatus	17
B.2.1 General	17
B.2.2 Optical transmitter	17
B.2.3 Launch conditions	18
B.2.4 Optical coupler or splitter	18
B.2.5 Optical receiver	18

B.2.6	Pulse duration and repetition rate	18
B.2.7	Signal processor.....	18
B.2.8	Display.....	18
B.2.9	Data interface (optional)	18
B.2.10	Reflection controller (optional)	18
B.2.11	Splices and connectors.....	19
B.3	Sampling and specimens	19
B.4	Procedure	19
B.4.1	Three techniques.....	19
B.4.2	Procedure common to all three techniques	19
B.4.3	Procedures specific to each technique	20
B.4.4	Determination of group index	22
B.5	Results.....	23
Annex C (normative)	Requirements specific to method C – Fibre elongation	24
C.1	Principle.....	24
C.2	Apparatus.....	24
C.2.1	General requirements	24
C.2.2	Optical measurement equipment.....	25
C.2.3	Instrument resolution	25
C.3	Procedure	26
C.3.1	Calibration	26
C.3.2	Specimen Sample measurement	26
C.4	Results.....	27
Annex D (normative)	Requirements specific to method D – Mechanical length	28
D.1	Principle.....	28
D.2	Apparatus.....	28
D.3	Procedure	28
D.3.1	Calibration	28
D.3.2	Operation.....	28
Annex E (normative)	Requirements specific to method E – Phase shift	29
E.1	General.....	29
E.2	Apparatus.....	29
E.2.1	General.....	29
E.2.2	Light source	29
E.2.3	Modulator.....	29
E.2.4	Launch optics.....	30
E.2.5	Signal detector and signal detection electronics	30
E.2.6	Reference signal	30
E.2.7	Computation equipment.....	31
E.3	Sampling and specimens	31
E.4	Procedure	31
E.4.1	Selection of starting frequency.....	31
E.4.2	Selection of maximum frequency.....	31
E.4.3	Phase measurement performance.....	31
E.4.4	Measurement of length of test fibre	32
E.5	Calculation and interpretation of results.....	32
E.5.1	Determination of test fibre length	33
E.6	Group index.....	33
E.6.1	Introduction General.....	33

E.6.2	Cut-back method	33
E.6.3	Substitution method	33
Annex F (informative)	Brillouin frequency shift test method	35
F.1	General	35
F.2	Principle	35
F.3	Apparatus	36
F.3.1	General requirements	36
F.3.2	Optical measurement equipment	36
F.3.3	Instrument resolution	37
F.4	Procedure	38
F.4.1	Calibration	38
F.4.2	Sample measurement	38
F.5	Results	40
Bibliography		41
List of comments		42
Figure A.1	– Time measurement of the transmitted pulse	13
Figure A.2	– Time measurement of the reflected pulse	13
Figure A.3	– Principle of fibre-length measurement	15
Figure B.1	– Block diagram of an OTDR	17
Figure B.2	– Schematic OTDR trace of a specimen sample (z_1 to z_0) with a section (e.g. dead-zone fibre) of unknown length, z_1 , preceding it and without a reflection pulse from the fibre joint point (two-point technique (B.4.3.1))	21
Figure B.3	– Schematic OTDR trace of a specimen sample (z_1 to z_2) with a section (e.g. dead-zone fibre) of unknown length, z_1 , preceding it and with a reflection pulse from the fibre joint point (two-point technique (B.4.3.1))	21
Figure B.4	– Schematic trace of a specimen sample (0 to z_2) with no section preceding it (single-point technique 0 (B.4.3.2))	22
Figure B.5	– Schematic OTDR trace of a specimen sample (z_D to z_2) with a section (e.g. dead-zone fibre) of known length, z_D , preceding it (single-point technique 1 (B.4.3.3))	22
Figure C.1	– Equipment set-up for phase-shift technique (C.2.2.2)	25
Figure C.2	– Equipment set-up for differential pulse-delay technique (C.2.2.3)	26
Figure E.1	– Apparatus for fibre length measurement	34
Figure F.1	– Equipment setup for BOTDR technique	37
Figure F.2	– Equipment setup for BOTDR technique	37
Figure F.3	– Differential strain recorded during a pulling test over a 100 m of cable	39
Figure F.4	– Absolute strain profile recorded during a pulling test over a 100 m of cable	39
Table 1	– Measurement methods	9

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL FIBRES –

**Part 1-22: Measurement methods and test procedures –
Length measurement**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

This commented version (CMV) of the official standard IEC 60793-1-22:2024 edition 2.0 allows the user to identify the changes made to the previous IEC 60793-1-22:2001 edition 1.0. Furthermore, comments from IEC SC 86A experts are provided to explain the reasons of the most relevant changes, or to clarify any part of the content.

A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text. Experts' comments are identified by a blue-background number. Mouse over a number to display a pop-up note with the comment.

This publication contains the CMV and the official standard. The full list of comments is available at the end of the CMV.

IEC 60793-1-22 has been prepared by subcommittee 86A: Fibres and cables, of IEC technical committee 86: Fibre optics. It is an International Standard.

This second edition cancels and replaces the first edition published in 2001. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Inclusion of category C single mode fibres in Table 1;
- b) Inclusion of a new informative Annex F on Brillouin frequency shift test method to determine the tensile strain applied to a fibre.

The text of this International Standard is based on the following documents:

Draft	Report on voting
86A/2456/FDIS	86A/2474/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 60793 series, published under the general title *Optical fibres*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

Publications in the IEC 60793-1 series concern measurement methods and test procedures as they apply to optical fibres.

Within the same series several different areas are grouped, as follows:

• ~~parts 1-10 to 1-19: General~~

- IEC 60793-1-20 to IEC 60793-1-29: *Measurement methods and test procedures for dimensions*
- IEC 60793-1-30 to IEC 60793-1-39: *Measurement methods and test procedures for mechanical characteristics*
- IEC 60793-1-40 to IEC 60793-1-49: *Measurement methods and test procedures for transmission and optical characteristics*
- IEC 60793-1-50 to IEC 60793-1-59: *Measurement methods and test procedures for environmental characteristics.*
- IEC 60793-1-60 to IEC 60793-1-69: *Measurement methods and test procedures for polarization-maintaining fibres.*

IEC 60793-1-2X consists of the following parts, under the general title: Optical fibres:

- Part 1-20: Measurement methods and test procedures – Fibre geometry
- Part 1-21: Measurement methods and test procedures – Coating geometry
- Part 1-22: Measurement methods and test procedures – Length measurement

OPTICAL FIBRES –

Part 1-22: Measurement methods and test procedures – Length measurement

1 Scope

This part of IEC 60793 establishes uniform requirements for measuring the length and elongation of optical fibre (typically within cable).

The length of an optical fibre is ~~one of the most~~ a fundamental values ~~and shall be known~~ for the evaluation of transmission characteristics such as losses and bandwidths.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-40, *Optical fibres – Part 1-40: Attenuation measurement methods* ~~and test procedures~~ *Attenuation*

IEC 60793-1-42, *Optical fibres – Part 1-42: Measurement methods and test procedures – Chromatic dispersion*

~~IEC 60794-1-1, Optical fibre cables – Part 1-1: Generic specification – General~~

3 Terms, definitions, and abbreviated terms

3.1 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.2 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply.

BOTDA	Brillouin optical time domain analysis
BOTDR	Brillouin optical time domain reflectometry
FWHM	full-width half-maximum
OTDR	optical time domain reflectometer
RMSW	root-mean-squared width
RTM	reference test method

4 Overview of method

4.1 General

This document gives five methods for measuring length, which are presented in Table 1.

Table 1 – Measurement methods

Method	Characteristics covered	Fibre categories covered	Former designation
A Delay measuring	Length	All A1, B, and all B C 1	IEC 60793-1 A6
B Backscattering	Length	All A1, B, and all B C	IEC 60793-1 C4C
C Fibre elongation ^a	Fibre elongation ^c	A1, B1 ^b , and C	IEC 60793-1 A7
D Mechanical	Length	All	IEC 60793-1 A5
E Phase shift	Length	All A1, B, and all B C	IEC 60793-1 A8
<p>^a The measurement of fibre elongation, method C, is part of several measurement methods for fibres and fibre optic cables, such as those used in IEC 60794-1-1.</p> <p>^b This measurement is applicable unreservedly to type B single-mode fibres. For type A1 multimode fibres, take particular care when interpreting the results because the results of this measurement may can be influenced by interfering modal effects, for example, due to the occurrence of non-longitudinal stresses on the fibre. Application of the measurement to A2 to A4 multimode fibres is under consideration.</p> <p>^c Informative Annex F has been added to determine the tensile strain applied to a fibre. It uses Brillouin reflectometry (BOTDR) or so-called Brillouin analysis (BOTDA), which are single-sided and double-sided methods respectively.</p>			

Information common to all measurements is contained in Clause 2 to Clause 8. Information on specific application appears in Annex A, Annex B, Annex C, Annex D, and Annex E for methods A, B, C, D and E, respectively.

4.2 Method A – Delay measuring

The delay measuring method applies to measurements of the fibre length by the measurement of the propagation time of an optical pulse or a pulse train based on a known value of the group index of the fibre.

Alternatively, this method is suitable for measuring the group index of a fibre of known length. Therefore, in practice this fibre length measurement method is calibrated against a known length of fibre of the same type.

4.3 Method B – Backscattering

The backscattering method, which is a single-sided measurement, uses an optical time domain reflectometer (OTDR), and measures the optical power backscattered from different points in the fibre to the beginning of the fibre.

4.4 Method C – Fibre elongation

This measurement method describes a procedure for determining the fibre elongation. It does not measure absolute strain, but instead measures the changes in strain from one loading condition to another.

4.5 Method D – Mechanical length

This measurement method describes a procedure for determining the fibre length by winding a fibre around a fixed diameter calibrated wheel that rotates. The length is determined by the number of revolutions of the wheel.

4.6 Method E – Phase shift

The phase shift method describes a procedure for determining the fibre length. The length is determined from the phase shift that occurs when a predetermined modulation frequency $f_{\max}$ is applied.

4.7 Reference test method

The reference test method (RTM), which shall be the one used to settle disputes, varies depending on whether the fibre is cabled or not, such as

- uncabled fibre: method D;
- length of fibre within cable: method B;
- elongation of fibre within cable: method C;
- elongation of uncabled fibre: method C.

5 Apparatus

Annex A, Annex B, Annex C, Annex D, and Annex E include layout drawings and other equipment requirements for each of the methods A, B, C, D and E, respectively.

6 Sampling ~~and specimens~~ 2

See the appropriate Annex A, Annex B, Annex C, Annex D or Annex E for specific requirements. General requirements follow.

Prepare a flat end face, perpendicular to the fibre axis, at the input and output ends of each ~~specimen~~ sample for measurements based on optical delay measurements.

7 Procedure

See the appropriate Annex A, Annex B, Annex C, Annex D or Annex E for specific requirements.

8 Calculations

See the appropriate Annex A, Annex B, Annex C, Annex D or Annex E for specific requirements.

9 Results

The following information shall be provided with each measurement:

- date and title of measurement;
- identification and description of ~~specimen~~ sample, including whether fibre or cable;
- ~~specimen~~ sample length, or elongation;
- measurement method used: A, B, C, D or E;

- other results, as required by the appropriate Annex A, Annex B, Annex C, Annex D or Annex E.

The following information shall be available upon request:

- description of measurement apparatus arrangement;
- type and wavelength of measurement source;
- launch conditions;
- details of computation technique;
- date of latest calibration of equipment.

See Annex A, Annex B, Annex C, Annex D and Annex E for any additional information that shall be available upon request.

10 Specification information

The detail specification shall specify the following information:

- type of fibre (or cable) to be measured;
- failure or acceptance criteria;
- information to be reported;
- deviations to the procedure that apply.

Annex A (normative)

Requirements specific to method A – Delay measuring

A.1 General

Use this method to measure the length of optical fibre by itself or installed in cable. If the ~~specimen~~ sample is a fibre in a cable, determine the value of group index N under conditions applicable to the ~~specimen~~ sample under measurement (for example, tension, temperature). This is done by inverting Formula (A.1) and the measurements on a ~~specimen~~ sample with a known length.

A.2 Principle

An optical pulse travelling through an optical fibre with length L and average group index N experiences a ~~travelling/delay time~~ time delay, Δt :

$$\Delta t = \frac{NL}{C} \quad (\text{A.1})$$

where

Δt is the time delay;

N is the average group index;

C is the velocity of light in vacuum.

If N is known, the measurement of Δt gives L . On the other hand, the measurement of Δt gives the value of N when L is known.

A.3 Apparatus


A.3.1 Two techniques

There are two techniques for measuring the propagation time of an optical pulse:

- time measurement of the transmitted pulse (Δt measured);
- time measurement of the reflected pulse ($2\Delta t$ measured).


See Figure A.1 and Figure A.2 for two different arrangements corresponding to the two techniques applying a sampling oscilloscope.

Instead of the sampling oscilloscope, backscattering equipment, or a counter with separate start-stop gate and averaging capability (e.g. at least 10^4 counts), can be used.

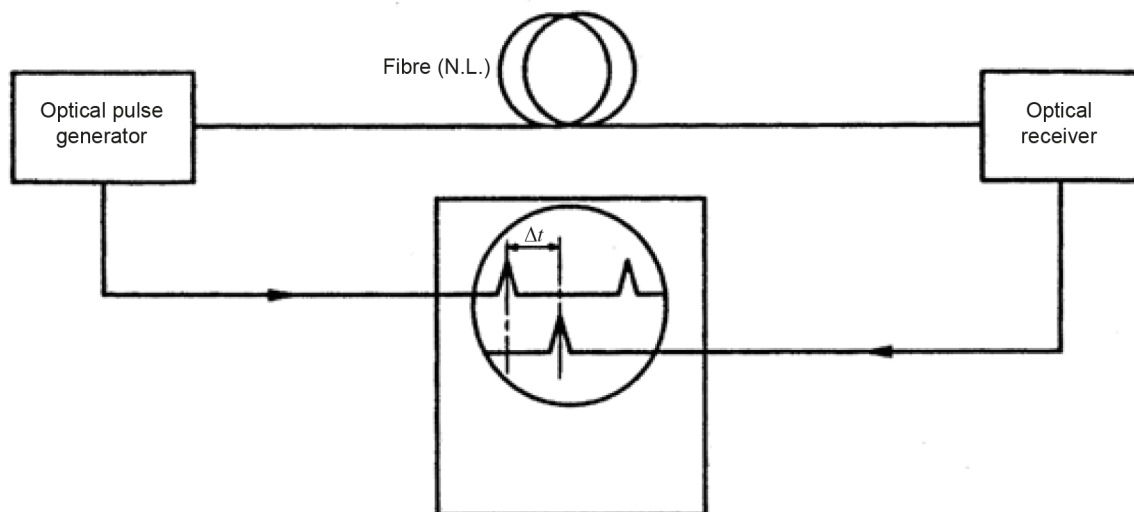

IEC

Figure A.1 – Time measurement of the transmitted pulse

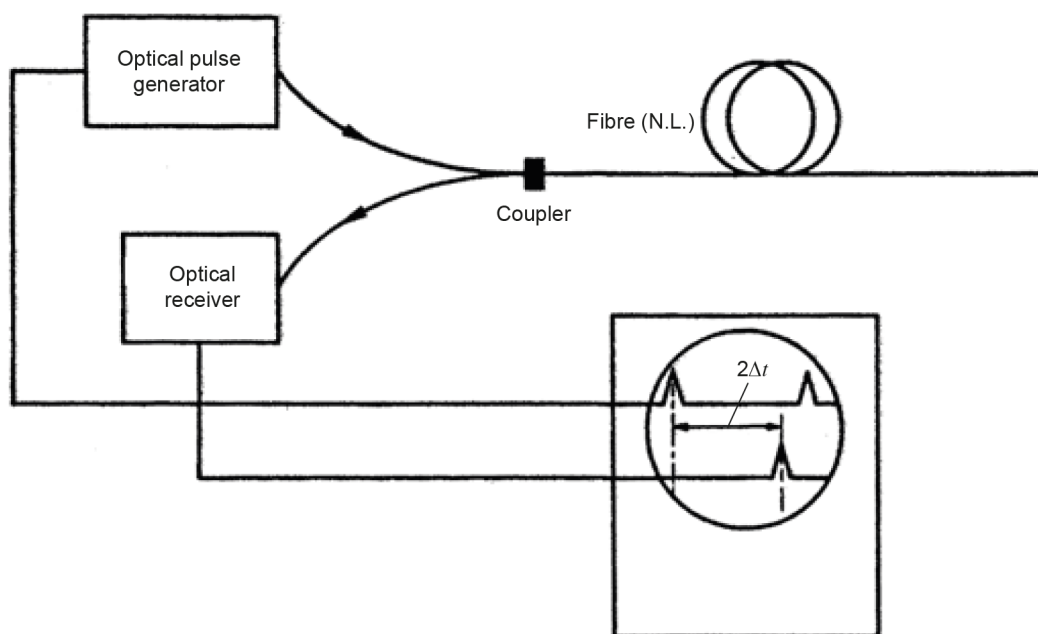

IEC

Figure A.2 – Time measurement of the reflected pulse

A.3.2 Optical source

A.3.2.1 Measurement with the sampling oscilloscope

An optical pulse generator shall ~~preferably~~ be a high-power laser diode, excited by an electrical pulse train generator, tunable in frequency and width. Record the wavelength and the spectral width.

A.3.2.2 Measurement with a counter or a backscattering apparatus

An optical pulse generator shall ~~preferably~~ be a high-power laser diode, excited by an electrical pulse train generator, tunable in width. The time between two pulses shall be longer than the travelling time of the transmitted pulse (Δt , with counter) or the reflected pulse ($2\Delta t$, with backscattering equipment). Record the wavelength and the spectral width of the laser diode.

A.3.3 Optical detector

The receiver shall ~~preferably~~ be a high-speed avalanche photodiode. The sensitivity of the optical detector ~~shall be sufficient~~ at the measuring wavelength, and its bandwidth shall ~~be large enough so as not to~~ not influence the shape of the pulse.

A.4 Procedure

A.4.1 Calibration

Measure the delay time of the optical source to the launching point (this is the delay time of the measurement apparatus itself).


A.4.2 Average group index value

On a known length of mechanically measured fibre, the measurement of Δt , gives the average value, N , of the group index of the fibre.


A.4.3 Length measurement

The length measurement is a time-domain reading on the screen of an oscilloscope (or the reading of the averaged travelling time on the display of an electronic counter to be corrected for the calibration value).


NOTE See Figure A.3 for an illustration of an important practical improvement for achieving the accuracy of the measurement, independent of the actual length of the fibre ~~specimen~~ sample. This uses a dual-channel approach.

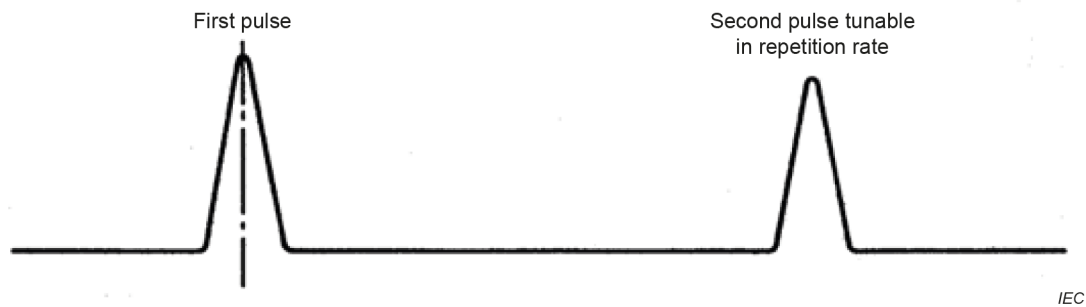

a) Channel 1: emitted pulse

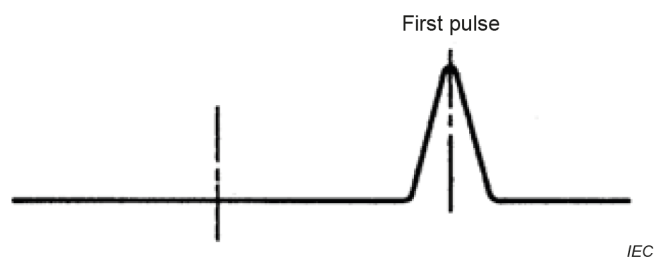

b) Channel 2: transmitted pulse

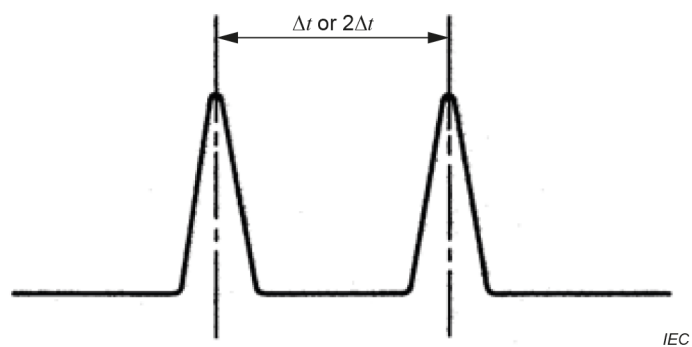

c) Emitted pulse after adjustment of the repetition rate in such a way that the second pulse of channel 1 coincides with the transmitted pulse of channel 2

Figure A.3 – Principle of fibre-length measurement

A.5 Calculations

A.5.1 General

Obtain the fibre length from one of the following formulae:

A.5.2 Transmitted-pulse technique

$$L = \frac{\Delta t \times c}{N} \quad (\text{A.2})$$

A.5.3 Reflected-pulse technique

$$L = \frac{\Delta t \times c}{2N} \quad (\text{A.3})$$

where

L is the fibre length, in m;

Δt is the transmission or reflection time, in ns;

c is the light velocity in vacuum, in m/ns;

N is the average group index.

A.6 Results

In addition to the results in Clause 9, the following information ~~shall~~ can be available upon request:

- average group index;
- delay time of the measurement apparatus ~~(optional)~~;
- transmission or reflection time ~~(optional)~~.

Annex B (normative)

Requirements specific to method B – Backscattering


B.1 General

This method uses an OTDR to measure the length of optical fibre by itself and installed in cable.

B.2 Apparatus

B.2.1 General

This method uses an optical time-domain reflectometer (OTDR), which shall normally consist of the following minimum list of components. See Figure B.1 for a block diagram.

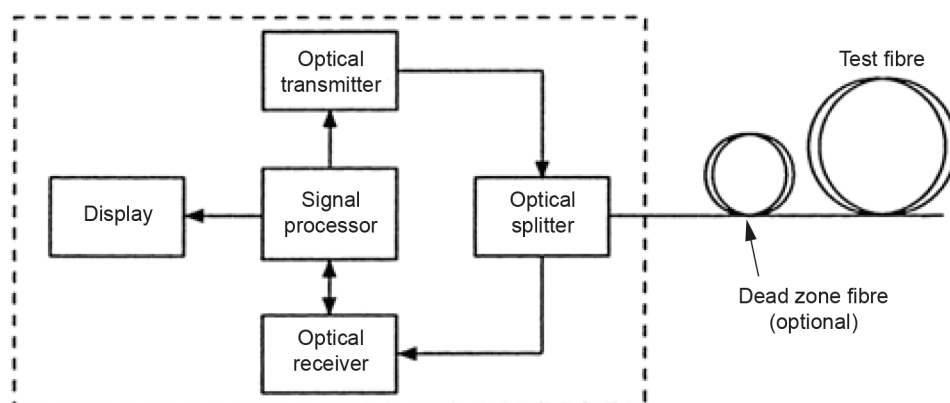

IEC

Figure B.1 – Block diagram of an OTDR

B.2.2 Optical transmitter

B.2.2.1 This usually includes one or more pulsed laser diode sources capable of one or more pulse durations and pulse repetition rates. Unless otherwise specified in the detail specification, the spectrum for each wavelength shall satisfy the following.

B.2.2.2 The ~~central~~ centroidal wavelength **3** shall lie within 15 nm of the specified value; report the difference between the ~~central~~ centroidal wavelength and the specified value if it is greater than 10 nm.

B.2.2.3 The root-mean-squared width (RMSW) shall not exceed 10 nm, or the full-width at half maximum (FWHM) shall not exceed 25 nm.

B.2.2.4 If the data are to be used in a spectral attenuation model:

- the spectral width shall not exceed 15 nm (FWHM) or 6 nm (RMS) for wavelengths in the water peak region (e.g. 1 360 nm to 1 430 nm);
- report the actual ~~central~~ centroidal wavelength to within 2 nm of the actual value.

B.2.3 Launch conditions

Provide a means for connecting the test fibre (or the optional dead-zone fibre of B.2.10) to the instrument panel, or to a fibre pigtail from the source.

For type A fibre, optical sources ~~may not~~ can produce launch conditions that are neither well controlled nor appropriate for this measurement method. Therefore, unless otherwise specified in the detail specification, launch conditions for attenuation measurements shall be those used in cut-back attenuation measurements (IEC 60793-1-40 method A).

B.2.4 Optical coupler or splitter

A coupler ~~or~~ splitter within the instrument directs the power from the transmitter into the fibre. It also directs light returning in the fibre from the opposite direction to the receiver.

B.2.5 Optical receiver

This usually includes a photodiode detector having a bandwidth, sensitivity, linearity and dynamic range compatible with the pulse durations used and signal levels received.

B.2.6 Pulse duration and repetition rate

The OTDR ~~may~~ can be provided a choice of several pulse durations and repetition rates (sometimes coupled to the distance control) to optimize the trade-off between resolution and range. With a high amplitude reflection, it ~~may~~ can be necessary to set the rate or range to a value exceeding twice the distance of the reflection in order to prevent spurious 'ghost' images. Pulse coding techniques ~~may~~ can also be used.

NOTE Care should be taken when selecting the pulse duration, repetition rate and source power. For shorter distance measurements, short pulse durations are necessary to provide adequate resolution. This in turn will limit dynamic range and maximum measurable length. For long length measurements, the dynamic range can be increased by increasing the peak optical power up to a level below which non-linear effects are insignificant. Alternatively, pulse width can be increased, which will reduce the resolution of the measurements.

B.2.7 Signal processor

If required, the signal-to-noise level ~~may~~ can be increased using signal averaging over a longer measurement time.

B.2.8 Display

This is incorporated into the OTDR and is part of the equipment controlling the OTDR. The OTDR signal is displayed in a graphical form with the vertical scale as decibels and the horizontal scale as distance. The vertical decibel scale shall correspond to half the round-trip of the backscatter loss. The horizontal scale shall correspond to half the associated (round-trip) optical group delay, converted to distance. Tools such as cursors ~~may~~ can be used to manually or automatically measure all or part of the OTDR trace on the display.

B.2.9 Data interface (optional)

The instrument ~~may~~ can be capable of interfacing with a computer for automatic analysis of the signal or for providing a hard copy of the display trace.

B.2.10 Reflection controller (optional)

Means of minimizing transient saturation of the receiver due to high Fresnel reflections ~~may~~ can be required to reduce the length of fibre "dead zone" following each reflector. This can be incorporated into the coupler ~~or~~ splitter or ~~may~~ can be done by electronic masking. To overcome the initial reflection at the OTDR connector, a dead-zone fibre (with a length in metres numerically exceeding one-tenth the displayed pulse duration in nanoseconds) ~~may~~ can be used between the OTDR connector and the ~~specimen~~ sample.

B.2.11 Splices and connectors

Unless otherwise indicated in this procedure, any splices or connectors required by the OTDR (e.g. to join the OTDR or the dead-zone fibre to the test fibre) shall have low insertion loss and reflectance (high return loss). This is to minimize extraneous effects upon the OTDR trace of interest.

B.3 Sampling ~~and specimens~~

The sample comprises a fibre on a reel or within a cable, under conditions specified in the detail specification. The measurement ~~may can~~ be performed in the factory or in the field, upon either single or concatenated sections.

NOTE ~~Care should be taken to~~ Ensure that winding does not introduce substantial elongation for length measurements.

B.4 Procedure

B.4.1 Three techniques

There are three techniques:

- two-point technique (B.4.3.1), to use when a fibre or cable section of unknown length precedes the test fibre or cable;
- single-point technique 0 (B.4.3.2), to use with no preceding section of fibre or cable;
- single-point technique 1 (B.4.3.3), to use with a preceding section of fibre of known length and similar group index as the fibre to be measured.

NOTE For cable measurement, it is important to note that, due to the structure of most cables, there is an excess length of fibre in the cable. Because of this, the cable group index exceeds the fibre group index for the same fibre type. This will lead to discrepancy between the fibre length in the cable and the cable length itself.

B.4.2 Procedure common to all three techniques

B.4.2.1 Connect the ~~specimen~~ sample either to the instrument or to one end of the dead-zone fibre (if used). Connect the other end of the dead-zone fibre (if used) to the instrument.

B.4.2.2 Because accurate distances are to be recorded, the effective group delay index of the ~~specimen~~ sample is required. If this value is not known, use the method described in B.4.4 to determine it.

B.4.2.3 Enter OTDR parameters such as source wavelength, pulse duration, length range and signal averaging into the instrument, along with the ~~specimen~~ sample group index. The values of some of these parameters ~~may can~~ be preset in the instrument.

B.4.2.4 Adjust the instrument to display a backscatter signal from the ~~specimen~~ sample. It ~~may can~~ be advantageous to begin with coarse vertical and horizontal scaling to maximize the length displayed.

B.4.2.5 If increased resolution is necessary, adjust the graphical display, if possible, to expand the section of interest to a larger scale (exercising care to ensure that proper readings of the true signal can still be distinguished from the noise points).

B.4.3 Procedures specific to each technique

B.4.3.1 Two-point technique

B.4.3.1.1 Place a cursor at the beginning of the trace of the ~~specimen~~ sample prior to any power drop-off (which ~~may~~ can be difficult to do) (Figure B.2), or at a point (which ~~may~~ can be specified by the manufacturer) on the rising edge of the reflection pulse (Figure B.3). If the beginning is not apparent because of minimal discontinuity, apply a tight bend at this location and vary the radius to assist in cursor placement. Obtain the distance coordinate, z_1 , via the alphanumeric display.

B.4.3.1.2 Place the same or another cursor at the end of the trace of the ~~specimen~~ sample at a point similar to that in B.4.3.1.1. If the end is not apparent due to minimal discontinuity, apply a tight bend at this location and vary the radius to assist in cursor placement. Alternatively, cleave the fibre far-end, if possible, to produce a reflection there. If the end is below the noise floor, the length measurement ~~may~~ can have a maximum error equal to the pulse length. Obtain the distance co-ordinate, z_2 .

B.4.3.1.3 For maximum length accuracy, the nature of the drop-off or rise-time points at z_1 and z_2 should be similar. Obtain the ~~specimen~~ sample length, $(z_2 - z_1)$.

B.4.3.2 Single-point technique 0

B.4.3.2.1 Use this method when no fibre or cable section (or dead-zone fibre) precedes the ~~specimen~~ sample. See Figure B.4.

B.4.3.2.2 Place a cursor at the end of the trace of the ~~specimen~~ sample prior to any power drop-off (which ~~may~~ can be difficult to do), or at a point (which ~~may~~ can be specified by the manufacturer) on the rising edge of the reflection pulse. If the end is not apparent because of minimal discontinuity, apply a tight bend at this location and vary the radius to assist in cursor placement. If the end is below the noise floor, the length measurement ~~may~~ can have a maximum error equal to the pulse length.

Alternatively, cleave the fibre far-end, if possible, to produce a reflection there. Obtain the distance coordinate, z_2 .

B.4.3.2.3 The ~~specimen~~ sample length equals z_2 .


B.4.3.3 Single-point technique 1

B.4.3.3.1 Use this method when a fibre or cable section (or a dead-zone fibre) of known length, z_D , precedes the ~~specimen~~ sample. See Figure B.5. The length ~~may~~ can be obtained by mechanical measurement, for example by using contact-type devices with counters.

NOTE—The fibre used in the preceding section (or dead-zone fibre) should have a similar group index as the ~~specimen~~ sample.


B.4.3.3.2 Perform the steps of B.4.3.2.2.

B.4.3.3.3 The ~~specimen~~ sample length equals $(z_2 - z_D)$.

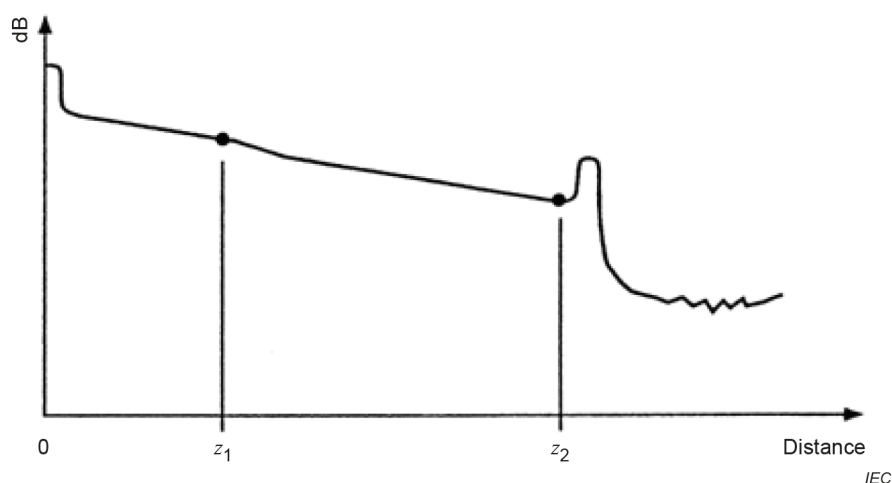

NOTE An example of the section of unknown length is dead-zone fibre

Figure B.2 – Schematic OTDR trace of a ~~specimen~~ sample (z_1 to z_0) with a section ~~(e.g. dead-zone fibre)~~ of unknown length, z_1 , preceding it and without a reflection pulse from the fibre joint point (two-point technique (B.4.3.1))

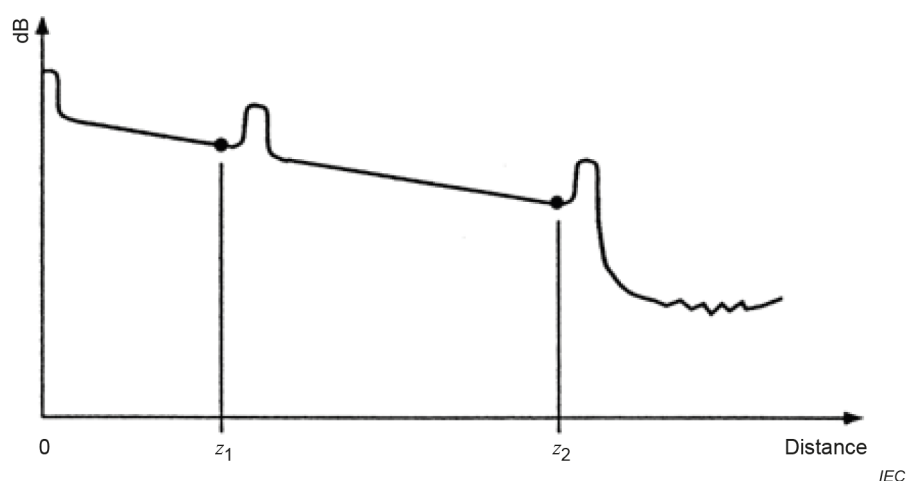

NOTE An example of the section of unknown length is dead-zone fibre

Figure B.3 – Schematic OTDR trace of ~~specimen~~ sample (z_1 to z_2) with a section ~~(e.g. dead-zone fibre)~~ of unknown length, z_1 , preceding it and with a reflection pulse from the fibre joint point (two-point technique (B.4.3.1))


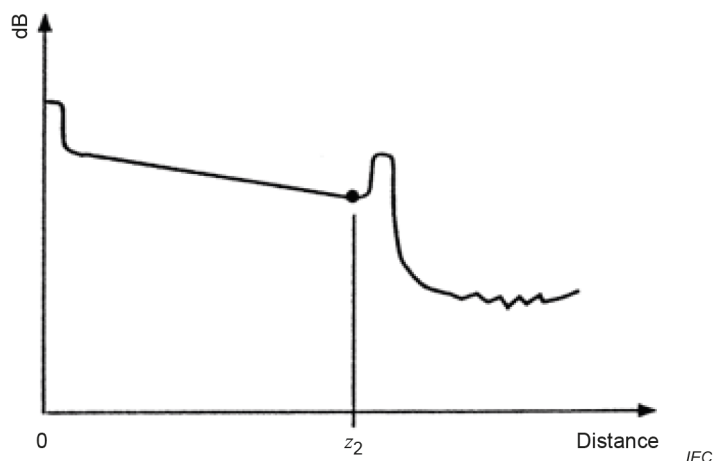


Figure B.4 – Schematic trace of a ~~specimen~~ sample (0 to z_2) with no section preceding it (single-point technique 0 (B.4.3.2))

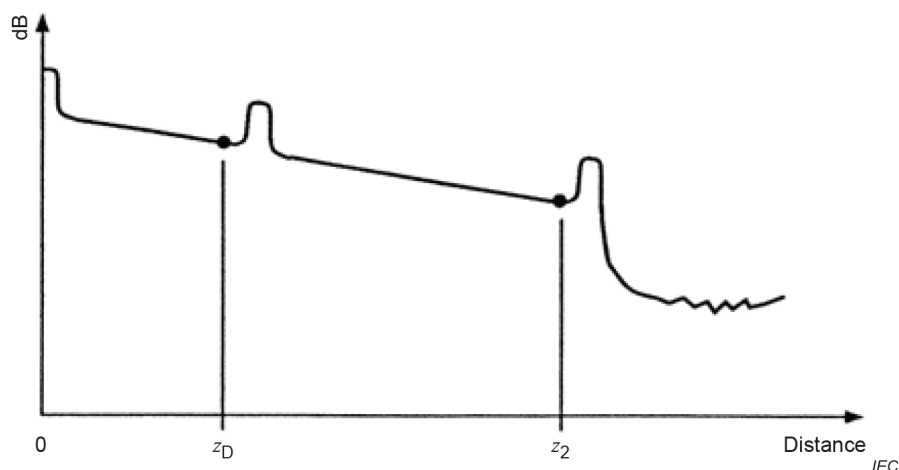

NOTE an example of the section of unknown length is dead-zone fibre

Figure B.5 – Schematic OTDR trace of a ~~specimen~~ sample (z_D to z_2) with a section (~~e.g., dead-zone fibre~~) of known length, z_D , preceding it (single-point technique 1 (B.4.3.3))

B.4.4 Determination of group index

B.4.4.1 Accurately determine the physical length of the calibration fibre or cable. This ~~may~~ ~~can~~ be done by mechanical measurement, for example by using contact-type devices with counters.

B.4.4.2 Perform the steps given in B.4.2.1 for the calibration fibre or cable.

B.4.4.3 Perform the steps given in B.4.2.3, but with an arbitrary group index.

B.4.4.4 Place one cursor at the beginning of the trace as indicated in B.4.3.1.1. Obtain the distance coordinate, z_1 , via the alphanumeric display.

B.4.4.5 Place another cursor at the end of the trace as indicated in B.4.3.1.2. Obtain the distance coordinate, z_2 .

B.4.4.6 Adjust the group index scale until the difference, $(z_2 - z_1)$, which ~~may~~ can be automatically calculated by the instrument, equals the length determined in B.4.4.1.

B.5 Results

In addition to the results in Clause 9, the following information shall be available upon request:

- group index.

Annex C (normative)

Requirements specific to method C – Fibre elongation

C.1 Principle

Derive the fibre elongation by the phase shift technique (C.2.2.1), or by the differential pulse delay (C.2.2.2).

The fibre elongation strain, $\varepsilon = \Delta L/L$, is given by:

$$\varepsilon = V \times \frac{\Delta t}{L} \quad (\text{C.1})$$

where

Δt is the differential pulse delay;

L is the ~~specimen~~ sample fibre length;

V is a constant that depends on the photoelastic coefficient (k), the speed of light in a vacuum (c), and the group index of refraction (N_{eff}).

$$V = \frac{kc}{N_{\text{eff}}} \quad (\text{C.2})$$

The factor, V , corrects the results for changes in the fibre's refractive index with strain.

When using the phase-shift technique (C.2.2.1), derive the differential delay, Δt , from:

$$\Delta t = \frac{\Delta\theta}{360 \times f} \quad (\text{C.3})$$

where

$\Delta\theta$ is the phase shift (degrees);

f is the modulation frequency.

Because the factor, V , depends on the fibre type, the measurement set-up shall be calibrated.

C.2 Apparatus

C.2.1 General requirements

The measurement fixture of known gauge length shall be capable of applying and varying longitudinal stresses on the cable or fibre. Observe the proper fixing of the ends of the ~~specimen~~ sample to prevent the fibres from slipping during loading. Provide a suitable elongation bench for the calibration of the phase-shift or pulse-delay versus the mechanically measured fibre elongation.

C.2.2 Optical measurement equipment

C.2.2.1 General

The equipment for either technique, phase shift technique or differential pulse delay, should be stable over the measurement time period and temperature range encountered. See Figure C.1 and Figure C.2, respectively, for diagrams of typical equipment set-ups.

C.2.2.2 Phase-shift technique

Use a light source (either a laser diode or filtered light-emitting diode), modulator, launch optics, signal detector and reference signal for measuring chromatic dispersion using the phase-shift technique. These pieces of equipment are outlined and specified in method A of IEC 60793-1-42. The difference is that only one laser diode is used. The phase shifts observed are a function of strain changes on the fibre.

~~NOTE Care should be exercised in observing~~ Ensure that 360° phase-shift roll-over ambiguities of the phase meter are accounted for when using this method.


C.2.2.3 Pulse-delay (time of flight) technique

Use equipment required for an appropriate time-of-flight measurement technique, such as a short-pulse/~~Fresnel~~ optical time domain reflectometer (OTDR).

C.2.3 Instrument resolution


The strain measurement resolution of the entire measurement system should be equal to or less than 0,01 %. This includes the optical measurement equipment (modulation frequency or pulse width, etc.) and the measurement fixture (~~specimen~~ sample gauge length, cable/ or fibre end fixers, load measurement, etc.). Since all these factors are involved in determining the entire measurement system's accuracy and resolution, each measurement bench should be evaluated separately.

This measurement procedure is intended to be conducted at ambient room conditions typically found in laboratories. This method is feasible under other conditions, provided the temperature is stable to ± 2 °C for the duration of the test. For extreme temperature and pressure changes (more than 40 atmospheres), corrections ~~may~~ can be necessary, particularly regarding the V factor.

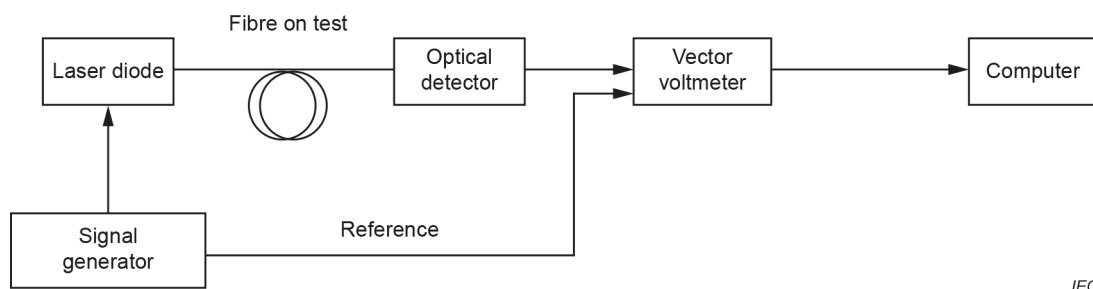

IEC

Figure C.1 – Equipment set-up for phase-shift technique (C.2.2.2)

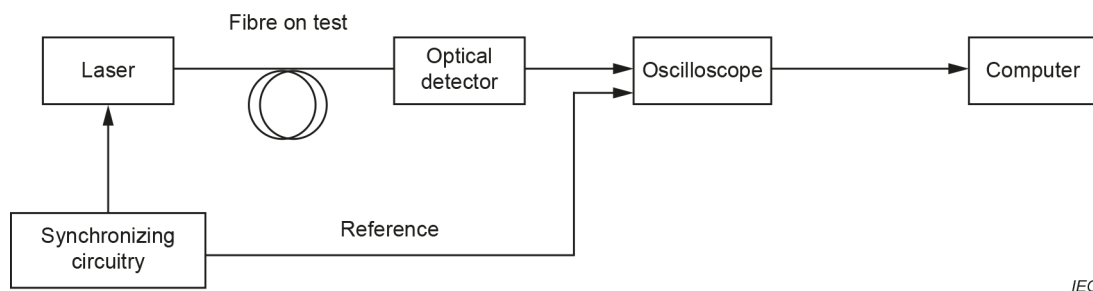

IEC

Figure C.2 – Equipment set-up for differential pulse-delay technique (C.2.2.3)

C.3 Procedure

C.3.1 Calibration

Install the reference fibre on the elongation bench and connect it to the optical measurement apparatus.

Progressively increase the fibre elongation within a known range of elongation that is sufficiently linear to determine the factor, V .

Measure and record, preferably continuously, the phase shift or pulse delay as a function of the mechanical fibre elongation.

The relation thus determined accounts for the strain-induced changes of the group index.

NOTE 1—It is recommended that the operator carry out the calibration with a random selection of fibre samples of the same type.

NOTE 2—It is not necessary to repeat this calibration before each fibre elongation measurement, if the same type of fibre (design and manufacturer) is used.

C.3.2 ~~Specimen~~ Sample measurement

Take either a phase reading in degrees or time-delay reading for the reference condition (typically ambient conditions). Record the reference value. Longitudinally strain the ~~specimen~~ sample to the specified load. After the applied load is stabilized, repeat the measurement procedures and record either the strained phase value or length value. Repeat these steps for any additional load conditions. Upon releasing the applied load, take a final measurement to ensure that the applied fibre strain has returned to its original reference condition.

NOTE—Perform a single-end measurement using one of the techniques shown below. If the phase-shift technique is used, the phase should be continuously recorded while applying the load to account for 360° phase-shift roll-overs.

- For a cable under test, form an optical path by two fibres that are connected at the far end. However, due to the averaging effect of the strains on the two fibres, take particular care when interpreting the results.
- Insert, at the near end, a suitable directional coupler connected, on one side, to the optical source and to the detector, and, on the other side, to the fibre under test. Then measure the phase shift or pulse delay between the input signal and the signal reflected from the far end. The cleaved fibre far end face shall be clean and perpendicular to maximize the reflected signal. Minimize other reflections (e.g. from the near end of the fibre).

In both cases, use a factor 2 to correct the collected phase-shift or pulse-delay data to take into account the double length of the optical path.

C.4 Results

In addition to the results in Clause 9, the following information shall be available upon request:

- load applied at each phase (or length) reading, and the calculated strain;
- type and frequency of modulator (phase-shift method).

Annex D (normative)

Requirements specific to method D – Mechanical length

D.1 Principle

This method of measuring fibre length is carried out by winding the fibre onto a spool. It ~~may~~ **can** be done on the draw, during the tensile-proof operation, or any other such winding process. During the process, the fibre engages with a fixed diameter calibrated wheel that rotates. The number of revolutions resulting from the winding process, multiplied by $\pi D/1\,000$, yields the length of the fibre in kilometres, where D is the diameter of the counting wheel, in metres.

D.2 Apparatus

Provide a wheel, or arrangement of wheels, so that the passage of fibre length through the assembly is linked to the counter wheel rotation in a linear fashion. Ensure that no slippage of the fibre relative to the surface of the counting wheel occurs.

The counter wheel shall be rigid, with a surface that is free of burrs or other features that can damage the fibre. Link the counter wheel with an electronic counter that ~~may~~ **can** optionally convert counts to length.

D.3 Procedure

D.3.1 Calibration

Calibrate the wheel by passing a fibre of known length (calibration fibre) through the winding process. This can correct for variations in wheel surface treatment or wheel machining.

Use surveying equipment to obtain length measurements on the calibration fibre. Use a fibre of a length that is long enough for the desired accuracy. When being measured, deploy it in a straight line and measure it at a temperature that is consistent with the operating temperature of the mechanical measurement device.

D.3.2 Operation

Reset the counter and initiate the winding process. At the completion of the winding process, note the count and convert to length.

~~NOTE—Care should be taken to~~ Ensure that winding does not introduce substantial elongation and that elongation conditions are the same during calibration.

Annex E (normative)

Requirements specific to method E – Phase shift

E.1 General

This test method uses the phase shift change in an optical fibre or cable when the frequency is increased to a predetermined modulation frequency $f_{\max}$. It ~~may~~ can be applied to fibre lengths typically in the range of less than 1 m to several kilometres for type A1 fibres and to several hundreds of kilometres for type B fibres.

E.2 Apparatus

E.2.1 General

A diagram of the measurement apparatus is shown in Figure E.1. The apparatus used in this measurement method ~~may~~ can also be configured to measure the chromatic dispersion of a fibre. Measurement of chromatic dispersion by the phase shift method is described in method A of IEC 60793-1-42.

E.2.2 Light source

Either a laser diode or a filtered light-emitting diode ~~may~~ can be used. The centre wavelength and modulated output phase shall be stable over the measurement time period at the bias current, modulation frequency and diode temperature range encountered.

The spectral width of the source at full-width half-maximum (FWHM) shall be less than or equal to 30 nm. This ~~may~~ can be achieved using a monochromator or optical filter, if necessary.

E.2.3 Modulator

Provide a means to modulate the intensity of the output of the optical source over a wide frequency range, typically from about 100 Hz up to a few gigahertz, to produce a waveform that has a single dominant Fourier component, such as a sine wave.

The choice of modulation frequency is determined by the maximum fibre length that is to be measured and the measurement precision that is required. To avoid ambiguities caused by 2π phase shifts, where there is more than one complete modulation cycle in the fibre, it is necessary to start with a low frequency and count the number of complete cycles as the frequency is slowly increased. It is important that the number of 2π phase shifts are counted unambiguously. The use of a higher frequency usually gives a more precise measurement of length. For a given fibre length L , in metres, the maximum starting frequency f_{start} , in hertz, is given by:

$$f_{\text{start}} \leq \frac{c}{N \times L} \quad (\text{E.1})$$

where

c is the velocity of light in a vacuum, in m/s;

N is the group index.

For example, for a length of 10 km a typical maximum value of f_{start} would be 20 kHz

Alternatively, if the starting frequency has already been chosen then the maximum length of fibre that can be measured ~~may~~ can be calculated from a re-arrangement of Formula (E.1).

The choice of upper frequency, the corresponding phase noise at this frequency and the uncertainty of the modulation frequency itself will determine the measurement resolution. For a minimum measurable phase change of $\Delta\phi$, in radians, the minimum resolvable length ΔL , in the absence of phase noise and frequency uncertainty, is given by:

$$\Delta L = \frac{\Delta\phi \times c}{f_{\max} \times N \times 2\pi} \quad (\text{E.2})$$

Note that the value of $\Delta\phi$ ~~may~~ can depend on the modulation frequency used.

Alternatively, for a given fibre length resolution, then the maximum frequency required ~~may~~ can be determined from a re-arrangement of Formula (E.2).

For example, for a phase resolution of 0,01 rad and a maximum frequency of 100 MHz, the length resolution would be approximately 3 mm.

E.2.4 Launch optics

Couple light from the source into the fibre under test by, for example, optically imaging the source onto the end of the test fibre or by direct butt coupling from a fibre pigtail that is coupled to the source. For type A1 fibres it is necessary to restrict the launch conditions to excite only low-order modes in the fibre, to minimize the effects of modal dispersion. This ~~may~~ can be achieved either by direct imaging of the source onto the end of the test fibre using an optical system in which the numerical aperture and the spot-size ~~may~~ can be restricted, or by direct coupling from a single-mode fibre pigtail which is positioned on the axis of the test fibre and in contact with it.

E.2.5 Signal detector and signal detection electronics

For signal detection use an optical detector that is sensitive at the wavelength of measurement, is stable over the duration of the measurement, and is linear over the intensity modulation range. An amplifier ~~may~~ can be used to increase detection sensitivity. Couple light from the test fibre onto the detector using, for example, direct imaging with lenses or a fibre pigtail that is directly coupled to the detector. For type A1 fibres it is necessary to collect only light from low-order modes in the test fibre. This ~~may~~ can be achieved by direct imaging onto the detector using an optical system in which the numerical aperture and the spot-size ~~may~~ can be restricted, or by direct coupling into a single-mode fibre pigtail which is positioned on the axis of the test fibre and in contact with it.

Use a phase-measuring instrument, such as a phase meter, vector voltmeter or network analyzer, that responds only to the fundamental Fourier component of the modulating signal to determine the phase of the detected light. Any phase shift that is introduced by the phase measuring system itself shall be constant for the duration of the measurement.

E.2.6 Reference signal

A reference signal is required by the phase meter, which has the same dominant Fourier component as the modulating signal, against which the phase of the output signal is measured. The reference signal shall be phase locked to the modulating signal. The reference signal ~~may~~ can be derived by either taking a direct electrical connection from the modulation source to the phase meter, or by using a detector coupled to an optical beam splitter or fibre coupler which is inserted between the source and the test fibre.

E.2.7 Computation equipment

A computer ~~may~~ can be used for the purposes of equipment control, data acquisition and numerical evaluation of data.

E.3 Sampling ~~and specimens~~

The test sample shall be a ~~fibre which may, or may not, be~~ cabled or non-cabled fibre. Typical fibre sample lengths are 1 m to hundreds of kilometres. The sample, launch optics and pigtails, if used, shall be fixed in position at a nominally constant temperature for the duration of the measurement. In the case of installed fibres and cables, the prevailing deployment and environmental conditions ~~may~~ can be used.

Either a phase calibration fibre of the same type as the fibre under test, (or the fibre pigtails, if used), is required to compensate for phase shifts that ~~may~~ can be introduced by the phase meter or internal optical path lengths. A typical length is 0 m to 2 m.

Prepare end faces for the input and output ends of the calibration fibre and test fibre, as appropriate for the requirements of E.2.3 and E.2.4.

E.4 Procedure

E.4.1 Selection of starting frequency

Select a suitably low modulation frequency f_{start} , determined using Formula (E.1). If the approximate length of the fibre is unknown then use the lowest available modulation frequency but exercise caution with respect to the possibility of 2π phase errors in the fibre.

E.4.2 Selection of maximum frequency

Select a suitable maximum frequency f_{max} , determined using Formula (E.2), for the required length resolution.

E.4.3 Phase measurement performance

Subclause E.4.3 applies to all length measurements made on the test fibre and the phase calibration fibre, and if required, during the determination of group index.

Starting at modulation frequency f_{start} increase the frequency, until f_{max} is reached, at a rate sufficient to allow the unambiguous determination of the number, m , of 2π phase shifts that occur. Measure the phase angle ϕ' at the output of the fibre at f_{max} .

Calculate the total phase angle ϕ as follows:

$$\phi = \phi' + m \times 2\pi \quad (\text{E.3})$$

E.4.4 Measurement of length of test fibre

E.4.4.1 Calibration of reference phase

Depending on whether fibre pigtails are used or not, calibrate the reference phase by following one of the two methods below:

- When pigtails are not used, couple one end of the phase calibration fibre (input) to the light source. Couple the other end (output) to the detection system. Measure the phase shift ϕ_{ref} according to E.4.3.
- When pigtails are used at both the launch and receive ends, these are connected to perform the reference phase measurement instead of using a separate phase calibration fibre. Measure the phase shift ϕ_{ref} according to E.4.3.

It is sometimes convenient to remove either the phase calibration fibre and/or the pigtails, or both, from the apparatus after the reference measurement has been made. This may can be done if the phase shift that occurred within either the phase calibration fibre and/or the pigtails, or both, is known and is subsequently added to the measured phase shift of the fibre under test, see E.4.4.2.

NOTE—It is not normally necessary to calibrate the reference phase before each measurement. The use of a stored reference value is permitted if it is understood that the presence of phase drift in the system may can degrade the measurement uncertainty.

E.4.4.2 Measurement of test fibre phase

Depending on whether fibre pigtails are used or not, measure the test fibre phase by following one of the two methods below.

- When pigtails are not used, uncouple the output of the phase calibration fibre from the detection system and couple it to one end of the fibre under test (input). Couple the other end (output) of the fibre under test to the detection system. Measure the phase shift ϕ_{sig} according to E.4.3 using the same value of f_{max} used E.4.4.1.
- When pigtails are used instead of a phase calibration fibre, disconnect the pigtails from each other and couple the free ends to the fibre under test. Measure the phase shift ϕ_{sig} according to E.4.3 using the same value of f_{max} used in E.4.4.1.

E.5 Calculation and interpretation of results

~~E.5.1 Determination of test fibre length~~

Calculate the length, L , of the test fibre as follows:

$$L = \frac{(\phi_{\text{sig}} - \phi_{\text{ref}}) \times c}{N \times f_{\text{max}} \times 2\pi} \quad (\text{E.4})$$

where

- L is in metres;
- $\phi_{\text{ref}}, \phi_{\text{sig}}$ are in radians;
- c is in metres per second;
- f_{max} is in hertz;
- N is the group index.

Note that ϕ_{ref} and ϕ_{sig} represent the total phase angle at the maximum frequency f_{max} used, including the total number of 2π phase shifts, see Formula (E.3).

NOTE The group index N ~~may~~ can be supplied by the fibre or cable manufacturer. The accuracy in measurement of length using this method largely depends on the certainty with which the group index is known. Group index values vary from fibre to fibre and ~~may~~ can also be temperature sensitive. Typical manufacturers' values have an uncertainty equivalent to 0,1 % in length measurement. If the group index is not known, then it ~~may~~ can be determined according to the procedure described in E.6.

E.6 Group index

E.6.1 ~~Introduction~~ General

To determine the value of group index it is necessary to measure the phase shift associated with a fibre of known length at the wavelength of measurement. This ~~may~~ can be performed either by cutting a known length of fibre from the output end of the test fibre, known as the cut-back method, described in E.6.2 or by connecting a fibre of known length, which is of the same class and type as the test fibre, to the apparatus in place of the test fibre, known as the substitution method, described in E.6.3.

NOTE Uncertainties due to non-linearities in the phase measurement system ~~may~~ can be minimized by choosing cut-back and substitution fibre lengths corresponding to approximately one 2π phase cycle of the modulation frequency. For example, at a maximum frequency f_{max} of 100 MHz this corresponds to a length of approximately 2 m.

E.6.2 Cut-back method

E.6.2.1 Couple one end (input) of the test fibre to the light source. Couple the other (output) end of the test fibre to the detection system. Measure the phase shift ϕ_{long} according to E.4.3.

E.6.2.2 From the output end of the test fibre, remove a short length of fibre L_{cut} typically 2 m to 3 m (see E.6.1). Re-prepare the new output end of the test fibre, which is now slightly shorter, and couple it to the detection system. Measure the phase shift ϕ_{short} according to E.4.3 using the same value of f_{max} that was used in E.6.2.1.

E.6.2.3 Measure the length of the fibre L_{cut} that was removed in E.6.2.2 using, for example, a calibrated metre rule. Note that the uncertainty in this measurement will proportionally affect the measurement uncertainty of the group index of the test fibre.

E.6.2.4 Calculate the group index using Formula:

$$N = \frac{(\phi_{\text{long}} - \phi_{\text{short}}) \times c}{L_{\text{cut}} \times f_{\text{max}} \times 2\pi} \quad (\text{E.5})$$

E.6.3 Substitution method

E.6.3.1 Couple one end (input) of the phase calibration fibre to the light source. Couple the other end (output) to the detection system. Measure the phase shift ϕ_{cal} according to E.4.3.

E.6.3.2 Uncouple the output of the phase calibration fibre from the detection system and couple a fibre of known length L_{sub} , typically 2 m to 3 m (see E.6.1), which is of the same class and type as the test fibre, between the output of the phase calibration fibre and the detection system. The length of this fibre ~~may~~ can be measured with, for example, a calibrated metre rule. Measure the phase shift ϕ_{sub} according to E.4.3 using the same value of f_{max} used in E.6.3.1.

E.6.3.3 Calculate the group index using Formula:

$$N = \frac{(\varphi_{\text{sub}} - \varphi_{\text{cal}}) \times c}{L_{\text{sub}} \times f_{\text{max}} \times 2\pi} \quad (\text{E.6})$$

The precision of the group index determination will affect the precision of the length as measured by phase shift method. Note, for very precise values, the group index value can vary from fibre to fibre, as well as with temperature and stress.

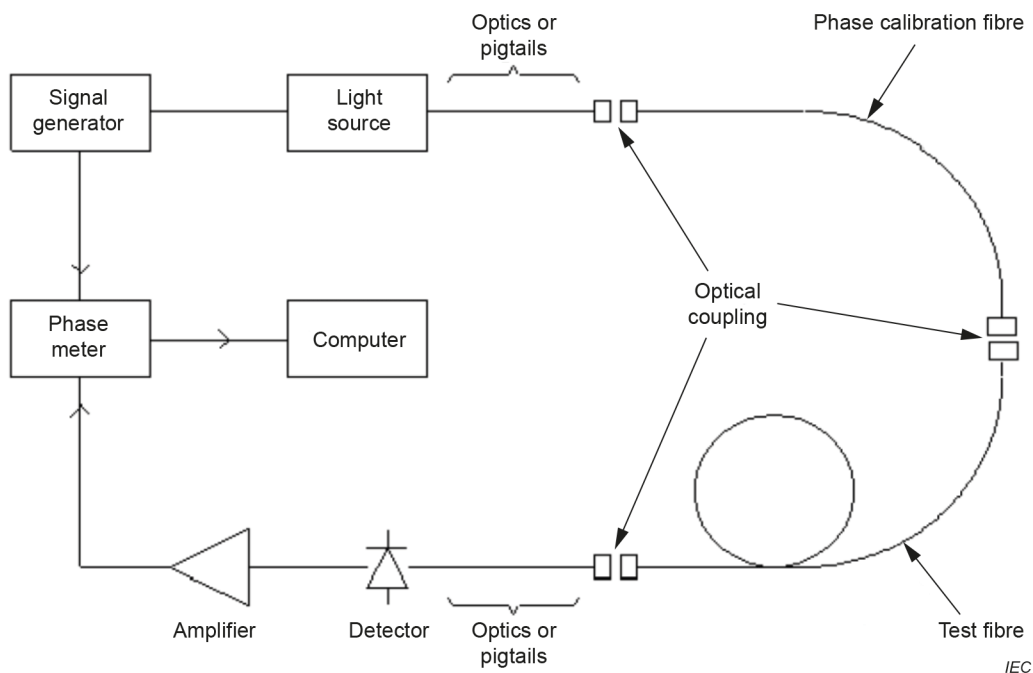


Figure E.1 – Apparatus for fibre length measurement

Annex F (informative)

Brillouin frequency shift test method 4

F.1 General

This Brillouin frequency shift method describes a procedure for determining the tensile strain applied to a fibre. It uses Brillouin reflectometry (BOTDR) or so-called Brillouin analysis (BOTDA), which are single-sided and double-sided methods respectively. A single distributed measurement of the Brillouin frequency shift gives access to distributed tensile strain, which can be absolute if one dispose of a strain-free portion. An absolute reading is essential to determine the initial state of a fibre prior to the pulling test, or for testing the state of a fibre over a long-distance cable. The difference of two subsequent measurements gives access to the distributed and relative fibre elongation, but also to an average elongation over the strained section that is equivalent to the one obtained with method C.

F.2 Principle

Derive the fibre elongation along the fibre from the distributed measurement of the Brillouin frequency shift. In the Brillouin process, the back-scattered radiation suffers a doppler shift, namely the Brillouin frequency shift f_B , which writes:

$$f_B = \frac{2 \cdot n \cdot V_a}{\lambda} \quad (\text{F.1})$$

where

n is the refractive index;

V_a is the velocity of an acoustic wave at frequency f_B , expressed in m/s;

λ the optical wavelength of the probe laser expressed in m.

There is a linear dependency between the Brillouin frequency shift and the tensile strain applied on fibre, associated with the changes of material density and elastic properties of the material under tensile strain [1].

$$f_B = f_{B0} + C_{f\varepsilon} \cdot \varepsilon \quad (\text{F.2})$$

where

f_{B0} is the Brillouin frequency shift for the strain free material, expressed in Hz;

$C_{f\varepsilon}$ is the coefficient of variation of the Brillouin frequency shift with tensile strain applied;

$\varepsilon = \frac{\Delta L}{L}$ is the relative elongation of the fibre of length L under tensile strain.

Several reflectometric techniques were reported allowing the determination of the Brillouin frequency shift $f_B(z)$, with z the position along an optical fibre. Metric spatial resolutions are commonly reported but centimetric spatial resolutions are also possible [4] and [6].

Distributed measurement of $f_B(z)$ gives access to a tensile strain state $\varepsilon(z)$, thanks to Formula F.2. The method F is the sole method providing an absolute value of the tensile strain, it only requires the possibility of measurement of the given fibre in a strain-free state ($\varepsilon = 0$) so to determine f_{B0} . Absolute and distributed tensile strain measurements can therefore be determined in two ways:

- a) From a single distributed measurement on a fibre link that include one section which is known to be in a strain-free state.
- b) From a set of two distributed measurements in two states, the first state being considered as a strain-free state.

For an optimal accuracy, the coefficient Cf_ε is calibrated for the given fibre, but in practice numerous publications already report very consistent values of this coefficient for a large range of fibre types. A nominal coefficient of $Cf_\varepsilon = 490$ MHz/% can however be used with an associated accuracy on tensile strain measurements better than 5 %. The accuracy on coefficients and length measurements was not debated for the other methods described in the present document, so these accuracy considerations are only provided as an indication of what can reasonably be expected.

F.3 Apparatus

F.3.1 General requirements

The measurement fixture of known gauge length shall be capable of applying and varying longitudinal stresses on the cable or fibre. Observe the proper fixing of the ends of the sample to prevent the fibres from slipping during loading. Provide an elongation bench for the calibration of the Brillouin frequency shift versus the mechanically measured fibre elongation.


F.3.2 Optical measurement equipment

F.3.2.1 General

The equipment for either technique, BOTDR or BOTDA, should be stable over the measurement time period and temperature range encountered. See Figure F.1 and Figure F.2, respectively, for diagrams of typical equipment set-ups. These diagrams only represent the general concepts leading to a distributed measurement of the Brillouin frequency shift. Many implementations are possible in practice [5], including coherent detection as a filter mechanism, additional amplifiers, pulsed RF-driven electro-optic modulators to produce wavelength tunability at the same time as pulsing.

F.3.2.2 BOTDR

Use of a pulsed light source to probe the fibre under test, the backscattered radiation is filtered to resolve temporally and spectrally the spontaneous Brillouin scattering. The instrument can also dispose of a Rayleigh OTDR to measure the fibre attenuation during pulling test.

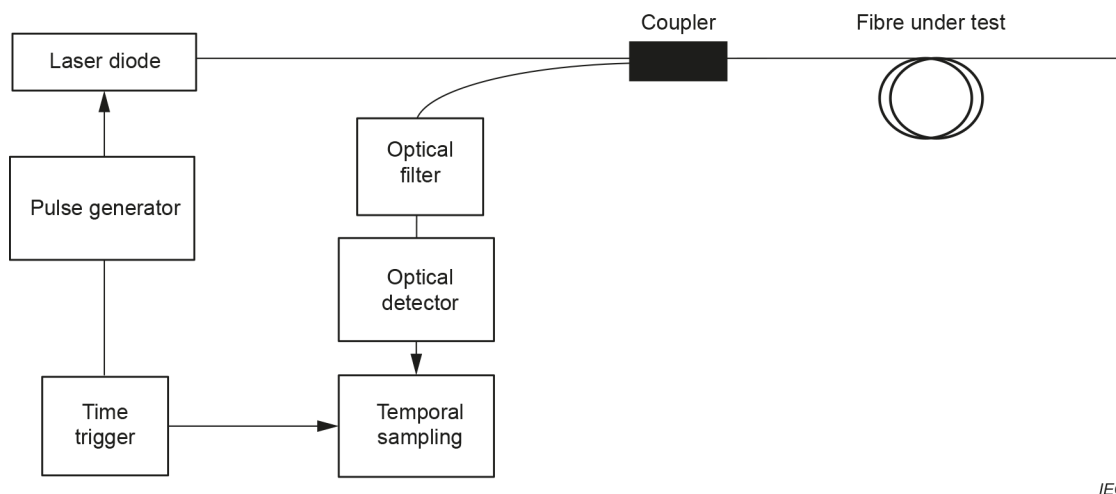


IEC

Figure F.1 – Equipment setup for BOTDR technique

F.3.2.3 BOTDA

Use of both a pulsed light source and a continuous wave light source sent in counter-propagation in the fibre under test, so to generate a strong stimulated Brillouin scattering interaction. The power of the transmitted continuous light source is detected as it carries the distributed information of the interaction that took place when and where it crossed the pulse. Tuning the relative frequency shift in between the two lasers allow to scan and record the Brillouin gain profile. The instrument can also dispose of a Rayleigh OTDR to measure the fibre attenuation during pulling test.

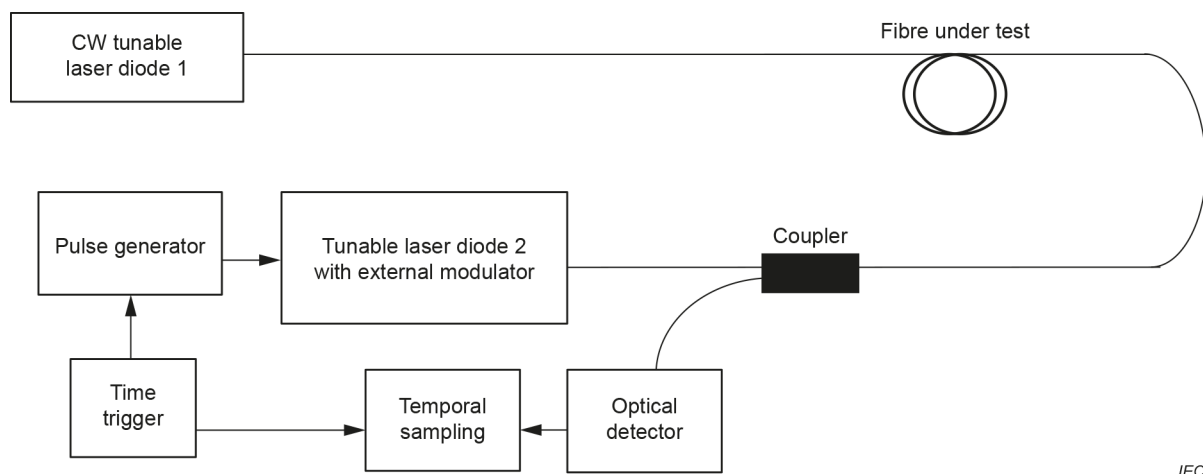

IEC

Figure F.2 – Equipment setup for BOTDR technique

F.3.3 Instrument resolution

The strain measurement resolution of the entire measurement system should be $\leq 0,01\%$. This includes the optical measurement equipment (frequency sampling or pulse width, etc.) and the measurement fixture (sample gauge length, cable or fibre end fixers, load measurement, etc.). Since all these factors are involved in determining the entire measurement system's accuracy and resolution, evaluate each measurement bench separately.

This measurement procedure is intended to be conducted at ambient room conditions typically found in laboratories. This method is feasible under other conditions, provided the temperature is stable to $\pm 2\text{ }^{\circ}\text{C}$ for the duration of the test. For extreme temperature and pressure changes (more than 40 atmospheres), corrections can be necessary, particularly regarding the C_{fe} factor.