IEC 60793-1-40

Edition 3.0 2024-11
REDLINE VERSION

INTERNATIONAL STANDARD

colour inside

Optical fibres –
Part 1-40: Attenuation measurement methods

Documents
Document Sharing Hub

IEC 60793-1-40:2024-11 RLV(en)

Full document details: IEC 60793-1-40 2024 RLV

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2024 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Documents
Document Sharing Hub

Full document details: IEC 60793-1-40 2024 RLV

IEC 60793-1-40

Edition 3.0 2024-11
REDLINE VERSION

INTERNATIONAL STANDARD

colour inside

Optical fibres –
Part 1-40: Attenuation measurement methods

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.10

ISBN 978-2-8327-0067-9

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: IEC 60793-1-40 2024 RLV

CONTENTS

FOREWORD 5
1 Scope 7
2 Normative references 7
3 Terms, definitions and abbreviated terms 8
3.1 Terms and definitions 8
3.2 Abbreviated terms 9
4 Calibration requirements 9
5 Reference test method 9
6 Apparatus 9
7 ~~Sampling and specimens~~ Sample preparation 9
7.1 ~~Specimen~~Sample length 9
7.2 ~~Specimen~~Sample end face 9
8 Procedure 9
9 Calculations 9
9.1 Methods A and B 9
9.2 Method C 10
9.3 Method D 10
10 Results 10
10.1 Information available with each measurement 10
10.2 Information available upon request 10
10.3 Method-specific additional information 10
11 Specification information 10
Annex A (normative) Requirements specific to method A – Cut-back 11
A.1 General 11
A.2 Apparatus 11
A.2.1 General apparatus for all fibres 11
A.2.2 Launch apparatus for all single-mode fibres 13
A.2.3 Launch apparatus for A1 multimode fibres 14
A.2.4 Launch apparatus for A2 to A4 multimode fibres 16
A.2.5 Calibration requirements 17
A.3 Procedure 18
A.4 Calculations 18
Annex B (normative) Requirements specific to method B – Insertion loss 19
B.1 General 19
B.2 Apparatus 19
B.2.1 General set-ups 19
B.2.2 Apparatus common to method A (cut-back) 19
B.2.3 Additional apparatus specific to method B (insertion-loss) 19
B.2.4 Calibration requirements 19
B.3 Procedure 19
B.4 Calculations 20
Annex C (normative) Requirements specific to method C – Backscattering 21
C.1 General 21
C.2 Apparatus 21
C.2.1 General 21

AVA Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

C.2.2 Optical transmitter 21
C.2.3 Launch conditions 22
C.2.4 Optical splitter 22
C.2.5 Optical receiver 22
C.2.6 Pulse duration and repetition rate 22
C.2.7 Signal processor 22
C.2.8 Display 22
C.2.9 Data interface (optional) 23
C.2.10 Reflection controller (optional) 23
C.2.11 Splices and connectors 23
C.3 Sampling and specimens 23
C.4 Procedure 23
C.4.1 General measurement steps 23
C.4.2 Further steps for measuring attenuation 24
C.4.3 Further steps for measuring point discontinuities 25
C.4.4 Calibration 27
C.5 Calculations 27
C.6 Results 28
Annex D (normative) Requirements specific to method D – Spectral attenuation modelling 29
D.1 General 29
D.2 Apparatus 29
D.3 Sampling and specimens 29
D.4 Procedure 29
D.5 Calculations 30
D.6 Results 31
Annex E (informative) Examples of short cable test results on A1 multimode fibres 32
Bibliography 34

Figure A.1 – Arrangement of equipment for loss measurement at a specified wavelength 11
Figure A.2 – Arrangement of equipment used to obtain loss spectrum 12
Figure A.3 – General launch arrangement 12
Figure A.4 – Limited phase space launch optics 15
Figure A.5 – Two examples of optical fibre scramblers 16
Figure A.6 – Lens system 16
Figure A.7 – Launch fibre 17
Figure A.8 – Mode scrambler (for A.4 fibre) 17
Figure A.9 – A wide-spectrum source (line "b") could lead to attenuation measurement errors due to sharp variations on spectral attenuation of polymer-core fibres (line "a") 18
Figure B.1 – Calibration of insertion loss measurement set 20
Figure B.2 – Measurement of insertion loss 20
Figure C.1 – Block diagram of an OTDR 21
Figure C.2 – Schematic OTDR trace for a "uniform" specimen preceded by a dead-zone fibre 24
Figure C.3 – Schematic OTDR trace for a "uniform" specimen not preceded by a dead-zone fibre 24

AVA Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

Figure C.4 – Schematic OTDR trace showing apparent loss due to point discontinuities, one reflective and one non-reflective 26
Figure C.5 – Schematic of an expanded OTDR trace showing two point discontinuities, one with apparent gain, and another with no apparent loss or gain 27
Figure E.1 – Example of attenuation coefficient tests on ~~A1a.1~~ A1-OM2 fibre 32
Figure E.2 – Example of attenuation coefficient tests on ~~A1a.3~~ A1-OM4 fibre 32
Figure E.3 – Example of attenuation coefficient tests on ~~A1b~~ A1-OM1 fibre 33

Table A.1 – Size examples 15
Table A.2 – Launch conditions for A2 to A4 fibres 16

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

OPTICAL FIBRES –

Part 1-40: Attenuation measurement methods

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 60793-1-40:2019. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

Documents
Document Sharing Hub

Full document details: IEC 60793-1-40 2024 RLV

IEC 60793-1-40 has been prepared by subcommittee 86A: Fibres and cables, of IEC technical committee 86: Fibre optics. It is an International Standard.

This third edition cancels and replaces the second edition published in 2019. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) modifying the definition of attenuation to be compatible with the definition in electropedia.org

The text of this International Standard is based on the following documents:

Draft	Report on voting
86A/2355/CDV	86A/2446/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 60793 series, published under the general title *Optical fibres*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC 60793-1-40 2024 RLV

OPTICAL FIBRES –

Part 1-40: Attenuation measurement methods

1 Scope

This part of IEC 60793 establishes uniform requirements for measuring the attenuation of optical fibre, thereby assisting in the inspection of fibres and cables for commercial purposes.

Four methods are described for measuring attenuation, one being that for modelling spectral attenuation:

– method A: cut-back;
– method B: insertion loss;
– method C: backscattering;
– method D: modelling spectral attenuation.

Methods A to C apply to the measurement of attenuation for all categories of the following fibres:

- class A multimode fibres;
- class B single-mode fibres.

Method C, backscattering, also covers the location, losses and characterization of point discontinuities.

Method D is applicable only to class B fibres.

Information common to all four methods appears in Clause 1 to Clause 11, and information pertaining to each individual method appears in Annex A, Annex B, Annex C, and Annex D, respectively.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-1, *Optical fibres – Part 1-1: Measurement methods and test procedures – General and guidance*

IEC 60793-1-22, *Optical fibres – Part 1-22: Measurement methods and test procedures – Length measurement*

IEC 60793-1-43, *Optical fibres – Part 1-43: Measurement methods and test procedures – Numerical aperture measurement*

IEC 61746-1, *Calibration of optical time-domain reflectometers (OTDR) – Part 1: OTDR for single mode fibres*

IEC 61746-2, *Calibration of optical time-domain reflectometers (OTDR) – Part 2: OTDR for multimode fibres*

AVA Documents
Document Sharing Hub

Full document details: IEC 60793-1-40 2024 RLV

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60793-1-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1.1
attenuation
~~attenuation of~~ optical power reduction along a fibre at wavelength λ between two cross-sections, 1 and 2, separated by a distance and defined as

$$A(\lambda) = 10\log_{10}\frac{P_1(\lambda)}{P_2(\lambda)} \quad (1)$$

where

$A(\lambda)$ is the attenuation, in dB, at wavelength λ;

$P_1(\lambda)$ is the optical power traversing the first cross-section;

$P_2(\lambda)$ is the optical power traversing the second cross-section.

Note 1 to entry: Attenuation is a measure of the decreasing optical power in a fibre at a given wavelength. It depends on the nature and length of the fibre and is also affected by measurement conditions.

3.1.2
attenuation coefficient
attenuation per unit length for a uniform fibre under steady-state conditions

Note 1 to entry: It is possible to define the attenuation per unit length or the attenuation coefficient as follows:

$$\alpha(\lambda) = \frac{A(\lambda)}{L} \quad (2)$$

which is independent of the chosen length of the fibre,

where

$\alpha(\lambda)$ is the attenuation coefficient;

$A(\lambda)$ is the attenuation at wavelength λ;

L is the length, in kilometres.

Note 2 to entry: Uncontrolled launching conditions normally excite higher order lossy modes that produce transient losses and result in attenuation that is not proportional to the length of the fibre. A controlled, steady-state launching condition yields attenuation that is proportional to the fibre's length. Under steady-state conditions, an attenuation coefficient of a fibre can be determined and the attenuation of concatenated fibres added linearly.

3.1.3
spectral attenuation modelling
technique that predicts the attenuation coefficients across a spectrum of wavelengths from a small number (three to five) of discrete values measured directly at different wavelengths

AVA Documents Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

3.1.4
point discontinuity
temporary or permanent local deviation of the continuous optical time-domain reflectometer (OTDR) signal in the upward or downward direction

Note 1 to entry: The nature of the deviation can vary with test conditions (e.g. pulse duration, wavelength, and direction of the OTDR signal). Although a point discontinuity can have a length greater than the corresponding displayed pulse duration (including transmitter and receiver effects), the length is usually about equal to the pulse duration. For a correct interpretation, the guidelines in IEC 60793-1-22 should be followed for measuring length.

3.2 Abbreviated terms

FWHM full width at half maximum
LPS limited phase space
OTDR optical time-domain reflectometer
RMSW root-mean-squared width
RTM reference test method

4 Calibration requirements

See Annex A, Annex B, and Annex C for methods A, B, and C, respectively.

5 Reference test method

Method A, cut-back, is the reference test method (RTM), which shall be the one used to settle disputes.

6 Apparatus

Annex A, Annex B, Annex C, and Annex D include layout drawings and other equipment requirements for each of the methods, respectively.

7 ~~Sampling and specimens~~ Sample preparation

7.1 ~~Specimen~~ Sample length

The ~~specimen~~ sample shall be a known length of fibre on a reel, or within a cable, as specified in the relevant specification.

7.2 ~~Specimen~~ Sample end face

Prepare a flat end face, orthogonal to the fibre axis, at the input and output ends of each ~~specimen~~ sample.

8 Procedure

See Annex A, Annex B, Annex C, and Annex D for methods A, B, C and D, respectively.

9 Calculations

9.1 Methods A and B

Methods A and B, cut-back and insertion loss use Formula (1) and Formula (2) respectively, which appear in 3.1.1 and 3.1.2.

AVA Documents Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

9.2 Method C

See Annex C.

9.3 Method D

See Annex D.

10 Results

10.1 Information available with each measurement

Report the following information with each measurement:

– date and title of measurement;
– identification of specimen;
– optical source wavelength;
– specimen length;
– spectral attenuation, in dB, or attenuation coefficient, in dB/km, versus wavelength or at specific wavelength(s), as required by the relevant specification.

10.2 Information available upon request

The following information shall be available upon request:

– measurement method used: A, B, C, or D;
– type of optical source used: centroidal wavelength(s) and spectral width(s);
– launching technique and conditions used;
– indication if a dead-zone fibre was used (for method C only);
– description of all key equipment;
– for type B fibres – dimensions and number of turns of the mode filter or mode scrambler;
– pulse duration(s), scale range(s), and signal-averaging details;
– details of computation technique (calculation method);
– any deviations to the procedure that were made;
– date of latest calibration of measurement equipment.

10.3 Method-specific additional information

For methods C and D, see the additional requirements in Clause C.6 and Clause D.6, respectively. This particularly applies when using method C for measuring point discontinuities.

11 Specification information

The relevant specification shall specify the following information:

– type of fibre (or cable) to be measured;
– failure or acceptance criteria at the wavelength or wavelength range;
– any deviations to the procedure that apply;
– information to be reported.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

Annex A
(normative)

Requirements specific to method A – Cut-back

A.1 General

The cut-back technique is the only method directly derived from the definition of fibre attenuation, in which the power levels, $P_1(\lambda)$ and $P_2(\lambda)$, are measured at two points of the fibre without change of input conditions. $P_2(\lambda)$ is the power emerging from the end of the fibre, and $P_1(\lambda)$ is the power emerging from a point near the input after cutting the fibre. This explains its wide acceptance as the reference test method for attenuation.

This measurement principle does not permit information to be obtained on the attenuation behaviour over the length of the fibre, nor is it easy to measure the change of attenuation under changing conditions. In some situations, its destructive nature is a disadvantage.

A.2 Apparatus

A.2.1 General apparatus for all fibres

A.2.1.1 General

See Figure A.1 and Figure A.2 for diagrams of suitable test set-ups.

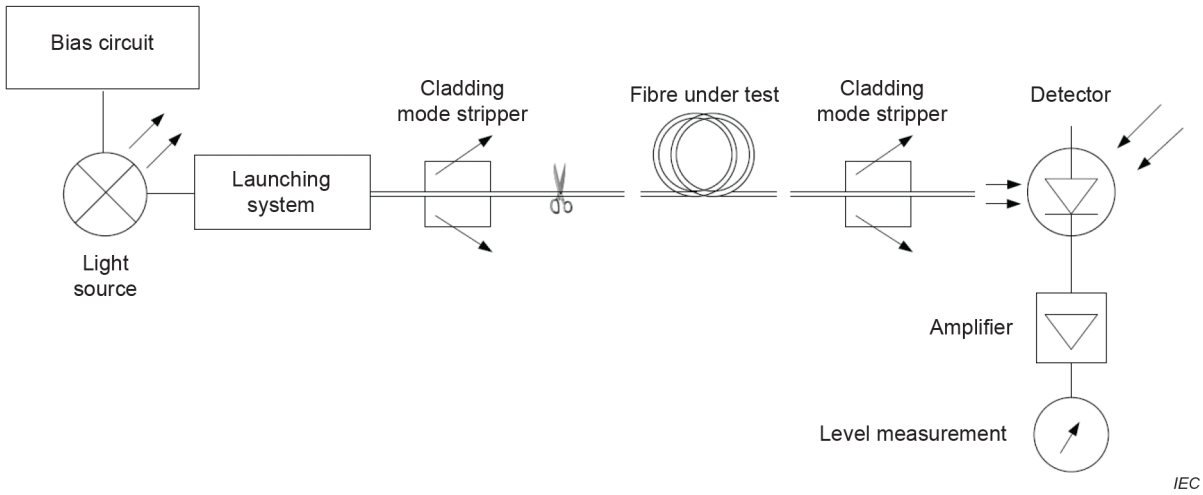

Figure A.1 – Arrangement of equipment for loss measurement at a specified wavelength

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

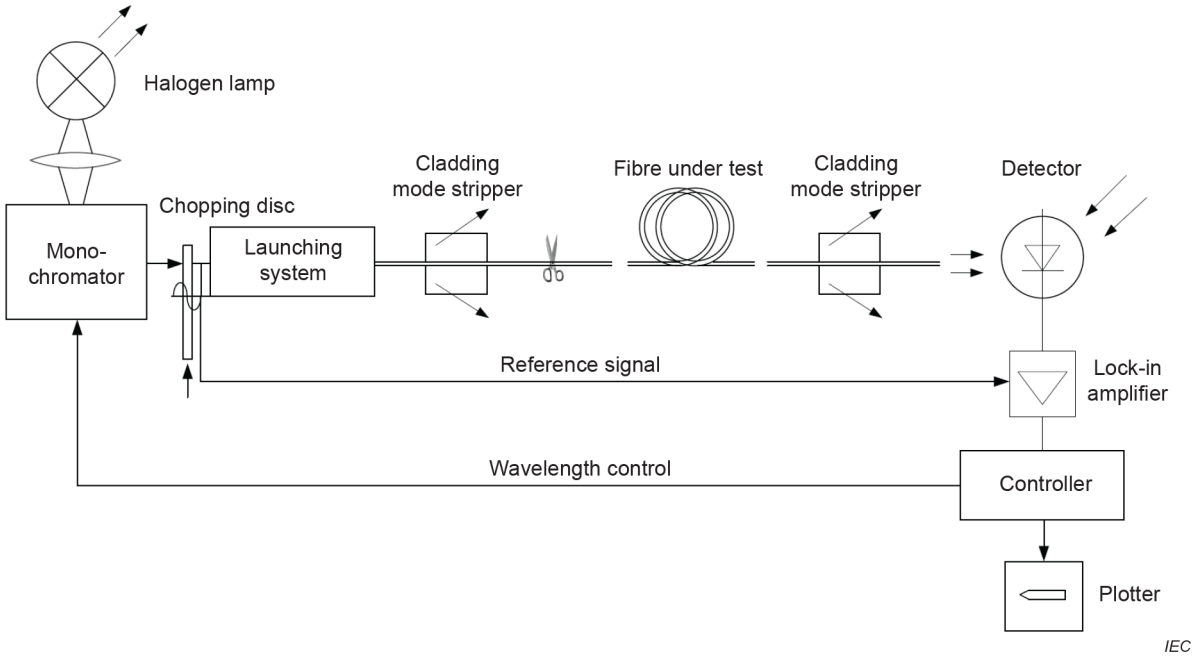

Figure A.2 – Arrangement of equipment used to obtain loss spectrum

A.2.1.2 General launch arrangement

Figure A.3 shows the general launch arrangement used for all fibres. See A.2.2 to A.2.4 for further details as they apply to specific categories of single-mode and multimode fibres.

A.2.1.3 Optical source

Use a suitable radiation source, such as a lamp, laser or light-emitting diode. The choice of source depends upon the type of measurement. The source shall be stable in position, intensity and wavelength over a time period sufficiently long to complete the measurement procedure. Specify the spectral line width (between the 50 % optical intensity power points of the sources used) such that the line width is narrow, for example <10 nm, compared with any features of the fibre spectral attenuation. Align the fibre to the launch cone or connect it to a launch fibre.

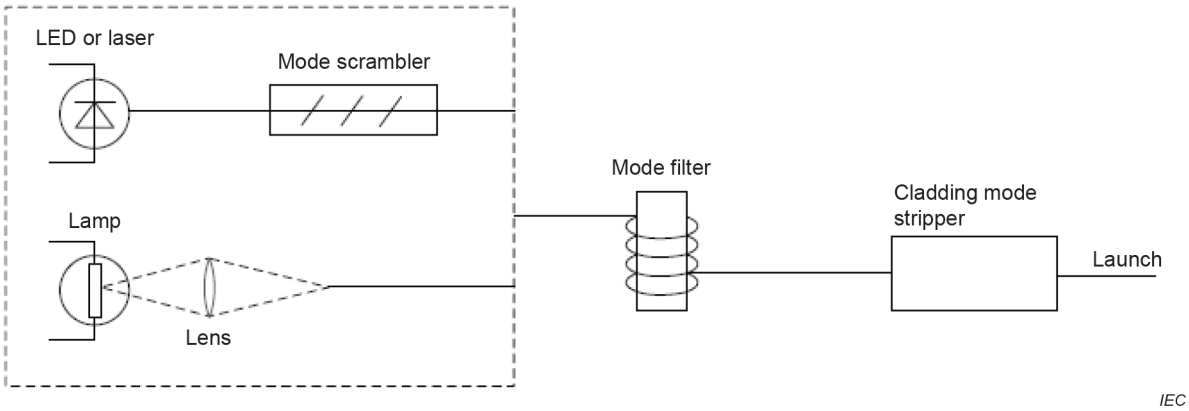

Figure A.3 – General launch arrangement

A.2.1.4 Source wavelength

Measurements can be made at one or more wavelengths. Alternatively, a spectral response can be obtained over a range of wavelengths.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

A.2.1.5 Optical detection assembly

Means shall be provided to couple all power emitted from the specimen to the active region of the detector. For example, an optical lens system, a butt spliced to a fibre pigtail, or a coupling directly to the detector ~~may~~ can be used. If the detector is already pigtailed, the pigtail fibre shall have sufficiently large core diameter and numerical aperture to capture all of the light exiting the reference and specimen fibres.

Use an optical detector that is linear and stable over the range of intensities and measurement times that are encountered in performing this measurement. A typical system might include a photovoltaic mode photodiode amplified by a current input amplifier, with synchronous detection by a lock-in amplifier.

A.2.1.6 Signal processing

It is customary to modulate the light source to improve the signal to noise ratio at the receiver. If such a procedure is adopted, link the detector to a signal processing system synchronous with the source modulation frequency. The detecting system should be substantially linear or have been fully characterized with a response function.

A.2.1.7 Cladding mode stripper

Use suitable techniques to remove optical power propagating in the cladding where this would significantly influence the received signal.

A.2.2 Launch apparatus for all single-mode fibres

A.2.2.1 General

An optical lens system or fibre pigtail ~~may~~ can be employed to excite the test fibre. The power coupled into the fibre shall be stable for the duration of the measurement. See Figure A.1.

A.2.2.2 Fibre pigtail

If using a pigtail, it ~~may~~ can be necessary to use index-matching material between the source pigtail and test fibre to eliminate interference effects.

A.2.2.3 Optical lens system

If using an optical lens system, provide a means of stably supporting the input end of the fibre, such as a vacuum chuck. Mount this support on a positioning device so that the fibre end can be repeatedly positioned in the input beam. A method of making the positioning of the fibre less sensitive is to overfill the fibre end spatially and angularly.

A.2.2.4 High-order mode filter

Use a method to remove high-order propagating modes in the wavelength range of interest. An example of such a high-order mode filter is a single loop of radius sufficiently small to shift the cut-off wavelength below the minimum wavelength of interest. For bending loss insensitive single-mode fibres, multiple loops with smaller radius or longer cut-back specimen length can be applied. Care should be taken that the radius is not too small as to induce wavelength-dependent oscillations. Increase of the cut-back specimen length should be accounted for in the attenuation computation.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

A.2.2.5 Cladding mode stripper

The cladding mode stripper ensures that no radiation modes, propagating in the cladding region, will be detectable after a short distance along the fibre. The cladding mode stripper often consists of a material having a refractive index equal to or greater than that of the fibre cladding. This ~~may~~ can be an index-matching fluid applied directly to the uncoated fibre near its ends; under some circumstances the fibre coating itself will perform this function.

A.2.3 Launch apparatus for A1 multimode fibres

A.2.3.1 General

The launching conditions are of paramount importance in meeting the objectives stated in Clause 1. Launching conditions are established to avoid launching power into higher-order, transient modes. By not launching power into these transient modes of the test fibre, attenuations which add in an approximately linear fashion will be measured. Because these power distributions are essentially unaltered by the fibre, they are called "steady-state distributions".

There are two commonly used techniques to produce steady-state launch conditions for attenuation measurements: mode filters and a geometrical optics launch. Proper care in the use of each technique gives comparable results.

~~Care should be taken~~Ensure that mode distribution is related with specimen length. For short A1 multimode fibre cables (less than 1 km), it is possible that the mode distribution ~~may~~ will not reach a steady state. This will induce an increase in attenuation values towards shorter fibre lengths, where the magnitude of the length dependence depends on fibre type, launch condition, etc. In these cases, attenuation values should be obtained from cables long enough to reach a steady-state condition, or they can be taken from the original longer donor cable. As guidance for sufficient cable lengths, see examples of cable test results on A1 multimode fibres in Annex E.

See Figure A.3 for a generic example of the launching arrangement using a mode filter. Examples of each mode filter appear below.

A.2.3.2 Examples of mode filters

A.2.3.2.1 Dummy-fibre mode filter

Select a fibre of a similar type to that of the test fibre. The fibre should be long enough (typically equal to or greater than 1 km) so that the power distribution carried by the fibre, when the launch source of A.2.1.2 is used, is a steady-state distribution.

A.2.3.2.2 Mandrel-wrapped mode filter

Another mode filter takes the form of a mandrel around which a few turns (typically three to five turns) of the fibre under test are wound with low tension. Select the mandrel diameter to ensure that the transient modes excited in the test fibre have been attenuated to steady-state. Use a far-field measurement to compare the power distribution exiting a long length of test fibre (greater than 1 km) that has been excited with a uniformly overfilling source, with the power distribution exiting a short length of the fibre with the mandrel applied. Select the mandrel diameter to produce a far-field distribution in the short length that approximates the long length far-field power distribution.

The numerical aperture (as measured by IEC 60793-1-43) of the radiation pattern exiting the short length shall be 94 % to 100 % of the numerical aperture of the long-length pattern.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

The diameter of the mandrel ~~may~~ can differ from fibre to fibre depending on fibre and coating type. Common prescriptions consist of diameters in the range of 15 mm to 40 mm, with five turns of fibre within a 20 mm length of the mandrel. While mandrels of different size and arrangement can be selected, Table A.1 illustrates common mandrel sizes for fibres of different core diameters.

Table A.1 – Size examples

Core diameter µm	Mandrel diameter mm
50	25
62,5	20
100	25

A.2.3.3 Example of geometrical optics launch

A limited phase space (LPS) launch is defined as a geometrically produced launch that uniformly fills 70 % of the test fibre's core diameter and 70 % of the test fibre's numerical aperture. This is the maximum geometrically launched power distribution that does not launch power into leaky, unbounded modes. For a 50/125 µm, 0,2 NA graded-index multimode fibre, the LPS launch condition consists of a uniform 35 µm spot and 0,14 NA.

An example of the optics necessary to produce the LPS launch is given in Figure A.4. It is important to ensure that the axis of the launch beam is coincident with the axis of the fibre so that the spot and incident cone of light are centred on the core of the fibre. Also, set up the optical system at the wavelengths of operation to ensure proper measurement. While mandrels of different size and arrangement can be selected, common mandrel sizes for fibres of different core diameters, are shown in Table A.1.

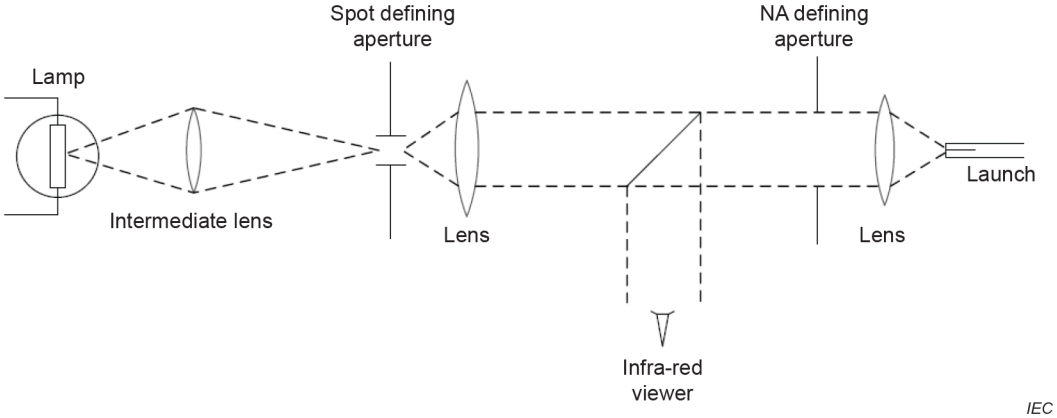

Figure A.4 – Limited phase space launch optics

A.2.3.4 Mode scrambler

An essentially uniform power distribution is launched prior to the mode filter. For a source such as an LED or laser, which does not form a uniform power distribution, use a mode scrambler. The mode scrambler shall comprise a suitable fibre arrangement (for example, a step-graded-step index profile sequence).

A "mode scrambler" is a device which is positioned between the light source and test fibre to control launching conditions. A particular mode scrambler design is not specified. It should be emphasized that the performance of these scramblers depends upon the launch optics and fibre sizes (core and NA) used in the actual construction.

AVA Documents Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

EXAMPLE The two designs given in Figure A.5 are for illustration purposes only.

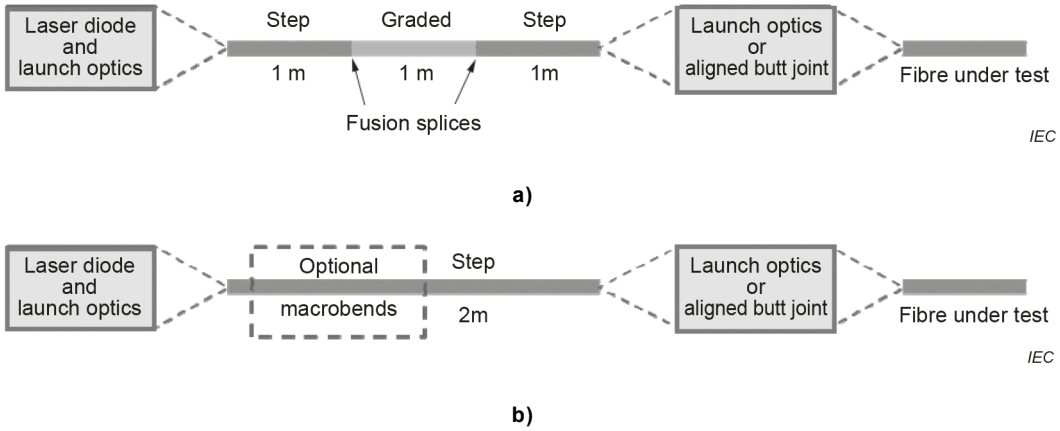

Figure A.5 – Two examples of optical fibre scramblers

A.2.4 Launch apparatus for A2 to A4 multimode fibres

Some examples of generic launching arrangements for short-distance fibres are described in Figure A.6, Figure A.7 and Figure A.8.

The reproducibility of the attenuation measurements of multimode fibres is critical. Therefore, a well-defined launching set-up description is necessary. Such a set-up can be achieved by using commercially available optical components and shall be capable of providing for spot sizes and launch NAs as given in Table A.2.

Table A.2 – Launch conditions for A2 to A4 fibres

	Fibre category		
Attribute	A2.2 fibre[a] Glass core/glass cladding	A3 fibre Glass core/plastic cladding	A4 fibre Plastic core/plastic cladding
Spot size	= fibre core size	= fibre core size	= fibre core size with full mode launch (or use mode scrambler with equilibrium mode launch)
Numerical aperture (NA)	= fibre max. Na[b]	= fibre max. NA[c]	= fibre max. NA, with full mode launch[c]

[a] Category A2.1 fibre requires further study.

[b] This launch condition can be produced by overfilling a mode filter made from 2 m of fibre identical to the fibre under test, with appropriate cladding mode stripping and using the output from this mode filter to launch into the fibre under test.

[c] This launch condition can be produced in the same manner as described in footnote b. However, some types of A3 and A4 fibre will not require cladding mode stripping for the mode filter.

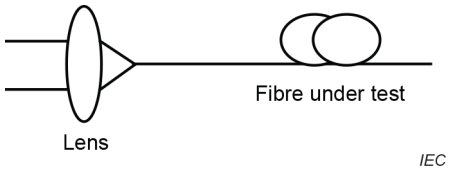

Figure A.6 – Lens system

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

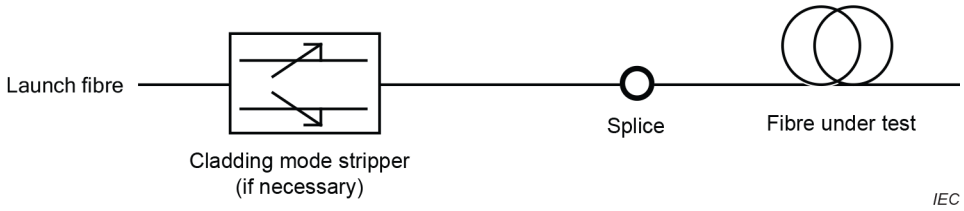

Figure A.7 – Launch fibre

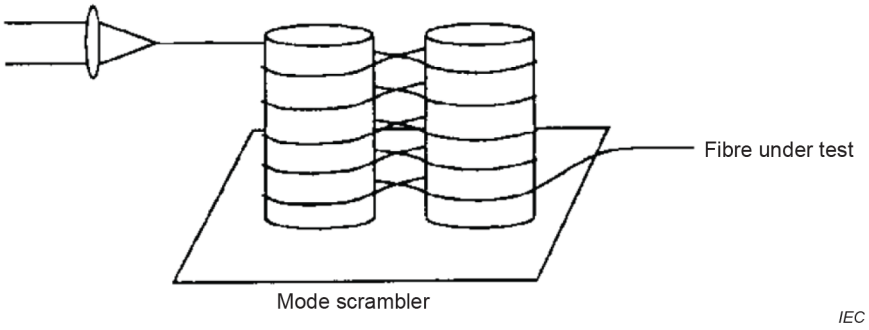

Figure A.8 – Mode scrambler (for A.4 fibre)

A.2.5 Calibration requirements

A.2.5.1 General calibration requirements

Calibrate the optical source's centroidal wavelength to within ±10 nm.

A.2.5.2 Requirements for A4 fibres

For A4 fibres it is common to perform attenuation measurements at specific wavelengths using an LED as optical source. Owing to characteristic strong sharp variations in attenuation over the wavelength spectrum of some polymeric materials, additional optical characterization measurements should be performed to take into account effects that could affect the measurement when calibrating wide-spectrum sources used for attenuation measurement, especially when the centroidal wavelength is significantly far from the intended wavelength measurement. A full characterization will ensure repeatability of the measurements and avoid the negative influence of the following effects:

– Distortion on the attenuation measurement

  An optical source with wide spectrum, for example, an LED, will cause measurement errors on the measurements, since parts of the optical spectrum lie in low-loss wavelengths and other parts lie in higher-loss wavelengths. This is illustrated in Figure A.9 with the Gaussian line "b" showing the spectral response for an LED source used to measure A4 fibres and with the expected spectral attenuation indicated by the line "a". To take proper consideration of the potentially high attenuation variations, the source shall be calibrated both in its centroidal wavelength and spectral width and it should be checked that these two characteristics match the expected wavelength attenuation of the fibre under test.

– Spectral filter effect

  Light with a wide spectrum undergoes relatively little attenuation at some wavelengths while other spectral parts suffer higher losses when propagating through A4a fibres. With longer measured fibre lengths, the detected LED spectral maximum shifts towards the fibre attenuation-minimum wavelength. This can be seen in Figure A.9, where the original spectral source is illustrated with the line "b" (characterized through a 0 m fibre length) and the same spectra detected after passing different lengths of an A4 fibre. As the measurement-fibre length increases, a shift on the maximum of the detected Gaussian signal occurs towards the wavelength of minimum attenuation of the fibre (lines "c" to "f" in Figure A.9).

AVA Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

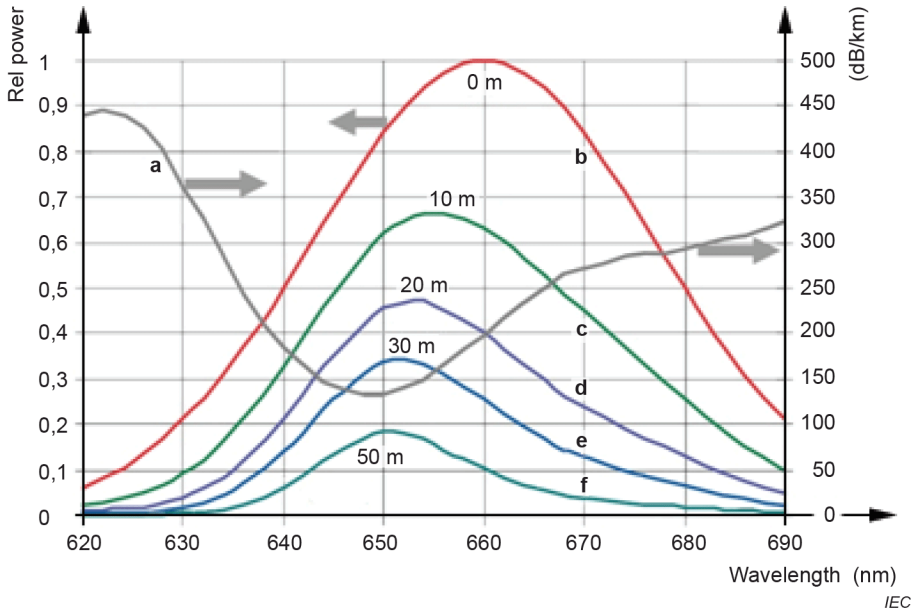

Figure A.9 – A wide-spectrum source (line "b") could lead to attenuation measurement errors due to sharp variations on spectral attenuation of polymer-core fibres (line "a")

A.3 Procedure

A.3.1 Set the fibre under test in the measurement apparatus. Record the output power, $P_2(\lambda)$.

A.3.2 Keeping the launching conditions fixed, cut the fibre to the cut-back length (for example, 2 m from the launching point). Record the output power, $P_1(\lambda)$, of the cut-back length.

A.4 Calculations

A.4.1 Calculate the attenuation between the points where $P_1(\lambda)$ and $P_2(\lambda)$ have been measured using Formula (1) in 3.1.1, or calculate the attenuation coefficient by using Formula (2) in 3.1.2, or both, as required.

A.4.2 Using the attenuation measurement results at discrete wavelengths, a spectral attenuation curve can be calculated with relationships such as those described in Annex D.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

Annex B
(normative)

Requirements specific to method B – Insertion loss

B.1 General

The insertion loss technique is, in principle, similar to the cut-back technique, but $P_1(\lambda)$ is the power emerging from the output of the launching system.

The insertion loss technique is less accurate than that of the cut-back technique but has the advantage of being non-destructive for the fibre under test and for the terminators possibly fixed at both ends. Therefore, it is suitable for field use, and mainly intended for use with connectorized cable lengths.

This method does not allow for analysis of the attenuation over the length of fibre. Given the previous known power, $P_1(\lambda)$, it is possible with this technique to measure the continuing change in attenuation over changing environmental conditions such as temperature and force.

B.2 Apparatus

B.2.1 General set-ups

Figure B.1 (calibration) and Figure B.2 (measurement) show diagrams of suitable measurement set-ups.

B.2.2 Apparatus common to method A (cut-back)

See the provisions of A.2.1. See also all of the appropriate information on launching conditions in A.2.2 (for single-mode fibre), A.2.3 (for A1 multimode fibre), and A.2.4 (for A2 to A4 multimode fibre).

B.2.3 Additional apparatus specific to method B (insertion-loss)

The insertion-loss technique requires the use of a very precise fibre-to-fibre coupling device to minimize the coupling losses and to ensure reliable results. This coupling device can be a mechanical adjustment that is visually inspected, or a connector with a core-to-core positioning.

B.2.4 Calibration requirements

See A.2.5.

B.3 Procedure

B.3.1 The reference fibre shall be of the same type as that under test. Any connectors and their associated losses are included in the definition of the reference fibre.

B.3.2 Initially calibrate the measurement equipment to obtain an input reference level, $P_1(\lambda)$. Use the same fibre type as a reference fibre at the initial calibration. The length of the reference fibre should be small (for example, 2 m) so that its attenuation can be neglected. (If the attenuation of the reference fibre cannot be neglected, add the value to the calculated value.)

B.3.3 Connect the fibre under test to the measurement apparatus and adjust the coupling to give a maximum level on the optical detector. Record the output power, $P_2(\lambda)$.

AVA Documents
Document Sharing Hub

Full document details: IEC 60793-1-40 2024 RLV

B.4 Calculations

Calculate the attenuation by using Formula (1) in 3.1.1, or calculate the attenuation coefficient by using Formula (2) in 3.1.2, or both, as required.

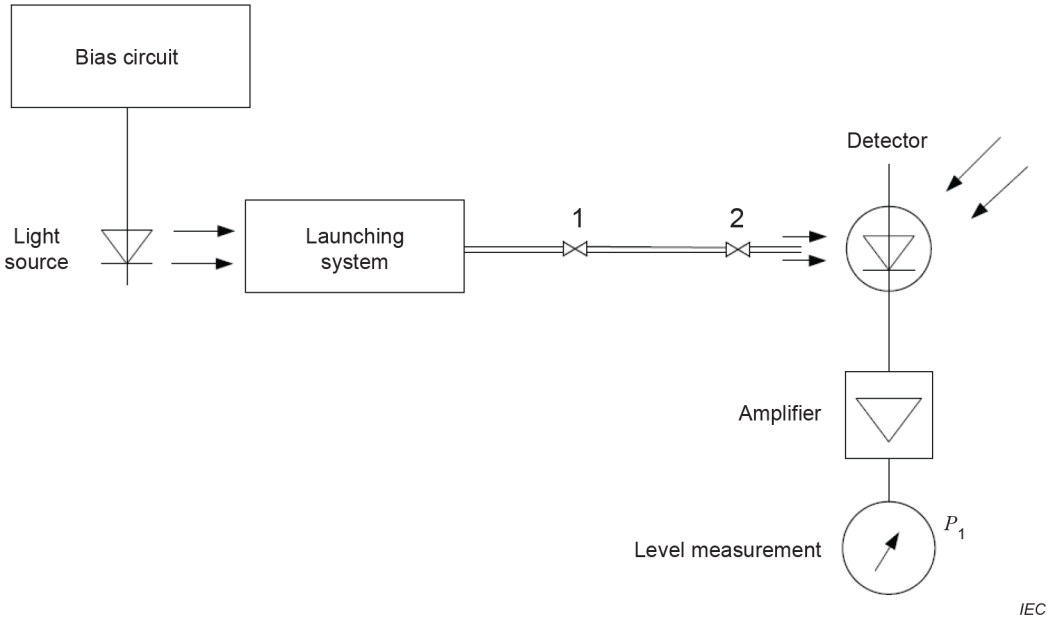

Figure B.1 – Calibration of insertion loss measurement set

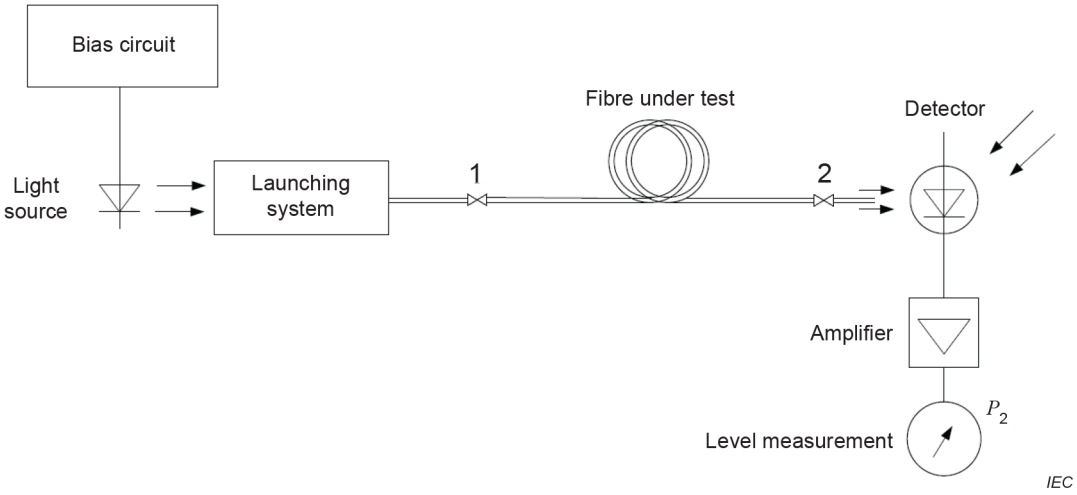

Figure B.2 – Measurement of insertion loss

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

Annex C
(normative)

Requirements specific to method C – Backscattering

C.1 General

The backscattering method, which is a discrete-wavelength, single-sided measurement, measures the optical power backscattered from different points in the fibre to the beginning of the fibre.

The measurement is affected by the propagation speed and the backscattering behaviour of the fibre and ~~may~~ it is possible that it will not be accurate for measuring fibre attenuation. The technique can only be used to measure the fibre's attenuation by taking the backscatter measurements from both ends of the fibre under test and averaging the two backscatter traces.

This technique allows analysis of the entire fibre, particularly of longitudinal subsections of the fibre, or even identification of discrete points such as splices. It also permits calculation of the fibre length.

Methods to describe the uniformity of attenuation from the bi-directionally averaged backscattered traces are considered in IEC TR 62316.

C.2 Apparatus

C.2.1 General

This method uses an optical time-domain reflectometer (OTDR), which shall normally consist of the following minimum list of components. See Figure C.1 for a block diagram.

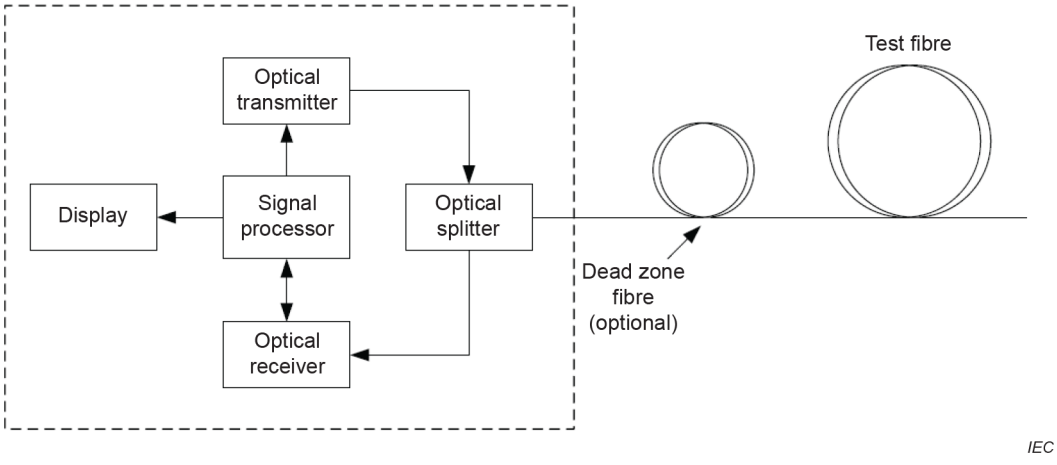

Figure C.1 – Block diagram of an OTDR

C.2.2 Optical transmitter

C.2.2.1 This usually includes one or more pulsed laser diode sources capable of one or more pulse durations and pulse repetition rates. Unless otherwise specified in the detail specification, the spectrum for each wavelength shall satisfy the following.

C.2.2.2 The centroidal wavelength shall lie within 15 nm of the specified value; report the difference between the centroidal wavelength and the specified value if it is greater than 10 nm.

AVA Documents Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

C.2.2.3 The root-mean-squared width (RMSW) shall not exceed 10 nm, or the full width at half maximum (FWHM) shall not exceed 25 nm.

C.2.2.4 If the data are to be used in a spectral attenuation model:

– the spectral width shall not exceed 15 nm (FWHM) or 6 nm (RMSW) for wavelengths in the water peak absorption region (e.g. 1 360 nm to 1 430 nm);

– report the actual centroidal wavelength to within 2 nm of the actual value.

C.2.3 Launch conditions

Provide a means for connecting the test fibre (or the optional dead-zone fibre of C.2.10) to the instrument panel, or to a fibre pigtail from the source.

For type A fibre, it is possible that optical sources ~~may~~ will not produce launch conditions that are well controlled or appropriate to this measurement method. Therefore, unless otherwise specified in the detail specification, launch conditions for attenuation measurements shall be those used in cut-back attenuation measurements (method A).

C.2.4 Optical splitter

A coupler/splitter within the instrument directs the power from the transmitter into the fibre. It also directs light returning in the fibre from the opposite direction to the receiver.

C.2.5 Optical receiver

This usually includes a photodiode detector having a bandwidth, sensitivity, linearity, and dynamic range compatible with the pulse durations used and signal levels received.

C.2.6 Pulse duration and repetition rate

The OTDR ~~may be provided~~ can provide a choice of several pulse durations and repetition rates (sometimes coupled to the distance control) to optimize the trade-off between resolution and range. With a high amplitude reflection, it ~~may~~ can be necessary to set the rate or range to a value exceeding twice the distance of the reflection in order to prevent spurious "ghost" images. Pulse coding techniques ~~may~~ can also be used.

Care should be taken when selecting the pulse duration, repetition rate, and source power. For shorter distance measurements, short pulse durations are necessary to provide adequate resolution. This in turn will limit dynamic range and maximum measurable length. For long length measurements, the dynamic range can be increased by increasing the peak optical power up to a level below which non-linear effects are insignificant. Alternatively, pulse width can be increased, which will reduce the resolution of the measurements.

C.2.7 Signal processor

If required, the signal-to-noise level ~~may~~ can be increased using signal averaging over a longer measurement time.

C.2.8 Display

This is incorporated into the OTDR and is part of the equipment controlling the OTDR. The OTDR signal is displayed in a graphical form with the vertical scale as decibels and the horizontal scale as distance. The vertical decibel scale shall correspond to half the round-trip of the backscatter loss. The horizontal scale shall correspond to half the associated optical group delay, converted to distance. Tools such as cursors ~~may~~ can be used to manually or automatically measure all or part of the OTDR trace on the display.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

C.2.9 Data interface (optional)

The instrument ~~may~~ can be capable of interfacing with a computer for automatic analysis of the signal or for providing a hard copy of the display trace.

C.2.10 Reflection controller (optional)

Means of minimizing transient saturation of the receiver due to high Fresnel reflections ~~may~~ can be required to reduce the length of fibre "dead zone" following each reflector. This can be incorporated into the coupler or splitter or ~~may~~ can be done by electronic masking. To overcome the initial reflection at the OTDR connector, a dead-zone fibre (with a length in metres numerically exceeding one-tenth the displayed pulse duration in nanoseconds) ~~may~~ can be used between the OTDR connector and the specimen.

C.2.11 Splices and connectors

Unless otherwise indicated in this procedure, any splices or connectors required by the OTDR (e.g. to join the OTDR or the dead-zone fibre to the test fibre) shall have low insertion loss and reflectance (high return loss). This is to minimize extraneous effects upon the OTDR trace of interest.

C.3 Sampling and specimens

This is a fibre on a reel or within a cable, under conditions specified in the detail specification. The measurement ~~may~~ can be performed in the factory or in the field, upon either single or concatenated sections.

Care should be taken to ensure that winding does not introduce artificial attenuation for point discontinuity or attenuation measurements. Alternatively, any induced loss confined to the ends of the fibre length (as with the first layer on a reel) can be excluded in a calculation of the attenuation coefficient.

C.4 Procedure

C.4.1 General measurement steps

C.4.1.1 The use of an OTDR for indirect measurement of attenuation or fibre attenuation coefficient of an optical fibre or fibre cable is described below.

For type A1 and A2 optical fibres, more accurate values ~~may~~ can be obtained by using spectral attenuation cut-back measurements. If the values obtained by these two techniques differ from each other, the values from the cut-back technique will be accepted as correct, unless otherwise specified in the detail specification.

For type B1 and B2 optical fibres, by performing these measurements at multiple wavelengths, a spectral attenuation curve can be generated using relationships such as those described in method D (see Annex D).

C.4.1.2 Connect the specimen either to the instrument or to one end of the dead-zone fibre (if used). Connect the other end of the dead-zone fibre (if used) to the instrument.

C.4.1.3 If the attenuation coefficient and accurate distances are to be recorded, the effective group index of the specimen is required. If this value is not known, use the procedure for the OTDR measurement of fibre or cable length (method B of IEC 60793-1-22) to determine it.

C.4.1.4 Enter OTDR parameters such as source wavelength, pulse duration, length range, and signal averaging into the instrument, along with the specimen's effective group index (if

AVA Documents Document Sharing Hub

Full document details: IEC 60793-1-40 2024 RLV

required by C.4.1.1.3). The values of some of these parameters ~~may~~ can be preset in the instrument.

C.4.1.5 Adjust the instrument to display a backscatter signal from the specimen. It ~~may~~ can be advantageous to begin with coarse vertical and horizontal scaling to maximize the length displayed. Figure C.2 and Figure C.3 give examples for use with measuring attenuation and Figure C.4 and Figure C.5 are example schematics for use with measuring point discontinuities.

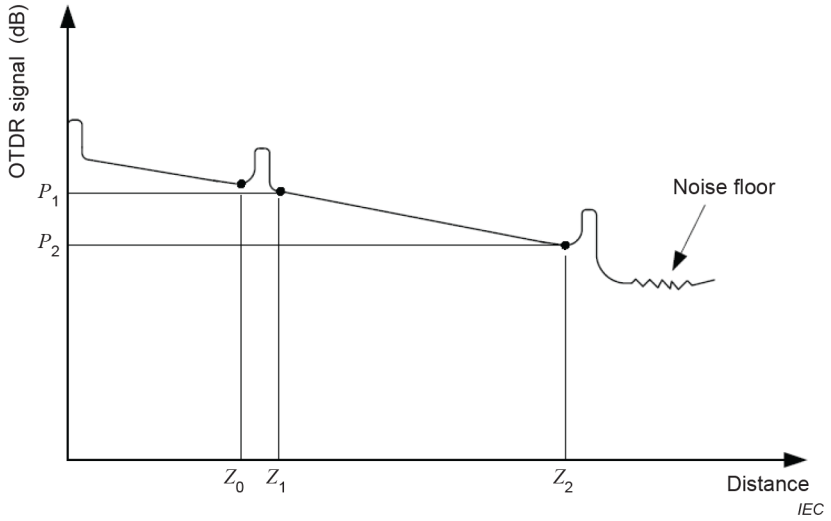

Figure C.2 – Schematic OTDR trace for a "uniform" specimen preceded by a dead-zone fibre

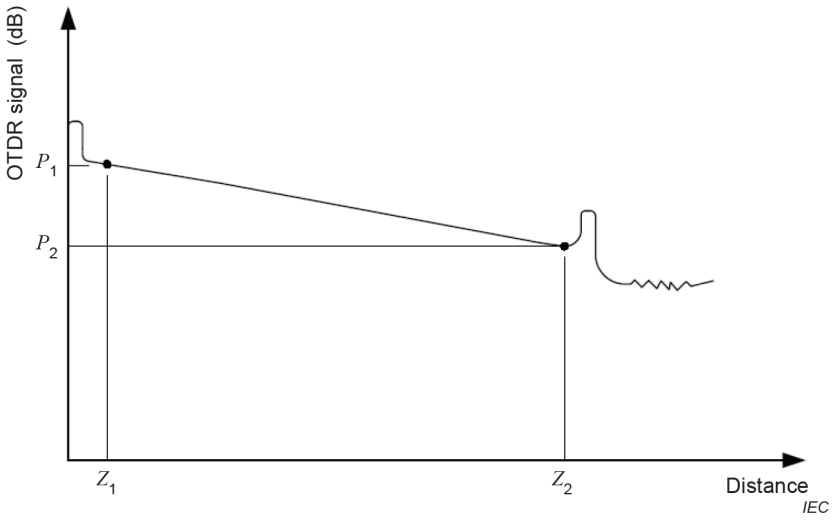

Figure C.3 – Schematic OTDR trace for a "uniform" specimen not preceded by a dead-zone fibre

C.4.2 Further steps for measuring attenuation

C.4.2.1 Step 1

C.4.2.1.1 If increased resolution is necessary, adjust the graphical display, if possible, to expand the section of interest to a larger scale (exercising care to ensure that proper readings of the true signal can still be distinguished from the noise points).

C.4.2.1.2 (Optional, along with C.5.3) If using a dead-zone fibre, refer to Figure C.2. Place a cursor at the beginning of the trace for the specimen prior to any power drop-off (which ~~may~~

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

can be difficult to do), or at a point (which ~~may~~ can be specified by the manufacturer) on the rising edge of the reflection pulse. (If the beginning of the trace is not apparent due to minimal discontinuity, apply a tight bend at this location and vary the radius to assist in cursor placement.) Obtain the distance coordinate, z_0, via the alphanumeric display. If a dead-zone fibre is not used, no cursor placement is required; take $z_0 = 0$.

C.4.2.1.3 Place a cursor on the beginning of the linear portion (after the near end) of the trace for the specimen. If using the dead-zone fibre (Figure C.2), place the cursor beyond the recovery from the small reflection at the end of the dead-zone fibre. If not using the dead-zone fibre (Figure C.3), place the cursor beyond the dead-zone of the OTDR connector. Obtain the distance and power coordinates, $[z_1, P_1(\lambda)]$, via the alphanumeric display.

C.4.2.1.4 Place the same or another cursor at the end of the trace for the specimen at a point by using the methodology described in C.4.2.1.2 for the beginning of the trace. If the end of the trace is not apparent due to minimal discontinuity, apply a tight bend at this location and vary the radius to assist in cursor placement. Alternatively, cleave the fibre far end, if possible, to produce a reflection there. Obtain the coordinates, $[z_2, P_2(\lambda)]$.

C.4.2.1.5 Repeat the relevant tests of Clause C.4 at each wavelength required.

C.4.2.2 Step 2

Repeat the measurement for a signal launched into the specimen in the opposite direction. To obtain accurate attenuation values, bi-directional traces at the same wavelength are averaged, to eliminate the effects of length varying backscatter properties.

C.4.3 Further steps for measuring point discontinuities

C.4.3.1 Examine the OTDR signal along the specimen for point discontinuities as defined in 3.1.4. If increased resolution is necessary, adjust the graphical display, if possible, to expand the section of interest to a larger scale (exercising care to ensure that proper readings of the true signal can still be distinguished from the noise points). See Figure C.5 for an example.

C.4.3.2 To determine that a point discontinuity (rather than an attenuation non-uniformity situation) exists, observe the area in question, using two different pulse durations. If the shape of the loss or gain changes with the pulse duration, the anomaly is a point discontinuity. If the shape does not change, consider the anomaly to be an attenuation non-uniformity to be measured according to the test procedure for measurement of fibre or cable attenuation. Alternatively, if the OTDR pulse shape and duration are known, the resultant shape of the backscatter curve at point discontinuities ~~may~~ can be used to determine their existence.

C.4.3.3 Determine the discontinuity location, if required, by placing a cursor at the beginning of a power rise or drop (or at another point specified by the OTDR manufacturer). This ~~may~~ can be difficult to do for a power drop. Obtain the coordinate via the alphanumeric display.

C.4.3.4 Obtain the apparent loss or gain of the discontinuity, if required, by the method described by the OTDR manufacturer. Some instruments require placement of a pair of cursors on each side of the discontinuity. Extrapolate the two best-fit straight lines (from a two-point or least-squares fit for each) to the location of the discontinuity. If available, the linear fit method should be chosen. The vertical separation of the lines gives the apparent loss or gain.

Note any reflection peak. The height of a given peak will decrease with increasing pulse width and increase with decreasing pulse width.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

C.4.3.5 Repeat the test for a signal launched into the specimen in the opposite direction. Make a loss calculation (and the elimination of apparent gain) by averaging readings taken bi-directionally at the same wavelength. This eliminates the effects of any backscatter differences for the fibre sections on both sides of the discontinuity. Bi-directional measurements ~~may~~ are not ~~be~~ possible in all cases, thus necessitating unidirectional measurement.

C.4.3.6 Report any point discontinuity deviations that exceed the values specified in the detail specification. Describe the nature of these discontinuities (e.g. apparent loss or gain, reflection, duration, etc.), as required by the detail specification.

C.4.3.7 If required by the detail specification, repeat the test at another wavelength.

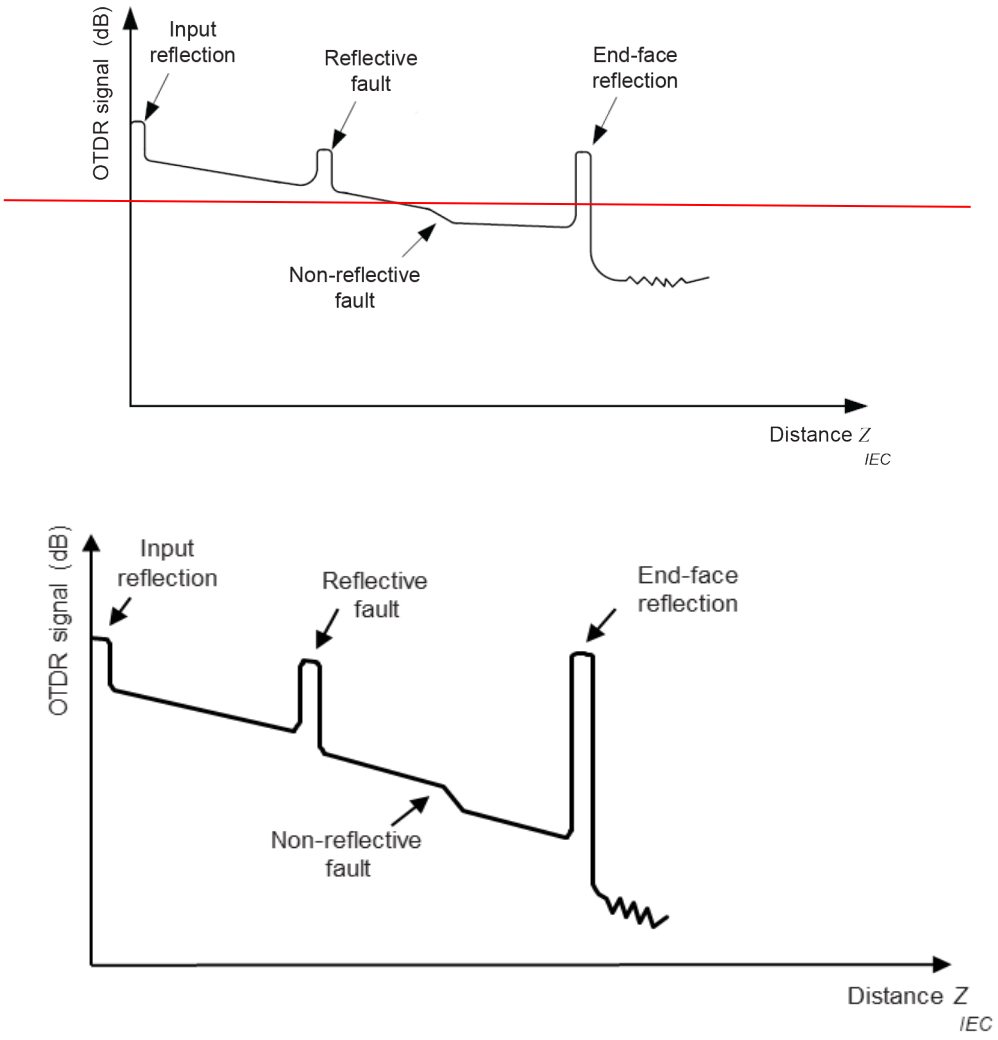

Figure C.4 – Schematic OTDR trace showing apparent loss due to point discontinuities, one reflective and one non-reflective

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

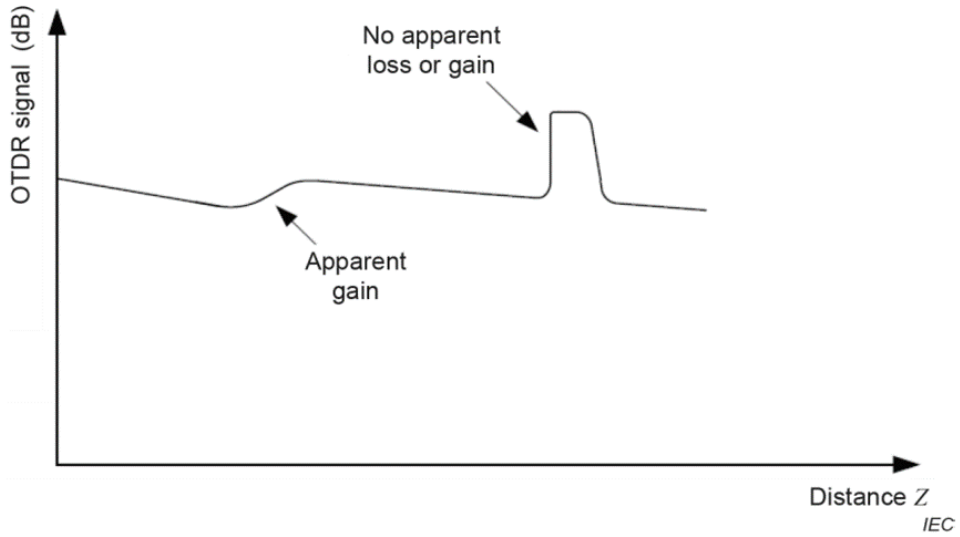

Figure C.5 – Schematic of an expanded OTDR trace showing two point discontinuities, one with apparent gain, and another with no apparent loss or gain

C.4.4 Calibration

Follow the provisions of IEC 61746-1 for the single-mode OTDR calibration method, or of IEC 61746-2 for the multimode OTDR calibration method.

C.5 Calculations

C.5.1 The unidirectional backscatter attenuation of the fibre or cable section beginning after the dead zone is given by $[P_1(\lambda) - P_2(\lambda)]$ in dB.

C.5.2 The unidirectional backscatter attenuation coefficient of the fibre or cable section is given by $\alpha = [P_1(\lambda) - P_2(\lambda)]/(z_2 - z_1)$ in dB/km.

C.5.3 (Optional, along with C.4.2.1.2) The unidirectional backscatter attenuation of the total fibre or cable section is given by $[P_1(\lambda) - P_2(\lambda)] + \alpha\,(z_1 - z_0)$ in dB (where α is given in C.5.2), or equivalently by $[P_1(\lambda) - P_2(\lambda)](z_2 - z_0)/(z_2 - z_1)$, in dB.

C.5.4 Some OTDRs can automatically perform the two-point subtractions in C.5.1 to C.5.2.

NOTE Some OTDRs can also utilize a least-squares fit to a line, but this can give results that differ from those given by the two-point subtractions. The type of calculation is indicated in the detail specification. While the least-square average (LSA) method can be the more repeatable method due to noise effects, it can err in the presence of inhomogeneities.

C.5.5 Repeat the calculations for the measurements made in the opposite direction. Compute the average of the two calculations made in C.5.2 to arrive at the fibre's attenuation coefficient at that wavelength.

C.5.6 Repeat the calculations of C.5.1 through C.5.5 at each wavelength to determine the attenuation coefficient at each wavelength.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

C.6 Results

C.6.1 In addition to the requirements of 10.1, report the following when measuring point defects:

– specimen end where the OTDR was located;

– features of the point discontinuities as required by the detail specification.

C.6.2 In addition to the requirements in 10.2, the following information shall also be available on request:

– fibre or cable specimen, including its type, effective group index, length, and deployment conditions;

– OTDR instrument (including brand, model and manuals);

– pulse duration(s), scale range(s), and signal averaging details;

– centroidal wavelength(s) and spectral width(s) as periodically verified in accordance with C.2.2;

– indication of whether dead-zone fibre is used;

– method of calculation.

– indication of the bi-directional or unidirectional measurement method.

Figure C.4 and Figure C.5 show examples of OTDR traces for several types of point discontinuities: a reflective discontinuity and a non-reflective one, both exhibiting apparent loss (Figure C.4); a discontinuity exhibiting an apparent "gain", and one with no apparent loss or gain (Figure C.5).

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

Annex D
(normative)

Requirements specific to method D – Spectral attenuation modelling

D.1 General

Method D can be demonstrated on class B single-mode fibres.

The attenuation coefficient of a fibre across a spectrum of wavelengths ~~may~~ can be calculated by means of a characterizing matrix, M, and a vector, v. The vector v contains the measured attenuation coefficients of a small number (three to five) of wavelengths (e.g. 1 310 nm, 1 330 nm, 1 360 nm, 1 380 nm, ~~and/~~or 1 550 nm).

In one approach, the fibre or cable supplier shall provide a matrix characteristic of its product, and the modelled spectral attenuation is a vector, w, calculated from the product of M and v:

$$w = M \times v \tag{D.1}$$

Alternatively, if using a generic matrix, the supplier shall provide a correction factor vector such that the prediction formula becomes

$$W = w + e \tag{D.2}$$

where

W is the modified vector;

w comes from Formula (D.1);

e is the correction factor vector.

A generic matrix is a characterizing matrix which can be applied to a variety of fibres, designs and suppliers (presumably within a single fibre type), and which is either determined or invoked, or both, by a standards body, single customer/end-user, or other industry source to which individual suppliers can compare their products, the difference being resolved by the vector, e.

D.2 Apparatus

Since this technique involves a calculation using predetermined values, no specific apparatus is required. Please refer to the specific technique used to generate the measured values upon which the calculations are made.

D.3 Sampling and specimens

See Clause D.2.

D.4 Procedure

See Clause D.2.

Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV

D.5 Calculations

The attenuation coefficient of a fibre across a spectrum of wavelengths ~~may~~ can be calculated by means of Formula (D.1). The vector, v, contains the measured attenuation coefficients of a small number (three to five) of predictor wavelengths (e.g. 1 310 nm, 1 330 nm, 1 360 nm, 1 380 nm, ~~and/~~or 1 550 nm). Multiplying the matrix, M, times the vector, v, yields another vector, w, which contains the predicted attenuation coefficients at many wavelengths (such as at 10 nm wavelength intervals from 1 240 nm to 1 600 nm). The resultant vector, w, contains the predicted attenuation coefficients at many wavelengths (such as at 10 nm wavelength intervals from 1 240 nm to 1 600 nm).

The matrix, M, is given by

$$\begin{matrix} A_{11} & A_{12} & A_{1n} \\ A_{21} & A_{22} & A_{2n} \\ \vdots & & \\ A_{m1} & A_{m2} & A_{mn} \end{matrix}$$

where

m is the number of wavelengths for which the attenuation coefficients have to be estimated;

n is the number of predictor wavelengths.

The standard deviation of the difference between the actual and predicted attenuation coefficients at each wavelength shall be less than a maximum attenuation value (in dB/km) within a stated wavelength range. A different value of maximum attenuation ~~may~~ can be necessary if an additional wavelength range is specified. The value(s) of maximum attenuation and the wavelength range(s) should be agreed upon between the user and the manufacturer.

If the estimate is obtained by using the supplier's specific matrix, M, then no correction vector, e, is necessary.

Since the elements of both M and e are achieved on a statistical basis, the w vector elements shall be statistically determined. To indicate the accuracy of the predicted attenuation coefficients, the fibre suppliers shall give a vector containing the standard deviation of the differences between the actual and predicted attenuation coefficients, together with either M or e, or both (see Clause D.6).

In order to facilitate the use of this matrix, the fibre should be routinely measured at the predictor wavelengths. The predictor wavelengths should number from three to five, with a strong preference given to the lower number if sufficient accuracy can be achieved. The specific wavelengths (e.g. 1 310 nm, 1 330 nm, 1 360 nm, 1 380 nm, ~~and/~~or 1 550 nm) are an item for further study.

This model considers only uncabled fibre attenuation. An additional vector should be added to w in order to account for cabling and environmental effects.

AVA Documents
Document Sharing Hub
Full document details: IEC 60793-1-40 2024 RLV