

CONSOLIDATED VERSION

VERSION CONSOLIDÉE



**Low-voltage switchgear and controlgear –
Part 5-4: Control circuit devices and switching elements – Method of assessing
the performance of low-energy contacts – Special tests**

**Appareillage à basse tension –
Partie 5-4: Appareils et éléments de commutation pour circuits de commande –
Méthode d'évaluation des performances des contacts à basse énergie – Essais
spéciaux**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

CONSOLIDATED VERSION

VERSION CONSOLIDÉE



**Low-voltage switchgear and controlgear –
Part 5-4: Control circuit devices and switching elements – Method of assessing
the performance of low-energy contacts – Special tests**

**Appareillage à basse tension –
Partie 5-4: Appareils et éléments de commutation pour circuits de commande –
Méthode d'évaluation des performances des contacts à basse énergie – Essais
spéciaux**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.130.20

ISBN 978-2-8322-6998-5

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

REDLINE VERSION

VERSION REDLINE



**Low-voltage switchgear and controlgear –
Part 5-4: Control circuit devices and switching elements – Method of assessing
the performance of low-energy contacts – Special tests**

**Appareillage à basse tension –
Partie 5-4: Appareils et éléments de commutation pour circuits de commande –
Méthode d'évaluation des performances des contacts à basse énergie – Essais
spéciaux**

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope and object.....	6
2 Normative references	6
3 Definitions and list of symbols used	7
3.1 Definitions	7
3.2 List of symbols used.....	9
4 General principles	10
5 General test method	10
6 General characteristics.....	11
6.1 Measurement methods	11
6.2 Sequences of operations	13
6.3 Electrical characteristics.....	15
6.4 Characteristics of operation.....	16
7 Characterization of defects.....	17
7.1 Basic method	17
7.2 Monitoring the load (figure 3)	17
8 Ambient conditions	17
8.1 Normal conditions	17
8.2 Preconditioning	18
8.3 Particular conditions.....	18
9 Methods of reporting	18
9.1 Failure criterion	18
9.2 Reporting the failure rate.....	18
10 Information to be provided in the test report	20
Annex A (normative) Information to be supplied by the manufacturer	22
Bibliography.....	25
Figure 1 – Functional diagram of the testing equipment	11
Figure 2 – Typical test circuit for the basic method	12
Figure 3 – Test circuit for monitoring a load	13
Figure 4 – Sequential diagram with load-switching contacts.....	14
Figure 5 – Sequential diagram without load-switching contacts	15
Table 1 – Coefficient K_C for a time-terminated test.....	21

INTERNATIONAL ELECTROTECHNICAL COMMISSION

LOW-VOLTAGE SWITCHGEAR AND CONTROLGEAR –

Part 5-4: Control circuit devices and switching elements – Method of assessing the performance of low-energy contacts – Special tests

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

DISCLAIMER

This Consolidated version is not an official IEC Standard and has been prepared for user convenience. Only the current versions of the standard and its amendment(s) are to be considered the official documents.

This Consolidated version of IEC 60947-5-4 bears the edition number 2.1. It consists of the second edition (2002-10) [documents 17B/1228/FDIS and 17B/1254/RVD] and its amendment 1 (2019-05) [documents 121A/284/FDIS and 121A/301/RVD]. The technical content is identical to the base edition and its amendment.

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 60947-5-4 has been prepared by subcommittee 17B: Low-voltage switchgear and controlgear, of IEC technical committee 17: Switchgear and controlgear.

This second edition has the status of an International Standard.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

Some slight modifications, mainly of an editorial nature, have been introduced since the first edition.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

General usage of control switches may not be suitable for use at very low voltages and therefore it is recommended to seek the advice of the manufacturer concerning any application with a low value of operational voltage, for example, below 100 V a.c. or d.c. (see IEC 60947-5-1:2016, note ~~2~~ of ~~4.3.1.1~~ 4.3.2.2).

However, the development of electronic systems and programmable controllers in industrial processes increases the use of switching elements in low-voltage circuit control.

It is thus necessary to define how predictional behaviour of contacts in this area should be established (with an acceptable confidence level), by using precise conventional testing methods, down to specified values (such as 24 V, 1 mA; 5 V, 10 mA).

The objective of this document is to ensure the availability of contacts used in this area, including normally-open contacts.

This document shall be used as a complement of IEC 60947-5-1 for low-energy contacts applications.

LOW-VOLTAGE SWITCHGEAR AND CONTROLGEAR –

Part 5-4: Control circuit devices and switching elements – Method of assessing the performance of low-energy contacts – Special tests

1 Scope and object

This part of IEC 60947 applies to separable contacts used in the utilization area considered, such as switching elements for control circuits.

This standard takes into consideration two **typical** rated voltage areas:

- a) above (and including) 10 V (typically 24 V) where contacts are used for switching loads with possible electrical erosion, such as programmable controller inputs;
- b) below 10 V (typically 5 V) with negligible electrical erosion, such as electronic circuits.

This standard does not apply to contacts used in:

- **functional safety area**. In case of contacts used in functional safety area, Annex N of IEC 60947-5-1:2016 applies;
- ~~the~~ very low energy area of measurement, for example, sensor or thermocouple systems.

The object of this standard is to propose a method of assessing the performances of low energy contacts giving

- useful definitions;
- general principles of test methods which are to monitor and record the behaviour of contacts at each operation;
- functional bases for the definition of a general testing equipment;
- preferred test values;
- particular conditions for testing contacts intended for specific applications (such as switching of PC inputs);
- information to be given in the test report;
- interpretation and presentation of the test results.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1:~~1988~~2013, *Environmental testing – Part 1: General and guidance*
~~Amendment 1 (1992)~~

IEC 60068-2 (all parts), *Environmental testing – Part 2: Tests*

IEC 60605-6:~~1997~~2007, *Equipment reliability testing – Part 6: Tests for the validity and estimation of the constant failure rate ~~or~~ and constant failure intensity ~~assumptions~~*

IEC 60947-1:~~1999~~2007, *Low-voltage switchgear and controlgear – Part 1: General rules*¹

Amendment 1 (~~2000~~2010)

Amendment 2 (~~2001~~2014)

IEC 60947-5-1:~~1997~~2016, *Low-voltage switchgear and controlgear – Part 5-1: Control circuit devices and switching elements – Electromechanical control circuit devices*²

~~Amendment 1 (1999)~~

~~Amendment 2 (1999)~~

~~IEC 61131-2:1992, *Programmable controllers – Part 2: Equipment requirements and tests*~~

3 Definitions and list of symbols used

3.1 Definitions

For the purpose of this part of IEC 60947, the following definitions apply.

In this standard the term “time interval” is expressed as the “number of operating cycles”, as appropriate in definitions.

3.1.1

reliability

probability that an item can perform a required function, under given conditions, for a given time interval (t_1 , t_2)

NOTE 1 It is generally assumed that the item is in a state to perform this required function at the beginning of the time interval.

NOTE 2 The term “reliability” is also used to denote the reliability performance quantified by this probability (see IEC 191-02-06).

[IEV 191-12-01]

3.1.2

contact reliability

probability that a contact can perform a required function, under given conditions, for a given number of operating cycles

3.1.3

failure

termination of the ability of an item to perform a required function

NOTE 1 After a failure the item has a fault.

NOTE 2 “Failure” is an event, as distinguished from “fault”, which is a state.

NOTE 3 This concept as defined does not apply to items consisting of software only.

[IEV 191-04-01]

3.1.4

defect

non-fulfilment of an intended requirement or an expectation for an entity, including one concerned with safety

NOTE The requirement or expectation should be reasonable under the existing circumstances.

¹~~A consolidated version of this standard exists.~~

²~~A consolidated version of this standard exists.~~

3.1.5**observed failure rate λ_{ob}**

for a stated period in the life of an item, ratio of the total number of failures in a sample to cumulated observed number of cycles on that sample. The observed failure rate is to be associated with particular and stated numbers of operating cycles (or summation of operating cycles) in the life of the item and with stated conditions

3.1.6**assessed failure rate λ_c**

failure rate of an item determined by a limiting value or values of the confidence interval associated with a stated confidence level, based on the same data as the observed failure rate of nominally identical items

NOTE 1 The source of the data should be stated.

NOTE 2 Results can be accumulated (combined) only when all conditions are similar.

NOTE 3 The assumed underlying distribution of failures against time should be stated.

NOTE 4 It should be stated whether a one-side or a two-side interval is being used.

NOTE 5 Where only one limiting value is given, this is usually the upper limit.

3.1.7**constant failure rate period**

that period, if any, in the life of a non-repaired item during which the failure rate is approximately constant

[IEV 191-10-09]

NOTE In reliability engineering, it is often assumed that the failure rate λ is constant, that is that the times to failure are distributed exponentially.

3.1.8**controlling unit**

equipment generating commands to run a specified test sequence controlling synchronization and the flow of orders (such as starts, measurements, stops)

3.1.9**steady state** (of the contacts after closing)

state of the contact after mechanical stabilization (after operation bounces)

3.1.10**load**

device which is to be controlled by the contact under test

3.1.11**duty ratio**

ratio, for a given time interval, of the on-load duration to the total time

[IEV 151-04-13]

3.1.12**contact voltage drop U_k**

voltage between the contact members in the steady state

3.1.13**defect contact voltage drop U_{kd}**

value of the voltage drop for which a defect is registered if it is exceeded for a time more than t_d

3.1.14**defect time t_d**

minimum time during which a contact voltage drop greater than U_{kd} is considered as a defect

3.1.15

ON voltage U_{ON}

minimum voltage necessary for activating the load from the OFF to the ON state

3.1.16

ON time t_{ON}

corresponding minimum duration of the application of voltage U_{ON} for activating the load from the OFF to the ON state

3.1.17

OFF voltage U_{OFF}

maximum voltage necessary for deactivating the load from the ON to the OFF state

3.1.18

OFF time t_{OFF}

corresponding minimum time to change from the ON to the OFF state when the voltage drops to U_{OFF} or below

3.2 List of symbols used

AX	auxiliary contact (see figure 2)
B	coefficient used for statistical analysis (see table 1)
c	confidence level
C	contact under test (see figure 2)
I	test current
m_c	statistical assessed constant mean number of operating cycles to failure (lower limit) at confidence level c ($m_c = 1/\lambda_c$)
M	measurement of voltage drop or monitoring the load (see figure 4)
n	number of tested items at the commencement of the test (see 9.2.2)
N	number of operating cycles (see 9.2.2)
N_i	number of operating cycles for item i (see 9.2.2)
N^*	cumulative number of operating cycles (see 9.2.2)
r	number of failures (see 9.2.2)
t_b	time to reach steady-state conditions (see figure 4)
t_d	defect time (see 3.1.14)
t_c	final time without surveillance before breaking current (see figure 4)
t_e	time interval between the opening of AX and C (see figure 5)
t_i	initial time without surveillance after initiation of current (see figure 4)
t_m	time of measurement of contact voltage drop U_k or monitoring the load (see figure 4)
t_{OFF}	OFF time (see 3.1.18)
t_{ON}	ON time (see 3.1.16)
t_p	time of current flowing (see figure 4)
t_s	time of steady state of the test contact (see 3.1.9 and figure 4)
U	supply voltage of the test circuit
U_k	contact voltage drop (see 3.1.12)
U_{kd}	defect contact voltage drop (see 3.1.13)
U_L	voltage across the load (see figure 3)
U_{OFF}	OFF voltage (see 3.1.17)

U_{ON}	ON voltage (see 3.1.15)
T	period of the test cycle (see figure 4)
λ	true constant failure rate
λ_c	assessed failure rate (upper limit) at confidence level c
λ_{ob}	observed failure rate (calculated from test) (see 3.1.5)

4 General principles

A method of assessing the performances of low-energy contacts by special tests is proposed. As the failures of such contacts are of a random nature, the method is based on a continuous monitoring of the contacts under test.

For the basic method (see 6.1.1), the voltage drop between the terminals of the closed contact (steady state – see 3.1.9) is measured for each operation and compared to a specified threshold.

In the alternative method, the behaviour of the load is monitored at each operating cycle.

The measurement is performed under constant voltage U (see figures 2 and 3). The contact(s) under test is (are) mounted and connected as in normal service and under ambient conditions as defined in clause 8. The measurement of the voltage drop is made directly on the connecting terminals of the contact(s) or on the connecting terminals of the load (see 6.1.2).

In the basic and alternative methods recommended here (see 6.1.1 and 6.1.2), the contacts under test switch (make and break) the load.

For tests without switching the load, the analysis may be performed on the same equipment. The testing equipment for this purpose should, therefore, be designed accordingly.

It may be possible to test the contact(s) in particular environments (dry heat, dust, damp heat, H_2S , etc.). Such environments shall be agreed between the user and the manufacturer, and shall be chosen from those defined in the IEC 60068-2 series (see clause 8).

In the basic method, tests are made with direct current. Precautions concerning measurement of low voltage shall be taken (for example, the use of shielded cables).


When the test is performed on a load, care must be taken to avoid voltage drops other than contact voltage drop (use of stabilized power supply).

Any external influence liable to affect the results (such as vibrations) shall be avoided.

5 General test method

The equipment used for the test (see figure 1) controls

- the operation of contacts under test;
- the electrical supply for contact circuits;
- the measurement of contact voltage drop for the basic method or the monitoring of the state of the load for the alternative method;
- the detection and recording of defects and failures for each of the contacts under test.

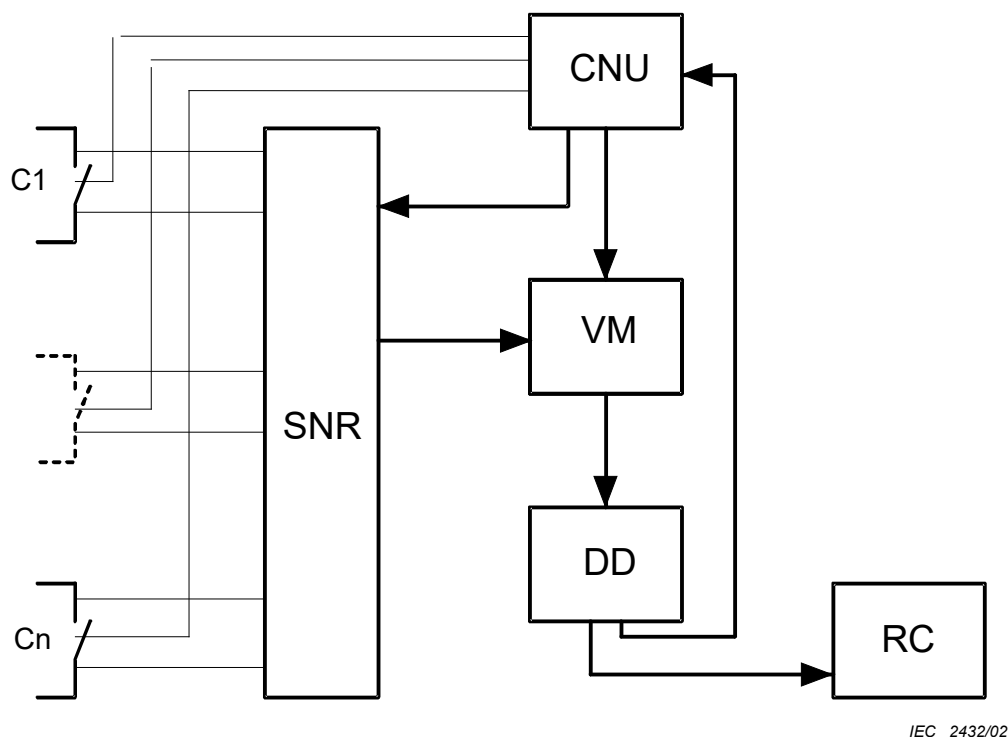

Key

C1,..., Cn	Contacts under test	CNU	Controlling unit
SNR	Scanner	VM	Voltage measuring device
DD	Detection of defects	RC	Recording of results

Figure 1 – Functional diagram of the testing equipment

To ensure an adequate statistical estimate of the failure rate, eight or more contacts of the type to be tested shall be tested.

NOTE Where applicable, both make and break contacts should be tested.

The number of operating cycles of the test shall be at least 25 %, and not more than 100 %, of the durability with the number of operating cycles at low energy stated by the manufacturer. Unless otherwise stated, this stated number is the mechanical durability.


Means of verification of the operating sequence, with special attention to the state of the contacts under test, and calibration of measuring devices shall be included in the test equipment.

6 General characteristics

6.1 Measurement methods

6.1.1 Measurement on the contact (basic method)

The measurement (detection of contact voltage drop) is made directly on the contact terminals according to figure 2.

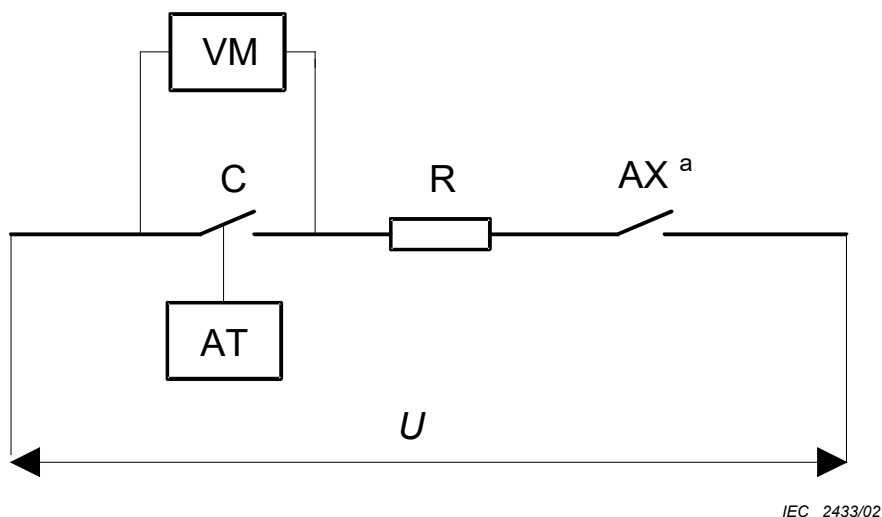

Key

C	Contact under test	AX	Auxiliary contact used for making and breaking current when not switching the load by the contact under test
U	Supply voltage d.c.	AT	Actuation function of contact under test
R	Resistive load		
VM	Voltage measuring device		

^a AX shall be chosen with low mechanical bounce and stable contact voltage drop.

Figure 2 – Typical test circuit for the basic method


6.1.2 Monitoring the load (alternative method)

In this method the contact is tested by monitoring the behaviour of the load according to figure 3.

This method corresponds to normal service conditions and gives results which depend on the load characteristics. The results can only be compared if the tests are performed on loads with identical characteristics.

The behaviour of the supply voltage has a direct influence on the performance of the load.

Therefore it is necessary to use a stable (better than $\pm 1\%$) uninterruptible power supply (see 6.3.1 for maximum ripple content of supply).

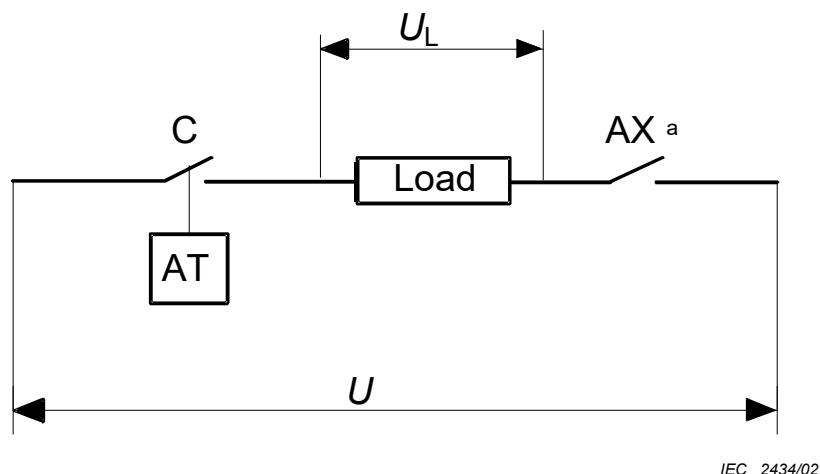

Key

C	Contact under test	AT	Actuation function of contact under test
U	Supply voltage (d.c. or a.c.)	AX	Auxiliary contact
U_L	Voltage across the load		

NOTE One AX contact may be used for more contacts under test, as long as the AX contact rating is not exceeded, each contact being monitored including an individual resistance load R.

^a AX shall be chosen with low mechanical bounce and stable contact voltage drop.


Figure 3 – Test circuit for monitoring a load

6.2 Sequences of operations

For these recommended tests (basic method or alternative method), the contact under test switches the load and AX (see figures 2 and 3) is permanently closed during the test. The sequential diagram is given in figure 4.

For specific applications, the contact under test does not switch the load. An example of a sequential diagram is given in figure 5.


In these diagrams, the represented functions (C, I, etc.) are those indicated in figures 2 and 3. The function M is actually the measurement of the contact voltage drop for the basic method. It can also be the monitoring or the recording of the state of the load in the alternative method.

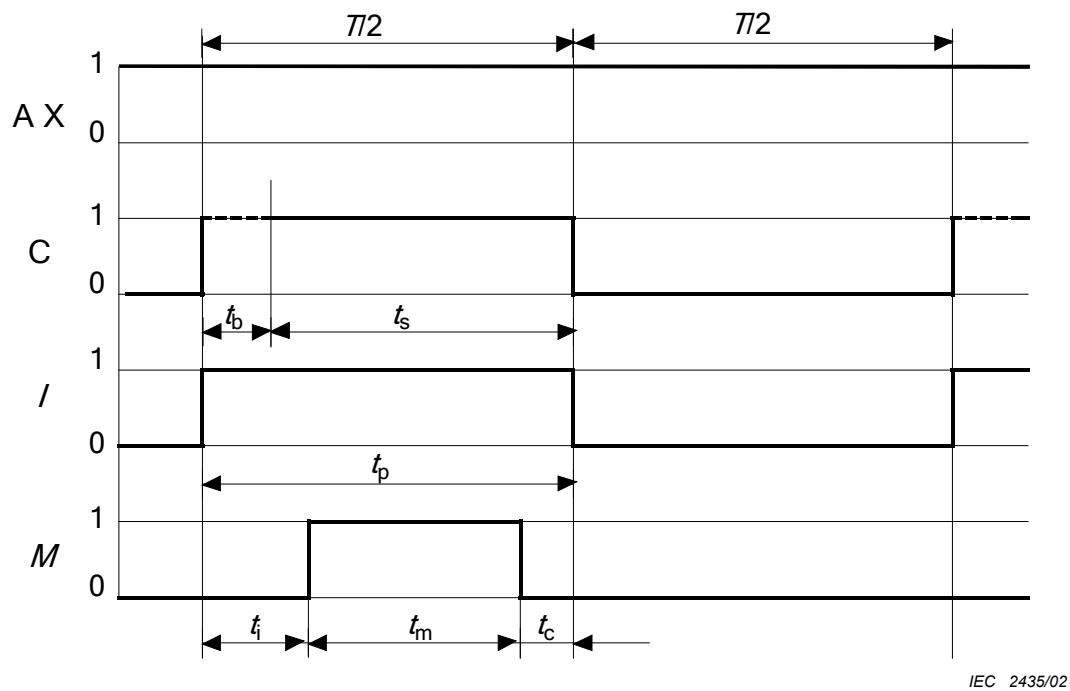

Key

C	Contact under test	t_i	Initial time without surveillance after initiation of current $t_i \leq 40\%$ of t_p and at least 10 ms
I	Test current	t_m	Time of measurement of contact voltage drop (U_k), or monitoring of the load
M	Measurement of voltage drop or monitoring of the load	t_p	Time of current flowing
T	Period of the test cycle	t_s	Time of steady state of the tested contact
AX	Auxiliary contact		
t_b	Time to reach steady-state conditions (bouncing has ceased) and at least 10 ms		
t_c	Final time without surveillance before breaking current (for example, $t_c = 10\%$ of t_p)		

Figure 4 – Sequential diagram with load-switching contacts

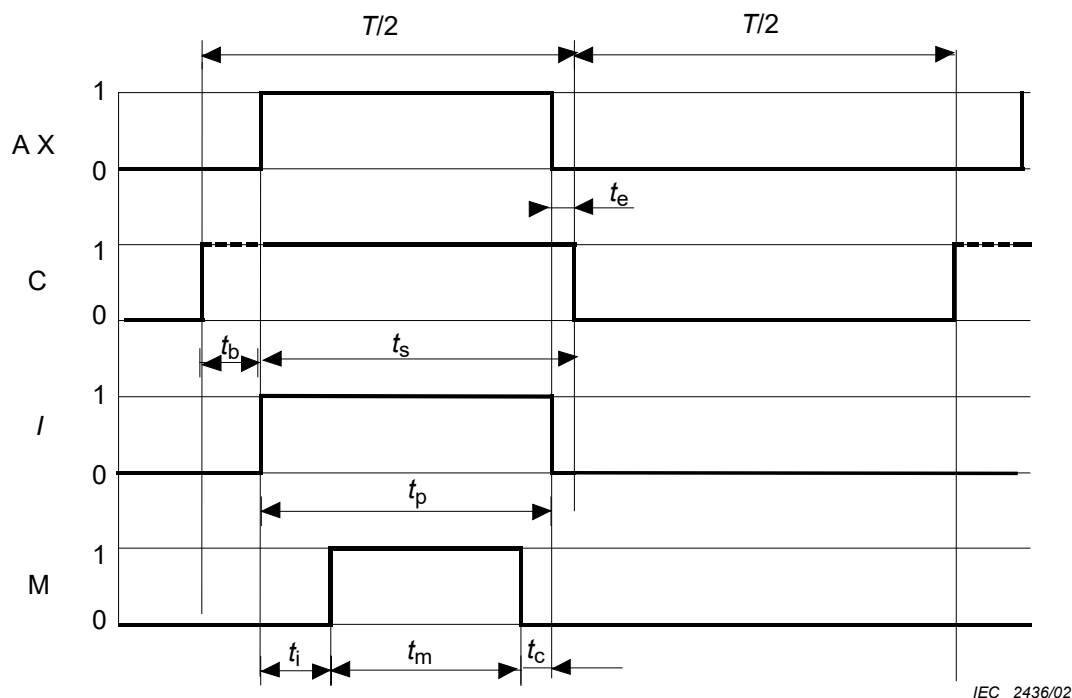

Key

C	Contact under test	t_e	Time interval between the opening of AX and C
I	Test current	t_i	Initial time without surveillance after initiation of current $t_i \leq 40\%$ of t_p and at least 10 ms
M	Measurement of voltage drop or monitoring of the load	t_m	Time of measurement of contact voltage drop (U_k), or monitoring of the load
T	Period of the test cycle	t_p	Time of current flowing
AX	Auxiliary contact	t_s	Time of steady state of the tested contact
t_b	Time to reach steady-state conditions (bouncing has ceased) and at least 10 ms		
t_c	Final time without surveillance before breaking current (for example, $t_c = 10\%$ of t_p)		

Figure 5 – Sequential diagram without load-switching contacts

6.3 Electrical characteristics

6.3.1 Characteristics of the supply for basic method

6.3.1.1 Supply voltage

The supply voltage for test circuits (see figure 2) shall be

- d.c. 24 V $\pm$ 5 % (ripple included), or
- d.c. 5 V $\pm$ 5 % (ripple included).

NOTE When testing contacts, it is recommended to reverse the direction of the current through the contacts at regular intervals during the test. This should be recorded in the test report.

6.3.1.2 Current

For the basic method with negligible contact resistance (short-circuited terminals), the prospective current for test shall be chosen from the following values: 1 mA, 5 mA, 10 mA, 100 mA; 10 mA is the preferred value.

The current shall not exceed the rating of the contacts under the stated test conditions.

The tolerance is ± 5 % of the nominal value (when setting at the actual voltage U).

6.3.2 Supply for alternative method

The supply depends on the load requirements. In every case, the stability shall be better than ± 1 % of the adjusted voltage (see figure 3).

6.3.3 Characteristics of active load

6.3.3.1 General

The load is characterized by the following values:

ON voltage: U_{ON} ON delay: t_{ON}
OFF voltage: U_{OFF} OFF delay: t_{OFF}

The load will be activated (ON state) when $U_L \geq U_{ON}$ for a time $t \geq t_{ON}$ and will return to OFF state when $U_L \leq U_{OFF}$ for a time $t \geq t_{OFF}$.

6.3.3.2 Digital input of programmable controller (~~PC system as defined in IEC 61131-2~~ as defined in S.3.2.2.3 of IEC 60947-1:2007)

Manufacturer's name and type designation of the PC system used for the test shall be recorded in the test report.

6.3.3.3 Contactor or relay

As the test corresponds to a practical application, the power supply can be a.c. or d.c. as appropriate.

The load shall be used as recommended by the manufacturer. If a suppressor is used, it shall be mentioned in the test report. The type of suppressor used (diode, varistor, RC link, etc.) shall also be mentioned.

The load, in this case being an electromechanical device, is subject to mechanical wear. Consequently, the load (contactor or relay) shall be replaced before reaching its stated mechanical life.

The manufacturer's name and type designation of the load shall be recorded in the test report.

6.4 Characteristics of operation

The operating cycle shall be chosen following 4.3.4.3 of IEC 60947-1:2007, appropriate to the device and load under test.

Duty ratio for the contacts under test: 50 %.

In some cases, an operating machine is necessary for actuating the tested contacts.

Operating conditions of the machine shall be as defined in 8.3.2.1 of IEC 60947-5-1:2016.

7 Characterization of defects

7.1 Basic method

7.1.1 General

The test equipment shall be adequate to detect contact voltage drops greater than U_{kd} persisting for a time $t \geq t_d$. The value of t_d required depends on the application and shall be recorded in the test report; preferred values of t_d are 1 ms and 5 ms.

The value for U_{kd} depends on the application. Preferred values are: 1 %, 10 %, 25 % of U .

For a defective operation only one defect shall be counted, even if several defects of conduction (intermittent contact) occur during t_m .

NOTE The characterization of a defect given in this standard is conventional. In practice, it might be possible that such a defect never causes a malfunction.

7.1.2 Calibration of the detection threshold

For fixed values of U and I , a calibration resistor replaces the contact to be tested and is adjusted to obtain U_{kd} . The detector (or the recorder) is adjusted to operate within the specified tolerances of measurement.

7.1.3 Monitoring (during t_m)

- By analogue measurement: for the measuring time t_m , see figures 4 and 5.
- By sampling at high frequency: the measuring time t_m shall be as shown in figures 4 and 5, and the time between two samplings shall be less than $t_d/2$.

7.2 Monitoring the load (figure 3)

7.2.1 Voltage drop measurement

The first method of monitoring can use the same principle as in 7.1: analogue or sampling measurement of U_L . In this case, there is a defect when $U_L < U_{ON}$ for a time $t \geq t_{OFF}$ (see 6.3.3).

7.2.2 Analysis of the state of the load

This is made by counting the number of operations of the output. In this case, the number of defects to be considered is the difference between the number of contact operations and the number of output changes.

8 Ambient conditions

8.1 Normal conditions

~~These are defined in 5.3 of IEC 60068-1, for temperature (15 °C to 35 °C), relative humidity (25 % to 75 %), and pressure (86 kPa to 106 kPa).~~

They are defined in Table 2 of IEC 60068-1:2013.

8.2 Preconditioning

The contacts to be tested should be exposed to the environmental testing conditions, stated in 8.1, for 24 h. If, however, the preconditioning is different from the above, it shall be mentioned in the test report, and a description of the preconditioning procedure shall be added.

8.3 Particular conditions

For particular applications, special tests may be required in controlled environments. Such environments should be chosen from IEC 60068-2 series.

9 Methods of reporting

9.1 Failure criterion

A failure of a contact is considered to have occurred after three defects.

The failure of a contact and the number of operating cycles at the occurrence of the failure for that contact are registered.

The time-terminated test is recommended.

After one failure (three defects), the contact shall not be considered for further statistical evaluation. It may be removed from test and replaced by a new contact whose performance is taken into consideration in the statistical analysis (see 9.2, test with replaced failed item).

9.2 Reporting the failure rate

9.2.1 General

In the case where it can be assumed that the failure rate is constant during the test (see IEC 60605-6), the confidence limits which give the assessed values may be derived from the χ^2 distribution.

For the one-sided interval, at confidence level c , the upper limit of the failure rate is λ_c for the assessed failure rate, with

$$0 < \lambda < \lambda_c$$

The assessed number of operating cycles to failure is: $m_c = 1/\lambda_c$

The failure rate is expressed by using the value λ_c at a given confidence level, c .

The preferred values of the confidence level c are 60 % and 90 %.

For a time-terminated test, the way of estimating λ_c or m_c is given below:

- for non-replaced failed items;
- for replaced failed items.

9.2.2 Estimation of λ_c when failed items are not replaced

$\lambda_{ob} = (\text{number of failed items})/(\text{total number of operating cycles})$

$$\lambda_{ob} = r/N^*$$

where

$$N^* = N_1 + N_2 + \dots + N_r + (n - r)N$$

$N_1, N_2, \dots, N_r$ are the operating cycles of items failed during the test

$$\lambda_c = K_c/N^*$$

Even when no failure arises during the test, an upper value of the failure rate λ_c can be estimated when using a time-terminated test.

EXAMPLE

- 20 contacts under test ($n = 20$)
- test duration: $N = (5 \times 10^6)$ operating cycles (time-terminated test)
- contact No. 1 failed at 100 000 operating cycles
- contact No. 2 failed at 400 000 operating cycles
- contact No. 3 failed at $(1,5 \times 10^6)$ operating cycles
- contact No. 4 failed at $(2,5 \times 10^6)$ operating cycles
- contacts No. 5 and No. 6 failed at (4×10^6) operating cycles
- contact numbers 7 to 20 completed (5×10^6) operating cycles without failure.

$$n = 20$$

$$r = 6$$

$$\begin{aligned} N^* &= 10^5 + (0,4 \times 10^6) + (1,5 \times 10^6) + (2,5 \times 10^6) + [2 \times (4 \times 10^6)] + [14 \times (5 \times 10^6)] \\ &= 82,5 \times 10^6 \end{aligned}$$

$$\lambda_{ob} = 6/82,5 \times 10^6 = 0,7 \times 10^{-7} \text{ failure/operating cycles}$$

At the confidence level of 90 %, $K_c = 10,55$ (from table 1)

$$\Rightarrow \lambda_c = 10,55 / (82,5 \times 10^6) = 1,3 \times 10^{-7} \text{ failure/operating cycles}$$

or

$$m_c = 7,7 \times 10^6 \text{ operating cycles}$$

9.2.3 Estimation of λ_c when failed items are replaced

When an item fails, it is replaced by a new one. All the failures which appear during the test are counted.

$$\lambda_{ob} = r / N^*$$

where

r = total number of failures

$$N^* = n \times N$$

$$\lambda_c = K_c / N^*$$

EXAMPLE

Same conditions as in the previous example, that is:

- 20 contacts under test and spare contacts available for replacing any failed ($n = 20$)
- test duration: $N = (5 \times 10^6)$ operating cycles (time-terminated test)
- contact No. 1 failed at $(0,1 \times 10^6)$ operating cycles. It was replaced by a new one which ran until the end of the test without failure.
- contact No. 2 failed at $(0,4 \times 10^6)$ operating cycles. It was replaced by a new one which ran until the end of the test without failure.
- contact No. 3 failed at $(1,5 \times 10^6)$ operating cycles. It was replaced by a new one which failed after (3×10^6) operating cycles (that is at the $(4,5 \times 10^6)^{\text{th}}$ operating cycle). It was then replaced by a new contact which ran until the end of the test without failure.
- contact No. 4 failed at $(2,5 \times 10^6)$ operating cycles. It was replaced by a new one which ran until the end of the test without failure.
- contacts No. 5 and No. 6 failed at (4×10^6) operating cycles. They were each replaced by a new one which ran until the end of the test without failure.
- contact numbers 7 to 20 completed (5×10^6) operating cycles without failure.

$$N = 20$$

$$R = 7$$

$$N^* = 20 \times (5 \times 10^6) = 10^8$$

$$\lambda_{\text{ob}} = 7 / 10^8 \quad \lambda_{\text{ob}} = 0,7 \times 10^{-7} \text{ failure/operating cycles}$$

$$\text{At the confidence level of 90 \%,} \quad K_c = 11,75 \text{ (from table 1)}$$

$$\Rightarrow \quad \lambda_c = 11,75 / 10^8 = 1,2 \times 10^{-7} \text{ failure/operating cycles}$$

or

$$m_c = 8,3 \times 10^6 \text{ operating cycles}$$

10 Information to be provided in the test report

The test report shall indicate

- chosen normative characteristics for the basic method: U , I , U_{kd} , t_d ;
- characteristics of loads when studying on active load: U_{ON} , U_{OFF} , t_{ON} , t_{OFF} , etc;
- wiring and mounting conditions;
- operating conditions: frequency of operations; mean velocity of actuating device if any; number of significant interruptions and their duration (and state of contact, open or closed, during these interruptions); particular ambient conditions;
- when the test is made on active load, the variations of functional characteristics shall be noted (including thermal stabilization). The characteristics (operating time, sensibility, etc.) of counters shall be given.

A recommended tabular form of report is given in annex A.

Table 1 – Coefficient K_c for a time-terminated test

Number of failures r	Value of K_c at confidence level c %	
	$c = 60$ %	$c = 90$ %
0	0,915	2,305
1	2,020	3,890
2	3,105	5,300
3	4,175	6,70
4	5,25	8,00
5	6,30	9,25
6	7,35	10,55
7	8,40	11,75
8	9,45	13,00
9	10,50	14,20
10	11,50	15,40
11	12,55	16,60
12	13,60	17,80
13	14,60	18,95
14	15,65	20,15
15	16,70	21,30
16	17,70	22,45
17	18,75	23,60
18	19,80	24,75
19	20,75	25,90
20	21,85	27,05
21	22,85	28,20
22	23,90	29,30
23	24,90	30,45
24	25,95	31,60
If the number of failures is more than 24, use the formula: $K_c = 0,25 [(4r+1)^{1/2} + B]^2$ where B has the following values: – for $c = 60$ %, $B = 0,253$ – for $c = 90$ %, $B = 1,28$		

Annex A (normative)

Information to be supplied by the manufacturer

Contacts under test
Manufacturer's name: Type designation of contacts: Form of contacts (see Figure 4 of IEC 60947-5-1:2016):

Active load (if any)
Nature of the load: Manufacturer's name: Type designation: Mounting conditions: Method of monitoring the load: (for example, counter, digital voltmeter, logical output): • operating time: • sensibility: Load characteristics • ON voltage: U_{ON} = ... V • ON time: t_{ON} = ... ms • OFF voltage: U_{OFF} = ... V • OFF time: t_{OFF} = ... ms

Environment	
Normal (~~5-3~~ Table 2 of IEC 60068-1:2013): If no, specify:	yes – no

Type test		
Reference to standards and subclauses	Test description and requirements	Test values and results
6.1.1	Basic method	yes – no
6.1.2	Alternative method	yes – no

Electrical characteristics		
6.3.1.1	Voltage: U d.c or a.c if d.c, U inverted: yes – no	 V
6.3.1.2	Current: I	 mA
4.3.4.3 of IEC 60947-1:2007,	Operating cycle	 cycle/hour
7.1	Defect contact voltage drop U_{kd}	 V
7.1	Defect time t_d	 ms

Mechanical characteristics		
8.3.2.1 of IEC 60947-5-1:2016,	Velocity of actuating device, if any (angular velocity for rotary switches)	 m/s

Characteristics of the test – Results	
Number of tested item at commencement of test	n =.....
Number of operating cycles	N =.....
Replacement of failed contacts	yes – no
Number of failures	r =.....
Cumulative number of operating cycles (see 9.2.2 and 9.2.3)	N^* =.....
Confidence level	c = 60 % 90 %
Coefficient K_c (from table 1)	K_c =.....
Assessed constant failure rate (failure/operating cycles) $\lambda_c = K_c/N^*$	λ_c =.....
Assessed number of operations to fail (operating cycles) $m_c = 1 / \lambda_c$	m_c =.....

Bibliography

IEC 60050-151:1978, *International Electrotechnical Vocabulary (IEV) – Part 151: Electrical and magnetic devices*

IEC 60050-191:1990, *International Electrotechnical Vocabulary (IEV) – Chapter 191: Dependability and quality of service*
Amendment 1 (1999)
Amendment 2 (2002)

SOMMAIRE

INTRODUCTION.....	29
1 Domaine d'application et objet.....	30
2 Références normatives.....	30
3 Définitions et liste des symboles utilisés.....	31
3.1 Définitions.....	31
3.2 Liste des symboles utilisés.....	33
4 Principes généraux.....	34
5 Méthode générale d'essai.....	35
6 Caractéristiques générales.....	36
6.1 Méthodes de mesure.....	36
6.2 Séquences des opérations.....	37
6.3 Caractéristiques électriques.....	39
6.4 Caractéristiques des opérations.....	40
7 Caractérisation des défauts.....	41
7.1 Méthode de base.....	41
7.2 Surveillance de la charge (figure 3).....	41
8 Conditions d'ambiance.....	41
8.1 Conditions normales.....	41
8.2 Préconditionnement.....	42
8.3 Conditions particulières.....	42
9 Méthodes de déclaration.....	42
9.1 Critère de défaillance.....	42
9.2 Annonce du taux de défaillance.....	42
10 Informations à fournir dans le rapport d'essai.....	44
Annexe A (normative) Informations à fournir par le constructeur.....	46
Bibliographie.....	49
Figure 1 – Schéma fonctionnel de l'équipement d'essai.....	35
Figure 2 – Circuit d'essai typique pour la méthode de base.....	36
Figure 3 – Circuit d'essai pour la surveillance de la charge.....	37
Figure 4 – Diagramme séquentiel avec contacts commutant la charge.....	38
Figure 5 – Diagramme séquentiel avec contacts ne commutant pas la charge.....	39
Tableau 1 – Coefficient K_C pour un essai tronqué.....	45

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

APPAREILLAGE À BASSE TENSION –

Partie 5-4: Appareils et éléments de commutation pour circuits de commande – Méthode d'évaluation des performances des contacts à basse énergie – Essais spéciaux

AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (IEC) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de l'IEC). L'IEC a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, l'IEC – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de l'IEC"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec l'IEC, participent également aux travaux. L'IEC collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de l'IEC concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de l'IEC intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de l'IEC se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de l'IEC. Tous les efforts raisonnables sont entrepris afin que l'IEC s'assure de l'exactitude du contenu technique de ses publications; l'IEC ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de l'IEC s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de l'IEC dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de l'IEC et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) L'IEC elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de l'IEC. L'IEC n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à l'IEC, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de l'IEC, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de l'IEC ou de toute autre Publication de l'IEC, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de l'IEC peuvent faire l'objet de droits de brevet. L'IEC ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets et de ne pas avoir signalé leur existence.

DÉGAGEMENT DE RESPONSABILITÉ

Cette version consolidée n'est pas une Norme IEC officielle, elle a été préparée par commodité pour l'utilisateur. Seules les versions courantes de cette norme et de son(ses) amendement(s) doivent être considérées comme les documents officiels.

Cette version consolidée de l'IEC 60947-5-4 porte le numéro d'édition 2.1. Elle comprend la deuxième édition (2002-10) [documents 17B/1228/FDIS et 17B/1254/RVD] et son amendement 1 (2019-05) [documents 121A/284/FDIS et 121A/301/RVD]. Le contenu technique est identique à celui de l'édition de base et à son amendement.

Dans cette version Redline, une ligne verticale dans la marge indique où le contenu technique est modifié par l'amendement 1. Les ajouts sont en vert, les suppressions sont en rouge, barrées. Une version Finale avec toutes les modifications acceptées est disponible dans cette publication.

La Norme internationale IEC 60947-5-4 a été établie par le sous-comité 17B: Appareillage à basse tension, du comité d'études 17 de l'IEC: Appareillage.

Cette deuxième édition a le statut de norme internationale.

Cette publication a été rédigée selon les Directives ISO/IEC, Partie 2.

Quelques légères modifications, principalement de nature éditoriale, ont été introduites par rapport à la première édition.

Le comité a décidé que le contenu de la publication de base et de son amendement ne sera pas modifié avant la date de stabilité indiquée sur le site web de l'IEC sous "<http://webstore.iec.ch>" dans les données relatives à la publication recherchée. A cette date, la publication sera

- reconduite,
- supprimée,
- remplacée par une édition révisée, ou
- amendée.

IMPORTANT – Le logo "*colour inside*" qui se trouve sur la page de couverture de cette publication indique qu'elle contient des couleurs qui sont considérées comme utiles à une bonne compréhension de son contenu. Les utilisateurs devraient, par conséquent, imprimer cette publication en utilisant une imprimante couleur.