IEC 61290-3-3

Edition 1.0 2013-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Optical amplifiers – Test methods – Part 3-3: Noise figure parameters – Signal power to total ASE power ratio

Amplificateurs optiques – Méthodes d'essais – Partie 3-3: Paramètres du facteur de bruit – Rapport puissance du signal sur puissance totale d'ESA

IEC 61290-3-3:2013

Documents
Document Sharing Hub

Full document details: IEC 61290-3-3 2013

THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.
If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.
Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,…).
It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,…).
Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

Documents
Document Sharing Hub

Full document details: IEC 61290-3-3 2013

IEC 61290-3-3

Edition 1.0 2013-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Optical amplifiers – Test methods – Part 3-3: Noise figure parameters – Signal power to total ASE power ratio

Amplificateurs optiques – Méthodes d'essais – Partie 3-3: Paramètres du facteur de bruit – Rapport puissance du signal sur puissance totale d'ESA

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

PRICE CODE
CODE PRIX

Q

ICS 33.180.30

ISBN 978-2-8322-1173-1

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

AVA Documents
Document Sharing Hub

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

Full document details: IEC 61290-3-3 2013

CONTENTS

FOREWORD 3
1 Scope and object 5
2 Normative references 5
3 Terms, definitions and abbreviations 5
3.1 Terms and definitions 5
3.2 Abbreviations 6
4 Background 7
5 Apparatus 8
5.1 Measurement using an OSA 8
5.2 Measurement using a bandpass filter and an optical power meter 9
6 Test sample 11
7 Procedure 11
7.1 General 11
7.2 Measurement using an OSA 11
7.2.1 Calibration 11
7.2.2 Measurement 12
7.3 Measurement using a bandpass filter and an optical power meter 13
7.3.1 General 13
7.3.2 Calibration 13
7.3.3 Measurement 13
8 Calculations 14
9 Test results 14
Annex A (informative) Signal power to total ASE power ratio – Dependence on signal input power, wavelength and output power 15
Bibliography 17

Figure 1 – Test set-up for OSA calibration and for measuring signal input power and source spontaneous emission power 8
Figure 2 – Test set-up for measuring signal output power and ASE power using an OSA 8
Figure 3 – Test set-ups for filter calibration and measuring the signal input power 10
Figure 4 – Test set-ups for measuring output signal power and ASE power using a filter and an optical power meter 10
Figure A.1 – The dependence of Sig_ASE on signal input power 15
Figure A.2 – The ASE spectrum for two different signal wavelengths 16
Figure A.3 – Sig_ASE as a function of output power for different signal wavelength 16

Documents
Document Sharing Hub
Full document details: IEC 61290-3-3 2013

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL AMPLIFIERS – TEST METHODS –

Part 3-3: Noise figure parameters – Signal power to total ASE power ratio

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61290-3-3 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

The text of this standard is based on the following documents:

CDV	Report on voting
86C/1121/CDV	86C/1184/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

Documents
Document Sharing Hub

Full document details: IEC 61290-3-3 2013

A list of all parts in the IEC 61290 series, published under the general title *Optical amplifiers – Test methods,* can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC 61290-3-3 2013

OPTICAL AMPLIFIERS – TEST METHODS –

Part 3-3: Noise figure parameters – Signal power to total ASE power ratio

1 Scope and object

This part of IEC 61290-3 applies to all commercially available single channel optical amplifiers (OAs), including OAs using optically pumped fibres (OFAs) based on either rare-earth doped fibres or on the Raman effect, semiconductor optical amplifier modules (SOA modules) and planar optical waveguide amplifiers (POWAs). More specifically, it applies to single channel OAs placed before optical receivers, where there are no optical bandpass filtering elements placed between the OA and the receiver.

The object of this part of IEC 61290-3 is to establish uniform requirements for accurate and reliable measurement of the ratio of the signal output power to the total ASE power generated by the OA in the optical bandwidth of the receiver. This quantity is a measure of the spontaneous-spontaneous beat noise at the receiver, and is correlated to the spontaneous-spontaneous noise factor of the OA, $F_{sp\text{-}sp}$, as defined in IEC 61290-3 and IEC 61291-1.

IEC 61290-3-1 describes a measurement method, using an optical spectrum analyzer, OSA, for the signal-spontaneous noise factor F_{sig-sp} but does not describe a method for measuring $F_{sp\text{-}sp}$. IEC 61290-3-2 describes a measurement method, using an electrical spectrum analyzer (ESA), for the total noise factor $F_{sp\text{-}sp} + F_{sig\text{-}sp}$. However, this method does not allow $F_{sp\text{-}sp}$ to be measured separately, and therefore does not provide a means of directly quantifying the effect of spontaneous-spontaneous beat noise at the receiver. This part of IEC 61290-3 complements IEC 61290-3-1 and IEC 61290-3-2 in that it provides such a means.

Two measurement methods are provided for the ratio of the signal output power to the total ASE power. The first method uses an OSA, while the second method uses a bandpass filter and an optical power meter.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61290-3, *Optical amplifiers – Test methods – Part 3: Noise figure parameters*

IEC 61291-1:2012, *Optical fibre amplifiers – Part 1: Generic specification*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

Documents
Document Sharing Hub
Full document details: IEC 61290-3-3 2013

3.1.1
signal input power
P_{in}
power of the optical signal at the input to the OA

3.1.2
signal output power
P_{out}
power of the optical signal at the output of the OA

3.1.3
signal wavelength
λ_s
wavelength of the signal optical carrier

[SOURCE: IEC 61291-1:2012, definition 3.2.2.1.1]

3.1.4
signal gain
G
gain of the OA at the signal wavelength, defined as the ratio of the output signal power to the input signal power

3.1.5
amplified spontaneous emission band
ASE band
B_{ASE}
wavelength band that contains at least 99 % of the total ASE power generated by OA

3.1.6
ASE centre wavelength
λ_C
centre wavelength of the ASE band

3.1.7
ASE power
P_{ASE}
ASE power generated by the OA within the ASE band

3.1.8
signal to total ASE power ratio
Sig_ASE
ratio of the output signal power to the total ASE power within B_{ASE}

3.1.9
spontaneous–spontaneous noise factor
$F_{sp\text{-}sp}$
ratio of the electrical SNR due to spontaneous-spontaneous beat noise at the OA output to the electrical SNR due to shot noise at the OA input

Note 1 to entry: See also IEC 61290-3 for a detailed formula for of $F_{sp\text{-}sp}$.

3.2 Abbreviations

APD avalanche photo diode

AFF ASE flattening filter

ASE amplified spontaneous emission

Documents
Document Sharing Hub

Full document details: IEC 61290-3-3 2013

CD	chromatic dispersion
DFB	distributed feedback
EDFA	erbium-doped fibre amplifier
ESA	electrical spectrum analyzer
FWHM	full width half maximum
NF	noise figure
OA	optical amplifier
OFA	optical fibre amplifier
OSA	optical spectrum analyzer
PDG	polarization dependent gain
PMD	polarization mode dispersion
POWA	planar optical waveguide amplifier
RBW	resolution band width
SNR	signal to noise ratio
SOA	semiconductor optical amplifier
VOA	variable optical attenuator
WDM	wavelength division multiplexing

4 Background

In recent years, high-speed transmission links beyond 10 Gb/s have been commercially introduced. These links (as well as some high-end 10-Gb/s links, such as submarine links) require high sensitivity receivers, e.g. avalanche photo diode (APD) receivers, which operate in a limited input optical power dynamic range. In addition, specialized optical components such as chromatic dispersion (CD) compensators and polarization mode dispersion (PMD) compensators may be placed on the receiver module, thus introducing considerable optical insertion loss.

In multi-channel wavelength division multiplexed (WDM) links a multi-channel OA is often placed at the end of the link before the WDM signal is demultiplexed into individual channels. The total output power of the multi-channel OA is typically such that the optical power per channel is in the range of 0 dBm to 5 dBm. This power is then attenuated by the demultiplexer, and further attenuated by the specialized optical components mentioned above. Thus, the optical power reaching the receiver may be below the required input optical power dynamic range. In this case, a single channel OA may be placed on the receiver module to boost the optical power reaching the receiver.

In such a situation, there is typically no optical bandpass filter between the single channel OA and the receiver, so that all the amplified spontaneous emission (ASE) noise generated by the amplifier reaches the receiver. This can result in a significant level of spontaneous-spontaneous beat noise at the receiver. One way to characterize this noise is through the spontaneous-spontaneous noise factor, $F_{\text{sp-sp}}$, as defined in IEC 61290-3 and IEC 61291-1. Another way to characterize the spontaneous-spontaneous beat noise is through the signal to total ASE power ratio, Sig_ASE, at the OA output, given by the following:

$$Sig_ASE = \frac{P_{\text{out}}}{P_{\text{ASE}}} \tag{1}$$

where P_{out} is the signal output power of the OA, and P_{ASE} is the ASE power generated by the OA within the ASE band, given by

Documents
Document Sharing Hub
Full document details: IEC 61290-3-3 2013

$$P_{\mathrm{ASE}} = \int_{B_{\mathrm{ASE}}} \rho_{\mathrm{ASE}}(\lambda) d\lambda \tag{2}$$

where B_{ASE} is the ASE band of the OA defined as a wavelength band that contains at least 99 % of the total ASE power generated by OA.

Care should be taken to define B_{ASE} such that it excludes other sources of noise not related to ASE. In particular, B_{ASE} should exclude possible pump leakage power exiting the OA output port. For example, for a C-band EDFA pumped by a 1 480 nm pump, B_{ASE} should not include wavelengths below 1 500 nm. This guarantees that B_{ASE} includes at least 99 % of the ASE generated within the EDFA on the one hand, while excluding possible 1 480 nm pump leakage power on the other.

NOTE 1 In many OAs, and especially in OFAs, the ASE is polarization independent. In some OAs, such as some types of SOA modules, the ASE may be polarization dependent. P_{ASE} refers to the total power in both polarization directions.

While there is no direct relation between Sig_ASE and $F_{\mathrm{sp\text{-}sp}}$, it is clear that there is a correlation between them, and that both quantities can be used to quantify the effect of spontaneous-spontaneous beat noise at the receiver. The higher is Sig_ASE, the lower is the spontaneous-spontaneous beat noise (and the lower $F_{\mathrm{sp\text{-}sp}}$), and vice-versa.

In this standard, a measurement method for Sig_ASE is presented. Annex A provides a brief technical discussion of the various OA parameters that can affect and determine the Sig_ASE value.

NOTE 2 All quantities in this standard are in linear units, unless specifically defined otherwise.

5 Apparatus

5.1 Measurement using an OSA

This subclause describes the apparatus used for measuring Sig_ASE using an OSA. Figure 1 shows the test set-up used for OSA calibration, as well as for measuring the signal input power and the source spontaneous emission power. Figure 2 shows the test set-up used to measure the signal output power and the ASE power.

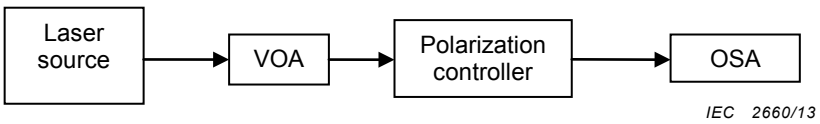

Figure 1 – Test set-up for OSA calibration and for measuring signal input power and source spontaneous emission power

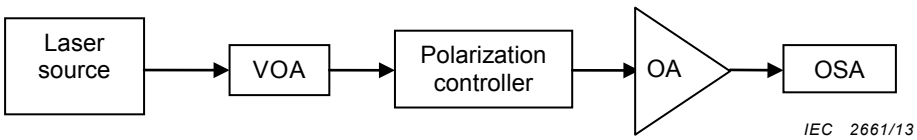

Figure 2 – Test set-up for measuring signal output power and ASE power using an OSA

Documents
Document Sharing Hub
Full document details: IEC 61290-3-3 2013

The test equipment listed below, with the required characteristics, is needed.

a) A laser source with the following characteristics:
   1) Either a tuneable laser or a set of discrete lasers able to support the range of signal wavelengths for which the OA under test is to be tested.
   2) An achievable output power such that the input signal power to the OA under test is above the maximum specified input signal power.
   3) A single line output with a side mode suppression ratio of at least 40 dB.
   4) A FWHM linewidth <0,01 nm.
   5) Output power stability <0,05 dB.

b) VOA – A variable optical attenuator (VOA) with a dynamic range sufficient to support the required range of input signal power levels at which the OA under test is to be tested. The reflectance from each port of the device should be <–50 dB.

   NOTE 1 If the output power of the laser source can be varied over the required dynamic range, then the VOA may not be needed.

c) Polarization controller – a device capable of transforming any input polarization state to any output polarization state. The reflectance from each port of the device should be <–50dB.

   NOTE 2 If the polarization dependent gain (PDG) of the an OFA or POWA is <0,3 dB, the polarization controller may not be needed.

d) OSA – the OSA shall have the following characteristics:
   1) Polarization sensitivity less than 0,1dB.
   2) Power stability better than 0,1dB.
   3) Wavelength accuracy better than 0,05 nm.
   4) The resolution bandwidth (RBW) of the OSA should be set to a value in the range of 0,2 nm to 1 nm, preferably 0,5 nm.
   5) Reflectance from the input port of the OSA should be <–50 dB.

5.2 Measurement using a bandpass filter and an optical power meter

This subclause describes the apparatus used for measuring Sig_ASE using a filter and an optical power meter. Figure 3 shows the test set-up used for the filter insertion loss calibration, as well as for measuring the signal input power. Figure 4 shows the test set-up used to measure the signal output power and the ASE power. This measurement method does not allow for the measurement of the laser source spontaneous emission, thus requiring a laser source with low enough spontaneous emission so as not to affect the Sig_ASE measurement (see laser source requirements below).

In cases where the OA may emit power outside of B_{ASE} (for example, pump leakage in the case of an amplifier employing 1 480 nm pumps), then a filter should be placed before the optical power meter to filter out such unwanted components. Such a filter should have an insertion loss ripple of <0,5 dB over B_{ASE}, and should have an extinction ratio of at least 30 dB (relative to the insertion loss within B_{ASE}) for the unwanted wavelength components. This filter should be placed before the optical power meter in Figure 3 and Figure 4.

Documents
Document Sharing Hub
Full document details: IEC 61290-3-3 2013

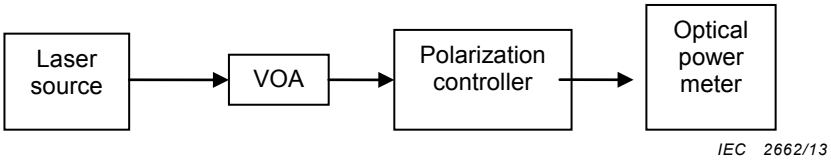

Figure 3a – Test set-up without bandpass filter

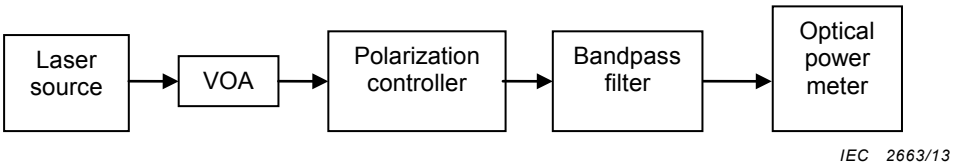

Figure 3b – Test set-up with bandpass filter

Figure 3 – Test set-ups for filter calibration and measuring the signal input power

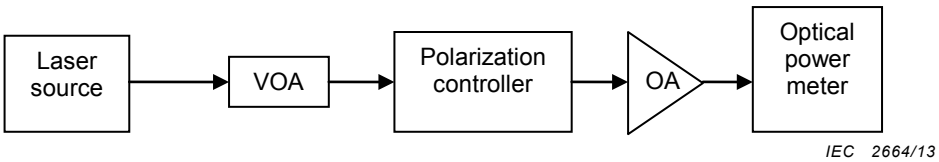

Figure 4a – Test set-up without bandpass filter

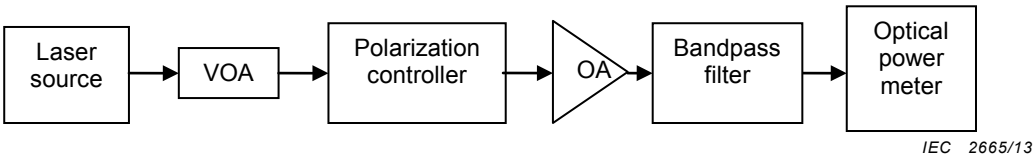

Figure 4b – Test set-up with bandpass filter

Figure 4 – Test set-ups for measuring output signal power and ASE power using a filter and an optical power meter

The test equipment listed below, with the required characteristics, is needed.

a) A laser source with the following characteristics:

   1) Either a tuneable laser or a set of discrete lasers able to support the range of signal wavelengths for which the OA under test is to be tested.

   2) An achievable output power such that the input signal power to the OA under test is above the maximum specified input signal power.

   3) A single line output with a side mode suppression ratio of at least 40 dB.

   4) A total spontaneous emission power within B_{ASE} which is at least $X + 20$ dB less than the laser output power, where X is the lowest specified Sig_ASE ratio of the OA.

   5) A FWHM linewidth <0,01 nm.

   6) Output power stability <0,05 dB.

b) VOA – A variable optical attenuator (VOA) with a dynamic range sufficient to support the required range of input signal power levels at which the OA under test is to be tested. The reflectance from each port of the device should be <–50 dB.

NOTE 2 If the output power of the laser source can be varied over the required dynamic range, then the VOA may not be needed.

AVA Documents Document Sharing Hub

Full document details: IEC 61290-3-3 2013