IEC 61300-3-43

Edition 1.0 2009-01

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 3-43: Examinations and measurements – Mode transfer function measurement for fibre optic sources

Dispositifs d'interconnexion et composants passifs fibroniques – Procédures fondamentales d'essais et de mesures –
Partie 3-43: Examens et mesures – Mesure de la fonction de transfert modal pour sources fibroniques

IEC 61300-3-43:2009-01(en-fr)

Documents
Document Sharing Hub

Full document details: IEC 61300-3-43-2009

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch
Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC
La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC
Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform
La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, …). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished
Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc
Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC online collection - oc.iec.ch
Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org
Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

AVA Documents
Document Sharing Hub

Full document details: IEC 61300-3-43-2009

IEC 61300-3-43

Edition 1.0 2009-01

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-43: Examinations and measurements – Mode transfer function measurement for fibre optic sources

Dispositifs d'interconnexion et composants passifs fibroniques – Procédures fondamentales d'essais et de mesures – Partie 3-43: Examens et mesures – Mesure de la fonction de transfert modal pour sources fibroniques

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 33.180.20

ISBN 978-2-8322-9359-1

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

AVA Documents
Document Sharing Hub

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

Full document details: IEC 61300-3-43-2009

CONTENTS

FOREWORD 3
1 Scope 5
2 Normative references 5
3 General description 5
4 Theory 5
4.1 Alternative method 7
4.2 Mode power distribution 7
4.3 Constraints 8
5 Apparatus 9
5.1 General 9
5.2 Test sample 9
5.3 Sample positioning device 9
5.4 Optical system 10
5.5 Camera 10
5.6 Video digitiser 10
5.7 Calibration 10
6 Procedure 11
6.1 Mounting and aligning the sample 11
6.2 Optimisation 11
6.3 Acquiring the data 11
7 Calculations 11
7.1 Background level subtraction 11
7.2 Location of centroid of intensity profile 12
7.3 Differentiating the intensity profile 12
7.4 Computing the MTF 14
8 Results 15
Annex A (informative) 16
Bibliography 18

Figure 1 – Example of normalised MTF 7
Figure 2 – Example of normalised MPD 8
Figure 3 – Schematic of measurement apparatus 9
Figure 4 – Location of fibre centre using symmetry computation 13
Figure A.1 – Sensitivity of MTF and MPD to core diameter 16
Figure A.2 – Sensitivity of MTF and MPD to profile factor 17

Documents
Document Sharing Hub

Full document details: IEC 61300-3-43-2009

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

Part 3-43: Examinations and measurements – Mode transfer function measurement for fibre optic sources

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61300-3-43 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This standard cancels and replaces IEC/PAS 61300-3-43, published in 2006. This first edition constitutes a technical revision.

The text of this standard is based on the following documents:

FDIS	Report on voting
86B/2780/FDIS	86B/2810/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

Documents
Document Sharing Hub

Full document details: IEC 61300-3-43-2009

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC 61300-3-43-2009

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

Part 3-43: Examinations and measurements – Mode transfer function measurement for fibre optic sources

1 Scope

This part of IEC 61300 describes the method for measuring the mode transfer function (MTF) to be used in characterising the launch conditions for measurements of attenuation and or return loss of multimode passive components. The MTF may be measured at the operational wavelengths.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61300-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance*

IEC 61300-3-4, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-4: Examination and measurements – Attenuation*

IEC 60793-1-20, *Optical fibres – Part 1-20: Measurement methods and test procedures – Fibre geometry*

3 General description

The modal distribution launched into multimode fibre can vary widely with different light sources. This variation in launched modal distribution can result in significant differences in measured attenuation in the same component. The MTF test method gives information about the launched modal distribution (LMD) condition in a measured component. The MTF test method is based on a measurement of the near-field intensity distribution in the fibre [1], [2][1].

4 Theory

For a fibre with a power-law index profile $n(r)$, given by,

$$n(r) = n_1\left[1 - 2\Delta\left(\frac{r}{a}\right)^{\alpha}\right]^{0,5} \quad \left(\frac{r}{a}\right) \leq 1 \qquad (1)$$

where

a is the fibre core radius;

α is the profile factor (α = 2 for a parabolic profile);

[1] Figures in square brackets refer to the Bibliography.

Documents
Document Sharing Hub
Full document details: IEC 61300-3-43-2009

Δ is the relative index difference, given by

$$\Delta = \frac{n_1^2 - n_2^2}{2n_1^2} \tag{2}$$

where

n_1 is the index at fibre centre;

n_2 is the cladding index.

The near-field intensity profile in the fibre $I(r)$ may be determined from an integration of the mode transfer function $MTF(\delta)$ in the fibre, as follows (ignoring constants):

$$I(r) = \int_{\Delta\left(r/a\right)^{\alpha}}^{\Delta} MTF(\delta) \times d\delta \tag{3}$$

where

δ is the normalised propagation constant;

r/a is the normalised radial position.

Differentiating both sides gives the MTF as follows (ignoring constants):

$$MTF(\delta) = \left[\frac{dI(r)}{dr} \times \frac{1}{r^{\alpha-1}}\right]_{\delta=\Delta\left(r/a\right)^{\alpha}} \tag{4}$$

The MTF is usually plotted as in terms of the principal mode number m divided by the maximum principal mode number M, where

$$\frac{m}{M} = \left[\frac{\delta}{\Delta}\right]^{(2+\alpha)/2\alpha} = \left[\frac{r}{a}\right]^{(2+\alpha)/2} \tag{5}$$

The term (m/M) is usually referred to as the relative mode number, or the normalised mode number.

The maximum principle mode number M, is given by

$$M = \sqrt{\frac{\alpha}{\alpha+2}}\left(\frac{n_1 2\pi a}{\lambda}\right)\sqrt{\Delta} \tag{6}$$

A typical normalised MTF plot is shown in Figure 1, where it can be seen, in this example, that normalised mode numbers up to about 0,6 are equally filled and higher order modes are progressively less well-filled.

Documents
Document Sharing Hub

Full document details: IEC 61300-3-43-2009

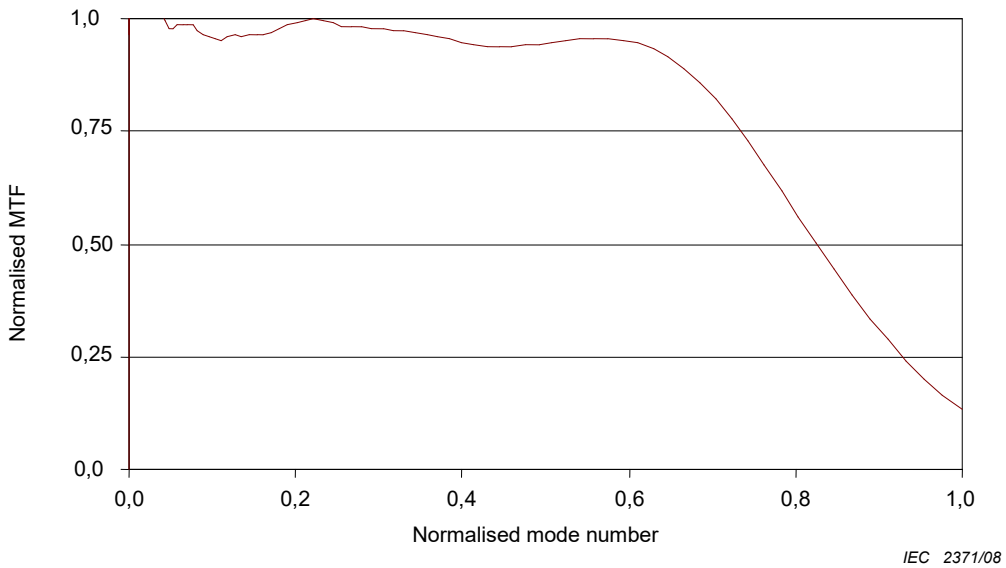

Figure 1 – Example of normalised MTF

4.1 Alternative method

If the profile factor, α, in Equation (4) is not known, then an alternative expression for MTF can be used.

It is known[3] that in a fully-filled fibre (i.e. MTF=1 for all mode numbers) the near-field intensity profile, I_o, is approximately the same shape as the square of the refractive index profile, $n(r)^2$. Furthermore, the term $r^{\alpha-1}$ Equation (4) is equal (ignoring constants) to the differential of $n(r)^2$ and so Equation(4) can be rewritten as:

$$MTF(\delta) = \left[\frac{dI(r)}{dr} \times \frac{1}{dI_o(r)/dr} \right]_{\delta=\Delta\left(r/a\right)^2} \tag{7}$$

where a value of α=2 has been assumed in order to compute values for the normalised mode number.

Thus the MTF is equal to the ratio of the derivative of the intensity profile under test to the derivative of the intensity profile of the same fibre under fully-filled conditions.

4.2 Mode power distribution

For graded index multimode fibre the number of discrete modes in a particular mode group is proportional to the principal mode number. Thus higher-order mode groups contain more modes and therefore will carry more light if all the modes are equally excited. This can be represented by the mode power distribution (MPD), defined as:

$$MPD(m) = MTF(m) \times m \tag{8}$$

Because of this relationship of modes within mode groups, the MPD transform effectively displays the relative power in the mode groups.

An example of a normalised MPD is shown in Figure 2, where it can be seen, in this case, that the peak power level occurs around 0,65 normalised mode number.

Documents
Document Sharing Hub
Full document details: IEC 61300-3-43-2009

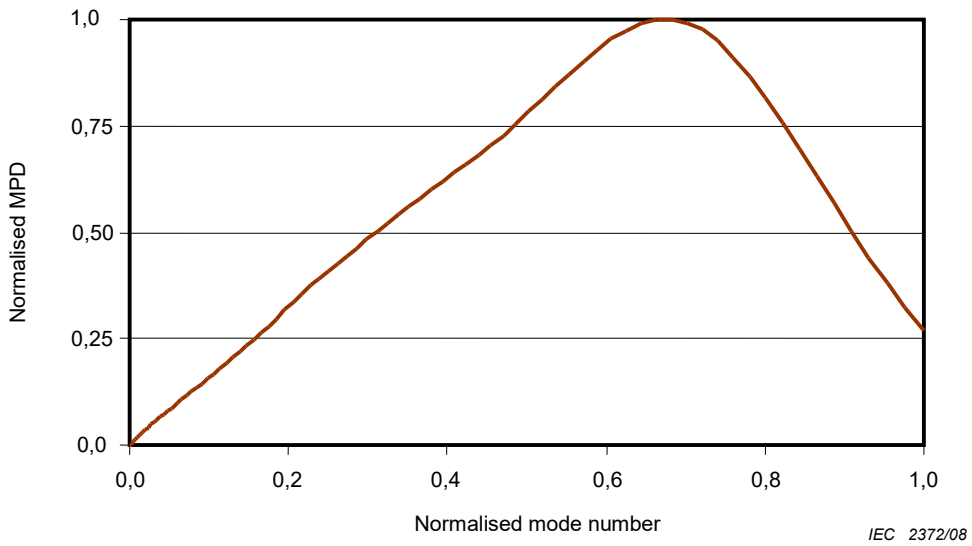

Figure 2 – Example of normalised MPD

4.3 Constraints

The MTF measurement method described herein is only valid under certain conditions, as follows:

- modes within a mode group carry the same power;
- there are random phases between the propagating modes.

It has been found[4] that both these conditions can be simultaneously met if the line-width $\Delta\lambda$ of the source is sufficiently broad, leading to the so-called "mode-continuum approximation", given by:

$$\frac{\Delta\lambda}{\lambda} \geq \frac{\sqrt{2\Delta}}{a \times k_0 \times N} \tag{10}$$

where

λ is the optical wavelength;

k_0 = $2\pi/\lambda$;

N is the group index, given by

$$N = n_1 - \lambda \times \frac{dn_1}{d\lambda} \tag{11}$$

Typically, for a 50 μm core diameter fibre, with 0,21 numerical aperture, then $\Delta\lambda$ > 0,5 nm at 850 nm and $\Delta\lambda$ > 1,0 nm at 1 300 nm satisfy this condition.

If the source line-width does not meet this criterion then interference between propagating modes may take place, resulting in "speckle" in the near-field image. The method can, however, still be applied to such sources by gently shaking, or somehow agitating, the fibre under test so as to cause a temporal averaging of the speckle pattern. In this case, it is important to ensure the near-field is azimuthally symmetric. This can be achieved by checking that the MTFs measured at 45° intervals around the fibre coincide with each other[5].

- The peak of the MPD occurs at a normalised mode number of <0,8.

Documents
Document Sharing Hub
Full document details: IEC 61300-3-43-2009

It is known that deviation of the measured near-field intensity profile $I(r)$ from the power law profile in Equation (1), for fibres that are well-filled, may occur towards the core/cladding boundary. It is recommended that, in this case, the alternative method for the determination of MTF described in 4.1 is employed.

5 Apparatus

5.1 General

The apparatus is essentially a video microscope where a near-field image of the end of the fibre under test is formed on the surface of a camera by an optical system. The camera image is then digitised by a video digitiser and transferred to a computer for analysis and data presentation.

A schematic of a typical measurement configuration is shown in Figure 3.

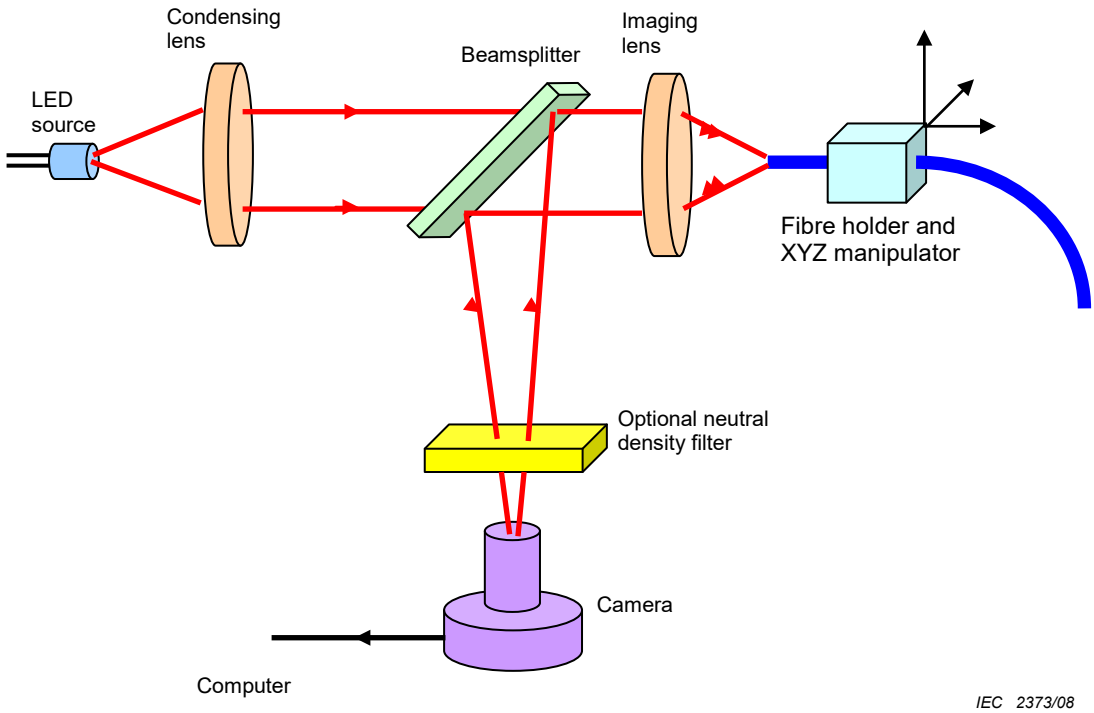

Figure 3 – Schematic of measurement apparatus

5.2 Test sample

The test sample consists of a multimode patch cord attached to a light source. It should be recognised that the mode distribution at the output of the patch cord is a product of both the launch conditions of the source and of the patch cord itself. The resultant MTF is therefore not a parameter of either the light source or the patch cord individually but rather of the combination, including the particular conditions under which the patch cord is disposed, such as bend radius.

5.3 Sample positioning device

A positioning device is required to ensure that the end of the patch cord under test is located on the optical axis of the instrument and also in the correct axial position to give a well-focussed image on the camera. For this purpose, an XYZ manipulation stage may be used or, preferably, a suitable connector receptacle mounted axially with the optics. An example is a standard 2,5 mm ferrule receptacle which is able to accommodate several connector types,

AVA Documents Document Sharing Hub

Full document details: IEC 61300-3-43-2009

such as FC, ST and SC. In this case, the XY positioning of the patch cord is well-defined and only a focussing adjustment is required.

5.4 Optical system

The optical system comprises magnifying optics to produce an image of the fibre end on the camera. To optimise measurement resolution, it is recommended that the optical magnification shall be chosen so that the image of the fibre core fills a reasonable proportion of the camera. Typically, this might be between 20 % and 50 % of the vertical extent of the camera.

The numerical aperture of the imaging system shall be greater than the numerical aperture of the fibre under test.

A means of illuminating the end face of the fibre in reflection may also be provided, such as a beam splitter and an LED source positioned between the focussing lens and the camera.

Neutral density (ND) filters may also be provided to control the amount of light reaching the camera.

5.5 Camera

A high quality camera shall be used that has demonstrable geometrical uniformity and intensity linearity. The pixel size of the camera, $picsize$, shall be sufficiently small compared with the magnified near-field image as to be less than the system diffraction limits by a factor of 2, given by

$$Picsize < \frac{0{,}61 Mag \lambda}{2 NA} \tag{12}$$

where

Mag is the system magnification;

NA is the numerical aperture of the fibre.

For example, if Mag = 20, NA = 0,21, λ = 850 nm then $picsize$ < 24 µm. It is recommended, however, that the camera pixel size is much smaller than this. In this example, the corresponding pixel size at the fibre would be equal to $picsize$ divided by Mag, which is equal to 1,2 µm.

5.6 Video digitiser

The video digitiser, which is connected to the camera, provides the computer with a digitised image of the fibre end. A typical video digitiser will provide an 8 bit image, although a digitiser providing more bits, for example 12, may be used for increased resolution.

5.7 Calibration

The calibration factor is expressed in units of µm/pixel. It is required in 7.4 to convert the processed data between pixel space and µm units.

The optical system may be calibrated by measuring an artefact of known dimension, such as a microscope graticule or an optical fibre of known cladding diameter. The calibration artefact is positioned in the object plane of the system and focussed onto the camera. In the case of a graticule, illumination may be by transmitted or reflected light. In the case of an optical fibre, reflected light must be used. This is typically achieved by the use of a light source and beam splitter positioned in the optical system between the focussing lens and the camera.

AVA Documents
Document Sharing Hub

Full document details: IEC 61300-3-43-2009

NOTE The wavelength of the illumination source should be within 30 nm of the nominal wavelength of the source under test so as to minimise chromatic effects on the system magnification.

Measure the size of the calibration artefact in pixels, n_{pix}. If the size of the artefact in µm is n_{cal}, then the calibration factor, $calfactor$, is given by

$$Calfactor = \frac{n_{cal}}{n_{pix}} \tag{13}$$

The system magnification, Mag, which is required in 5.5 may be calculated from the calibration factor as follows:

$$Mag = \frac{picsize}{calfactor} \tag{14}$$

NOTE In the case where the camera pixels are non-square, then the calibration factor must be determined along the particular axis of the camera that is used for subsequent MTF measurements, (see Clause 7).

6 Procedure

6.1 Mounting and aligning the sample

Mount the fibre to be measured in the sample positioning device in the object plane of the optical system and switch on the end illumination source. Align the lateral position of the fibre end, if necessary, and adjust the focus position of the fibre to give a well-focussed near-field image on the camera. Switch off the end illumination and switch on the source under test, which, if necessary, should be allowed to stabilise.

6.2 Optimisation

In order to utilise the full analogue-to-digital converter (ADC) range of the video digitiser effectively adjust the intensity of the image so that it fills typically about 90 % of the ADC range. This may be achieved by any or a combination of the following means:

- adjusting the intensity of the light source;
- the use of neutral density (ND) filters in front of the camera;
- adjusting the gain and/or electronic shuttering of the camera.

6.3 Acquiring the data

A digitised image of the fibre end is then transferred by the controlling computer for analysis. Typically the image is then converted to a two-dimensional array of ADC values for subsequent processing. In order to improve signal-to-noise ratio, several images or frames, can be serially acquired and their ADC values averaged on a pixel-by-pixel basis. A typical number of frames is ten to twenty, although, in the case of a coherent source where agitation must be used to break up the speckle pattern, several hundred frames is typical.

If the alternative method (4.1) is being used then it is necessary to disconnect the source under test from the patchcord and replace this with a source which overfills the patchcord. A second digitised image is then obtained in the same manner as above.

7 Calculations

7.1 Background level subtraction

It is important that the background level, or dark level, of the camera is uniform to avoid unwanted noise caused by the differential in Equation (4). The background uniformity may be

AVA Documents
Document Sharing Hub
Full document details: IEC 61300-3-43-2009