

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Wind energy generation systems –
Part 21-1: Measurement and assessment of electrical characteristics – Wind
turbines**

**Systèmes de génération d'énergie éolienne –
Partie 21-1: Mesurage et évaluation des caractéristiques électriques – Éoliennes**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Wind energy generation systems –
Part 21-1: Measurement and assessment of electrical characteristics – Wind
turbines**

**Systèmes de génération d'énergie éolienne –
Partie 21-1: Mesurage et évaluation des caractéristiques électriques – Éoliennes**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 27.180

ISBN 978-2-8322-6761-5

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	10
INTRODUCTION.....	12
1 Scope.....	13
2 Normative references	13
3 Terms and definitions	14
4 Symbols and units	25
5 Abbreviated terms	26
6 Wind turbine specification.....	27
7 Test conditions and test systems	27
7.1 General.....	27
7.2 Overview of required test levels	27
7.3 Test validity	28
7.4 Test conditions	29
7.5 Test equipment.....	30
8 Measurement and test of electrical characteristics.....	32
8.1 General.....	32
8.2 Power quality aspects	32
8.2.1 General	32
8.2.2 Flicker during continuous operation	32
8.2.3 Flicker and voltage change during switching operations.....	35
8.2.4 Harmonics, interharmonics and higher frequency components	38
8.3 Steady-state operation.....	40
8.3.1 General	40
8.3.2 Observation of active power against wind speed.....	40
8.3.3 Maximum power	42
8.3.4 Reactive power characteristic ($Q = 0$)	44
8.3.5 Reactive power capability	44
8.3.6 Voltage dependency of PQ diagram.....	45
8.3.7 Unbalance factor	46
8.4 Control performance	47
8.4.1 General	47
8.4.2 Active power control	47
8.4.3 Active power ramp rate limitation	50
8.4.4 Frequency control.....	52
8.4.5 Synthetic inertia.....	54
8.4.6 Reactive power control	55
8.5 Dynamic performance	58
8.5.1 General	58
8.5.2 Fault ride-through capability	58
8.6 Disconnection from grid	66
8.6.1 General	66
8.6.2 Grid protection.....	66
8.6.3 Test of rate of change of frequency RoCoF (df/dt) protection device	70
8.6.4 Reconnection test.....	71
Annex A (informative) Reporting	72
A.1 Overview.....	72

A.2	General.....	72
A.3	Power quality aspects	74
A.4	Steady-state operation	83
A.5	Dynamic performance (see 8.5)	101
A.6	Disconnection from grid (see 8.6)	106
Annex B	(informative) Voltage fluctuations and flicker.....	110
B.1	Continuous operation.....	110
B.2	Switching operations.....	110
B.3	Verification test of the measurement procedure for flicker	111
B.3.1	General	111
B.3.2	Fictitious grid performance testing	112
B.3.3	Distorted $u_m(t)$ voltage with multiple zero crossings.....	113
B.3.4	Distorted $u_m(t)$ voltage with inter-harmonic modulation	113
B.3.5	Slow frequency changes	114
B.4	Deduction of definitions.....	114
B.4.1	Flicker coefficient	114
B.4.2	Flicker step factor	115
B.4.3	Voltage change factor	116
Annex C	(normative) Measurement of active power, reactive power and voltage.....	117
C.1	General.....	117
C.2	Generator convention of the signs.....	117
C.3	Calculation of positive, negative and zero sequence quantities	118
C.3.1	Phasor calculations	118
C.3.2	Calculation of the positive sequence quantities using phasor components	121
C.3.3	Calculation of the negative sequence quantities using phasor components.....	122
C.3.4	Calculation of the zero sequence quantities using phasor components	123
Annex D	(informative) Harmonic evaluation	125
D.1	General.....	125
D.2	General analysis methods.....	125
D.2.1	General	125
D.2.2	Harmonic voltages	125
D.2.3	Harmonic phase angles and magnitudes.....	125
D.2.4	Statistical analysis	129
D.2.5	Sample rate adjustment	129
D.2.6	Determination of background harmonic voltage distortion	129
D.2.7	Diurnal variations of the harmonic voltage and current.....	129
D.2.8	Shutting down neighbouring WT or loads.....	130
D.2.9	Harmonics of current and voltage over power	130
D.2.10	Filters switching.....	131
D.2.11	Measuring at a standard source.....	132
D.2.12	Harmonics power flow + voltage measurement, phase angle	132
D.2.13	Voltage harmonics with and without operation of the tested wind turbine	133
D.2.14	Measurements at different sites	134
D.2.15	Harmonic model.....	134
D.3	Determination of harmonic amplitude affected by space harmonics at DFAG systems	134

Annex E (informative) Assessment of power quality of wind turbines and wind power plants.....	136
E.1 General.....	136
E.2 Voltage fluctuations	136
E.2.1 General	136
E.2.2 Continuous operation.....	137
E.2.3 Switching operations	137
E.3 Current harmonics, interharmonics and higher frequency components	138
Annex F (informative) Guidelines for the transferability of test results to different turbine variants in the same product platform.....	140
Bibliography.....	144
Figure 1 – Example of step response	22
Figure 2 – Measurement system description including the most significant components.....	31
Figure 3 – Fictitious grid for simulation of fictitious voltage	33
Figure 4 – Active power as a function of the wind speed (example).....	41
Figure 5 – Number of measurements in power bins (example)	42
Figure 6 – Number of measurements in wind speed bins (example)	42
Figure 7 – Example of PQ capability diagram for a given voltage at WT level.....	45
Figure 8 – Adjustment of active power reference value	48
Figure 9 – Example of active power response step	48
Figure 10 – Example of available active power and active power in ramp rate limitation mode.....	51
Figure 11 – Example of an active power control function $P=f(f)$, with the different measurement points and related steps of frequency	52
Figure 12 – Synthetic inertia – definitions	55
Figure 13 – Test for static error.....	56
Figure 14 – Test of dynamic response (example)	57
Figure 15 – Example UVRT test equipment.....	59
Figure 16 – Tolerances of the positive sequence voltage for the undervoltage event with disconnected WT under test	60
Figure 17 – Tolerance of positive sequence overvoltage event.....	61
Figure 18 – Example OVRT capacitor test unit.....	62
Figure 19 – Example of an undervoltage test chart	63
Figure 20 – Example of an overvoltage capability curve	64
Figure 21 – Example of step ramp for overvoltage or frequency testing.....	68
Figure 22 – Example of pulse ramp for over voltage or frequency testing	69
Figure 23 – Example of the test levels to determine the release time	69
Figure A.1 – Voltage flicker P_{St} vs. active power	74
Figure A.2 – Flicker coefficient $c(30^\circ)$ vs. active power	74
Figure A.3 – Flicker coefficient $c(50^\circ)$ vs. active power	75
Figure A.4 – Flicker coefficient $c(70^\circ)$ vs. active power	75
Figure A.5 – Flicker coefficient $c(85^\circ)$ vs. active power	75
Figure A.6 – Time series of 3-phase voltages as RMS of start-up at the wind speed of ... m/s	76

Figure A.7 – Time series of 3-phase currents as RMS of start-up at the wind speed of ... m/s	76
Figure A.8 – Time series of active and reactive power of start-up at the wind speed of ... m/s	76
Figure A.9 – Time series of 3-phase voltages as RMS of start-up at the wind speed of ... m/s	77
Figure A.10 – Time series of 3-phase currents as RMS of start-up at the wind speed of ... m/s	77
Figure A.11 – Time series of active and reactive power of start-up at the wind speed of ... m/s	77
Figure A.12 – Time series of 3-phase voltages as RMS of change from generator stage 1 to stage 2.....	78
Figure A.13 – Time series of 3-phase currents as RMS of change from generator stage 1 to stage 2.....	78
Figure A.14 – Time series of active and reactive power of change from generator stage 1 to stage 2.....	78
Figure A.15 – Time series of 3-phase voltages as RMS of change from generator stage 2 to stage 1.....	78
Figure A.16 – Time series of 3-phase currents as RMS of change from generator stage 2 to stage 1.....	78
Figure A.17 – Time series of active and reactive power of change from generator stage 2 to stage 1.....	79
Figure A.18 – Max. of the 95 th percentiles of integer harmonic currents vs. harmonic order.....	83
Figure A.19 – Max. of the 95 th percentiles of interharmonic currents vs. frequency.....	83
Figure A.20 – Max. of the 95 th percentiles of higher frequency current components vs. frequency.....	83
Figure A.21 – Active power as a function of the wind speed	84
Figure A.22 – Reactive power vs. active power	85
Figure A.23 – PQ-Diagram.....	86
Figure A.24 – PQ-Diagram.....	87
Figure A.25 – PQ-Diagram.....	88
Figure A.26 – Mean 1-min current unbalance factor over active power.....	89
Figure A.27 – Time-series of active power reference values, available power and measured active power output during active power control for the evaluation of the static error	89
Figure A.28 – Time-series of measured wind speed during active power control during the test of the static error	89
Figure A.29 – Time-series of active power reference values, available power and measured active power output during active power control for the evaluation of the settling time	90
Figure A.30 – Time-series of available and measured active power output during ramp rate limitation.....	90
Figure A.31 – Time-series of measured wind speed during ramp rate limitation	91
Figure A.32 – Time-series of available and measured active power output during ramp rate limitation.....	91
Figure A.33 – Time-series of measured wind speed during ramp rate limitation	91
Figure A.34 – Time-series of available and measured active power output during ramp rate limitation.....	92

Figure A.35 – Time-series of measured wind speed during ramp rate limitation	92
Figure A.36 – Time-series of available and measured active power output during ramp rate limitation	93
Figure A.37 – Time-series of measured wind speed during ramp rate limitation	93
Figure A.38 – Time-series of available power, measured active power and reference value of the grid frequency change	94
Figure A.39 – Time-series of measured wind speed	94
Figure A.40 – Measured active power over frequency change	94
Figure A.41 – Time-series of available power, measured active power and reference value of the grid frequency change	95
Figure A.42 – Time-series of measured wind speed	95
Figure A.43 – Measured active power over frequency change	95
Figure A.44 – Test 1, time-series of available power, measured active power and reference value of the grid frequency for $0,25 \times P_n < P < 0,5 \times P_n$	96
Figure A.45 – Test 1, time-series of wind speed for $0,25 \times P_n < P < 0,5 \times P_n$	96
Figure A.46 – Test 2, time-series of available power, measured active power and reference value of the grid frequency for $0,25 \times P_n < P < 0,5 \times P_n$	97
Figure A.47 – Test 2, time-series of wind speed for $0,25 \times P_n < P < 0,5 \times P_n$	97
Figure A.48 – Test 3, time-series of available power, measured active power and reference values of the grid frequency for $P > 0,8 \times P_n$	97
Figure A.49 – Test 3, time-series of wind speed for $P > 0,8 \times P_n$	97
Figure A.50 – Test 4, time-series of available power, measured active power and reference value of the grid frequency for $P > 0,8 \times P_n$	97
Figure A.51 – Test 4, time-series of wind speed for $P > 0,8 \times P_n$	98
Figure A.52 – Test 5, time-series of available power, measured active power and reference value of the grid frequency for $v > v_n$	98
Figure A.53 – Test 5, time-series of wind speed for $v > v_n$	98
Figure A.54 – Test 6, time-series of available power, measured active power and reference value of the grid frequency for $v > v_n$	98
Figure A.55 – Test 6, time-series of wind speed for $v > v_n$	98
Figure A.56 – Time-series of reactive power reference values and measured reactive power during the test of reactive power control	99
Figure A.57 – Time-series of active power during the test of reactive power control	99
Figure A.58 – Time-series of reactive power reference values and measured reactive power during the test of reactive power dynamic response	100
Figure A.59 – Time-series of active power during the test of reactive power dynamic response	100
Figure A.60 – Wave shape of 3-phase voltages during entrance of voltage dip/swell when the WT under test is not connected	101
Figure A.61 – Wave shape of 3-phase voltages during clearance of voltage dip/swell when the WT under test is not connected	102
Figure A.62 – 3-phase voltages as RMS (1 line period) during the test when the WT under test is not connected	102
Figure A.63 – Positive sequence voltage during the test when the WT under test is not connected	102
Figure A.64 – Wave shape of 3-phase voltages during entrance of the voltage dip/swell when the WT under test is connected	104
Figure A.65 – Wave shape of 3-phase voltages during clearance of the voltage dip/swell when the WT under test is connected	104

Figure A.66 – 3-phase voltages as RMS (1 line period) during the test when the WT under test is connected	104
Figure A.67 – Positive and negative sequence fundamental voltage during the test when the WT under test is connected	104
Figure A.68 – 3-phase currents as RMS (1 line period) during the test when the WT under test is connected	104
Figure A.69 – Pos. and neg. sequence fundamental current during the test when the WT under test is connected	105
Figure A.70 – Pos. sequence fundamental active power during the test when the WT under test is connected	105
Figure A.71 – Pos. sequence fundamental reactive power during the test when the WT under test is connected	105
Figure A.72 – Pos. sequence fundamental active current during the test when the WT under test is connected	105
Figure A.73 – Pos. sequence fundamental reactive current during the test when the WT under test is connected	105
Figure A.74 – Wind speed or available power during the test when the WT under test is connected	106
Figure A.75 – Voltage during the reconnection test of 10 s	107
Figure A.76 – Active power during the reconnection test of 10 s, including the recovery	107
Figure A.77 – Time-series of measured wind speed during the reconnection test of 10 s	108
Figure A.78 – Voltage during the reconnection test of 60 s	108
Figure A.79 – Active power during the reconnection test of 60 s, including the recovery	108
Figure A.80 – Time-series of measured wind speed during the reconnection test of 60 s	108
Figure A.81 – Voltage during the reconnection test of 600 s	108
Figure A.82 – Active power during the reconnection test of 600 s including the recovery	109
Figure A.83 – Time-series of measured wind speed during the reconnection test of 600 s	109
Figure B.1 – Measurement procedure for flicker during continuous operation of the wind turbine	110
Figure B.2 – Measurement procedure for voltage changes and flicker during switching operations of the wind turbine	111
Figure C.1 – Positive directions of active power, reactive power, instantaneous phase voltages and instantaneous phase currents with generator convention	117
Figure C.2 – Examples of the power phasor diagrams of the generator convention in each quadrant with respective instantaneous phase voltage and current	118
Figure D.1 – Definition of the phase angles of the spectral line in generator convention – (5th harmonic with $\alpha_{I5} = + 120^\circ$ and $\alpha_{U5} = + 170^\circ$ shown as an example, thus 5th harmonic phase angle is $\varphi_5 = + 170^\circ - 120^\circ = + 50^\circ$)	126
Figure D.2 – Comparison of harmonic amplitude aggregation (dotted) no aggregated amplitude directly from DFT with 10-cycle window, (dashed) 10-second aggregation	127
Figure D.3 – Comparison of the prevailing angle ratio (PAR)	128
Figure F.1 – Block diagram for generic wind turbine (source IEC 61400-27-1)	141
Table 1 – Overview of required test levels	28
Table 2 – Specification of requirements for measurement equipment	31
Table 3 – Number of 10-min time-series per wind speed bin	41
Table 4 – Number of measurements per power bin (10 min average)	41

Table 5 – Measured maximum active power values.....	43
Table 6 – Accuracy of the active power control values	49
Table 7 – Results from the active power reference test	49
Table 8 – Active power ramp rate calculation	51
Table 9 – Example of Settings for the frequency dependent active power function	53
Table 10 – Test for static error.....	58
Table 11 – Test for dynamic response	58
Table 12 – Example of undervoltage events.....	63
Table 13 – Example of overvoltage tests.....	65
Table 14 – Grid protection tests	67
Table A.1 – General report information	72
Table A.2 – General data	73
Table A.3 – Nominal data.....	73
Table A.4 – Test conditions.....	73
Table A.5 – Flicker coefficient per power bin (95 th percentile)	74
Table A.6 – Start-up at cut in wind speed.....	75
Table A.7 – Start-up at nominal active power	76
Table A.8 – Worst-case switching between generators	77
Table A.9 – General test information.....	79
Table A.10 – 95 th percentile of 10-min harmonic magnitudes per power bin	79
Table A.11 – 95 th percentile of 10-min harmonic magnitudes per power bin	81
Table A.12 – 95 th percentile of 10-min harmonic magnitudes per power bin	82
Table A.13 – Active power against wind speed (see 8.3.2).....	83
Table A.14 – Measurement data set.....	84
Table A.15 – Maximum active power.....	84
Table A.16 – Reactive power characteristic.....	85
Table A.17 – PQ-diagram.....	86
Table A.18 – PQ-diagram at maximum voltage.....	87
Table A.19 – PQ-diagram at minimum voltage	88
Table A.20 – P-IUF _i diagram.....	88
Table A.21 – General test information.....	89
Table A.22 – Static error	89
Table A.23 – Dynamic response	90
Table A.24 – General test information.....	90
Table A.25 – Active power ramp rate calculation at start-up	90
Table A.26 – General test information.....	91
Table A.27 – Active power ramp rate limitation at start-up.....	91
Table A.28 – General test information.....	92
Table A.29 – Active power ramp rate limitation at normal stop	92
Table A.30 – General test information.....	92
Table A.31 – Active power ramp rate limitation in normal operation	93
Table A.32 – General test information.....	93
Table A.33 – Test at $0,25 \times P_n < P < 0,5 \times P_n$	94

Table A.34 – Test at $P > 0,8 \times P_n$	95
Table A.35 – Synthetic inertia results	96
Table A.36 – General test information	99
Table A.37 – Static error	99
Table A.38 – Dynamic response	100
Table A.39 – Results for tests where the WT is not connected	101
Table A.40 – Results for tests where the WT is connected	103
Table A.41 – Voltage protection	106
Table A.42 – Frequency protection	106
Table A.43 – Complete trip circuit test	106
Table A.44 – RoCoF test results	107
Table A.45 – RoCoF test information	107
Table A.46 – Reconnection test results	107
Table B.1 – Nominal values of the wind turbine used in the verification tests	111
Table B.2 – Input relative current fluctuation, $\Delta I/I$, for flicker coefficient $c(\psi_k) = 2,00 \pm 5 \%$ when $S_{k, \text{fic}} = 20 \cdot S_n$	112
Table B.3 – Input relative current fluctuation, $\Delta I/I$, for flicker coefficient $c(\psi_k) = 2,00 \pm 5 \%$ when $S_{k, \text{fic}} = 50 \cdot S_n$	112
Table B.4 – Test specification for distorted voltage with multiple zero crossings	113
Table D.1 – Example of measurements results presentation	133
Table E.1– Specification of exponents in accordance with IEC TR 61000-3-6	139
Table F.1– Main components influencing the electrical characteristics of the WT	142

INTERNATIONAL ELECTROTECHNICAL COMMISSION

WIND ENERGY GENERATION SYSTEMS –**Part 21-1: Measurement and assessment of electrical characteristics –
Wind turbines****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61400-21-1 has been prepared by IEC technical committee 88: Wind energy generation systems.

This first edition cancels and replaces the second edition of 61400-21 published in 2008. This edition constitutes a technical revision.

This edition includes the following new items with respect to 61400-21:

- a) frequency control measurement;
- b) updated reactive power control and capability measurement, including voltage and $\cos \varphi$ control;
- c) inertia control response measurement;
- d) overvoltage ride through test procedure;
- e) updated undervoltage ride through test procedure based on Wind Turbine capability.

f) new methods for the harmonic assessment.

Parts of the assessments related to the wind power plant evaluation are moved to Annex E, as they will be replaced by IEC 61400-21-2, *Measurement and assessment of electrical characteristics – Wind power plants*.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
88/711/FDIS	88/716/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61400 series, published under the general title *Wind energy generation systems*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This part of IEC 61400 provides a uniform methodology that will ensure consistency and accuracy in reporting, testing and assessment of electrical characteristics of grid connected wind turbines (WTs). The electrical characteristics include wind turbine specifications and capabilities, voltage quality (emissions of flicker and harmonics), under- and overvoltage ride-through response, active power control, frequency control, voltage control, and reactive power control, grid protection and reconnection time.

This part of IEC 61400 has been prepared with the anticipation that it would be applied by:

- the WT manufacturer, striving to meet well-defined electrical characteristics;
- the WT purchaser, in specifying such electrical characteristics;
- the WT operator, who may be required to verify that stated, or required electrical characteristics are met;
- the WT planner or regulator, who has to be able to accurately and fairly determine the impact of a WT on the voltage quality to ensure that the installation is designed so that voltage quality requirements are respected;
- the WT certification authority or testing organization, in evaluating the electrical characteristics of the wind turbine type;
- the planner or regulator of the electric network, who has to be able to determine the grid connection required for a WT.

This part of IEC 61400 provides recommendations for preparing the measurements and assessment of electrical characteristics of grid connected WTs. This document will benefit those parties involved in the manufacture, installation planning, obtaining of permission, operation, usage, testing and regulation of WTs. The measurement and analysis techniques, recommended in this document, should be applied by all parties to ensure that the continuing development and operation of WTs are carried out in an atmosphere of consistent and accurate communication.

This part of IEC 61400 presents measurement and analysis procedures expected to provide consistent results that can be replicated by others. Any selection of tests can be done and reported separately.

WIND ENERGY GENERATION SYSTEMS –

Part 21-1: Measurement and assessment of electrical characteristics – Wind turbines

1 Scope

This part of IEC 61400 includes:

- definition and specification of the quantities to be determined for characterizing the electrical characteristics of a grid-connected wind turbine;
- measurement procedures for quantifying the electrical characteristics;
- procedures for assessing compliance with electrical connection requirements, including estimation of the power quality expected from the wind turbine type when deployed at a specific site.

The measurement procedures are valid for single wind turbines with a three-phase grid connection. The measurement procedures are valid for any size of wind turbine, though this part of IEC 61400 only requires wind turbine types intended for connection to an electricity supply network to be tested and characterized as specified in this part of IEC 61400.

The measured characteristics are valid for the specific configuration and operational mode of the assessed wind turbine product platform. If a measured property is based on control parameters and the behavior of the wind turbine can be changed for this property, it is stated in the test report. Example: Grid protection, where the disconnect level is based on a parameter and the test only verifies the proper functioning of the protection, not the specific level.

The measurement procedures are designed to be as non-site-specific as possible, so that electrical characteristics measured at for example a test site can be considered representative for other sites.

This document is for the testing of wind turbines; all procedures, measurements and tests related to wind power plants are covered by IEC 61400-21-2.

The procedures for assessing electrical characteristics are valid for wind turbines with the connection to the PCC in power systems with stable grid frequency.

NOTE

For the purposes of this document, the following terms for system voltage apply:

- Low voltage (LV) refers to $U_n \leq 1$ kV;
- Medium voltage (MV) refers to $1 \text{ kV} < U_n \leq 35$ kV;
- High voltage (HV) refers to $35 \text{ kV} < U_n \leq 220$ kV;
- Extra high voltage (EHV) refers to $U_n > 220$ kV.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61000-3-2:2014, *Electromagnetic compatibility (EMC) – Part 3-2: Limits – Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)*

IEC 61000-3-3, *Electromagnetic compatibility (EMC) – Part 3-3: Limits – Limits of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current < 16 A per phase and not subject to conditional connection*

IEC TR 61000-3-6, *Electromagnetic compatibility (EMC) – Part 3-6: Limits – Assessment of emission limits for the connection of distorting installations to MV, HV and EHV power systems*

IEC TR 61000-3-7, *Electromagnetic compatibility (EMC) – Part 3-7: Limits – Assessment of emission limits for the connection of fluctuating installations to MV, HV and EHV power systems*

IEC TR 61000-3-14, *Electromagnetic compatibility (EMC) – Part 3-14: Assessment of emission limits for harmonics, interharmonics, voltage fluctuations and unbalance for the connection of disturbing installations to LV power systems*

IEC 61000-4-7:2002, *Electromagnetic compatibility (EMC) – Part 4-7: Testing and measurement techniques – General guide on harmonics and interharmonics measurements and instrumentation, for power supply systems and equipment connected thereto*
IEC 61000-4-7:2002/AMD1:2008

IEC 61000-4-15:2010, *Electromagnetic compatibility (EMC) – Part 4-15: Testing and measurement techniques – Flickermeter – Functional and design specifications*

IEC 61000-4-30, *Electromagnetic compatibility (EMC) – Part 4-30: Testing and measurement techniques – Power quality measurement methods*

IEC TR 61869-103:2012, *Instrument transformers – The use of instrument transformers for power quality measurement*

IEC 62008, *Performance characteristics and calibration methods for digital data acquisition systems and relevant software*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

continuous operation

normal operation of the wind turbine excluding switching operations

3.2

cut-in wind speed

lowest wind speed at hub height at which the wind turbine starts to produce power

[SOURCE: IEC 60050-415:1999, 415-03-05]

3.3**disconnection time**

time duration from exceeding a predefined disconnection level until the physical disconnection of the wind turbine from the grid

3.4**flicker coefficient for continuous operation**

$c(\psi_k)$

normalized measure of the flicker emission during continuous operation of the wind turbine

$$c(\psi_k) = P_{st, fic} \times \frac{S_{k, fic}}{S_n}$$

where

$P_{st, fic}$ is the short-term flicker severity from the wind turbine on the fictitious grid;

S_n is the nominal apparent power of the wind turbine;

$S_{k, fic}$ is the short-circuit apparent power of the fictitious grid

3.5**flicker step factor**

$k_f(\psi_k)$

normalized measure of the flicker emission due to a single switching operation of the wind turbine

$$k_f(\psi_k) = \frac{1}{130} \times \frac{S_{k, fic}}{S_n} \times P_{st, fic} \times T_p^{0,31}$$

where

T_p is the measurement period in seconds, long enough to ensure that the transient of the switching operation has abated, though limited to exclude possible power fluctuations due to turbulence;

$P_{st, fic}$ is the short-term flicker severity from the wind turbine on the fictitious grid;

S_n is the nominal apparent power of the wind turbine;

$S_{k, fic}$ is the short-circuit apparent power of the fictitious grid

Note 1 to entry: The short-term flicker severity $P_{st, fic}$ is here evaluated over the time period T_p .

3.6**maximum measured power**

highest measured value of active power (with a specified averaging time) that is observed during continuous operation of the wind turbine

3.7**network impedance phase angle**

ψ_k

phase angle of network short-circuit impedance

$$\psi_k = \arctan(X_k/R_k)$$

where

X_k is the network short-circuit reactance;

R_k is the network short-circuit resistance

3.8

normal operation

fault free operation according to the description in the wind turbine manual

3.9

operational mode

operation according to control setting, for example voltage control mode, frequency control mode, reactive power control mode, active power control mode, etc.

3.10

output power

electric active power delivered by the wind turbine at its terminals

[SOURCE: IEC 60050-415:1999, 415-04-02, modified – "at any time by a wind turbine generator system" has been replaced by "by the wind turbine at its terminals"]

3.11

point of common coupling

PCC

point of a power supply network, electrically nearest to a particular load, at which other loads may be connected

Note 1 to entry: These loads can be devices, equipment or systems, or distinct customer's installations.

Note 2 to entry: In some applications, the term "point of common coupling" is restricted to public networks.

Note 3 to entry: This note applies to the French language only.

[SOURCE: IEC 60050-161:1990, 161-07-15, modified – "are, or may be" has been replaced by "may be".]

3.12

power collection system

electrical system that collects the power from a wind turbine and feeds it into an electrical supply network

[SOURCE: IEC 60050-415:1999, 415-04-06, modified – "generator system" has been deleted and "a network step-up transformer or electrical loads" has been replaced by "an electrical supply network".]

3.13

nominal apparent power

S_n

apparent power from the wind turbine while operating at nominal current and nominal voltage and frequency

$$S_n = \sqrt{3}U_n I_n \text{ at } Q = 0$$

where

U_n is the nominal voltage;

I_n is the nominal current

3.14

nominal current

nominal value I_n of wind turbine current, which are calculated from nominal active power P_n

and nominal voltage U_n according to $I_n = \frac{P_n}{\sqrt{3}U_n}$

3.15**nominal active power**

nominal value of wind turbine active power, which is stated by the manufacturer and is used as a per-unit base for all powers (active, reactive, apparent)

3.16**Q capability**

reactive power capability of a wind turbine, which is measured from the capability curve or by a site-specific test or defined by the manufacturer

3.17**nominal wind speed**

wind speed at which a wind turbine's nominal active power is achieved

[SOURCE: IEC 60050-415:1999, 415-03-04, modified – the term defined "rated wind speed" has been changed to "nominal wind speed".]

3.18**standstill**

condition of a wind turbine that is stopped

[SOURCE: IEC 60050-415:1999, 415-01-15, modified – "wind turbine generator system" has been changed to "wind turbine"]

3.19**start-up**

transitional state of a wind turbine between standstill and power production

3.20**short-circuit ratio****SCR**

ratio of the short circuit apparent power S_k to the nominal power S_n

$$SCR = \frac{S_k}{S_n}$$

3.21**switching operation**

start-up or shutdown of the wind turbine, or switching between generators in the wind turbine

3.22**turbulence intensity**

ratio of the wind speed standard deviation to the mean wind speed, determined from the same set of measured data samples of wind speed, and taken over a specified period of time

[SOURCE: IEC 60050-415:1999, 415-03-25]

3.23**voltage change factor** **$k_u(\psi_k)$**

normalized measure of the voltage change due to a switching operation of the wind turbine:

$$k_u(\psi_k) = \sqrt{3} \times \frac{U_{\text{fic,max}} - U_{\text{fic,min}}}{U_n} \times \frac{S_{k,\text{fic}}}{S_n}$$

where

$U_{\text{fic,min}}$ and $U_{\text{fic,max}}$ are the minimum and maximum one period RMS value of the phase-to-neutral voltage on the fictitious grid during the switching operation;

U_n is the nominal phase-to-phase voltage;

S_n is the nominal apparent power of the wind turbine;

$S_{\text{k, fic}}$ is the short-circuit apparent power of the fictitious grid.

Note 1 to entry: The voltage change factor k_u is similar to k_i , being the ratio between the maximum inrush current and the nominal current, though k_u is a function of the network impedance phase angle. The highest value of k_u will be numerically close to k_i .

3.24

wind turbine

WT

system that converts kinetic wind energy into electric energy

Note 1 to entry: This note applies to the French language only.

3.25

wind turbine terminals

point that is part of the WT and identified by the WT manufacturer as a point at which the WT may be connected to the power collection system

3.26

voltage dip

limited duration non-periodic sudden decrease of the power supply network's voltage magnitude and associated change of its phase

Note 1 to entry: In some articles, publications, etc. the expression "voltage sags" is used for the same event.

3.27

voltage swell

limited duration non-periodic sudden increase of the power supply network's voltage magnitude above its nominal value and associated change of the phase of the voltage

3.28

fault ride through

FRT

ability of a wind turbine or wind power plant to stay connected during faults in the grid

Note 1 to entry: This note applies to the French language only.

3.29

undervoltage ride through

UVRT

ability of a wind turbine or wind power plant to stay connected during voltage dips

Note 1 to entry: In some publications, the expression "low voltage ride through (LVRT)", is used for the same event.

Note 2 to entry: This note applies to the French language only.

3.30

overvoltage ride through

OVRT

ability of a wind turbine or wind power plant to stay connected during voltage swells

Note 1 to entry: In some publications, the expression "high voltage ride through (HVRT)", is used for the same event.

Note 2 to entry: This note applies to the French language only.

3.31**phasor**

representation of a sinusoidal quantity by a complex quantity whose argument is equal to the initial phase and whose modulus is equal to the root-mean-square value or to the amplitude

Note 1 to entry: For a quantity $a(t) = A\sqrt{2}\cos(\omega t + \theta_0) = A_m\cos(\omega t + \theta_0)$ the phasor is either $Ae^{j\theta_0}$ or $A_me^{j\theta_0}$.

Note 2 to entry: A phasor can also be represented graphically.

[SOURCE: IEC 60050-131:2002, 131-11-26, modified – "integral" has been deleted, "or to the amplitude" has been added, and the first note has been modified]

3.32**positive sequence component of the fundamental**

for a three-phase system with phases L1, L2 and L3, the symmetrical sinusoidal three-phase set of voltages or currents having positive frequency equal to the fundamental frequency. The positive sequence component is defined by the following complex mathematical expression:

$$\underline{X}_1 = \frac{1}{3}(\underline{X}_{L1} + \underline{a}\underline{X}_{L2} + \underline{a}^2\underline{X}_{L3})$$

where $\underline{a} = e^{j2\pi/3}$ is the 120-degree operator, and $\underline{X}_{L1}$, $\underline{X}_{L2}$ and $\underline{X}_{L3}$ are the complex expressions of the fundamental frequency phase quantities concerned, that is, current or voltage phasors

Note 1 to entry: In a balanced harmonic-free system, only positive sequence component of the fundamental exists. For example, if phase voltage phasors are symmetrical $\underline{U}_{L1} = Ue^{j\theta}$, $\underline{U}_{L2} = Ue^{j(\theta+4\pi/3)}$ and $\underline{U}_{L3} = Ue^{j(\theta+2\pi/3)}$ then $\underline{U}_1 = (Ue^{j\theta} + e^{j2\pi/3} Ue^{j(\theta+4\pi/3)} + e^{j4\pi/3} Ue^{j(\theta+2\pi/3)})/3 = (Ue^{j\theta} + Ue^{j\theta} + Ue^{j\theta})/3 = Ue^{j\theta}$.

[SOURCE: IEC 60050-448:1995, 448-11-27, modified – the term and the definition have been modified and Note 1 to entry has been added.]

3.33**negative sequence component of the fundamental**

for a three-phase system with phases L1, L2 and L3, the symmetrical sinusoidal three-phase set of voltages or currents having negative frequency the absolute value of which is equal to the fundamental frequency

Note 1 to entry: The negative sequence component is defined by the following complex mathematical expression:

$$\underline{X}_2 = \frac{1}{3}(\underline{X}_{L1} + \underline{a}^2\underline{X}_{L2} + \underline{a}\underline{X}_{L3})$$

where $\underline{a} = e^{j2\pi/3}$ is the 120-degree operator, and $\underline{X}_{L1}$, $\underline{X}_{L2}$ and $\underline{X}_{L3}$ are the complex expressions of the fundamental frequency phase quantities concerned, that is, current or voltage phasors.

Note 2 to entry: Negative sequence voltage or current components may be significant only when the voltages or currents, respectively, are unbalanced. For example, if phase voltage phasors are symmetrical $\underline{U}_{L1} = Ue^{j\theta}$, $\underline{U}_{L2} = Ue^{j(\theta+4\pi/3)}$ and $\underline{U}_{L3} = Ue^{j(\theta+2\pi/3)}$ then $\underline{U}_2 = (Ue^{j\theta} + e^{j4\pi/3} Ue^{j(\theta+4\pi/3)} + e^{j2\pi/3} Ue^{j(\theta+2\pi/3)})/3 = Ue^{j\theta} (1 + e^{j2\pi/3} + e^{j4\pi/3})/3 = 0$

[SOURCE: IEC 60050-448:1995, 448-11-28, modified – The term and the definition have been modified and two notes to entry added.]

3.34**zero-sequence component of the fundamental**

for a three-phase system with phases L1, L2 and L3, the in-phase sinusoidal voltage or current component having the fundamental frequency and equal amplitude in each of the phases

Note 1 to entry: The zero-sequence component is defined by the following complex mathematical expression:

$$\underline{X}_0 = \frac{1}{3}(\underline{X}_{L1} + \underline{X}_{L2} + \underline{X}_{L3})$$

where $\underline{X}_{L1}$, $\underline{X}_{L2}$ and $\underline{X}_{L3}$ are the complex expressions of the fundamental frequency phase quantities concerned, that is, current or voltage phasors

[SOURCE: IEC 60050-448:1995, 448-11-29, modified – the term and the definition have been modified and the note to entry added.]

3.35 **unbalance factor**

in a three-phase system, the degree of unbalance expressed by the ratio $|\underline{X}_2/\underline{X}_1|$ (in percent) between the values of the negative sequence component $\underline{X}_2$ and the positive sequence component $\underline{X}_1$ of voltage or current

[SOURCE: IEC 60050-614:2016, 614-01-33, modified – The symbols have been added.]

3.36 **control interface**

point that is part of the WT and identified by the WT supplier as a point at which the WT may be connected to the power plant control system

3.37 **wind power plant**

power station comprising one or more wind turbines, auxiliary equipment and plant control

3.38 **assessor**

body accredited to do the assessment

3.39 **time-series**

record consisting of the numerical values of a time varying signal's equidistant samples

Note 1 to entry: Samples may represent a measured signal or data processed from the measured values.

3.40 **short-circuit apparent power**

S_k
product of the current in the short circuit at a point of a system and a conventional voltage, generally the operating voltage

3.41 **percentile**

value of a variable below which a certain percent of observations fall

3.42 **synthetic inertia**

wind turbine or wind power plant active power production as a function of time after a sudden change in the grid frequency

Note 1 to entry: The expression "synthetic inertia" are in some publications also defined as "virtual inertia", "fast frequency response", "inertia control". In this document, we use the term "synthetic inertia" for this functionality.

3.43 **static error**

deviation between the obtained values compared to a requested reference value

3.44**response time**

elapsed time from the start of a step change or start of event until the observed value first time enters the predefined tolerance band of the target value

Note 1 to entry: See Figure 1.

3.45**settling time**

elapsed time from the start of a step change event until the observed value continuously stays within the predefined tolerance band of the target value

Note 1 to entry: See Figure 1.

3.46**rise time**

time from when the observed value reaches 10 % of the step change until the observed value reaches 90 % of the step change

Note 1 to entry: See Figure 1.

3.47**overshoot**

difference between the maximum value of the response and the steady-state final value

Note 1 to entry: See Figure 1.

3.48**reaction time**

elapsed time from test command issued until the change in amplitude reaches 10 % of the measured output variable of the step height

Note 1 to entry: See Figure 1.

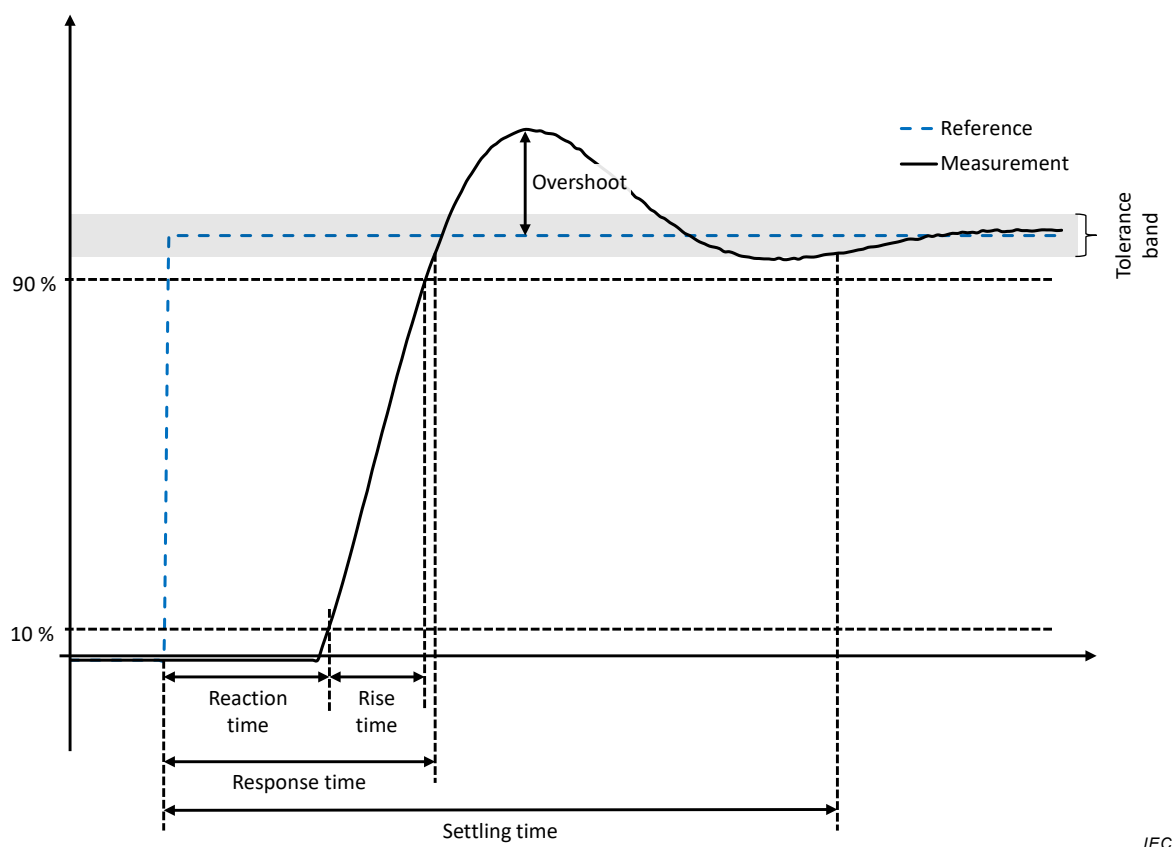


Figure 1 – Example of step response

3.49

ramp-down time

time during which the measured value decreases from 90 % to 10 % of the target value

3.50

recovery time

time from end of the event after which the measured value is continuously within the predefined tolerance band around the start value before the event

3.51

steady state

status of the system obtained when the settling time has expired

3.52

tolerance band

acceptable deviation range of the measured signal from the defined target value

Note 1 to entry: The steady-state target value is usually defined to be equal to the observed signal's reference value or the value towards which the observed signal is converging after the event.

Note 2 to entry: Default tolerance band is defined to be $\pm 10\%$ of the nominal value if nothing else is stated.

3.53

start of event

time instant where the stimulus value deviates for the first time outside its defined stimulus tolerance band

Note 1 to entry: Stimulus may be a reference signal or a disturbance.

Note 2 to entry: Default stimulus tolerance band is defined to be $\pm 10\%$ of the stimulus increment and centred on the value the stimulus had before the event.

3.54

wind turbine product platform

turbines sharing the same mechanical platform, electrical system and main drive train components

Note 1 to entry: These turbines are part of the same turbine platform (family) and the differences are typical of the IEC 61400-1 wind classes; they are designed for with the corresponding rotor diameter and nominal power.

Note 2 to entry: Other examples of turbines from the same platform are e.g. wind turbines with different wind turbine transformer primary side voltage ratings, wind turbines with different rotor diameters, etc. See also Annex F.

3.55

component test

test on a single component, where all necessary functions and performance for the test are available in the component and are not dependent on other components/systems (e.g. the protection device, if this an independent unit)

Note 1 to entry: Test done on component level is valid for all turbine variants, where the component is used.

3.56

sub-system

portion of a system that fulfils a specific function, consisting of several components/elements, which are directly related to each other and are directly interacting for the defined function

3.57

sub-system test

test on a sub-system, where all necessary functions and performance for the test are available in the sub-system and are not dependent on other components or systems

Note 1 to entry: Test done on a sub-system is valid for all turbine variants, where the sub-system is used.

3.58

available active power

predicted instantaneous active power from the turbine, either based on the power curve and measured wind speed or as an output from the turbine controller, where more parameters are taken into the calculation

3.59

power factor

under periodic conditions, ratio of the absolute value of the active power P to the apparent power S :

$$PF = \frac{P}{S} \quad PF = \frac{|P|}{S}$$

Note 1 to entry: Under sinusoidal conditions, the power factor is the absolute value of the active factor.

[SOURCE: IEC 60050-131:2002, 131-11-46]

3.60

ramp rate

gradient of ramp during a given period

3.61

reference value

target value that a control system aims to reach

3.62

active power bin

consecutive, non-overlapping intervals of WT active power measured at WT terminals

Note 1 to entry: The bins (intervals) are equal size from 0 %, 10 %, 20 %, ... , 100 % of P_n . 0 %, 10 %, 20 %, ... , 100 % are the bin midpoints.

3.63

fictitious grid

representation of an ideal phase-to-neutral voltage source with the instantaneous value $u_0(t)$, in series with a defined grid resistance R and grid inductance L

Note 1 to entry: The fictitious grid is used for the normalization of flicker measurements.

3.64

field measurement

measurements performed on a wind turbine or wind power plant installation on a given site

3.65

field test

tests to validate and measure the performance of a wind turbine or wind power plant installation on a given site

3.66

wind speed bin

groups of 10- or 1-minute average measurements into bins based on the average wind speed

4 Symbols and units

In this part of IEC 61400, the following symbols and units are used.

$\frac{\Delta U_{\text{dyn}}}{U_n}$	maximum permitted voltage change (%)
ψ_k	network impedance phase angle (°)
$\alpha_m(t)$	electrical angle of the fundamental of the measured voltage (°)
β	exponent associated with summation of harmonics
$c(\psi_k)$	flicker coefficient for continuous operation
d	relative voltage change (%)
E_{Plti}	long-term flicker emission limit
E_{Psti}	short-term flicker emission limit
f_g	nominal grid frequency (50 Hz or 60 Hz)
$f_{\text{inertia, recovery}}$	frequency threshold where the turbine shall stop boosting active power (Hz)
$f_{\text{inertia, trigger}}$	frequency threshold where the turbine shall start boosting active power (Hz)
f_{sim}	frequency reference value
f_{over}	over-frequency protection level
f_{under}	under-frequency protection level
h	harmonic order
HW	hardware
$I_{h,i}$	h 'th order harmonic current distortion of i 'th wind turbine (A)
$i_m(t)$	measured instantaneous current (A)
I_n	nominal current (A)
IUF	current unbalance factor
$k_f(\psi_k)$	flicker step factor
k_i	ratio of maximum inrush current and nominal current
$k_u(\psi_k)$	voltage change factor
L_{fic}	inductance of fictitious grid (H)
$N_{10\text{m}}$	maximum number of one type of switching operations within a 10 min period
$N_{120\text{m}}$	maximum number of one type of switching operations within a 120 min period
n_i	ratio of the transformer at the i 'th wind turbine
N_m	total number of measured flicker coefficient values
N_{wt}	number of wind turbines
P	active power (W)
$P_{0,2}$	maximum measured active power (0,2 s average value) (W)
P_{60}	maximum measured active power (60 s average value) (W)
P_{600}	maximum measured active power (600 s average value) (W)
PF	power factor
P_{lt}	long-term flicker severity
P_n	nominal active power of wind turbine (W)

$Pr(c < x)$	accumulated distribution of c
P_{st}	short-term flicker severity
$P_{st, fic}$	short-term flicker severity at fictitious grid
Q	reactive power (var)
R_{fic}	resistance of fictitious grid (Ω)
S_k	short-circuit apparent power of grid (VA)
$S_{k, fic}$	short-circuit apparent power of the fictitious grid (VA)
S_n	nominal apparent power of wind turbine (VA)
SW	software
THC	total harmonic current distortion (% of I_n)
T_p	transient time period of a switching operation in seconds (s)
U	phase-to-phase voltage (V)
$u_0(t)$	instantaneous phase-to-neutral voltage of an ideal voltage source (V)
$u_{fic}(t)$	instantaneous phase-to-neutral voltage simulated at fictitious grid (V)
$U_{fic, max}$	maximum phase-to-neutral voltage at fictitious grid (V)
$U_{fic, min}$	minimum phase-to-neutral voltage at fictitious grid (V)
U_{min}	minimum phase-to-phase voltage the turbine can ride through in p.u.
U_{max}	maximum phase-to-phase voltage the turbine can ride through in p.u.
U_n	nominal phase-to-phase voltage (V)
U_{under}	undervoltage protection level
U_{UVRC}	the difference between U_n of the WT and U_{min} in p.u. (undervoltage range capability).
U_{OVRC}	the difference between U_{max} and U_n of the WT in p.u. (overvoltage range capability).
U_{over}	overvoltage protection level
U_{pre}	prefault voltage; calculated as 0,2 s average value measured from 10 s before the event to start of the event.
v_{cut-in}	cut-in wind speed (m/s)
X_{fic}	reactance of fictitious grid (Ω)
Z_1	impedance for limiting the effect of the short-circuit on the upstream grid (Ω)
Z_2	impedance between phases or to ground during short-circuit (Ω)

5 Abbreviated terms

The following abbreviated terms are used in this document.

A/D converter	analogue to digital converter
DFAG	doubly fed asynchronous generator Often referred to as a doubly-fed induction generator (DFIG), but it is not operated as an induction generator when the rotor current is controlled.
DFT	discrete fourier transform
HV	high voltage
LV	low voltage

MV	medium voltage
RMS	root mean square
RoCoF	rate of change of frequency
SCADA	supervisory control and data acquisition
THC	total harmonic current distortion
WT	wind turbine

6 Wind turbine specification

The nominal data of the wind turbine (referred to the wind turbine terminals) shall be specified, including P_n , S_n , U_n , I_n and, where applicable, undervoltage and overvoltage ride through profiles, reactive power capability profile and control values.

Based on manufacturer's information, the wind turbine specifications as outlined in Annex A shall be stated.

NOTE The nominal data are only used as base for the p.u. calculations in this document.

7 Test conditions and test systems

7.1 General

Clause 7 gives the testing fundamentals that are necessary for the assessment of the electrical characteristics of a wind turbine, i.e. test validity (7.3), test conditions (7.4) and test equipment (7.5). A sample report format is given in Annex A.

Generator sign convention shall be used, i.e. the positive direction of the power flow is defined to be from the generator to the grid. If the wind turbine is replaced with a resistor and an inductor, both active and reactive power will be negative (see Annex C).

7.2 Overview of required test levels

Table 1 gives an overview of the required and optional test levels for the different tests and measurements as described in Clause 8. Optional tests and measurements may be carried out and reported for more detailed assessment of simulation models and compliance with specific grid codes. A test is not required at all, if a wind turbine does not provide the corresponding functionality. In some cases a test or measurement (or part of it) would be acceptable on a lower system level, if certain conditions are met which are then provided in Clause 8. For some tests and measurements, a different system level than stated as "required" would be acceptable, too. These cases are marked as "optional" in the following overview and would replace the test on the "required" system level.

Table 1 – Overview of required test levels

Clause	Test	Component test	Sub-system Test	Field measurement – Wind turbine level	Field measurement – Wind power plant
Power Quality Aspects					
8.2.2	Flicker			S	O
8.2.3	Switching operations			S	O
8.2.4	Harmonics, interharmonics and higher frequency components		C	S	O
Steady-State Operation					
8.3.3	Maximum power			S	O
8.3.4	Reactive power characteristic ($Q=0$)		S	O	O
8.3.5	Reactive power capability		S	O	O
8.3.6	Voltage dependency of PQ diagram		S	O	O
8.3.7	Unbalance factor		S	O	O
Control Performance					
8.4.2	Active power control		C	S	O
8.4.3	Active power ramp rate limitation		C	S	O
8.4.4	Frequency control		S	O	O
8.4.5	Synthetic inertia			S	O
8.4.6	Reactive power control		S	O	O
Dynamic Performance					
8.5.2	Fault ride-through capability		C	S	O
Grid Protection					
8.6.2	Grid protection	S	O	O	O
8.6.4	Reconnection time			S	O
8.6.3	Rate of change of frequency RoCoF (df/dt)	S	O	O	O
S: Suggested minimum measurement / test level C: Conditional measurement / test level, if certain conditions are fulfilled (details in corresponding clause) O: Optional measurement / test level, if the function is available on other level than required as a minimum					

7.3 Test validity

Measurements are required in order to validate theoretical analysis and numerical simulations as well as electrical performance. Appropriate measurements as well as data processing are crucial in wind turbine evaluation and comparison with expected theoretical assumptions.

The measured characteristics are valid for the wind turbine product platform. Some wind turbine designs include a built-in transformer. The measurements of the electrical characteristics shall be made at the wind turbine terminals. It is up to the wind turbine manufacturer to define the wind turbine terminals to be at the low-voltage or high-voltage side of the transformer. Changing the transformer from one output voltage to another is not expected to cause the wind turbine to behave differently with respect to power quality characteristics. Thus, separate assessment is not required, if the transformer output voltage is

changed and if the assessment has been previously done at other MV levels or at the low-voltage side of the wind turbine transformer, except that nominal voltage and current shall be updated. The considerations given in Annex F shall be taken into account.

NOTE Measuring voltage and current on the low- or high-voltage side of transformer has an influence on harmonic measurement results. However, it is still up to the manufacturer to define the "WT terminals". When transferring test results to other turbines of one product platform, the test validity applies for the same side of the transformer. If necessary, an additional measurement could be done at a specific site in accordance with this document.

The location of the wind turbine terminals (being the measurement point) and the specific configuration of the assessed wind turbine including the relevant control parameter settings shall be clearly stated in the test report (Annex A).

Any selection of tests can be done and reported separately. This means that all parts in this document can be tested and reported individually and it is not mandatory to perform all the described test and measurements procedures.

Optional tests and measurements (for example pitch angle and rotational speed) may be carried out and reported for more detailed assessment of simulation models and compliance with specific grid code requirements.

Type testing one turbine which is part of a product platform shall be considered sufficient to cover the entire turbine product platform, provided that a documented risk assessment is carried out according to Annex F to determine which type tests are valid and which tests need to be repeated on the rest of the turbine product platform.

7.4 Test conditions

The following test conditions are required and shall be measured and reported as part of the test procedure. Any test data measured during periods not complying with the given test conditions shall be excluded.

- The wind turbine shall be connected directly to the network through a standard transformer (i.e. equal or electrically comparable to a transformer to be used in other applications than the prototype measurement) with nominal apparent power at least corresponding to the nominal apparent power of the assessed wind turbine.
- The total harmonic distortion of the voltage including all harmonics up to the order of 50 shall be less than 5 % measured as 10 min average data at the wind turbine terminals while the wind turbine is not generating. The total harmonic distortion of the voltage may be determined by measurement prior to testing the wind turbine.
- The grid frequency measured as 0,2 s average data shall be within ± 1 % of the nominal frequency, and the rate of change of the grid frequency measured as 0,2 s average data shall be less than 0,2 % of the nominal frequency per 0,2 s. If the grid frequency is known to be very stable and well within the above requirements, which would commonly be the case in a large interconnected power system, this need not be assessed any further. Otherwise, the grid frequency shall be measured during the test.
- The voltage shall be within ± 10 % of its nominal value measured as 10 min average data at the wind turbine terminals.
- The voltage unbalance factor shall be less than 2 % measured as 10 min data at the wind turbine terminals. The voltage unbalance factor shall be determined as described in IEC 61000-4-30 where the voltage unbalance factor is defined as ratio of positive and negative sequence component of the voltage. If the voltage unbalance factor is known to be well within the above requirement, it need not be assessed any further. Otherwise, the voltage unbalance factor shall be measured during the test.
- The environmental conditions shall comply with the manufacturer's requirements for the instruments and the wind turbine. Commonly, this does not call for any online measurements of the environmental conditions, though it is required that these are described in general terms as part of the measurement report.

- Tests may be prepared at any turbulence intensity and at any short-circuit ratio, but conditions (average turbulence intensity, short-circuit apparent power and network impedance angle) shall be stated as part of the test report/certificate.
- The characteristics shall be stated for the wind turbine operating with reactive power as close as possible to zero, i.e. if applicable, the reactive reference value shall be set to $Q = 0$, unless stated differently in the corresponding clause of a specific test. If any other operational mode is used, this shall be clearly stated in the report.
- Various operational modes could be taken into consideration. Please note that various operational modes can be characterized by different frequency response of the turbine control system affecting the electrical characteristics, therefore it is recommended to specify if the operation mode was changed during the assessment process and exclude invalid data. It is the manufacturer's responsibility to define if changes in the operational mode will change the measured electrical characteristics. A guideline to evaluate the influence of design changes is given in Annex F.
- Electromagnetic influence on the measurement should be avoided. Therefore, it is recommended that all measurement equipment shall have an EMC class that meets at least the expected level of electromagnetic emission in the wind turbine.
- The temperature variation regarding the calibration uncertainties of the measurement equipment shall not exceed the limits specified by the equipment manufacturer. The data acquisition device shall meet the requirements given in IEC 62008 in terms of performance characteristics and calibration methods.

NOTE 1 The specified conditions above are required to achieve reliable test results and should not be interpreted as conditions for a reliable grid connection and operation of wind turbines.

NOTE 2 The maximum measured power depends for some wind turbine designs to some degree on the air density. Hence, the maximum measured power determined following the procedure in 8.3.3 and measured at a site with low air density can be less than at a site with higher air density. It is, however, found that the uncertainty introduced by not specifying a limited air density range cannot justify the cost of additional equipment and procedures associated with this.

7.5 Test equipment

The measurement equipment should be carefully adjusted in order to record electrical characteristics of interest with acceptable accuracy and precision. The description of the measurements assumes application of a digital data acquisition system with elements as illustrated in Figure 2.

The anemometer, voltage transducers and current transducers are the required sensors of the measurement system. The signal conditioning is for connecting these to the low-pass filter that is required for anti-aliasing. See Table 2 for the specification of equipment accuracy. The transducers shall meet the requirements given in IEC 61869-103.

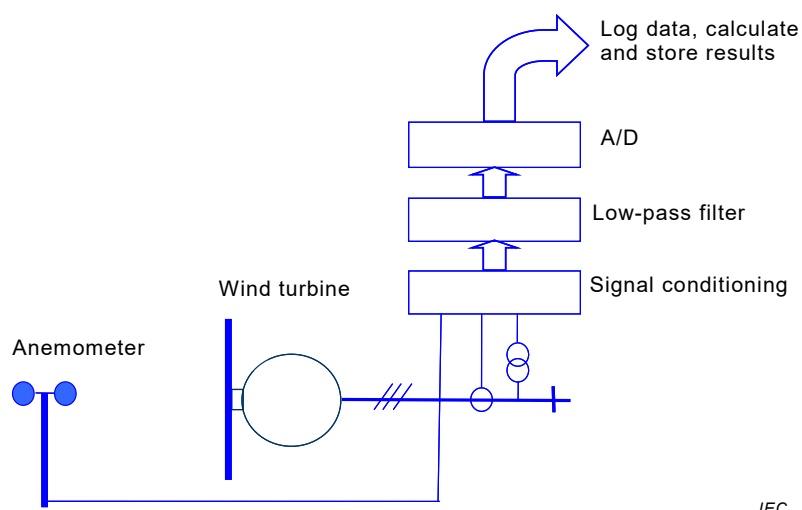


Figure 2 – Measurement system description including the most significant components

Table 2 defines the overall required accuracies for the measurement equipment, if there are no specific requirements mentioned in the specific subclauses.

Table 2 – Specification of requirements for measurement equipment

Equipment	Required accuracy
Voltage transducers	Class 1,0
Current transducers	Class 1,0
Anemometer	± 1 m/s
Filter + A/D converter + data acquisition system	1 % of full scale
Frequency	10 mHz

The digital data acquisition system is assumed to log, calculate and store results as specified in the subclauses of Clause 8. General guidance for calculation of RMS voltage, active and reactive power in a system as outlined in Figure 2 is given in Annex C. This requires a sample rate of at least 2 kHz per channel of the voltage and current signals. For measurements of harmonics, interharmonics and higher frequency components, the sampling rate should be chosen in accordance with the established rules of signal analysis such that frequency components up to 9 kHz inclusive can be measured. It has to be guaranteed that the frequency response of the transducers is linear up to 9 kHz.

The minimum signal bandwidth for measurements of flicker shall be 1 500 Hz. See also the note in 7.5.

The wind speed signal shall be sampled with at least 1 Hz, the measurement from the corrected nacelle anemometer can be used.

Alternatively, a hub-height anemometer located at a position unaffected by wind turbine blockage or wind turbine wakes can be applied for measuring the wind speed. A position 2,5 rotor diameter upstream would generally give good definition. As another alternative, hub-height wind speed can be estimated from lower level measurement possibly in conjunction with power measurements and knowledge of the power curve.

The measurement equipment configuration including sensors bandwidth, cable shielding, anti-aliasing filter cut-off frequency, A/D converter resolution and sample rate, should be adjusted

in order to measure all expected frequency components with sufficient amplitude and phase angle accuracy.

Other signals needed in the test are reference values and available active power. Reference values shall be read by the measurements system either via network connection, serial or analogue values. The available active power can be calculated from the measured wind speed signal, which is converted into an active power signal according to the observation of active power against wind speed (see 8.3.2). Alternatively, the available active power output shall be provided by the control system of the wind turbine.

8 Measurement and test of electrical characteristics

8.1 General

The electrical characteristics to be measured and tested consist of five different categories of tests: power quality, steady-state operation, control performance, dynamic performance and disconnection from grid. These five categories cover all aspects needed to evaluate the performance of the turbine against requirements given in the grid code.

8.2 Power quality aspects

8.2.1 General

Subclause 8.2 covers the classical power quality terms with respect to flicker during normal operation, flicker and voltage change during switching operations and current harmonics under different operational conditions.

8.2.2 Flicker during continuous operation

8.2.2.1 Description

The network will normally have other fluctuating loads that may cause significant voltage fluctuations at the wind turbine terminals where the test measurements are taken. Moreover, the voltage fluctuations imposed by the wind turbine will depend on the characteristics of the grid e.g. the short-circuit power and impedance angle. The aim is, however, to achieve test results that are independent of the grid conditions at the test site. To accomplish this, IEC 61400-21-1 specifies a method that uses current and voltage time-series measured at the wind turbine terminals to simulate the voltage fluctuations on a fictitious grid with no source of voltage fluctuations other than the wind turbine (see NOTE).

The application of the fictitious grid is further described in 8.2.2.2 and in Annex B. The measurement procedures for voltage fluctuations are separated into procedures for continuous operation and switching operations. This separation reflects that the flicker emission from a wind turbine has the character of stochastic noise during continuous operation, whereas the flicker emission and voltage changes during switching operations have the character of a number of time-limited, non-coincident events.

NOTE Although the specified method to simulate the voltage fluctuations on a fictitious grid avoids the direct influence of the real voltage fluctuations of the grid at the measurement point on flicker, there can be an influence of these voltage fluctuations, imposed by other sources, on the measured current from the wind turbine. This in turn may influence the simulated voltage fluctuations on the fictitious grid. However, this effect is relatively small and does not justify changing the procedure for determining the flicker coefficient.

8.2.2.2 Procedure

The following procedure is used to measure flicker.

Fictitious grid

The phase diagram of the fictitious grid is shown in Figure 3.

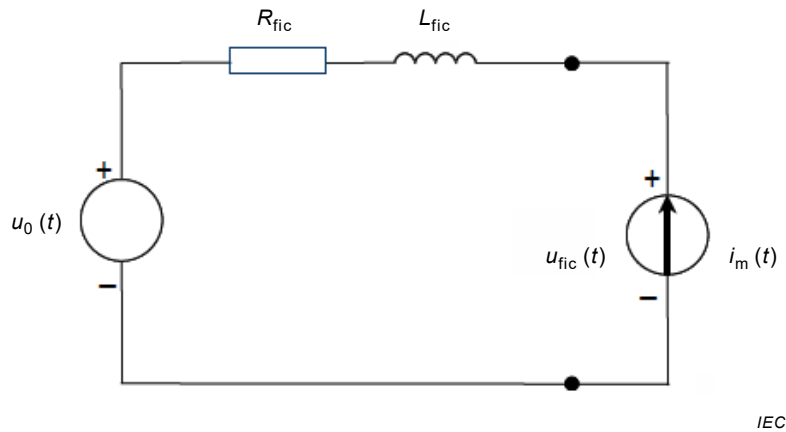


Figure 3 – Fictitious grid for simulation of fictitious voltage

The fictitious grid is represented by an ideal phase-to-neutral voltage source with the instantaneous value $u_0(t)$ and a grid impedance given as a resistance R_{fic} in series with an inductance L_{fic} . The wind turbine is represented by the current generator $i_m(t)$, which is the measured instantaneous value of the line current. This simple model gives a simulated voltage with the instantaneous value $u_{fic}(t)$ in accordance with Equation (1):

$$u_{fic}(t) = u_0(t) + R_{fic} \times i_m(t) + L_{fic} \times \frac{di_m(t)}{dt} \quad (1)$$

The ideal voltage source $u_0(t)$ can be generated in different ways. But two properties of the ideal voltage should be fulfilled:

- the ideal voltage should be without any fluctuations, i.e. the flicker on the voltage should be zero;
- $u_0(t)$ shall have the same electrical angle $\alpha_m(t)$ as the fundamental of the measured voltage. This ensures the phase angle between $u_{fic}(t)$ and $i_m(t)$ is correct, provided that $|u_{fic}(t) - u_0(t)| \ll |u_0(t)|$.

To fulfil these properties, $u_0(t)$ is defined as:

$$u_0(t) = \sqrt{\frac{2}{3}} \times U_n \times \sin(\alpha_m(t)) \quad (2)$$

where U_n is the RMS value of the nominal voltage of the grid.

The electrical angle of the fundamental of the measured voltage may be described by Equation (3).

$$\alpha_m(t) = 2\pi \times \int_0^t f(t) dt + \alpha_0 \quad (3)$$

where

- $f(t)$ is the frequency (that may vary over time);
- t is the time since the start of the time-series;
- α_0 is the electrical angle at $t = 0$.

R_{fic} and L_{fic} shall be selected to obtain the appropriate network impedance phase angle ψ_k applying Equation (4) below:

$$\tan(\psi_k) = \frac{2\pi \times f_g \times L_{\text{fic}}}{R_{\text{fic}}} = \frac{X_{\text{fic}}}{R_{\text{fic}}} \quad (4)$$

where f_g is the nominal grid frequency (50 Hz or 60 Hz).

The three-phase short-circuit apparent power of the fictitious grid is given by Equation (5) below:

$$S_{k,\text{fic}} = \frac{U_n^2}{\sqrt{R_{\text{fic}}^2 + X_{\text{fic}}^2}} \quad (5)$$

A proper short-circuit ratio $S_{k,\text{fic}}/S_n$ shall be used to ensure that the applied flicker meter algorithm or instrument gives P_{st} values that are well within the measurement range required in IEC 61000-4-15. A class F1 flicker meter for low measurement uncertainties shall be used. Due to the magnitude of the P_{st} values involved in the flicker characterization of the wind turbines, the flicker meter shall specify the working range in the performance testing (rectangular voltage changes and performance testing, Table 5 of IEC 61000-4-15:2010) as the lowest and highest k-value for which the corresponding value $P_{\text{st},k}$ is within $\pm 5\%$. This part of IEC 61400 suggests using the measurement range $0,05 \leq k \leq 5,0$, though it is the responsibility of the assessor to select the appropriate short-circuit ratio $S_{k,\text{fic}}/S_n$ for the available measurement range.

NOTE It should be taken into account that, in one hand, larger voltage fluctuations can be obtained by decreasing the short-circuit ratio. On the other hand, if the short-circuit ratio becomes too small, the mean RMS value of $u_{\text{fic}}(t)$ will deviate significantly from the RMS value of $u_0(t)$, which will influence the relative voltage changes because the absolute voltage changes are normalised with a different mean value. To obtain simulated voltage fluctuations within the flicker meter range, a short-circuit ratio $S_{k,\text{fic}}/S_n$ between 20 and 50 is recommended.

Flicker coefficient during continuous operation

The wind turbine flicker coefficient for continuous operation, $c(\psi_k)$ shall be stated as the 95th percentile for the network impedance phase angles $\psi_k = 30^\circ, 50^\circ, 70^\circ$ and 85° in tables for operation of the wind turbine within the active power bins 0 %, 10 %, 20 %, ... , 100 % of P_n . 0 %, 10 %, 20 %, ... , 100 % are the bin midpoints. The measurements shall be based on observation times of 10 minutes for each data set.

The flicker coefficient $c(\psi_k)$ shall be determined so it can be stated in accordance with Annex A. This shall be done by measurement and simulation.

The detailed procedure is provided here, whereas an informative outline is provided in Annex B.

The following measurements shall be performed:

- The three instantaneous line currents and the three instantaneous phase-to-neutral voltages shall be measured at the wind turbine terminals. If the phase-to-neutral voltages are not available, the phase-to-phase voltages shall be measured and the phase-to-neutral voltages calculated from the measured phase-to-phase voltages. The phase-to-neutral voltages shall be calculated in accordance with Annex C.
- Measurements shall be taken so that at least seven, 10-minute data sets of instantaneous voltage and current measurements (seven tests and three phases equal to 21 time series) are collected for each 10 % power bin. If more than these twenty-one time series are collected for a power bin, then all of the time series shall be used.
- The wind speed should be measured optionally in accordance with 8.3.2.
- Switching operations such as start-up and shut-down of the wind turbine are excluded.

The voltage flicker during the test shall be reported. The voltage flicker shall be measured at the wind turbine terminals and according to IEC 61000-4-15.

The measurements shall be taken with a measurement set-up and by applying voltage and current transducers with specifications in accordance with 7.5. The cut-off frequency of the voltage and current measurements shall be at least 1 500 Hz.

The measurements shall be treated to determine the flicker coefficient of the wind turbine as a function of the network impedance phase angle and its active power bin. This shall be done by repeating the following procedure for each of the network impedance phase angles and power bins.

First, the flicker coefficient for each set of 10-minute measured voltage and current time-series shall be determined. The procedure for this is given in steps 1) to 3) below.

- 1) The measured time-series shall be combined with Equation (1) to give voltage time-series of $u_{\text{fic}}(t)$.
- 2) The voltage time-series of $u_{\text{fic}}(t)$ shall be input to the flicker algorithm in compliance with IEC 61000-4-15 to give one flicker emission value $P_{\text{st, fic}}$ on the fictitious grid for each 10-minute time-series.
- 3) The flicker coefficient shall be determined for each of the calculated flicker emission values by applying Equation (6):

$$c(\psi_k) = P_{\text{st, fic}} \times \frac{S_{k, \text{fic}}}{S_n} \quad (6)$$

where

S_n is the nominal apparent power of the wind turbine;

$S_{k, \text{fic}}$ is the short-circuit apparent power of the fictitious grid.

Finally, the flicker coefficient $c(\psi_k)$ shall be determined as the 95th percentile for each power bin and for each phase angle of the fictitious grid, and represented in a table, as in Table 4.

The long-term flicker severity can, in accordance with IEC TR 61000-3-7, be calculated as the cubic average of 12 consecutive short-term values. The flicker measurement will be done over the full range of active power capability. Seven 10-minute datasets at each power bin are used for the evaluation of the flicker behaviour. With this method, the long-term flicker severity becomes equal to the short-term value, which is a conservative approach.

NOTE 1 The formula defining the flicker coefficient is further explained in B.4.1.

NOTE 2 The 95th percentile is applied as the flicker emission limit.

8.2.2.3 Documentation

Flicker from continuous operation shall be documented in a table and graphs, as defined, for example, in Annex A.

- Flicker coefficients as function of the impedance angle ψ_k for all power bins
- Graphs of the voltage flicker P_{st} and flicker coefficients against the active power.

8.2.3 Flicker and voltage change during switching operations

8.2.3.1 General

Switching operation covers flicker generated by start, stop and switching between generators of the turbine.

8.2.3.2 Description

The characteristics shall be stated for the following types of switching operations:

- a) wind turbine start-up at cut-in wind speed;
- b) wind turbine start-up at nominal active power;
- c) the worst case of switching between generators (applicable only to wind turbines with more than one generator or a generator with multiple windings).

For each of the above types of switching operations, the values of the parameters below shall be stated:

- The maximum number N_{10m} of the switching operation within a 10-minute period.
- The maximum number N_{120m} of the switching operation within a 2-hour period.
- The flicker step factor $k_f(\psi_k)$ for the network impedance phase angles $\psi_k = 30^\circ, 50^\circ, 70^\circ$ and 85° .
- The voltage change factor $k_u(\psi_k)$ for the network impedance phase angles $\psi_k = 30^\circ, 50^\circ, 70^\circ$ and 85° .

Based on manufacturer's information, the maximum number of switching operations, N_{10m} and N_{120m} shall be determined for each type of switching operation. In the event that the wind turbine manufacturer cannot provide these values, or the manufacturer cannot provide sufficient specification of the wind turbine control system to support the provided values, the following shall be assumed:

- wind turbine start-up at around cut-in wind speed: $N_{10m} = 10$ and $N_{120m} = 120$;
- wind turbine start-up at nominal active power: $N_{10m} = 1$ and $N_{120m} = 12$;
- the worst case of switching between generators: $N_{10m} = 10$ and $N_{120m} = 120$.

NOTE 1 The worst case of switching between generators is in the context of flicker step factor defined as the switching operation that gives the highest flicker step factor, and in the context of voltage change factor defined as the switching operation that gives the highest voltage change factor.

NOTE 2 The parameters N_{10m} and N_{120m} are typically provided by the manufacturer, whereas $k_f(\psi_k)$ and $k_u(\psi_k)$ are measured and calculated.

NOTE 3 Depending on the control system of the wind turbine, the maximum number of switching operations within a 2-hour period can be less than twelve times the maximum number of switching operations within a 10-minute period.

8.2.3.3 Procedure

Measurements, simulations and calculations shall be prepared to determine the voltage change factor $k_u(\psi_k)$, and the flicker step factor $k_f(\psi_k)$ for each type of switching operation specified in 8.2.3.2.

The measurement should be taken under normal operational conditions; if it's not possible, it can be measured by manually controlling the WT.

The detailed procedure is provided here, whereas an informative outline is provided in Clause B.2.

Whereas 8.2.3.2 a) and 8.2.3.2 b) each specify switching at a specific wind speed, it is the task of the assessor to identify the conditions of 8.2.3.2 c). This may be done by assessment of the wind turbine design, or if this does not give sufficient evidence, measurements shall be taken to identify the conditions for 8.2.3.2 c). See also NOTE 1 in 8.2.3.2.

To determine the voltage change factor $k_u(\psi_k)$, and the flicker step factor $k_f(\psi_k)$, the following measurements shall be prepared:

- the three instantaneous line currents and the three instantaneous phase-to-neutral voltages shall be measured at the wind turbine terminals;
- the measurements shall be taken for a period, T_p , long enough to ensure that the transient of the switching operation has abated, though limited to exclude possible power fluctuations due to turbulence;
- in order to ensure that the results of the measurements are representative of the normal average conditions, at least five time series shall be evaluated;
- the wind speed shall be measured in accordance with Clause 7. The 1-minute average wind speed during the switching operation shall be within a range of ± 2 m/s of the required wind speed.

The measurements shall be taken with a measurement set-up and by applying voltage and current transducers and an anemometer with specifications in accordance with Clause 7. The cut-off frequency of the voltage and current measurements shall be at least 1 500 Hz.

NOTE For wind turbines applying soft-starters or other effective limitation of the inrush currents, the current transducers should be nominal two to four times the nominal current. For wind turbines with converter systems, the rating of the current transducers can be in general below 2 times rated current. For wind turbines without any inrush current limitation, as guidance, the current transducers should be nominal 10 to 20 times the nominal current of the wind turbine.

The measurements shall be used to determine the voltage change factor and the flicker step factor. This shall be done applying the following procedure.

- The measured time-series shall be combined to give voltage time-series of $u_{fic}(t)$, in accordance with 8.2.2.2
- The simulated voltage time-series of $u_{fic}(t)$ shall be input to the flicker algorithm in compliance with IEC 61000-4-15 to give one flicker emission value $P_{st,fic}$ on the fictitious grid for each time-series of $u_{fic}(t)$. This will result in 15 values of $P_{st,fic}$ for each case, i.e. five tests and three phases.
- The flicker step factor $k_f(\psi_k)$ shall be calculated in accordance with Equation (7).

$$k_f(\psi_k) = \frac{1}{130} \times \frac{S_{k,fic}}{S_n} \times P_{st,fic} \times T_p^{0,31} \quad (7)$$

- The voltage change factor $k_u(\psi_k)$ shall be determined in accordance with Equation (8).

$$k_u(\psi_k) = \sqrt{3} \times \frac{U_{fic,max} - U_{fic,min}}{U_n} \times \frac{S_{k,fic}}{S_n} \quad (8)$$

where

$U_{fic,min}$ is the minimum one period RMS value of the voltage on the fictitious grid during the switching operation;

$U_{fic,max}$ is the maximum one period RMS value of the voltage on the fictitious grid during the switching operation.

- The flicker step factor and the voltage change factor shall be determined as the average result of the 15 values.

NOTE 1 The formula defining the flicker step factor is deduced from IEC 61000-3-3 as explained in B.4.2.

NOTE 2 The flicker coefficient $P_{st,fic}$ is here evaluated over the time period T_p .

NOTE 3 The formula defining the voltage change factor is further explained in B.4.3.

8.2.3.4 Documentation

The following parameters have to be reported in, for example, a table as described in Annex A:

- flicker step factor,
- voltage change factor,

as a function of the impedance phase angle, for all measured cases.

Furthermore, time series of the voltage, current, active and reactive power shall be documented in a graph for one switching event in each case.

8.2.4 Harmonics, interharmonics and higher frequency components

8.2.4.1 General

The emission of current harmonics, interharmonics and higher frequency components during continuous operation shall be stated.

8.2.4.2 Description

It is recommended to measure the voltage harmonics: additionally, see Annex D.2.1 and IEC TR 61400-21-3¹.

The voltage and current transducers used for this kind of measurements should comply with the requirements given in IEC 61000-4-30. It should be ensured that the measurement sensors are capable of measuring the frequency components (i.e. harmonics and interharmonics) of interest.

Frequencies outside the measurement range of the instrument shall be attenuated as described in IEC 61000-4-7 so they don't affect the measurement results.

The values of the individual current components (harmonics, interharmonics and higher frequency components) and the total harmonic current distortion shall be given in tables in percentage of I_n and for operation of the wind turbine within the active power bins 0, 10, 20, ... , 100 % of P_n . 0, 10, 20, ... , 100 % are the bin midpoints.

The individual harmonic current components shall be specified as sub grouped values for frequencies up to 50 times the fundamental grid frequency in accordance with Equation 9 of 5.6, Figure 6 in IEC 61000-4-7:2002/AMD1:2008 and the total harmonic current distortion shall be stated as derived from these.

The interharmonic current components below 2 kHz shall be sub-grouped in accordance with Annex A of IEC 61000-4-7:2002/AMD1:2008.

The higher frequency components, i.e. the 2 to 9 kHz current components, shall be measured and grouped in accordance with Annex B of IEC 61000-4-7:2002/AMD1:2008 (Equation (B.1)). The output of raw DFT shall be grouped in bands of 200 Hz.

10-minute aggregation is performed using the square root of the arithmetic mean of the squared 10-cycle (for a 50 Hz power system) resp. 12-cycle window values (for a 60 Hz power system) for each harmonic as further described in Annex D and reported for each active power bin. The measurement procedure shall be suitable for wind turbines, i.e. where the

¹ Under preparation. Stage at the time of publication: IEC DTR 61400-21-3:2018.

magnitude of the current harmonics produced can be expected to change over the periods of a few seconds.

If current harmonics, interharmonics or higher frequency components are clearly influenced by background distortion, then the measured values of the current harmonics, interharmonics or higher frequency components can be reduced by the amount related with the background distortion. If the harmonics are reduced, a description of the method used in determining the background distortion reduction (simulations, comparative measurements, etc.) should be included in the measurement report. See Annex D for further details. If the amount of reduction cannot be defined:

- a) a note about the possible influence of the background distortion can be added to the affected harmonics, interharmonics and higher frequency components in the report;
- or
- b) the harmonic model in accordance with IEC TR 61400-21-3 can be used, in order to calculate the harmonic contribution.

8.2.4.3 Procedure

Measurements shall be taken so that at least seven, 10-minute data sets of instantaneous voltage and current measurements (seven tests and three phases equal to 21 time series) are collected for each 10 % power bin. If more than these twenty-one time series are collected for a power bin, then all of the time series shall be used.

The 10-cycle window for 50 Hz and 12-cycle window for 60 Hz power systems is recommended. The window size shall be stated in the test report (see Annex A).

Harmonic currents below 0,1 % of I_n for any of the harmonic orders need not be reported.

NOTE Harmonic levels below 0,1 % are typical below the measurement accuracy and may be considered as measurement noise and should not be reported.

The DFT is applied to each of the measured currents with rectangular weighting, i.e. no special weighting function (Hanning, Hamming, etc.) shall be applied to measured time-series. The active power shall be evaluated over the same time window as the harmonics. It is recommended to perform measurements without synchronization and later adjust the sample rate during post-processing or to exclude measurement data in cases when the synchronization is lost.

The THC distortion for each 10-cycle window for 50 Hz and 12-cycle window for 60 Hz shall be calculated in accordance with Equation (9):

$$\text{THC} = \frac{\sqrt{\sum_{h=2}^{50} I_h^2}}{I_n} \times 100 \quad (9)$$

where

I_h is the sub grouped RMS current harmonic of harmonic order h ;

I_n is the nominal current of the wind turbine.

The 10-minute square root of the arithmetic mean of the squared 10-cycle (for 50 Hz power systems) or 12-cycle (for 60 Hz power systems) window values of each frequency band (i.e. each sub-grouped harmonic, interharmonic, higher frequency current component and THC) shall be calculated for each 10-minute time-series.

NOTE 1 Harmonics are considered harmless as long as the duration is limited to a short period of time. Hence, this document does not require specification of short-duration harmonics caused by wind turbine start-up or other switching operations.

NOTE 2 IEC 61000-4-7:2002/AMD1:2008, Subclause 5.6 is on voltage harmonics. This grouping procedure is still recommended for assessing the current harmonics of a fluctuating source like wind turbines.

NOTE 3 It is recommended to measure harmonic voltage in accordance with Annex D. The harmonic voltage measurements can furthermore be used for the harmonic model validation as defined in IEC TR 61400-21-3.

8.2.4.4 Documentation

The emission of current harmonics, interharmonics and higher frequency components shall be documented in tables and graphs as shown, for example, in Annex A. The following parameters have to be measured and reported:

- 95th percentile of current harmonics;
- 95th percentile of current interharmonics;
- 95th percentile of the higher frequency current components.

8.3 Steady-state operation

8.3.1 General

The steady-state operation subclause consists of measurements of active power against wind speed, maximum power, and reactive power capability.

8.3.2 Observation of active power against wind speed

8.3.2.1 Description

The aim is to illustrate the power production against the wind speed, during the power quality measurement period.

NOTE It is not necessary to perform an additional measurement campaign for this test as the data from 8.2.2 can be used for the analysis and reporting.

8.3.2.2 Procedure

The measured wind speed and active power shall be processed into 10-minute block average values. During the measurement, the data shall be recorded continuously.

Measurements shall be taken so that at least seven 10-minute data sets of instantaneous voltage and current measurements are collected for each 10 % power bin.

8.3.2.3 Documentation

The following parameters have to be documented and reported:

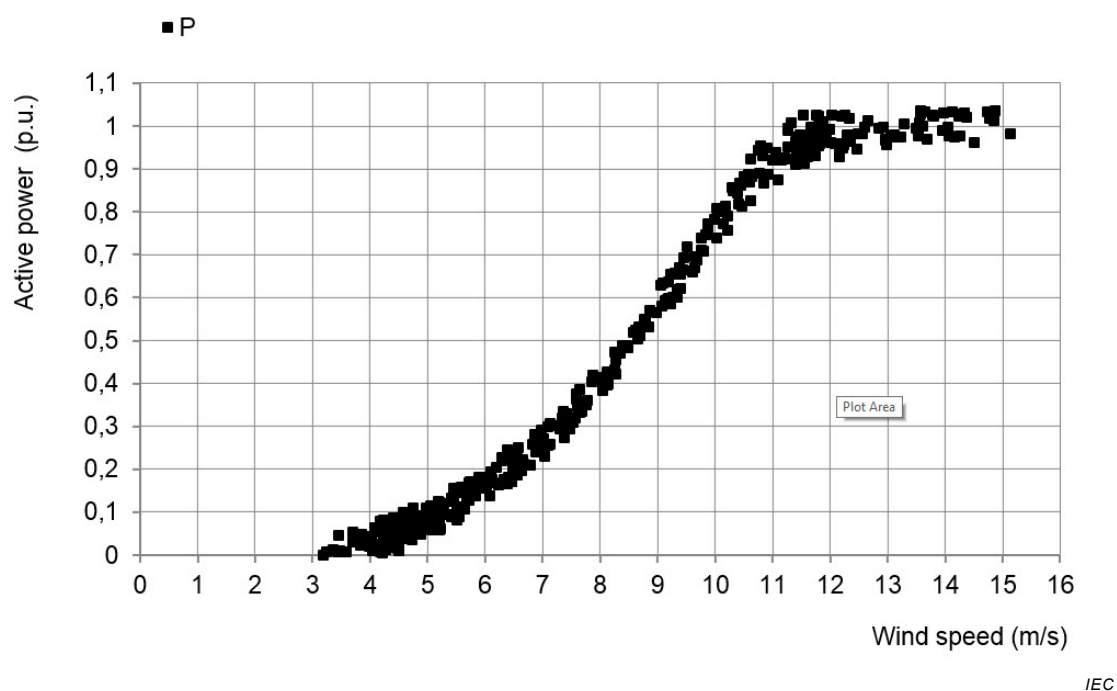
- the active power of the wind turbine (WT) shall be displayed as a function of the wind speed as shown, for example, in Figure 4.
- The number of measured 10-minute time series of active power per wind speed bin shall be represented as shown in Table 3 or as shown in Figure 6;
- The number of measured 10-minute data sets of active power per power bin as shown, for example, in Figure 5 or Table 4.


Table 3 – Number of 10-min time-series per wind speed bin

Wind speed bin: [m/s]	1-2	2-3	3-4	4-5	5-6	6-7	7-8	8-9	9-10	10-11	11-12	12-13	13-14	...
Total number of data sets:														

Table 4 – Number of measurements per power bin (10 min average)


Power bin [% of P_n]	-5 to 5	5 to 15	15 to 25	25 to 35	35 to 45	45 to 55	55 to 65	65 to 75	75 to 85	85 to 95	95 to 105
Total number of datasets											

**Figure 4 – Active power as a function of the wind speed (example)**

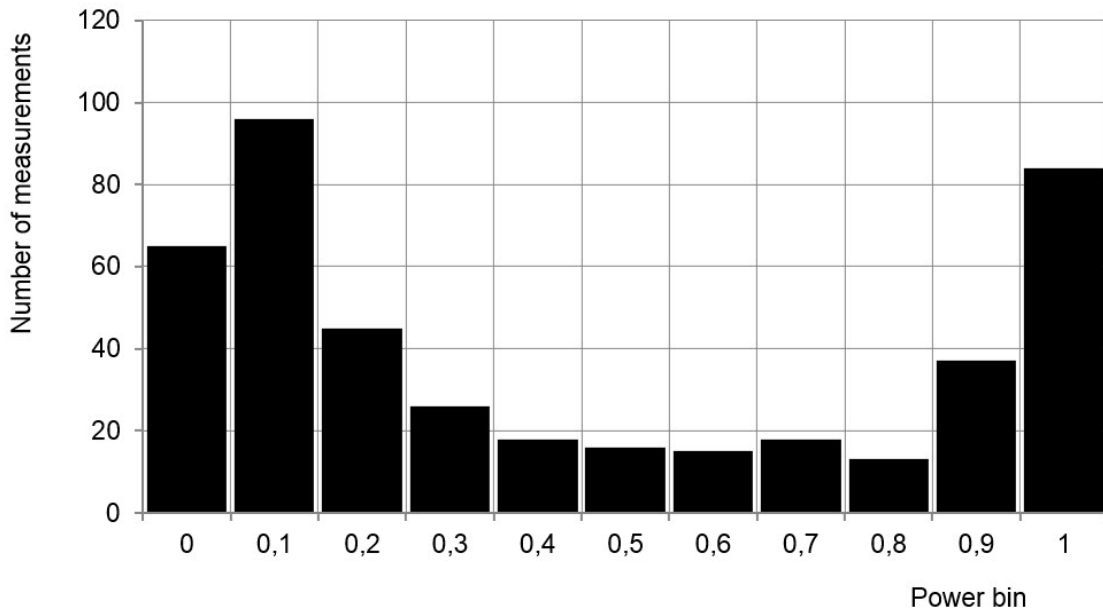

IEC

Figure 5 – Number of measurements in power bins (example)

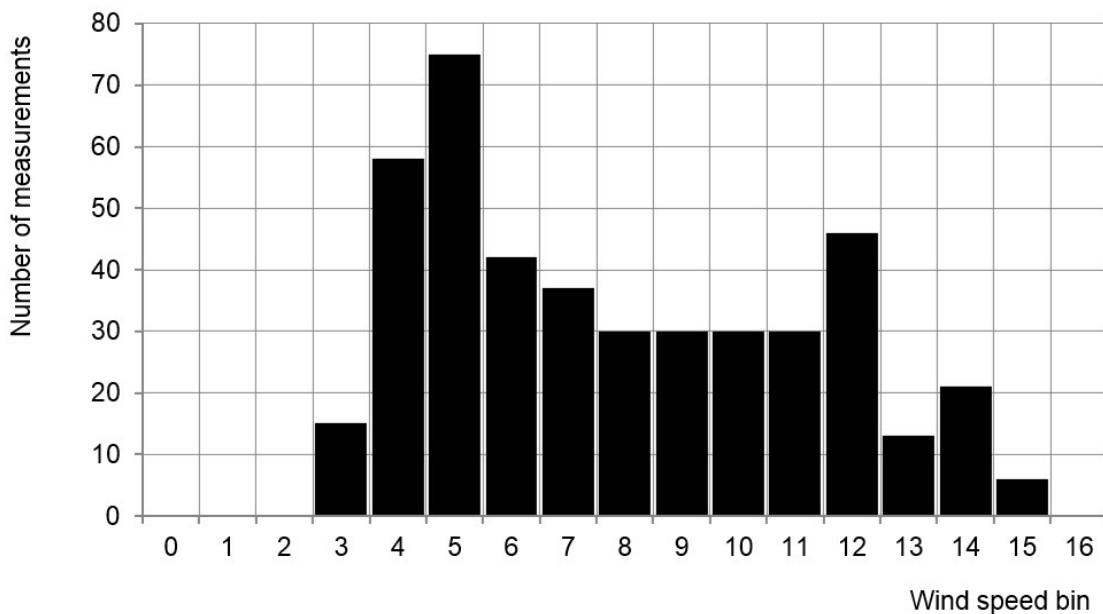

IEC

Figure 6 – Number of measurements in wind speed bins (example)

8.3.3 Maximum power

8.3.3.1 Description

The aim of the test is to show that the specified value of the active power output is kept independent from the averaging time. Data recorded from the test at 8.2.2 can be used.

The maximum measured power of the wind turbine shall be specified as a 600 s average value, P_{600} , a 60 s average value, P_{60} and as a 0,2 s average value, $P_{0,2}$. The maximum active power peaks are determined from each of the different averaging intervals.

8.3.3.2 Procedure

The maximum power shall be measured so that it can be specified in accordance with 8.3.3.1 as a 600 s average value, P_{600} , a 60 s average value, P_{60} , and as a 0,2 s average value, $P_{0,2}$, applying the following procedure:

- measurements shall be sampled during continuous normal operation only;
- the active power shall be measured at the WT terminals;
- measurements shall be taken, so that at least seven 10-minute time series in each power bin are collected;
- the measured power shall be transferred to 60 s average data and to 600 s average data by block averaging;
- $P_{0,2}$ shall be determined as the highest valid 0,2 s average value recorded during the measurement period;
- P_{60} shall be determined as the highest valid 60 s average value recorded during the measurement period;
- P_{600} shall be determined as the highest valid 600 s average value recorded during the measurement period;
- the total number of 10- minute data sets of the entire measurement campaign, from which the highest average values have been selected, shall be represented in a table (in accordance with Table 5).

As guidance, the full-scale range for measuring the current may be two times the nominal current of the wind turbine.

8.3.3.3 Documentation

The following parameters have to be calculated and documented:

- $P_{0,2}$,
- P_{60} ,
- P_{600} ,

including the number of datasets.

The results of the measured values of active power shall be represented in a table as shown in Table 5 .

Table 5 – Measured maximum active power values

Active power P_x	$P_{0,2}$	P_{60}	P_{600}
Measured active power [kW]			
Normalized active power [p.u.]			
Total number of 10-min. data sets			

8.3.4 Reactive power characteristic ($Q = 0$)

8.3.4.1 Description

The aim of this measurement is to determine reactive power characteristic of the WT for a reference value of $Q = 0$. Data recorded for 8.2.2 can be used for the analysis and reporting.

8.3.4.2 Procedure

The measurements can be carried out either in an open area test site or on a test bench. The test setup shall reflect the design envelope of the WT. The measuring devices and their accuracies shall satisfy the requirements of 7.5.

The WT shall be set to the operation mode with a reactive power reference value of 0.

The following procedure shall be applied:

- measurements shall be sampled during continuous operation only;
- the active and reactive power shall be calculated according to Annex C based on the voltages and currents at the WT terminals;
- the power factor shall be calculated according to Annex C based on the voltages and currents at the WT terminals;
- measurements shall be taken so that at least seven 1-minute time-series of active and reactive power are collected at each 10 % power bin;
- the sampled data shall be transferred into 1-minute block average values.

8.3.4.3 Documentation

The following parameters shall be documented and reported as e.g. described in Annex A:

- the measured reactive power as a function of active power (10 % bin classification);
- the measured power factor as a function of active power (10 % bin classification).

8.3.5 Reactive power capability

8.3.5.1 Description

The aim of this measurement is to determine the under- and overexcited reactive power capability of the WT as a function of the active power output.

8.3.5.2 Procedure

The measurements shall be performed in a field test or at a test bench.

The capability of the WT concerning the maximum underexcited reactive power and the maximum overexcited reactive power of the WT shall be measured as 1-minute block average values as a function of the 1 minute average active output power for all power bins.

Reactive power reference values:

- for the measurement of the maximum underexcited reactive power, the WT shall be given a reference value high enough to show the maximum underexcited reactive power capability in the active power range;
- for the measurement of the maximum overexcited reactive power, the WT shall be given a reference value high enough to show the maximum overexcited reactive power capability in the active power range.

For each of the two reactive powers setting modes, the following procedure shall be applied:

- measurements shall be sampled during continuous operation only;
- the active and reactive power shall be calculated in accordance with Annex C based on the voltages and currents at the WT terminals;
- the power factor shall be calculated in accordance with Annex C based on the voltages and currents at the WT terminals;
- measurements shall be taken so that at least seven 1-minute time-series of active and reactive power are collected at each 10 % power bin for field test measurements;
- measurements shall be taken so that at least one 1-minute time-series of active and reactive power are collected at each 10 % power bin for sub- system tests;
- the sampled data shall be transferred into 1-minute block average values.

8.3.5.3 Documentation

The following parameters shall be documented and reported as described, for example, in Annex A:

- the measured reactive power as a function of active power (10 % bin classification);
- the measured power factor as a function of active power (10 % bin classification);
- the measured PQ diagram, including the measured voltage shall be reported as illustrated in Figure 7.

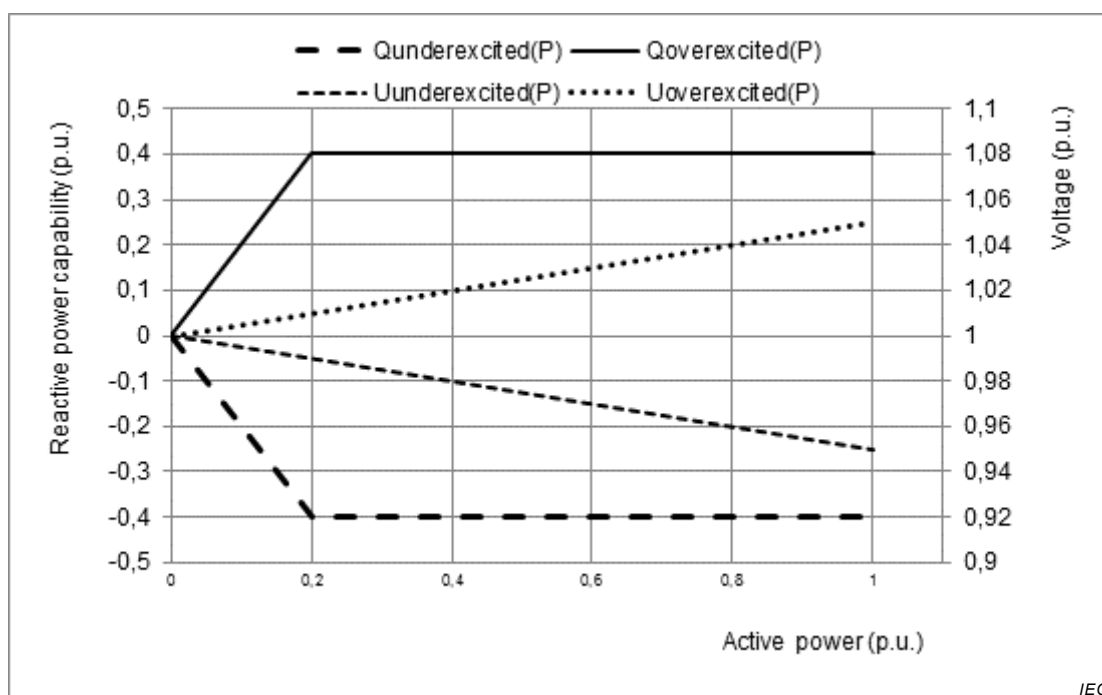


Figure 7 – Example of PQ capability diagram for a given voltage at WT level

8.3.6 Voltage dependency of PQ diagram

8.3.6.1 Description

The dependency to the voltage variations at the WT terminals should be documented according to the manufacturer's specification. The PQ diagram should be repeated for the maximum and minimum continuous operation voltage for the wind turbine according to the manufacturer's specification. To be able to adjust the voltage to cover the operation range of the wind turbine, it is recommended to perform a sub-system test of generator and converter on a test-bench, if it is not feasible to test in a field test.

8.3.6.2 Procedure

Requirements for the voltage dependency of P(Q)-characteristic measurement in a field test:

The results shall be reported in the form of a PQ diagram clearly indicating the voltage dependency or in separated diagrams (see Figure 7 as example).

Requirements for the voltage dependency of P(Q)-characteristic measurement in a test bench test:

The test-bench should have a variable power supply and the sub-system under test shall consist of all the components that influence the reactive power capability.

Procedure for sub-system test:

- select active power reference value inside the active power bin;
- run the generator at the r/min corresponding to the active power reference value;
- set the reactive power reference value to maximum underexcited or overexcited;
- adjust the input voltage to the desired level;
- record at least one 1-minute time series at the active power bin;
- repeat the procedure for all power bins.

8.3.6.3 Documentation

The following parameters shall be documented and reported as described, for example, in Annex A:

- the measured reactive power as a function of active power (10 % bin classification);
- the measured power factor as a function of active power (10 % bin classification);
- the measured PQ diagrams, including the measured voltage at different voltage levels shall be reported as illustrated in Figure 7.

8.3.7 Unbalance factor

8.3.7.1 Description

The aim of the measurement is to determine the unbalance factor in the wind turbine fed-in current. The measurement data from 8.2.2 can be used for the analysis and reporting.

8.3.7.2 Procedure

Current unbalance factor IUF is calculated as 1-minute aggregated values using the square root of the arithmetic mean of the squared 10-cycle (for 50 Hz power systems) resp. 12-cycle window values (for 60 Hz power systems), as defined in IEC 61000-4-30 from each measured record using the following equation:

$$IUF = \frac{I_2}{I_1} \cdot 100 \%$$

where:

I_1 is the 10-cycle or 12-cycle window positive sequence current, in accordance with Annex C;

I_2 is the 10-cycle or 12-cycle window negative sequence current, in accordance with Annex C.

Active power positive sequence system component is calculated as 1-minute arithmetic mean

The data are grouped into 10 % active power bins. Only measurement data where the active power are above or equal to 10 % of P_N are used. The aggregated values of the current and voltage positive and negative phase sequence system components, current unbalance and active power positive phase sequence system component are calculated for each active power bin.

8.3.7.3 Documentation

The measured 1-minute values of the current unbalance and the active power positive sequence system component are represented as an IUF-P diagram.

The measurement results shall be presented in a table as mean values of each power bin, as defined, for example, in Annex A. The maximum current unbalance factor as a 1-minute value shall be explicitly given.

8.4 Control performance

8.4.1 General

Control performance is the ability of the turbine to follow a given reference value for active or reactive power or to control the power based on the grid frequency.

8.4.2 Active power control

8.4.2.1 Description

The ability of the wind turbine to operate in active power control mode shall be characterized for various reference values given by the control interface. The aim of this test is to determine the response of the WT to reference commands regarding the static error, the rise time and the settling time of active power, for both steady-state conditions and under dynamic response conditions. An exemplary tabular representation of the test results is given in Annex A.

8.4.2.2 Procedure

Static error test

For the test of the static error, the following test procedure is recommended: a reference value shall request active power reduction from 1,00 p.u. to 0,20 p.u. in steps of 0,20 p.u. with at least 2-minute operation at each reference value in accordance with Figure 8. The static error and the settling time shall be determined in accordance with 3.43.

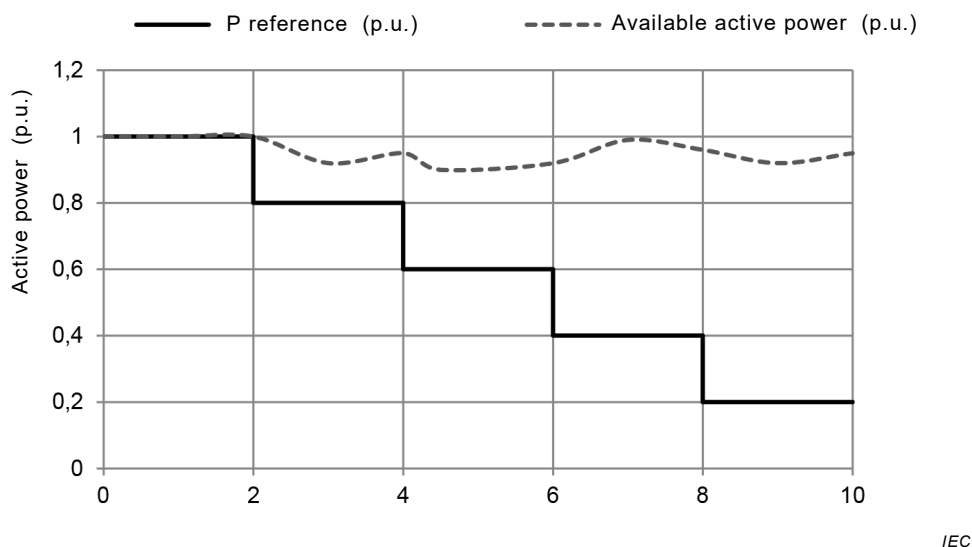


Figure 8 – Adjustment of active power reference value

The calculation of the 1-minute block-average values for the test report shall be carried out after steady state is reached. The time of steady state will be defined as the last 1 minute at each step.

- The absolute static error of the active power shall be measured.
- The wind speed should be such that the available active power output of the WT is at least 0,1 p.u. higher than the targeted reference value, but not less than 0,5 p.u. during the entire test procedure. For the reference value of 1,0 p.u. the WT shall operate with nominal active power.
- The test has to be carried out continuously, i.e. it is not allowed to connect disjoint measurements. A control interface shall be used.
- The sampled data for the active power shall be one fundamental period average data.

Dynamic response test

This test will be used to determine the dynamic behaviour of the WT by observing the step response characteristics (i.e. settling time, ramp-down time, reaction time). The test shall be carried out by a step with a minimum step size of 0,4 p.u. of the nominal active power according to Figure 9.

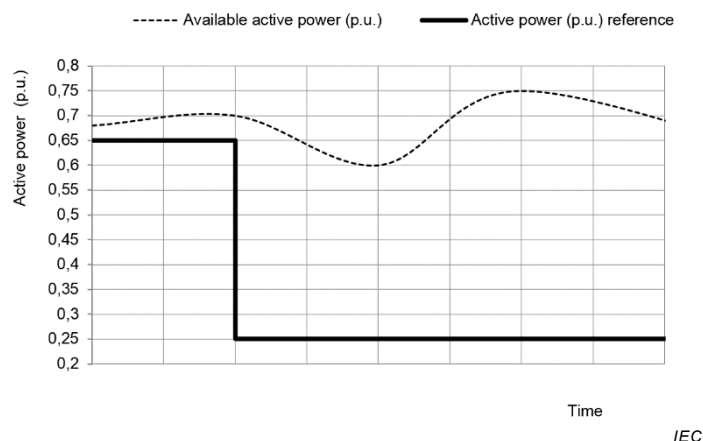


Figure 9 – Example of active power response step