



DPC: 25 / 30509716 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 07 February 2025

Origin: International

Latest date for receipt of comments: 26 February 2025

Project No. 2023/01537

Responsible committee: GEL/86/2 Fibre optic interconnecting devices and passive components

Interested committees:

Title: Draft BS IEC 61753-1 ED3 Fibre optic interconnecting devices and passive components - Performance standard

Part 1: General and guidance

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 26 February 2025**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Responsible Committee Secretary: **Committee Service Centre (BSI)**
Direct tel: **020 8996 7009**
E-mail: csc@bsigroup.com

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



86B/5014/CD

COMMITTEE DRAFT (CD)

PROJECT NUMBER: IEC 61753-1 ED3	
DATE OF CIRCULATION: 2025-01-31	CLOSING DATE FOR COMMENTS: 2025-03-28
SUPERSEDES DOCUMENTS: 86B/4920A/CD, 86B/4942A/CC	

IEC SC 86B : FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS	
SECRETARIAT: Japan	SECRETARY: Mr Ryo Koyama
OF INTEREST TO THE FOLLOWING COMMITTEES:	HORIZONTAL FUNCTION(S):
ASPECTS CONCERNED:	

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Recipients of this document are invited to submit, with their comments, notification of any local regulations or technical reasons that may exist and should be considered should this proposal proceed, recognizing that failure to address such requirements could result in the need for new or existing "In Some Countries" clauses. (SEE [AC/22/2007](#) OR [NEW GUIDANCE DOC](#)).


TITLE:
Fibre optic interconnecting devices and passive components - Performance standard - Part 1: General and guidance

NOTE FROM TC/SC OFFICERS:

Copyright © 2025 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

FOREWORD	5
INTRODUCTION	8
1 Scope	9
2 Normative references	9
3 Terms and definitions	12
3.23 16	
3.25 16	
4 Abbreviations	17
5 Preparation of a performance standard	17
5.1 General	17
5.2 Performance standard title	17
5.3 Tests	17
5.4 Details	17
5.5 Requirements	18
5.6 Sample size	18
5.7 Sample definition	18
5.8 Groupings/sequences	18
5.9 Pass/fail criteria	18
5.10 Reference product definition	18
5.11 Performance standard test report	18
5.12 Environmental aspects	19
Annex A (normative) Tests and test severities for performance standards	20
A.1 General	20
A.2 How to find the performance tests for the desired category?	24
Annex B (normative) Material test for protective housings	78
Annex C (normative) Acceptance or pass/fail criteria for performance standards	80
Annex D (informative) Grandfathered requirements for Category E	94
Annex E (normative) Performance standard numbering	97
Annex F (normative) Minimum temperature value in Finland	98
Bibliography	99
Note 1 to entry: Examples of protective housings: boxes, cabinets, optical distribution frame sub racks, closures, terminals or pedestals as shown in Figure 1. A closure can be either a "sealed closure" or a "free breathing closure". Boxes are free breathing protective housings and permanently fixed to a wall or a pole. The incoming cables are attached to the wall or the pole. As a result no cable bending and torsion requirements are given as cables are not moved anymore after installation. Closures can be moved into handholes or onto poles after installation. During maintenance or due to network churn the closure can be moved back to a location that provides better conditions for cable addition, splicing and fibre routing (more controlled environment). As cable movement will occur, the closures have additional sets of requirements on cable handling (torsion and bending)	15

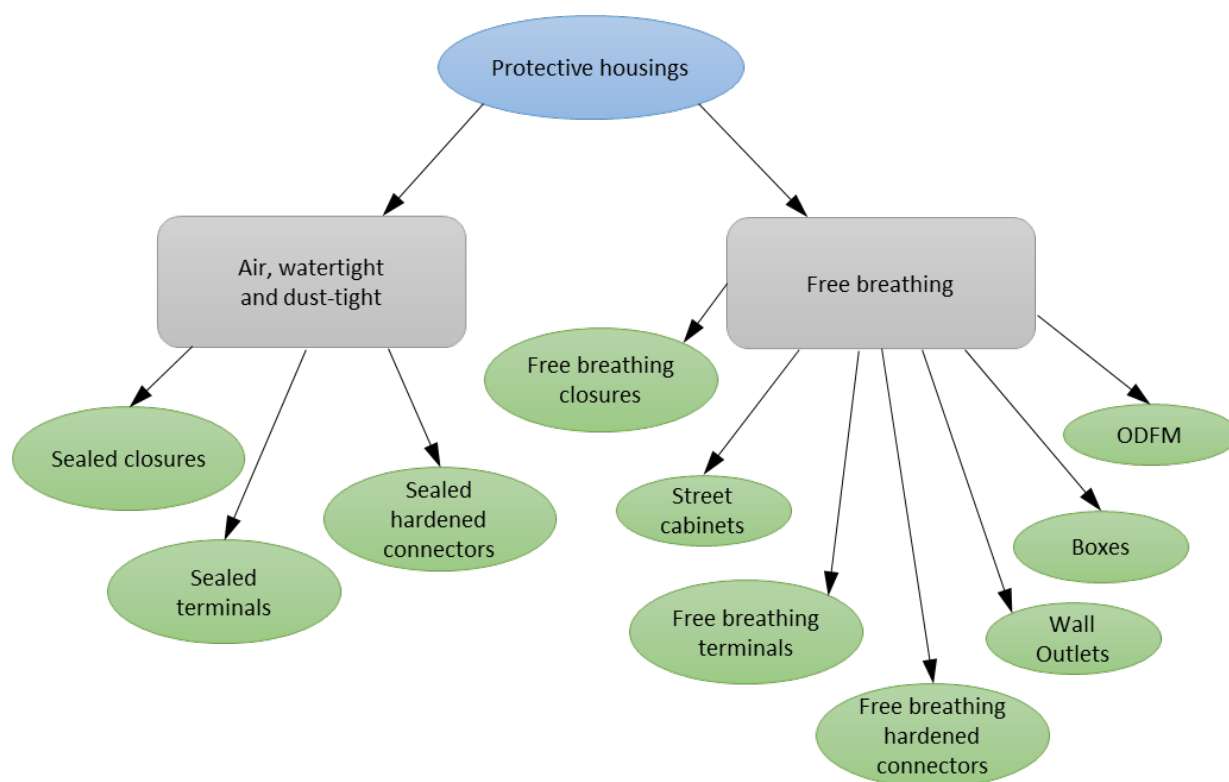

15

Figure 1 – Relationship between various protective housing types 15

NOTE: For components containing active electronics with negligible heat dissipation, a category without HD can be chosen provided there is no risk the maximum test temperature will occur during the lifetime. 25

Figure A.1 – Flow chart to identify the relevant category for the operating service environment 25

Table A.1 – Operating service environments and performance categories 21

Table A.2 – Operating service environments and performance categories for components in locations with additional heat dissipation by active electronics 23

Table A.3 – Connectors, passive components, splices and fibre management systems – Category C – Indoor controlled environment 27

Table A.4 – Connectors, field mountable connectors, passive components, splices and fibre management systems – Category C^{HD} – Indoor controlled environment with additional heat dissipation 30

Table A.5 – Connectors, field mountable connectors, passive components, splices and fibre management systems – Category OP – Outdoor protected environment 31

Table A.6 – Connectors, field mountable connectors, passive components, splices and fibre management systems – Category OP^{HD} – Outdoor protected environment with additional heat dissipation 34

Table A.7 – Connectors, field mountable connectors, passive components, splices and fibre management systems – Category OP⁺ – Extended outdoor protected environment 35

Table A.8 – Connectors, field mountable connectors, passive components, splices and fibre management systems – Category OP⁺^{HD} – Extended outdoor protected environment with additional heat dissipation 36

Table A.9 – Connectors, passive optical components – Category I – Industrial environment 37

75	Table A.10 – Connectors, passive optical components – Category I ^{HD} – Industrial	
76	environment with additional heat dissipation	39
77	Table A.11 – Wall outlets, boxes, optical distribution frame modules and free breathing	
78	closures Category C – Indoor controlled environment	40
79	Table A.12 – Sealed closures – Category C – Indoor controlled environment	46
80	Table A.13 – Free breathing hardened optical connectors, street cabinets, boxes,	
81	terminals and closures Category A – Outdoor aerial environment	51
82	Table A.15 – Sealed hardened optical connectors, sealed closures and sealed	
83	terminals Category G – Outdoor ground environment	66
84	Table A.16 – Sealed closures – Category S – Outdoor subterranean environment	73
85	Table B.1 – Material tests and acceptance criteria	78
86	Table C.1 – Single-mode connectors	81
87	Table C.2 – Single-mode field mountable connectors	82
88	Table C.3 – Multi mode connectors	83
89	Table C.4 – Single-mode mechanical splices	84
90	Table C.5 – Multi mode mechanical splices	85
91	Table C.6 – Single-mode fusion splices	85
92	Table C.7 – Single-mode passive optical components	86
93	Table C.8 – Fibre management systems	87
94	Table C.9 – Category C – Wall outlets and boxes	88
95	Table C.10 – Category C – Optical distribution frame modules (OFDM)	89
96	Table C.11 – Category A, boxes, street cabinets, free breathing closures and free	
97	breathing terminals	90
98	Table C.12 – Category C, A, G and S single-mode sealed closures and sealed	
99	terminals	91
100	Table C.13 – Category A and G single-mode hardened fibre optic connectors	92
101	Table C.14 – Category A and G multimode hardened fibre optic connectors	93
102	Table D.1 – Connectors and passive optical components – Category E – Extreme	
103	environment	94

104

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING DEVICES AND
PASSIVE COMPONENTS – PERFORMANCE STANDARD –****Part 1: General and guidance****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61753-1 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition published in 2018. It constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Definitions and tables updated with new products: free-breathing hardened connectors, free-breathing and sealed terminals;
- b) replaced all test temperatures $23\text{ °C} \pm 3\text{ °C}$ by $23\text{ °C} \pm 5\text{ °C}$ to harmonize with the standard atmospheric conditions in IEC 61300-1;

- c) addition of ageing cycle temperatures for the assembly/disassembly requirements in categories C, C^{HD}, OP, OP^{HD}, OP+, OP+^{HD}, A, G and S;
- d) correction duration of shock pulses according to IEC 60068-2-27 (IEC 61300-2-9 to be updated to align duration with IEC 60068-2-27). Changed duration of 2 000 m/s² pulse to 6 ms and to 11 ms for the 500 m/s² pulse;
- e) removal of the static side load test requirement in categories C, C^{HD}, OP, OP^{HD}, OP+, OP+^{HD};
- f) addition of installation test for FMS in category C and OP;
- g) moved category E to an informative annex D;
- h) added separate tables for free breathing and sealed housings in categories C and A;
- i) added information on test overpressure for sealing tests in tables for sealed protective housings in categories C, A, G and S;
- j) addition of material tests for protective housings (UV-light resistance, mould growth, hydrolysis resistance and resistance to cleaning solvents) in a new Annex B;
- k) added alternative for nonyl-phenol ethoxylate (Igepal®) as stress-cracking solvent;
- l) updated the cable retention test severities for categories A, G and S;
- m) updated the cable axial compression test severities for categories C, A, G and S;
- n) added new grade 1m (≥ 45 dB mated, ≥ 35 dB unmated) for return loss of multimode APC connectors;
- o) added torque limit of 25 Nm for cable torsion test of protective housings in categories C, A, G and S;
- p) added limit of 100 N for force to bend cables in the cable bending test of protective housings in categories C, A, G and S;
- q) added new pass/fail criteria for ingress of dust and water in IP5x, IPx4, IPx5 and IPx6 free breathing housings according to IEC TS 63334;
- r) specified the 300 N proof test (straight pull 0°) requirement for hardened connectors for pulling on cap/plug/cable interface;
- s) specified 200 N proof test (straight pull 0°) requirement for hardened connectors for pulling on socket/plug/cable interface;
- t) cable retention test was replaced by transmission with applied tensile load for hardened connectors;
- u) re-stated Annex F with exemption of lower test temperatures of -45 °C for Finland for categories OP+, E, A and G.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
86B/xxxx/FDIS	86B/xxxx/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61753 series, published under the general title *Fibre optic interconnecting devices and passive components – Performance standard*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- 200 • reconfirmed,
- 201 • withdrawn,
- 202 • replaced by a revised edition, or
- 203 • amended.

204 The contents of the corrigendum of May 2019 have been included in this copy.

205

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

206

207

208

INTRODUCTION

209 The IEC 61753 series is dealing with performance standards for all passive fibre optic products,
210 including connectors, passive optical components, fibre management systems and various
211 protective housings. The standard is published in multiple parts. This part, Part 1, covers
212 general information on performance standards. Subsequent parts are known as performance
213 standards and are numbered according to the classification defined in Annex E. These
214 standards contain the minimum test and measurement severities which are common to all
215 passive fibre optic products, for a particular service environment or performance category, and
216 the test and measurement severities which are considered specific to that particular product in
217 that environment.

218 Performance Standards define the requirements for standard optical performance under a set
219 of specified conditions. Each standard contains a series or a set of tests and measurements
220 with clearly stated conditions, severities and pass/fail criteria. The series of tests, commonly
221 referred to as an operating service environment or performance category, is intended to be run
222 on a 'one-off' basis to prove the product's ability to satisfy the requirements of a specific
223 application, market sector or user group.

224 This document defines those sets of tests which form each operating service environment or
225 performance category and which have been standardised for international use. A product that
226 has been shown to meet all the requirements of a performance standard can be declared as
227 complying with that performance standard.

228 Products having the same classification from one manufacturer that satisfy a performance
229 standard, will operate within the boundaries set by the performance standard. Intermateability
230 or interchangeability of products from different suppliers (having the same classification and
231 conforming to the same performance standard) can only be guaranteed when these products
232 also meet the interface standards. Only in this condition will an equivalent level of performance
233 be provided when they are used together (for example, in the case of optical connectors).

234 Conformance to a performance standard is not a guarantee of lifetime assured performance or
235 reliability. Reliability testing is the subject of a separate test schedule, where the tests and
236 severities selected are truly representative of the requirements of this reliability test programme.
237 Consistency of manufacture will be maintained using a recognised quality assurance
238 programme whilst the reliability of product will be evaluated using the procedures recommended
239 in IEC 62005 series.

240 Tests and measurements are selected from IEC 61300 series. Where this is not possible, the
241 required test method is attached as an annex to the performance standard.

242

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – PERFORMANCE STANDARD –

Part 1: General and guidance

1 Scope

This part of IEC 61753 provides guidance for the drafting of performance standards for all passive fibre optic products, except for optical fibres and optical fibre cables, for stationary use.

This document defines the tests and severities which form the performance categories or general operating service environments and identifies those tests which are considered to be product specific. Test and severity details are given in Annex A.

It does not include the performance standards for transportation applications as those are included in separate specifications.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-2-10, *Environmental testing – Part 2-10: Tests – Test J and guidance: Mould growth*

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 61300 (all parts), *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*

IEC 61300-2-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-1: Tests – Vibration (sinusoidal)*

IEC 61300-2-2, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-2: Tests – Mating durability*

IEC 61300-2-4, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-4: Tests – Fibre or cable retention*

IEC 61300-2-5, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-5: Tests – Torsion*

IEC 61300-2-6, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-6: Tests – Tensile strength of coupling mechanism*

IEC 61300-2-7, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-7: Tests – Bending moment*

IEC 61300-2-9, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-9: Tests – Shock*

- 281 IEC 61300-2-10, *Fibre optic interconnecting devices and passive components – Basic test and*
282 *measurement procedures – Part 2-10: Tests – Crush resistance*
- 283 IEC 61300-2-11, *Fibre optic interconnecting devices and passive components – Basic test and*
284 *measurement procedures – Part 2-11: Tests – Axial compression*
- 285 IEC 61300-2-12, *Fibre optic interconnecting devices and passive components – Basic test and*
286 *measurement procedures – Part 2-12: Tests – Impact*
- 287 IEC 61300-2-17, *Fibre optic interconnecting devices and passive components – Basic test and*
288 *measurement procedures – Part 2-17: Tests – Cold*
- 289 IEC 61300-2-18, *Fibre optic interconnecting devices and passive components – Basic test and*
290 *measurement procedures – Part 2-18: Tests – Dry heat*
- 291 IEC 61300-2-19, *Fibre optic interconnecting devices and passive components – Basic test and*
292 *measurement procedures – Part 2-19: Tests – Damp heat (steady state)*
- 293 IEC 61300-2-21, *Fibre optic interconnecting devices and passive components – Basic test and*
294 *measurement procedures – Part 2-21: Tests – Composite temperature/humidity cyclic test*
- 295 IEC 61300-2-22, *Fibre optic interconnecting devices and passive components – Basic test and*
296 *measurement procedures – Part 2-22: Tests – Change of temperature*
- 297 IEC 61300-2-23, *Fibre optic interconnecting devices and passive components – Basic test and*
298 *measurement procedures – Part 2-23: Tests – Sealing for non-pressurized closures of fibre*
299 *optic devices*
- 300 IEC 61300-2-26, *Fibre optic interconnecting devices and passive components – Basic test and*
301 *measurement procedures – Part 2-26: Tests – Salt mist*
- 302 IEC 61300-2-27, *Fibre optic interconnecting devices and passive components – Basic test and*
303 *measurement procedures – Part 2-27: Tests – Dust – Laminar flow*
- 304 IEC 61300-2-28, *Fibre optic interconnecting devices and passive components – Basic test and*
305 *measurement procedures – Part 2-28: Tests – Corrosive atmosphere (sulphur dioxide)*
- 306 IEC 61300-2-33, *Fibre optic interconnecting devices and passive components – Basic test and*
307 *measurement procedures – Part 2-33: Tests – Assembly and disassembly of fibre optic*
308 *mechanical splices, fibre management systems and closures*
- 309 IEC 61300-2-34, *Fibre optic interconnecting devices and passive components – Basic test and*
310 *measurement procedures – Part 2-34: Tests – Resistance to solvents and contaminating fluids*
311 *of interconnecting components and closures*
- 312 IEC 61300-2-35, *Fibre optic interconnecting devices and passive components – Basic test and*
313 *measurement procedures – Part 2-35: Tests – Cable nutation*
- 314 IEC 61300-2-37, *Fibre optic interconnecting devices and passive components – Basic test and*
315 *measurement procedures – Part 2-37: Tests – Cable bending for fibre optic closures*
- 316 IEC 61300-2-38, *Fibre optic interconnecting devices and passive components – Basic test and*
317 *measurement procedures – Part 2-38: Tests – Sealing for fibre optic sealed closures and*
318 *hardened connectors using air pressure*

- 319 IEC 61300-2-42, *Fibre optic interconnecting devices and passive components – Basic test and*
320 *measurement procedures – Part 2-42: Tests – Static side load for strain relief*
- 321 IEC 61300-2-44, *Fibre optic interconnecting devices and passive components – Basic test and*
322 *measurement procedures – Part 2-44: Tests – Flexing of the strain relief of fibre optic devices*
- 323 IEC 61300-2-45, *Fibre optic interconnecting devices and passive components – Basic test and*
324 *measurement procedures – Part 2-45: Tests – Durability test by water immersion*
- 325 IEC 61300-2-46, *Fibre optic interconnecting devices and passive components – Basic test and*
326 *measurement procedures – Part 2-46: Tests – Damp heat, cyclic*
- 327 IEC 61300-2-50, *Fibre optic interconnecting devices and passive components – Basic test and*
328 *measurement procedures – Part 2-50: Tests – Fibre optic connector proof test with static load*
329 *– Single-mode and multimode*
- 330 IEC 61300-2-54, *Fibre optic interconnecting devices and passive components – Basic test and*
331 *measurement procedures – Part 2-54: Tests – Corrosive atmosphere (mixed gas)*
- 332 IEC 61300-2-56, *Fibre optic interconnecting devices and passive components – Basic test and*
333 *measurement procedures – Part 2-56: Tests – Wind resistance of mounted housing*
- 334 IEC 61300-3-1, *Fibre optic interconnecting devices and passive components – Basic test and*
335 *measurement procedures – Part 3-1: Examinations and measurements – Visual examination*
- 336 IEC 61300-3-3, *Fibre optic interconnecting devices and passive components – Basic test and*
337 *measurement procedures – Part 3-3: Examinations and measurements – Active monitoring of*
338 *changes in attenuation and return loss*
- 339 IEC 61300-3-4, *Fibre optic interconnecting devices and passive components – Basic test and*
340 *measurement procedures – Part 3-4: Examinations and measurements – Attenuation*
- 341 IEC 61300-3-6, *Fibre optic interconnecting devices and passive components – Basic test and*
342 *measurement procedures – Part 3-6: Examinations and measurements – Return loss*
- 343 IEC 61300-3-7, *Fibre optic interconnecting devices and passive components – Basic test and*
344 *measurement procedures – Part 3-7: Examinations and measurements – Wavelength*
345 *dependence of attenuation and return loss of single-mode components*
- 346 IEC 61300-3-28, *Fibre optic interconnecting devices and passive components – Basic test and*
347 *measurement procedures – Part 3-28: Examinations and measurements – Transient loss*
- 348 IEC 61300-3-29, *Fibre optic interconnecting devices and passive components – Basic test and*
349 *measurement procedures – Part 3-29: Examinations and measurements – Spectral transfer*
350 *characteristics of DWDM devices*
- 351 IEC 61300-3-34, *Fibre optic interconnecting devices and passive components – Basic test and*
352 *measurement procedures – Part 3-34: Examinations and measurements – Attenuation of*
353 *random mated connectors*
- 354 IEC 61300-3-45, *Fibre optic interconnecting devices and passive components – Basic test and*
355 *measurement procedures – Part 3-45: Examinations and measurements – Attenuation of*
356 *random mated multi-fibre connectors*
- 357 IEC 61753-101-03, *Fibre optic interconnecting devices and passive components performance*
358 *standard – Part 101-03: Fibre management systems for category OP – Outdoor protected*
359 *environment*

IEC TS 63334, *Fibre optic interconnecting devices and passive components - Conditions for testing the protection against dust and water ingress of passive optical protective housings and hardened fibre optic connectors (IP5X, IPX4, IPX5, IPX6)*

IEC Guide 109, *Environmental aspects – Inclusion in electrotechnical product standards*

ISO 527-1, *Determination of tensile properties, Part 1: General principles*

ISO 527-2, *Determination of tensile properties, Part 2: Test conditions for moulding and extrusion plastics*

ISO 846, *Plastics — Evaluation of the action of microorganisms*

ISO 1998-1:1998, *Petroleum industry – Terminology – Part 1: Raw materials and products*

ISO 4892-3, *Plastics - Methods of exposure to laboratory light sources – Part 3: Fluorescent UV lamps*

ASTM G21, *Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi*

ASTM G.154, *Standard Practice for Operating Fluorescent Ultraviolet (UV) Lamp Apparatus for Exposure of Materials*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

NOTE Terms and definitions for various components can be found in IEC TS 62538 and in the relevant IEC 61753 series performance standards.

3.1

adaptor

component that permits mating between a connector plug and another optical component

Note 1 to entry: Another optical component is a connector plug, an active device, a passive optical component.

3.2

box

free breathing housing that is permanently fixed to a wall or pole

Note 1 to entry: A box is not specifically designed to allow cable movement (e.g. torsion, bending) at the cable ports during operation.

Note 2 to entry: A box is typically designed for reconfiguration or maintenance work without removing it from the wall or pole. Since the location of boxes generally remains static, with minimal handling, boxes are considered less robust than closures and terminals.

3.3

closure

protective housing utilised for the storage, distribution or protection of one or more cable joints or any passive or active telecom equipment

399 Note 1 to entry: A closure can be either a "sealed closure" or a "free breathing closure".

400 Note 2 to entry: Closures can be moved into handholes, direct buried or mounted onto poles after installation. During
401 maintenance or due to network churn, the closure can be moved back to a more controlled environment location that
402 provides better conditions for cable addition, splicing and fibre routing. As cable movement will occur, the closures
403 have additional sets of requirements on cable handling (torsion and bending). Because of this additional handling,
404 closures are considered to be more robust than boxes.

405 **3.4**

406 **connector**

407 component normally attached to a cable or piece of apparatus for the purpose of providing
408 interconnection and disconnection of fibre optic cables

409 Note 1 to entry: Connectors are connector plugs, connector adaptors, and connector receptacles.

410 **3.5**

411 **fibre management system**

412 **FMS**

413 system to control, protect and store at least two elements such as splices, connectors, passive
414 optical components, and fibres from incoming to outgoing cables

415 Note 1 to entry: Splice trays or organiser trays are parts of a fibre management system.

416 **3.6**

417 **fibre splice**

418 permanent or separable joint between optical fibres

419 Note 1 to entry: Splicing is either fusion splicing or mechanical technology.

420 **3.7**

421 **field mountable connector**

422 **FMC**

423 connector which is mounted directly onto fibre or fibre cable in the field

424 **3.8**

425 **free breathing closure**

426 protective housing that allows a free exchange of air with the environment

427 Note 1 to entry: A free breathing closure may look like a sealed closure, but it is not designed to hold a varying
428 overpressure or underpressure caused by temperature changes or atmospheric pressure changes. Free breathing
429 closures are used in indoor controlled and aerial environments for the interconnection of cables.

430 Note 2 to entry: Limited water ingress and/or limited dust ingress is possible. Free breathing closures are not
431 intended for use in areas that are subject to flooding or water immersion.

432 Note 3 to entry: A free breathing closure is typically removed from the fixing position in operation for reconfiguration
433 or maintenance work. During relocation for this work, movement of the cables may occur and should have no negative
434 effect on the operation of the network.

435 **3.9**

436 **free breathing hardened fibre optic connector**

437 connector with a free breathing protective housing that allows a free exchange of air with the
438 environment

439 Note 1 to entry: A free breathing hardened fibre optic connector is typically used as connection in aerial
440 environments mounted on a free breathing protective housing.

441 **3.10**

442 **free breathing terminal**

443 terminal with a free breathing protective housing that allows a free exchange of air with the
444 environment

445 Note 1 to entry: A free breathing terminal may look like a sealed terminal, but it is not designed to hold a varying
446 overpressure or underpressure caused by temperature changes or atmospheric pressure changes.

447 Note 2 to entry: A free breathing terminal is typically used in aerial environments where limited water ingress and/or
448 dust ingress is possible.

449 **3.11**
450 **hardened fibre optic connector**
451 connector with a protective housing

452 Note 1 to entry: A hardened connector can be either a "sealed hardened connector" or a "free breathing hardened
453 connector".

454 **3.12**
455 **MICE**
456 classification system that describes the environment conditions that are local to a channel
457 based upon the following factors:

- 458 – mechanical (M),
- 459 – ingress (I),
- 460 – climatic and chemical (C),
- 461 – electromagnetic (E)

462 Note 1 to entry: The term MICE is referenced in the generic cabling standards produced by ISO/IEC JTC1 SC25
463 and relates to the classification of the environment local to the cabling channel.

464 There are four primary environmental criteria used to classify an environment:

- 465 – the M element, defining the mechanical characteristics of the environment;
- 466 – the I element, defining the ingress protection characteristics of the environment;
- 467 – the C element, defining the climatic and chemical characteristics of the environment;
- 468 – the E element, defining the electromagnetic characteristics of the environment.

469 Each of the four primary environmental criteria is further divided into specific parameters and levels for those
470 parameters. The MICE classification for a given location is therefore defined as MalbCcEd where a, b, c and d are
471 the individual sub-classifications (levels) for the M, I, C and E criteria respectively.

472 The suffices for the four primary environmental criteria are either 1, 2 or 3. For example, the most benign environment
473 is described as M1I1C1E1 whereas the most harsh environment would be defined as M3I3C3E3.

474 Note 2 to entry: The E element is considered not relevant to passive optical components.

475 [SOURCE: ISO/IEC 24702:2006, 3.1.11, modified – The notes have been added.]

476 **3.13**
477 **optical distribution frame module**
478 **ODF module**
479 **ODFM**
480 housing which is mountable in a supporting structure

481 Note 1 to entry: An ODFM contains a fibre management system and can provide rearrangeable interconnections
482 between the incoming to the outgoing cables.

483 Note 2 to entry: The supporting structure that houses the ODFM is often called a distribution or equipment rack.

484 **3.14**
485 **operating service environment**
486 typical service environment of an operating location simulated by a performance category

487 **3.15**
488 **performance category**
489 series of tests and measurements with clearly stated conditions and severities, which are
490 chosen to simulate a particular operating service environment

3.16**performance standard**

standard which is designed to verify that a product is capable of meeting the requirements of a particular service environment

Note 1 to entry: A performance standard contains a combination of those tests, together with their severities and pass-fail criteria, which are applied to all passive fibre optic products for a particular performance category, together with those which are considered specific to that particular product in that environment.

3.17**performance standard test report**

report to be produced on completion of testing to a performance standard

3.18**product specific tests**

tests which are considered to be specific to a particular product category or type

Note 1 to entry: Where there is a specific requirement for a product, this is the subject of a separate test and is included in the relevant product performance standard.

3.19**protective housing**

indoor and outdoor housing utilised for the storage, distribution or protection of one or more cable joints or any passive or active telecom equipment

Note 1 to entry: Examples of protective housings: boxes, cabinets, optical distribution frame sub racks, closures, terminals or pedestals as shown in Figure 1. A closure can be either a "sealed closure" or a "free breathing closure". Boxes are free breathing protective housings and permanently fixed to a wall or a pole. The incoming cables are attached to the wall or the pole. As a result no cable bending and torsion requirements are given as cables are not moved anymore after installation. Closures can be moved into handholes or onto poles after installation. During maintenance or due to network churn the closure can be moved back to a location that provides better conditions for cable addition, splicing and fibre routing (more controlled environment). As cable movement will occur, the closures have additional sets of requirements on cable handling (torsion and bending).

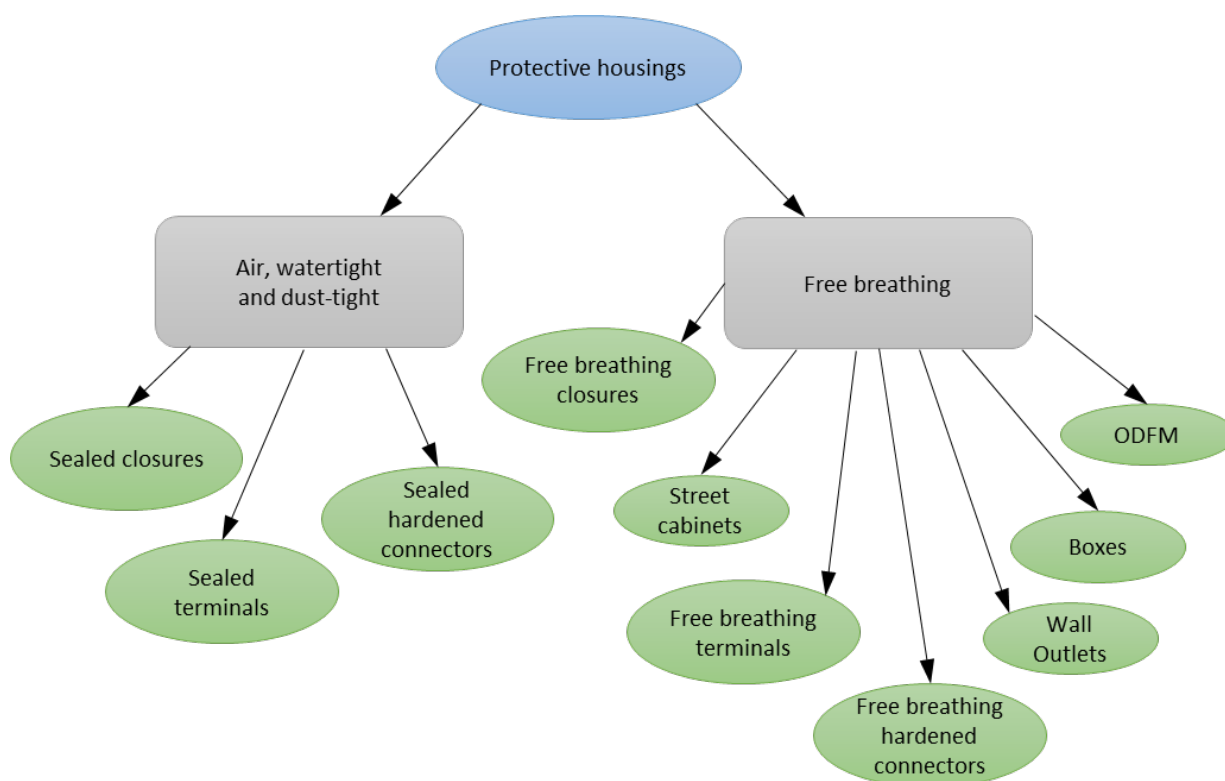


Figure 1 – Relationship between various protective housing types

3.20**sealed closure**

airtight, watertight and dust-tight housing that can hold a varying overpressure or underpressure caused by temperature changes or atmospheric pressure changes

Note 1 to entry: After installation, a sealed closure can be pressurized in the field to check the integrity of the environmental seal.

Note 2 to entry: There is no exchange of air with the outside environment when exposed to temperatures over the specified operating temperature range. Although often referred to as hermetic sealed closures, humidity can enter the inner closure by diffusion.

Note 3 to entry: Sealed closures represent the most robust environmental protection available for fibre optic protective housings. This category of closures is generally required for deployment in the buried or underground plant and in any other deployment scenario where exposure to chemicals or corrosive agents is expected.

Note 4 to entry: Complete inner filled housings are also considered to be sealed closures.

3.21**sealed hardened connector**

connector in an airtight, watertight and dust-tight housing that can hold a varying overpressure or underpressure caused by temperature changes or atmospheric pressure changes

Note 1 to entry: There is no exchange of air with the outside environment when exposed to temperatures over the specified operating temperature range.

Note 2 to entry: Sealed hardened connectors represent the most robust environmental protection available for fibre optic connectors. This category of connectors is generally required for deployment in aerial or underground plant and in any other deployment scenario where exposure to chemicals or corrosive agents is expected.

3.22**sealed terminal**

terminal with an airtight, watertight and dust-tight protective housing that can hold a varying overpressure or underpressure caused by temperature changes or atmospheric pressure changes

Note 1 to entry: There is no exchange of air with the outside environment when exposed to temperatures over the specified operating temperature range.

Note 2 to entry: Sealed terminals represent the most robust environmental protection available for fibre optic terminals. This category of terminals is generally required for deployment in aerial or ground level plant and in any other deployment scenario where exposure to chemicals or corrosive agents is expected.

3.23**street cabinet**

outdoor free breathing above ground-installed housing that is permanently attached to the ground

Note 1 to entry: A street cabinet is permanently fixed to the ground and is not specifically designed to allow cable movement (e.g. torsion, bending) during operation.

3.24**terminal**

outdoor, pre-terminated, and not re-enterable protective housing equipped with a cable stub or hardened connector ports, or both, and intended for connecting a limited number of customer drops, typically between two and twelve.

Note 1 to entry: A terminal serves a limited number of customers. In this context and depending on the use case, the severities of the tests for this type of protective housing may be less severe compared to the closures.

Note 2 to entry: Terminals can be free-breathing or sealed.

3.25**wall outlet**

free breathing housing with fixed connecting devices where the horizontal cable terminates

Note 1 to entry: The wall outlet provides the interface to work area cabling.

4 Abbreviations

FMC	field mountable connector
FMS	fibre management system
ODFM	optical distribution frame module

5 Preparation of a performance standard

5.1 General

This document provides guidance for the drafting of performance standards for all passive fibre optic products. Performance standards are numbered according to the classification defined in Annex E.

When a conflict exists between a published document from the IEC 61753 series and the published IEC 61753-1 then the tests, test parameters and acceptance criteria of most recent document shall apply.

If no performance standard for a particular product and performance category exists in the IEC 61753 series, the tests, test parameters and acceptance criteria should be taken from the current edition of IEC 61753-1.

5.2 Performance standard title

The performance standard title shall be clear. This information shall include

- the product description,
- the appropriate performance category, and
- any other variant or differentiation information to distinguish it from other performance standards.

5.3 Tests

The tests to be carried out on the product in order for it to meet the performance standard shall be clearly defined, including those which are product specific. No ambiguity or options shall be allowed.

The defined tests shall combine the severity/duration, the method used and the pass/fail criteria that are suitable for the defined operating environment indicated in IEC 61753-1.

The test method to be used shall be clearly defined for each test. Wherever possible, the test method shall be selected from the IEC 61300 series, but where this is not possible other test methods may be defined. If an undefined test method is used, the test method and details to be specified shall be included in the appropriate annex of the performance standard.

Performance standards may require additional tests that may be needed to fully characterise a particular connector or component.

5.4 Details

The details to be considered (severities and durations) shall be given for all tests and measurements defined in a performance standard. They shall be directly related to the performance requirements defined by the operating service environment. No ambiguity or options are allowed.

5.5 Requirements

The performance requirements that shall be satisfied in order for the product to comply with the performance standard shall be specified for each test and/or measurement. No ambiguities are allowed.

5.6 Sample size

The sample size for each test shall be defined in the appropriate performance standard. No deviations are allowed.

5.7 Sample definition

The sample to be tested shall be defined in the relevant IEC 61753-xxx-yy performance standard. The test sample configuration and the minimum length of fibre(s) or cable(s) placed in the environmental test chamber is given in IEC 61300-1. In case of a specific deviation, the information shall be given in the relevant IEC 61753-xxx-yy document.

5.8 Groupings/sequences

In general, no sequencing is required and each test is intended to be performed individually. When applicable, test groups and test sequences can be required by the user, user group or manufacturer.

5.9 Pass/fail criteria

Where required by the performance category, the pass/fail criteria shall be unambiguously stated for each test within the performance standard. No deviation or exceptions are allowed.

A product meets the requirements of this document provided no failures occur in any test.

Consecutive testing on the same sample is allowed. In the event of a failure during consecutive testing, the failing test shall be re-done using new samples. When the samples fail again, the test shall be reported as a failure.

5.10 Reference product definition

Where a performance standard requires the use of a reference product or component, the reference product shall be clearly defined in the appropriate annex of the performance standard.

5.11 Performance standard test report

Conformance to a performance standard shall be supported by a test report. The test report shall clearly demonstrate that the tests were carried out in accordance with the requirements of the performance standard and provide full details of the tests together with a pass/fail declaration. All test and measurement requirements shall be satisfied before a component may be declared to be in compliance with the performance standard.

The failure of any product to comply with a particular test or sequence of tests shall be reported in the performance standard test report. An analysis of the cause of the failure shall be undertaken and any corrective actions taken shall be described.

If no design changes are made to the product, the test or test sequence where the failure occurred shall be rerun with the results of both tests reported.

If design changes are made, another complete performance standard test programme shall be undertaken. Any tests previously completed successfully shall be repeated with new samples.

647 **5.12 Environmental aspects**

648 The requirements concerning the reduction of adverse environmental impacts over the whole
649 life cycle of products are not covered in this document. The appropriate environmental aspects
650 shall be implemented according to the guidelines in IEC Guide 109.

Annex A (normative)

Tests and test severities for performance standards

A.1 General

Annex A defines the tests, the recommended severities and the recommended performance criteria for the various performance categories, which reflect the operating service environments applicable to passive fibre optic products. The list of the operating service environments is given in Table A.1 to Table A.3.

The performance standards of the following components are covered by this document:

- fibre optic connectors (plugs and adaptors);
- field mountable connectors (FMC);
- splices (referring to both fusion splice protectors and mechanical splices);
- passive optical components;
- fibre management systems (FMS);

The performance standards of the following protective housings are covered by this document:

- wall outlets (indoor applications only);
- boxes (wall mounted and pole mounted);
- street cabinets;
- optical distribution frame modules (ODFM);
- closures (sealed and free breathing);
- terminals (sealed and free breathing)
- hardened connectors (sealed and free breathing)

The choice of tests and associated severities in each performance category is based upon a harmonized set of requirements determined to be appropriate for that category. The set of tests that form a particular performance category, given in Tables A.4 to A.17, are a combination of common tests, which are applicable to all fibre optic product types, and product specific tests.

Those tests which constitute a performance category form a minimum set of testing requirements. It is recognised that additional tests may often be necessary to fully characterize a particular component or connector.

The outdoor environmental conditions are derived from IEC 60721-2-1. The following climate types are covered for categories E, OP+, A, G and S:

- cold;
- cold temperate;
- warm temperate;
- warm dry;
- mild warm dry;
- extremely warm dry;
- warm damp;
- warm damp, equable.

For category OP, the following climate types are covered (the "cold" environments are excluded)

- 692 – cold temperate;
- 693 – warm temperate;
- 694 – warm dry;
- 695 – mild warm dry;
- 696 – extremely warm dry;
- 697 – warm damp;
- 698 – warm damp, equable.

699 All of the performance categories contained in this Annex A are applicable to single-mode and
 700 multimode fibre optic transmission. The minimum performance acceptance criteria and
 701 requirements for connectors, mechanical splices, passive optical components, fibre
 702 management systems and various types of protective housings are given in Tables C.1 to C.14
 703 in Annex C. The choice of which values to include in the performance standard test schedules
 704 will depend on the system type and the required performance level.

705 The indicated minimum and maximum temperature limits include the thermal effects caused by
 706 solar radiation during the day and surface radiation during cloudless nights. There is a
 707 possibility that in environmental categories C, I, OP and OP+ the products are situated in a site
 708 or location together with active electronics which generate heat. In this document, such
 709 situations are called "sites with heat dissipation". In these circumstances, the maximum upper
 710 temperature limit is extended as listed in Table A.3. For category C^{HD}, the temperature is
 711 increased from +60 °C to +70 °C. For the outdoor categories, it is increased to +85 °C. This
 712 means that a product in category OP shall withstand an upper temperature of +70 °C and in
 713 category OP^{HD} +85 °C (HD indicates an extended upper temperature necessary due to
 714 additional heat dissipation by active electronics).

715 For all categories, there is no defined sequence in which the tests shall be run. All tests are
 716 intended to be performed individually. If a certain test sequence is required, it shall be defined
 717 in the relevant performance standard.

718 **Table A.1 – Operating service environments and performance categories for fibre optic**
 719 **connectors, FMC, mechanical splices, fusion splice protectors, passive optical**
 720 **components and fibre management systems**

Fibre optic connectors, FMC, mechanical splices, fusion splice protectors, passive optical components and fibre management systems		
Performance category	Description	Operating service environment
C	Indoor controlled environment	Operating temperature: –10 °C to +60 °C Relative humidity: 5 % RH to 93 % RH Weather protected, partly temperature-controlled locations. Typically within an office, home, building, indoor garage, cellar, equipment room, telecommunication centre or enclosed in an indoor protective housing of category C. Not subjected to condensed water.
OP	Outdoor protected environment	Operating temperature: –25 °C to +70 °C Relative humidity: 0 % RH to 95 % RH Weather protected, locations with uncontrolled temperature. Typically outdoors but enclosed or covered. Locations: shacks, lofts, telephone booths, entrances of buildings, open garage, unattended equipment stations, street cabinets or enclosed in protective housings of categories A, G or S. Subject to salt mist, condensed water and limited wind driven precipitation. In close proximity to sand or dust.

OP+	Outdoor protected environment Same as OP with wider operational temperature range for cold, dry heat and change of temperature to cover both cold and extremely warm climates. Additional composite temperature/humidity cyclic test	Operating temperature: –40 °C to +75 °C Relative humidity: 0 % RH to 95 % RH Weather protected, locations with uncontrolled temperature. Typically outdoors but enclosed or covered. Locations: shacks, lofts, telephone booths, entrances of buildings, open garages, unattended equipment stations, street cabinets or enclosed in protective housings of categories A, G or S. Subject to salt mist, condensed water and limited wind driven precipitation. In close proximity to sand or dust.
I	Industrial environment derived from MICE	Operating temperature: –40 °C to +70 °C Relative humidity: 0 % RH to 95 % RH Locations: typically automation islands in indoor or protected outdoor locations. Subject to severe vibrations, industrial sources of corrosive gasses, splashes of liquid solvents, not subjected to immersion.
E ^a	Extreme environment	Operating temperature –40 °C to +85 °C Relative humidity 0 % RH to 100 % RH Locations: non-weather protected locations with uncontrolled temperature and humidity. Locations: typically outdoors, not enclosed, direct exposed to open air climate.
^a Category E was originally used for temporary connections in direct exposed outdoor environments. For permanent connections the hardened connectors of categories A and G are recommended. For grandfathered requirements of Category E, refer to Annex D.		

Table A.2– Operating service environments and performance categories for hardened connectors and protective housings

Hardened connectors and protective housings (wall outlets, boxes, ODFM, street cabinets, terminals and closures)		
Performance category	Description	Operating service environment
C	Indoor controlled environment	Operating temperature –10 °C to +60 °C Relative humidity 5 % RH to 93 % RH Weather protected, partly temperature-controlled locations. Typically within an office, home, building, indoor garage, cellar, equipment room or telecommunication centre. Not subjected to condensed water.
OP	Outdoor protected environment	Operating temperature: –25 °C to +70 °C Relative humidity: 0 % RH to 95 % RH Weather protected, locations with uncontrolled temperature. Typically outdoors but enclosed or covered. Locations: shacks, lofts, telephone booths, entrances of buildings, open garage, unattended equipment stations, street cabinets or enclosed in protective housings of categories A, G or S. Subject to salt mist, condensed water and limited wind driven precipitation. In close proximity to sand or dust.

OP+	Outdoor protected environment Same as OP with wider operational temperature range for cold, dry heat and change of temperature to cover both cold and extremely warm climates. Additional composite temperature/humidity cyclic test	Operating temperature: –40 °C to +75 °C Relative humidity: 0 % RH to 95 % RH Weather protected, locations with uncontrolled temperature. Typically outdoors but enclosed or covered. Locations: shacks, lofts, telephone booths, entrances of buildings, open garages, unattended equipment stations, street cabinets or enclosed in protective housings of categories A, G or S. Subject to salt mist, condensed water and limited wind driven precipitation. In close proximity to sand or dust.
A	Outdoor aerial environment	Operating temperature –40 °C to +65 °C Relative humidity 0 % RH to 100 % RH Outdoor, fully exposed environment, above ground level aerial mounted. No flooding requirements.
G	Outdoor ground level environment	Operating temperature –40 °C to +65 °C Relative humidity 0 % RH to 100 % RH Outdoor, fully exposed environment mounted just above or at ground level with possibility of flooding, or below ground level inside footway boxes or hand holes continuously immersed in water. –1 m ≤ height ≤ +3 m (–: below ground level, +: above ground level)
S	Outdoor subterranean environment	Operating temperature –30 °C to +60 °C Relative humidity 5 % RH to 100 % RH Outdoor, either direct buried and covered with soil or stored below ground level in handholes or manholes and hidden below a lid continuously immersed in water 1 m ≤ depth ≤ 5 m

Table A.3 – Operating service environments and performance categories for fibre optic connectors, FMC, mechanical splices, fusion splice protectors, passive optical components and fibre management systems in locations with additional heat dissipation by active electronics

Fibre optic connectors, FMC, mechanical splices, fusion splice protectors, passive optical components and fibre management systems		
Performance category	Description	Operating service environment
C ^{HD}	Indoor controlled environment with additional heat dissipation. Same as category C with higher operational upper temperature limit for dry heat and change of temperature.	Operating temperature: –10 °C to +70 °C Relative humidity: 5 % RH to 93 % RH Weather protected, partly temperature-controlled locations. Typically within an office, home, building, indoor garage, cellar, equipment room, telecommunication centre or enclosed in a protective housing. Not subjected to condensed water.
OP ^{HD}	Outdoor protected environment with additional heat dissipation. Same as category OP with higher operational upper temperature limit for dry heat and change of temperature.	Operating temperature: –25 °C to +85 °C Relative humidity: 0 % RH to 95 % RH Weather protected, locations with uncontrolled temperature. Typically outdoors but enclosed or covered. Locations: shacks, lofts, telephone booths, entrances of buildings, open garage, unattended equipment stations, street cabinets or enclosed in a protective housing. Subject to salt mist, condensed water and limited wind driven precipitation. In close proximity to sand or dust.

OP ^{HD}	Outdoor protected environment with additional heat dissipation. Same as category OP+ with higher operational upper temperature limit for dry heat and change of temperature.	Operating temperature: –40 °C to +85 °C Relative humidity: 0 % RH to 95 % RH Weather protected, locations with uncontrolled temperature. Typically outdoors but enclosed or covered. Locations: shacks, lofts, telephone booths, entrances of buildings, open garages, unattended equipment stations, street cabinets or enclosed in a protective housing. Subject to salt mist, condensed water and limited wind driven precipitation. In close proximity to sand or dust.
I ^{HD}	Industrial environment with additional heat dissipation. Same as category I with higher operational upper temperature limit for dry heat and change of temperature.	Operating temperature: –40 °C to +85 °C Relative humidity: 0 % RH to 95 % RH Locations: typically automation islands in indoor or protected outdoor locations. Subject to severe vibrations, industrial sources of corrosive gasses, splashes of liquid solvents, not subjected to immersion.

Fire performance is outside the scope of this document and covered by other standards and regulations.

Resistance of polymer materials to ozone and UV radiation should be considered for categories A or G, or in other environments with long-term UV light exposure. These material related requirements shall be given in Annex B and in the relevant IEC 61753-series standard.


A.2 How to find the performance tests for the desired category?

The relevant category for the operating service environment of a product can be found by following the flow chart as given in Figure A.1. Once the category is identified, the following Tables A.4 to A.19 will give the minimum required tests, the test severities and the recommended acceptance criteria for the specific product:

- connectors, passive components, splices and fibre management systems – Category C – Indoor controlled environment (Table A.4);
- connectors, field mountable connectors, passive components, splices and fibre management systems – Category C^{HD} – Indoor controlled environment with additional heat dissipation (Table A.5);
- connectors, field mountable connectors, passive components, splices and fibre management systems – Category OP – Outdoor protected environment (Table A.6);
- connectors, field mountable connectors, passive components, splices and fibre management systems – Category OP^{HD} Outdoor protected environment with additional heat dissipation (Table A.7)
- connectors, field mountable connectors, passive components, splices and fibre management systems – Category OP+ Extended outdoor protected environment (Table A.8);
- connectors, field mountable connectors, passive components, splices and fibre management systems – Category OP^{HD} Extended outdoor protected environment with additional heat dissipation (Table A.9);
- connectors, passive optical components – Category I – Industrial environment (Table A.10);
- connectors, passive optical components – Category I^{HD} – Industrial environment with additional heat dissipation (Table A.11);
- connectors and passive optical components – Category E – Extreme environment (Annex D, Table D.1).

Note: Category E was originally used for temporary connections in direct exposed outdoor environments. For permanent connections the hardened connectors of categories A and G are recommended.

- wall outlets, boxes, optical distribution frame modules and free breathing closures – Category C – Indoor controlled environment (Table A.12)
- optical distribution frame modules – Category OP – Outdoor protected environment (Table A.13);
- optical distribution frame modules – Category OP+ – Extended outdoor protected environment (Table A.14);
- sealed closures – Category C – Indoor controlled environment (Table A.15);
- free breathing hardened connectors, street cabinets, boxes, terminals and closures – Category A – Outdoor aerial environment (Table A.16);
- sealed hardened connectors, sealed terminals and sealed closures – Category A – Outdoor aerial environment (Table A.17);
- sealed hardened connectors, sealed closures and sealed terminals – Category G – Outdoor ground environment (Table A.18);
- sealed hardened connectors and sealed closures – Category S – Outdoor subterranean environment (Table A.19).

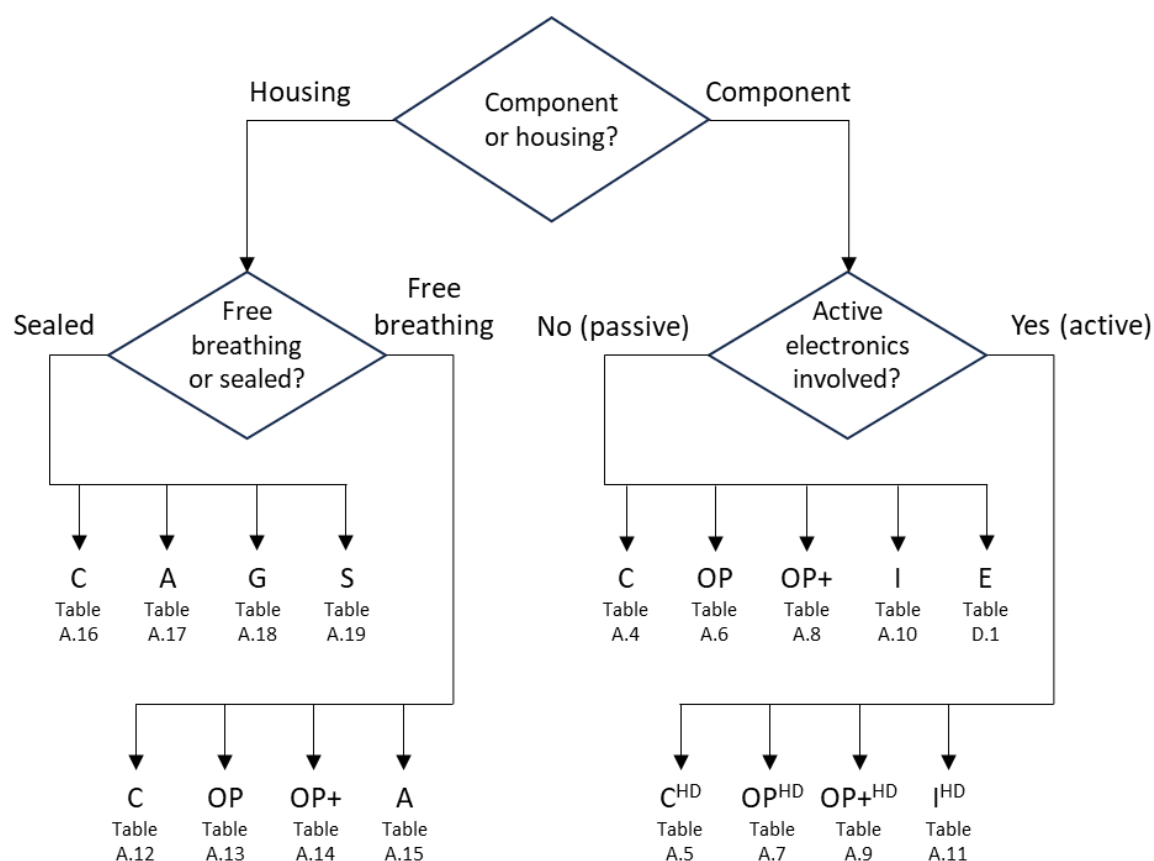

NOTE: For components containing active electronics with negligible heat dissipation, a category without HD can be chosen provided there is no risk the maximum test temperature will occur during the lifetime.

Figure A.1 – Flow chart to identify the relevant category for the operating service environment

The acceptance or pass/fail criteria of the tests that need to be performed for each product listed at the top of the columns in the above-mentioned tables are:

- S: Sealing acceptance criteria
- O: Optical acceptance criteria
- V: Visual examination acceptance criteria
- M: Material acceptance criteria

- 787 The tests with a blank cell are not required for the selected product.
- 788 The detailed acceptance criteria S, O and/or V are listed in Tables C.1 to C.14 in Annex C. The
789 detailed acceptance criteria M are given in Table B.1 in Annex B.
- 790

791 **Table A.4 – Connectors, field mountable connectors, passive components, splices and**
 792 **fibre management systems – Category C – Indoor controlled environment**

Test	Severity	Connectors	FMC	Passive components	Splices	FMS
Installation test IEC 61753-101-03 Annex B	A live optical circuit is built with 5 splices and/or connections. The fibres and splices are kept outside the splice trays. Active monitoring is started and the fibres and splices are installed in the splice trays. After installation of all fibres and splices, the change in attenuation is checked.					O,V
Fibre/cable retention IEC 61300-2-4	Load and duration: 50 N for 60 s for reinforced cables with strength members attached 10 N for 60 s for tubes and cables with strength members that are not intended for attachment 5,0 N for 60 s for buffered fibres 2,0 N for 60 s for primary coated fibres	O,V	O,V		O,V	
Fibre/cable retention IEC 61300-2-4	Load and duration: 10 N for 60 s for cables 5,0 N for 60 s for buffered fibres 2,0 N for 60 s for primary coated fibres			O,V		
Fibre/cable retention ^b IEC 61300-2-4	Load and duration: 10 N for 60 s for cables 5,0 N for 60 s for cable elements and tubes					O,V ^b
Tensile strength of coupling mechanism IEC 61300-2-6	Load and duration: 40 N for 60 s	O,V	O,V	O,V ^c		
Flexing of the strain relief of fibre optic devices IEC 61300-2-44	Load: 2 N for cables Cycle: $\pm 90^\circ$ Number of cycles: 50	O,V		O,V ^a		
Torsion IEC 61300-2-5	Load: 10 N for cables 2,0 N for primary coated and buffered fibres 25 cycles $\pm 180^\circ$ Fibre/cable clamping distance: 25 cm $\pm$ 5 cm	O,V	O,V			
Torsion IEC 61300-2-5	Load: 5 N for cables 2,0 N for primary coated and buffered fibres Cycle: $\pm 180^\circ$ Number of cycles: 10 Fibre/cable clamping distance: 25 cm $\pm$ 5 cm			O,V	O,V	
Mating durability IEC 61300-2-2	200 cycles for cylindrical ferrules 50 cycles for rectangular ferrules Not less than 3 s between engagements	O,V	O,V	O,V ^c		

Test	Severity	Connectors	FMC	Passive components	Splices	FMS
Assembly and disassembly of fibre optic mechanical splices, fibre management systems and closures ^e IEC 61300-2-33	Open and re-install the mechanical splice ^e Number of disassembly/assembly cycles: 5 Aging between each disassembly/assembly cycle by at least one "Change of temperature" cycle: - Temperature cycle: -10 °C to +60 °C - Dwell time: 2 h - Transition: 1 °C/minute				O,V	
Assembly and disassembly of fibre optic mechanical splices, fibre management systems and closures IEC 61300-2-33	If applicable, move the fibre management system to gain access to the splice trays. Move the splice trays to gain access to splices and fibres. Rearrange splices and/or connectors. Add splice trays/splice modules when applicable. Add fibre/cable.					O,V
Vibration (sinusoidal) IEC 61300-2-1	Frequency sweep: from 10 Hz to 55 Hz to 10 Hz Number of sweeps: 15 sweeps per axis Rate of frequency change: 1 octave/min Number of axes: 3 mutually perpendicular axes Amplitude: 0,75 mm	O,V	O,V	O,V	O,V	
Vibration (sinusoidal) IEC 61300-2-1	Frequency sweep: from 5 Hz to 500 Hz to 5 Hz Number of sweeps: 10 sweeps per axis Rate of change of frequency: 1 octave/min Number of axes: 3 mutually perpendicular axes Amplitude: 3,5 mm at frequencies below 9 Hz Acceleration: 10 m/s ² at frequencies above 9 Hz					O,V
Impact (method A) IEC 61300-2-12	5 drops 1,5 m drop height	O,V	O,V			
Shock IEC 61300-2-9	Wave form: half sine pulse Acceleration and pulse duration: - Component or module mass ≤ 0,125 kg: 5 000 m/s ² / 1 ms - 0,125 kg < module mass ≤ 0,225 kg: 2 000 m/s ² / 6 ms - 0,225 kg < module mass ≤ 1 kg: 500 m/s ² / 11 ms Axes: 3 mutually perpendicular axes Number of shocks: 2 shocks per axis and per direction of axis, 12 shocks total.			O,V ^d	O,V	
Shock IEC 61300-2-9	Wave form: half sine Duration: 11 ms Acceleration: 150 m/s ² Axes: 3 mutually perpendicular axes Number of shocks: 3 shocks per axis and per direction of axis, 18 shocks in total.					O,V

Test	Severity	Connectors	FMC	Passive components	Splices	FMS
Cold IEC 61300-2-17	Temperature: –10 °C Duration: 96 h	O,V	O,V	O,V	O,V	
Dry heat IEC 61300-2-18	Temperature: +60 °C Duration: 96 h	O,V	O,V	O,V	O,V	
Damp heat (steady state) IEC 61300-2-19	Temperature: +40 °C Humidity: 93 % RH Duration: 96 h	O,V	O,V	O,V	O,V	O,V
Change of temperature IEC 61300-2-22	Temperature: –10 °C to +60 °C Duration: 1 h at extremes Rate of temperature change: 1°C/min 5 cycles	O,V	O,V	O,V	O,V	O,V
^a These tests shall be applicable to passive optical components with a strain relief boot attached to the component. The test is not applicable for components without a strain relief boot. ^b If cables or cable elements (loose tubes) are not fixed to the entry: ports of the fibre management system, the test shall not be performed. ^c Applicable only if the component contains a receptacle. ^d If the product is normally mounted in a shock resistant mounting, then it shall be tested in this configuration. ^e This test is only applicable for re-installable mechanical splices.						