



DPC: 25/30509940 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 30 June 2025

Origin: International

Latest date for receipt of comments: 23 August 2025

Project No. 2025/00437

Responsible committee: IST/37 Coding of picture, audio, multimedia and hypermedia information

Interested committees:

Title: Draft BS ISO/IEC 19566-6 Information technologies — JPEG systems. Part 6: JPEG 360.

Please notify admin.start@bsigroup.com if you are aware of any keywords that might assist in clarifying or identifying the standard or of the content of this standard:

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD. THIS DRAFT IS NOT CURRENT BEYOND 23 August 2025This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.Information on the co-operating organizations represented on the committees referenced above may be obtained from <https://standardsdevelopment.bsigroup.com/>.

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/ Figure/Table/Note	Type of comment	Comment (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



DRAFT International Standard

ISO/IEC DIS 19566-6

Information technologies — JPEG systems —

Part 6: JPEG 360

Technologies de l'information — Systèmes JPEG —

Partie 6: JPEG 360

ICS: 35.040.30

ISO/IEC JTC 1/SC 29

Secretariat: JISC

Voting begins on:
2025-06-30

Voting terminates on:
2025-09-22

This document is circulated as received from the committee secretariat.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENTS AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

Reference number
ISO/IEC DIS 19566-6:2025(en)

Full document details: 25/30509940 DC



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2025

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms, definitions and abbreviated terms	1
3.1 Terms and definitions	1
3.2 Abbreviated terms	2
4 Conventions	3
4.1 Conformance language	3
4.2 Typesetting	3
5 Description and definition of JPEG 360 images	3
5.1 General	3
5.2 Relative orientation	6
5.3 Viewport representation	8
5.4 Stereoscopic 360 image	10
5.4.1 General	10
5.4.2 Stereoscopic formats	10
5.4.3 Viewport definition in the stereo vision model	12
5.4.4 Compatible with a conventional 360 image viewer	12
5.5 Basic set of general 360 image parameters	13
6 Structuring of JPEG 360 Metadata	13
6.1 General	13
6.2 Definition of JPEG 360 Content Type boxes	14
Annex A (normative) JPEG 360 Content Type JUMBF box	15
Annex B (normative) XML box for JPEG 360	16
Annex C (normative) Accelerated ROIs rendering for JPEG (ISO/IEC 10918) images	27
Bibliography	35

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

A list of all parts in the ISO/IEC 19566 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The ISO/IEC 19566 series is designed primarily for format and metadata storage and protection method of compressed continuous-tone photographic content.

There is increasing use of multi-sensor images from multiple image sensor devices, such as 360 degree capturing cameras or dual-camera smartphones available to consumers. Images from these cameras are shown on computers, smartphones, and head-mounted displays (HMD).

Because existing JPEG standards do not fully cover these new uses, incompatibilities have reduced the interoperability of these images, and thus reducing the widespread ubiquity which consumers have come to expect when using JPEG-based images.

Additionally, new modalities for interacting with images, such as computer-based augmentation, face-tagging, and object classification require support for metadata that was not part of the original JPEG scope.

This document defines “JPEG 360”, building upon the features of JPEG Universal Metadata Box Format (JUMBF) (see ISO/IEC 19566-5) which itself builds upon ISO/IEC 18477-3 (Box file format) which provides compatibility with Rec. ITU-T T.871 | ISO/IEC 10918-5 (JPEG File Interchange Format (JFIF)).

This document defines the use of the JPEG 360 Content Type JUMBF superbox with respect to the sub-box components which include the definition of an XML box, the use of other boxes such as unstitched image elements for omnidirectional captures together with the main image and descriptive metadata, and encrypted parts of the image.

This is the second edition of this document (JPEG 360). It has been updated to incorporate the latest advancements in stereoscopic imaging as well as dealing with accelerated rendering of region of interest viewports.

Information technologies — JPEG systems —

Part 6: JPEG 360

1 Scope

This document specifies omnidirectional/360-degree image and motion contents using Rec. ITU-T T.81 | ISO/IEC 10918-1, Rec. ITU-T T.800 | ISO/IEC 15444-1, and ISO/IEC 18477-3.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 19566-5, *Information technologies — JPEG systems — Part 5: JPEG universal metadata box format (JUMBF)*

Rec. ITU-T T.871 | ISO/IEC 10918-5, *Information technology — Digital compression and coding of continuous-tone still images — Part 5: JPEG File Interchange Format (JFIF)*

ISO/IEC 14496-12, *Information technology — Coding of audio-visual objects — Part 12: ISO base media file format (ISO-BMFF)*

Rec. ITU-T T.800 | ISO/IEC 15444-1, *Information technology — JPEG2000 Image Coding System — Part 1: Core coding system*

ISO 16684-3, *Graphic technology — Extensible metadata platform (XMP) specification — Part 3: JSON-LD serialization of XMP*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1.1

box

binary structure that encapsulates an object embedded in a file

3.1.2

box-based file format

file format whose composing elements are boxes containing structured data in compliance with ISO-based media file format

3.1.3

deserialization

extraction of data structure from a series of bytes

3.1.4

equirectangular projection

projection for mapping a portion of the surface of a sphere to a flat image

3.1.6

metadata

data that describes other data, including text, image, hypertext and combinations thereof

3.1.7

omnidirectional

(sub)spherical surface of an image of a scene as if observed from a single point of projection.

3.1.8

serialization

translation of data structures into a series of bytes that can be stored and/or transmitted

3.1.9

JPEG 1

common image compression data format and means of reference to ISO/IEC10918-1:1994

3.2 Abbreviated terms

3D	three dimensional
CTE	centre-to-edge
ERP	equirectangular projection
FOV	field of view
JSON	JavaScript object notation
JPEG	joint photographic experts group
JUMBF	JPEG universal metadata box format
MIME	multipurpose internet mail extensions
URL	uniform resource locator
XML	eXtensible Markup Language
XMP	eXtensible Metadata Platform
ROI	region of Interest
RDF	resource description framework
W3C	World Wide Web Consortium
UMF	universal metadata framework
URI	uniform resource identifier
UUID	universal unique identifier

4 Conventions

4.1 Conformance language

In this document, the following verbal forms are used:

- “shall” indicates a requirement;
- “should” indicates a recommendation;
- “may” indicates a permission;
- “can” indicates a possibility or a capability.

Information marked as “NOTE” is intended to assist the understanding or use of the document. “Notes to entry” used in [Clause 3](#) provide additional information that supplements the terminological data and can contain provisions relating to the use of a term.

The keyword “reserved” indicates a provision that is not specified at this time, shall not be used, and may be specified in the future. The keyword “forbidden” indicates “reserved” and in addition indicates that the provision will never be specified in the future.

4.2 Typesetting

Regular face fonts as this text describe informative text that provides instructions, comments or details for the reader.

Monospaced text as this paragraph indicates program input or output as necessary to either run the software, or as generated by the software on the console.


NOTE The character values of the monospaced text in this document could differ the actual value due to differences in the character encodings used; e.g., ISO 8859 vs UTF-8.

5 Description and definition of JPEG 360 images

5.1 General

The equirectangular projection is a commonly used projection of omnidirectional cameras to a two-dimensional rectangular image and is the default image projection for JPEG 360.

The equirectangular projection maps the image onto a spherical surface from a single projection point at the centre of the sphere. The surface of the sphere is specified by two angular measures as shown in [Figure 1](#); for convenience, a unit sphere is assumed. The centre of the sphere is coincident with the origin of the three-dimensional Cartesian coordinates. A point on the surface of the sphere is defined by the two angles ϕ and θ , which are also referred to as “longitude” and “latitude” respectively.

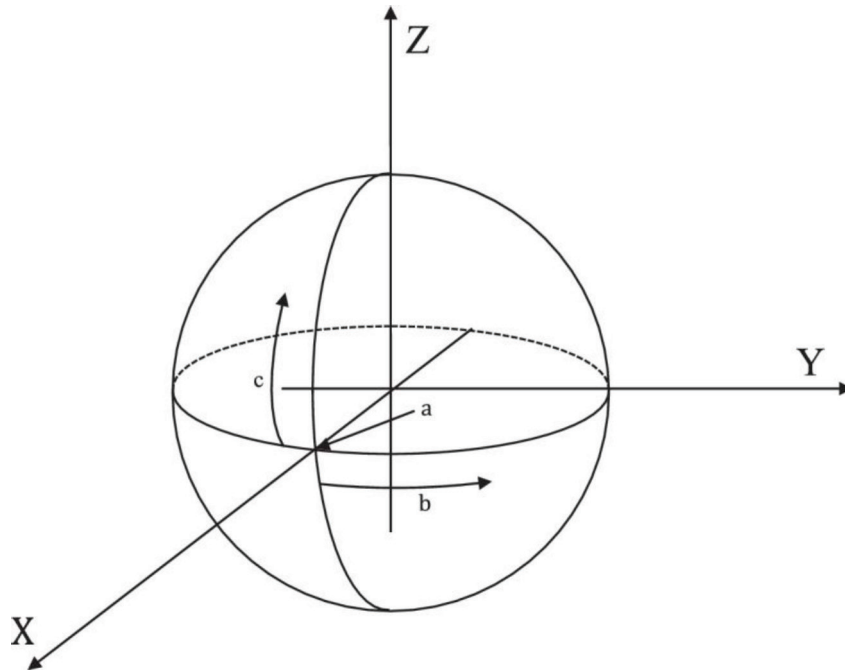


- a Origin of 360 image ($\theta = \phi = 0$).
- b Direction of increasing ϕ .
- c Direction of increasing θ .

Figure 1 — Spherical and Cartesian coordinates

In Cartesian coordinates, the points on the sphere are defined as follows:

- $x = \cos\phi \cdot \cos\theta$
- $y = \sin\phi \cdot \sin\theta$
- $z = \sin\theta$

For an equirectangular projection the sphere's surface, expressed in terms of the angles ϕ and θ , can be mapped to a two-dimensional Cartesian surface. For example, in [Figure 2](#) which includes the mapping for several lines of constant longitude or constant latitude.

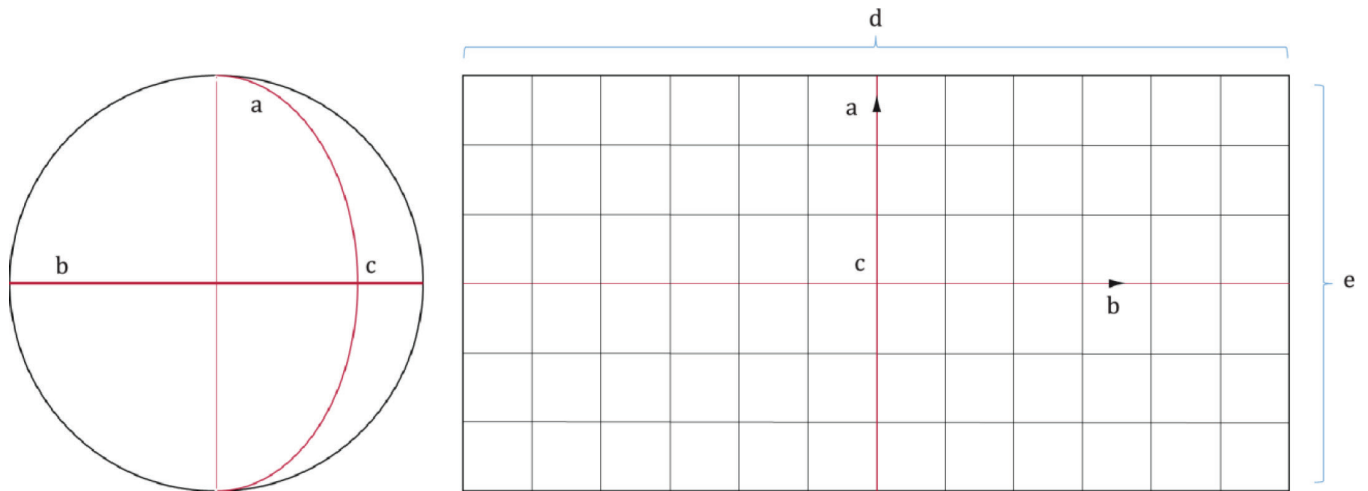

- a Prime meridian (commonly at $\phi = 0$).
- b Equator (typically at $\theta = 0$).
- c Origin of 360 image ($\theta = \phi = 0$).
- d Span of ϕ (commonly -180° to 180°).
- e Span of θ (commonly -90° to 90°).

Figure 2 — Description of mapping from spherical surface to equirectangular

For this document, a simplified representation will be used, for example, for equirectangular projection for a full spherical surface as shown in [Figure 3](#).

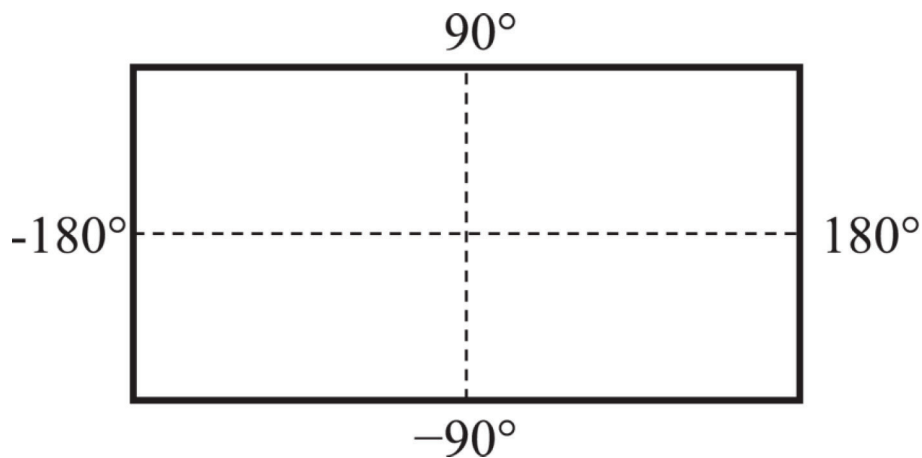


Figure 3 — Simplified representation for equirectangular projection for full spherical surface

The generalized equirectangular projection is expressed in terms of ranges for ϕ and θ by defining four values $\phi_{\min}$, $\phi_{\max}$, $\theta_{\min}$, and $\theta_{\max}$ as shown in [Figure 4](#).