IEC 62343-3-3

Edition 2.0 2020-04
REDLINE VERSION

INTERNATIONAL STANDARD

colour inside

Dynamic modules –
Part 3-3: Performance specification templates – Wavelength selective switches

IEC 62343-3-3:2020-04 RLV(en)

Documents
Document Sharing Hub

Full document details: IEC 62343-3-3 2020 RLV

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,…). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary
67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

Documents
Document Sharing Hub

Full document details: IEC 62343-3-3 2020 RLV

IEC 62343-3-3

Edition 2.0 2020-04
REDLINE VERSION

INTERNATIONAL STANDARD

colour inside

Dynamic modules –
Part 3-3: Performance specification templates – Wavelength selective switches

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.20

ISBN 978-2-8322-8185-7

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

AVA Documents
Document Sharing Hub

Full document details: IEC 62343-3-3 2020 RLV

CONTENTS

FOREWORD 3
INTRODUCTION 2
1 Scope 6
2 Normative references 6
3 Terms and definitions 7
4 Test report 7
~~5 Reference components ..... 14~~
5 Performance requirements 14
5.1 Dimensions 14
5.2 Sample size 14
5.3 Test details and requirements 14
Bibliography 19

~~Figure 1 – Illustration of X-dB bandwidth ..... 14~~
~~Figure 2 – Illustration of adjacent channel crosstalk ..... 14~~
~~Figure 3 – Illustration of non-adjacent channel crosstalk ..... 14~~
~~Figure 4 – Illustration of latency time, rise time, fall time, bounce time, and switching time ..... 14~~

Table 1 – Tests and requirements 15

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

DYNAMIC MODULES –

Part 3-3: Performance specification templates – Wavelength selective switches

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

AVA Documents
Document Sharing Hub

Full document details: IEC 62343-3-3 2020 RLV

International Standard IEC 62343-3-3 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

This second edition cancels and replaces the first edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) modification of the normative references;

b) modification of the terms and definitions.

The text of this standard is based on the following documents:

FDIS	Report on voting
86C/1648/FDIS	86C/1655/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62343 series, published under the general title *Dynamic modules,* can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC 62343-3-3 2020 RLV

INTRODUCTION

A wavelength selective switch (WSS) is a dynamic module (DM), which is mainly used in a reconfigurable optical add-drop multiplexer (ROADM) system to switch a particular wavelength signal to any output ports in DWDM networks. The WSS ~~module~~ has one input port and a plurality of output ports (i.e. $1 \times N$ WSS) and can be used in reverse, with N input ports and one output port, depending on its application. It is controlled with software, which determines any wavelength signal among a DWDM signal from one input port to switch to a particular output port in case of $1 \times N$ application.

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV

DYNAMIC MODULES –

Part 3-3: Performance specification templates – Wavelength selective switches

1 Scope

This part of IEC 62343 provides a performance specification template for wavelength selective switches. The object is to provide a framework for the preparation of detail specifications on the performance of wavelength selective switches.

Additional specification parameters ~~may be~~ are often included for detailed product specifications or performance specifications if necessary. However, specification parameters specified in this document ~~shall~~ are not ~~be~~ removed from the detail product specifications or performance specifications.

The technical information regarding wavelength selective switches and their applications in DWDM systems with single-mode fibres ~~will be~~ are described in IEC TR 62343-6-4~~, currently under consideration~~.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61290-7-1, *Optical amplifiers – Test methods – Part 7-1: Out-of-band insertion losses – Filtered optical power meter method*

IEC 61300-2-14, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-14: Tests – High optical power*

IEC 61300-3-2, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-2: Examination and measurements – Polarization dependent loss in a single-mode fibre optic device*

IEC 61300-3-6, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-6: Examinations and measurements – Return loss*

IEC 61300-3-14, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-14: Examinations and measurements – ~~Accuracy~~ Error and repeatability of the attenuation settings of a variable optical attenuator*

IEC 61300-3-21, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-21: Examinations and measurements – Switching time ~~and bounce time~~*

IEC 61300-3-29, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-29: Examinations and measurements – ~~Measurement techniques for characterizing the amplitude of the spectral transfer function of DWDM components~~ Spectral transfer characteristics of DWDM devices*

Documents
Document Sharing Hub

Full document details: IEC 62343-3-3 2020 RLV

IEC 61300-3-32, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-32: Examinations and measurements – Polarization mode dispersion measurement for passive optical components*

IEC 61300-3-38, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-38: Examinations and measurements – Group delay, chromatic dispersion and phase ripple*

IEC 61753-021-2, *Fibre optic interconnecting devices and passive components performance standard – Part 021-2: Grade C/3 single-mode fibre optic connectors for category C – Controlled environment*

IEC 62074-1, *Fibre optic interconnecting devices and passive components – Fibre optic WDM devices – Part 1: Generic specification*

IEC 62343, *Dynamic modules – General and guidance*

IEC 62343-1, *Dynamic modules – Part 1: Performance standards – General conditions*

~~IEC 62343-4-1, *Dynamic modules – Part 4-1: Software and hardware interface standards – 1x9 wavelength selective switch* [1]~~

IEC 62343-5-2, *Dynamic modules – Part 5-2: Test methods – 1 x N fixed-grid WSS – Dynamic crosstalk measurement*

ITU-T Recommendation G.694.1, *Spectral grids for WDM applications: DWDM frequency grid*

~~ITU-T G.Sup39, *Optical system design and engineering considerations*~~

3 Terms and definitions

For the purpose of this document, the ~~following~~ terms and definitions given in IEC 62343 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

~~**3.1**~~
~~**wavelength selective switch**~~
~~WSS~~
~~dynamic module, which is mainly used in a reconfigurable optical add-drop multiplexer (ROADM) system to switch all wavelength signals to their respective required output port in DWDM networks~~

~~Note 1 to entry: It is electrically controlled with software, which directs each wavelength signal among an input DWDM signal from one input port to the required output port for each wavelength signal.~~

~~[1] Under consideration.~~

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV

3.2
operating wavelength range
specified range of wavelengths from λ_{imin} to λ_{imax} about a nominal operating wavelength λ_i, within which a dynamic optical module is designed to operate with a specified performance and generally corresponds to spectral bands for single-mode systems defined in ITU-T G.Sup39

3.3
port
optical fibre or optical fibre connector attached to a WSS module for the entry and/or exit of the optical signal (input and/or output)

3.4
channel
signal at wavelength, λ, that corresponds to ITU grid (ITU-T Recommendation G.694.1) within the range of operating wavelength range

3.5
channel spacing
centre-to-centre difference in frequency (or wavelength) between adjacent channels in a device

3.6
channel frequency range
frequency range within which a device is expected to operate with a specified performance

Note 1 to entry: For a particular nominal channel central frequency, f_{nomi}, this frequency range is from $f_{imin} = (f_{nomi} - \Delta f_{max})$ to $f_{imax} = (f_{nomi} + \Delta f_{max})$, where Δf_{max} is the maximum channel central frequency deviation.

Note 2 to entry: Nominal channel centre frequency and maximum channel centre frequency deviation are defined in ITU-T Rec. G.692.

3.7
insertion loss
IL
value defined in the equation below at the particular wavelength between two conducting ports

Note 1 to entry: It is the reduction in optical power between an input and output port of a module expressed in decibels.

$$IL = -10 \log (P_{out}/P_{in})$$

where

P_{in} is the optical power launched into input port;

P_{out} is the optical power received from the output port.

3.8
insertion loss uniformity
difference between the maximum and minimum insertion loss at the output for a specified set of input ports

3.9
insertion loss ripple
maximum peak-to-peak variation of the insertion loss within a channel frequency (or wavelength) range

3.10
***X*-dB passband width**
width of a channel centred about the channel central wavelength within which the optical attenuation is within X dB

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV

Note 1 to entry: The terms "operating wavelength range" or "channel passband" are used and have the same meaning as passband for DWDM devices. The X-dB bandwidth is defined through the spectral dependence of a_{ij} (where $i \neq j$) as the minimum wavelength range centred about the operating wavelength λ_h within which the variation of a_{ij} is less than X dB. The minimum wavelength range is determined considering thermal wavelength shift, polarization dependence and long-term aging shift (refer to Figure 1 below).

Note 2 to entry: It is recommended that the passband width be specified as 0,5 dB, 1 dB and 3 dB (X = 0,5, 1 and 3).

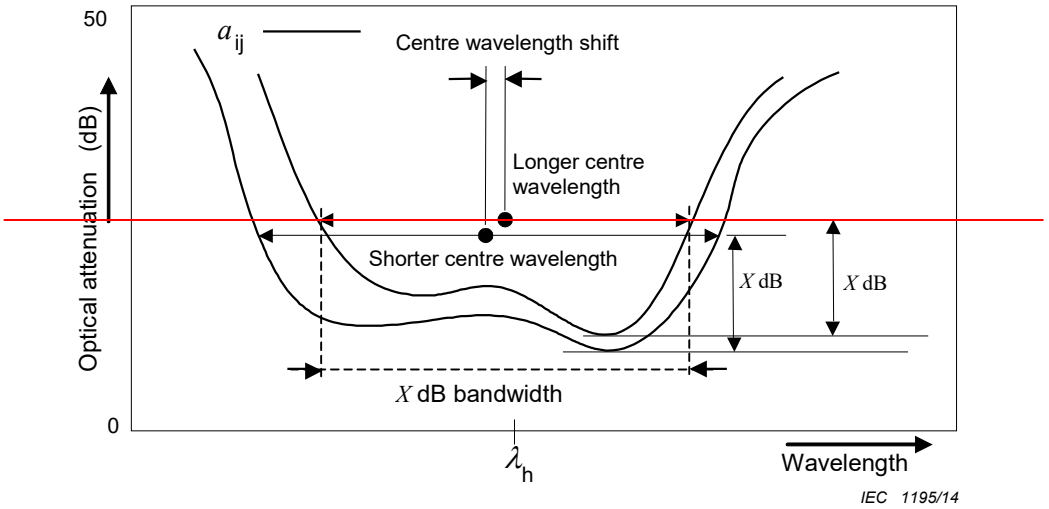

Figure 1 – Illustration of X-dB bandwidth

3.11
return loss
RL
fraction of input power that is returned from any port of a module expressed in decibels and defined in this equation at the particular wavelength between two conducting ports

$$RL = -10 \log (P_{refl}/P_{in})$$

where

P_{in} is the optical power launched into port;

P_{refl} is the optical power received back from the same port.

3.12
adjacent channel crosstalk
adjacent channel isolation
crosstalk with the restriction that x, the isolation wavelength number, is restricted to the channels immediately adjacent to the (channel) wavelength number associated with output port

Note 1 to entry: Adjacent channel crosstalk is a negative value in dB (see Figure 2, below).

Note 2 to entry: The adjacent channel isolation is different from adjacent channel crosstalk. In Figure 2, an up-pointing arrow shows positive, a down-pointing arrow negative. Generally, there are two adjacent channel isolations for the shorter wavelength (higher frequency) side and a longer wavelength (lower frequency) side.

Note 3 to entry: The term crosstalk and isolation are often used with almost the same in meaning. Care should be taken not to confuse crosstalk and isolation. Crosstalk is defined so that for WDM devices, the value of the ratio between the optical power of the specified signal and the specified noise, is a negative value in dB. The crosstalk is defined for each output port. Crosstalk for WDM devices is defined for a DEMUX (1 × N WDM device). The crosstalk for port o to port j is the subtraction from the insertion loss of port i to o (conducting port pair) to the isolation of port j to o (isolated port pair). For WDM devices having three of more ports, the crosstalk should be specified as the maximum value of the crosstalk for each output port. On the other hand, isolation is the minimum value of a_{ij} (where $i \neq j$) within isolation wavelength range for isolated port pair. Isolation is positive value in dB.

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV

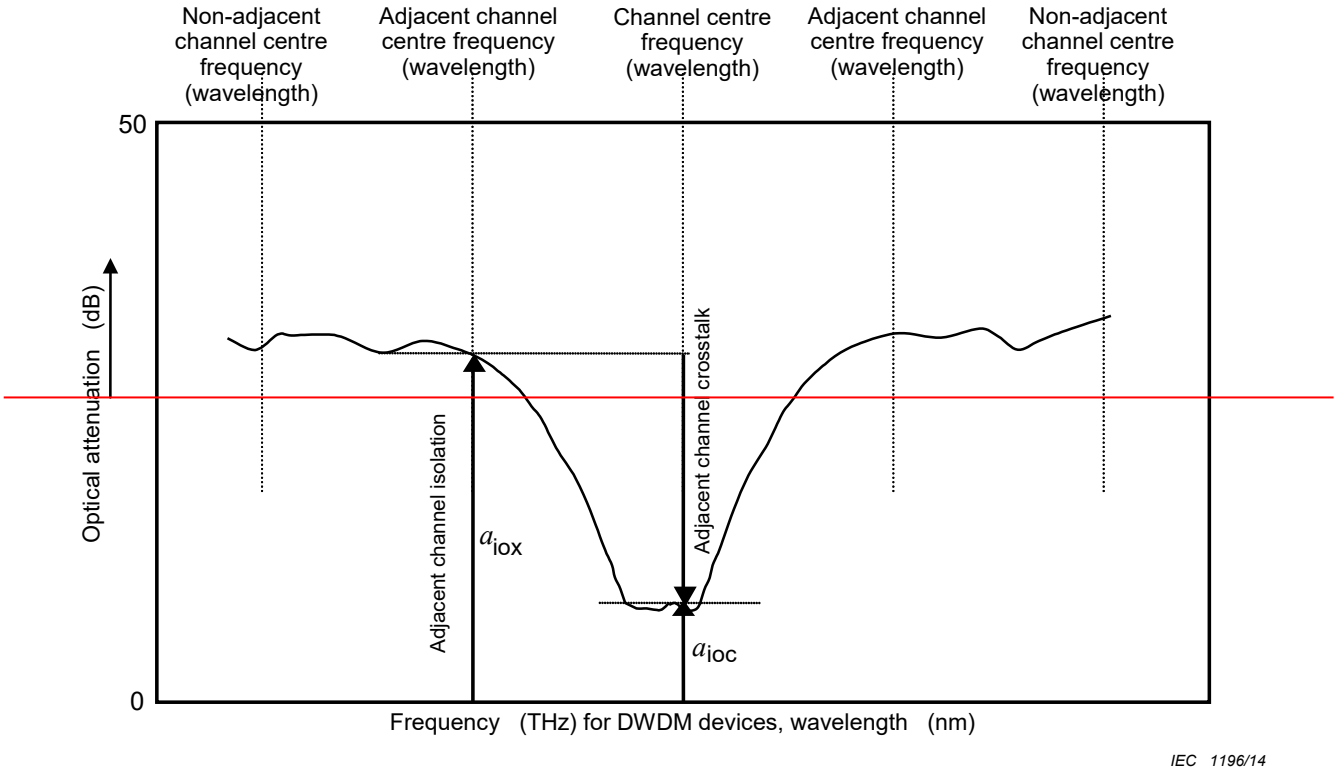

~~Figure 2 – Illustration of adjacent channel crosstalk~~

~~3.13~~
~~non-adjacent channel crosstalk~~
~~non-adjacent channel isolation~~
~~crosstalk with the restriction that the isolation wavelength (frequency) is restricted to each of the channels not immediately adjacent to the channel associated with output port~~

~~Note 1 to entry: The non-adjacent channel crosstalk is different from non-adjacent channel isolation. In Figure 3, up-pointing arrow shows positive, down-pointing arrow negative.~~

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV

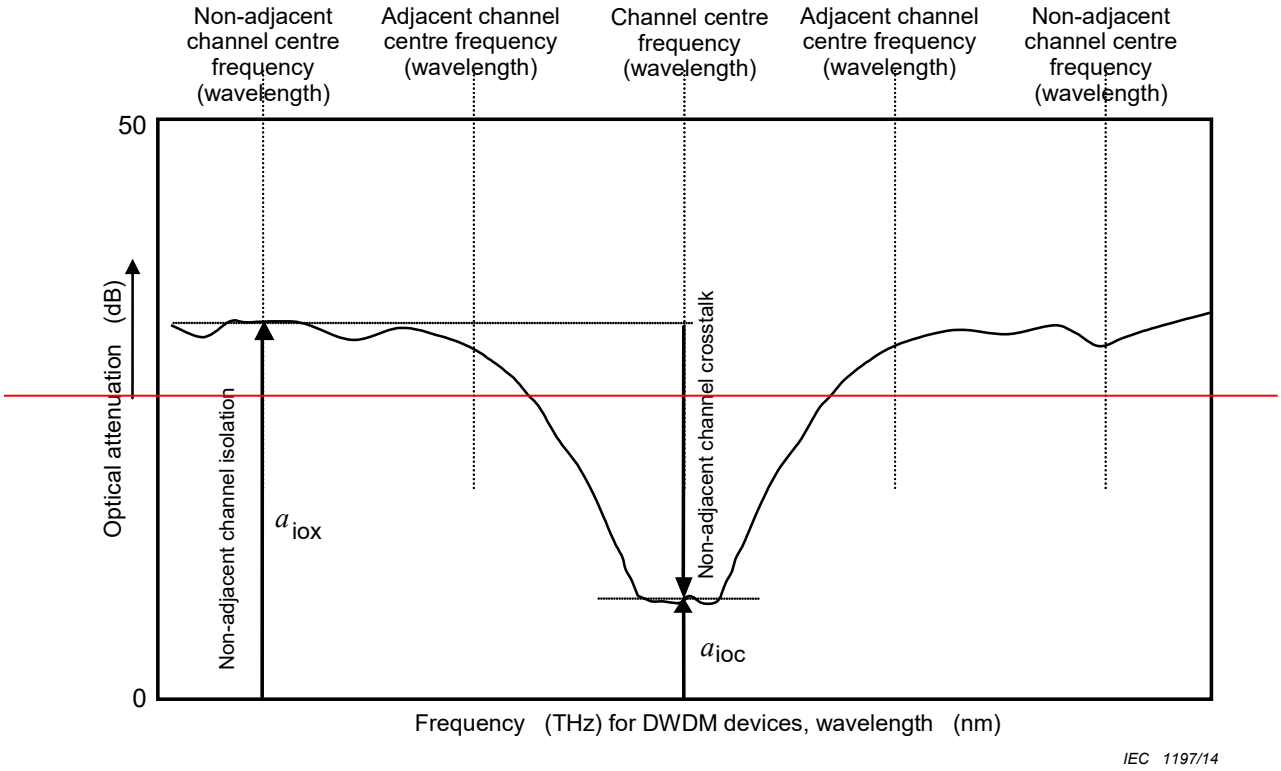

Figure 3 – Illustration of non-adjacent channel crosstalk

3.14
total channel crosstalk
total channel isolation
cumulative isolation due to the contributions at all the isolation wavelengths (frequencies) and transfer matrix coefficient for ports i and j, t_{ij} for any two ports i and j (where $i \neq j$). It is the ratio defined as

$$XT_{tot} = -10 \times \mathrm{Log}\left[\frac{t_{ij}(\lambda_h)}{\sum_{k(k\neq h)}^{N} t_{ij}(\lambda_k)}\right]$$

where

N is the number of channels of the device;

λ_h is the nominal operating wavelength (frequency) for the two of ports, i and j;

λ_k are the nominal isolation wavelengths (frequencies) for the same pair of ports.

Note 1 to entry: Total channel crosstalk is also expressed by total channel isolation as in the following equation:

$$XT_{tot} = a_{ij}(\lambda_h) - I_{tot}$$

Note 2 to entry: Total channel crosstalk is a negative value in dB. For a WDM device, total channel crosstalk shall be specified as the maximum value of total channel crosstalk of all channels.

3.15
transient crosstalk
transient isolation/transient directivity
crosstalk that is attributed to both channel crosstalk (due to same wavelength and/or other wavelengths) and port isolation, predicted to change during switching operation in WSS module

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV

Note 1 to entry: Hitless operation means that there is no influence on other performance during switching operation.

3.16
channel blocking attenuation
attenuation value when a particular channel is set in the blocking state (possible maximum attenuation)

3.17
attenuation without power
attenuation value when electric power for driving the attenuation is not supplied

3.18
variable attenuation range
attenuation value that can be changed with channel-by-channel independently controlled by driving circuit with software

3.19
variable attenuation resolution
resolution of the setting of attenuation value

3.20
attenuation accuracy
precision of attenuation value when once set by driving circuit with software and includes the point of view of both repeatability and stability in the timeframe

Note 1 to entry: This is important when used in open loop operation.

3.21
response time for attenuation
elapsed time to change the attenuation value of any channel from an initial value to the desired value, measured from the time the actuation energy is applied

3.22
out-of-band attenuation
minimum attenuation (in dB) of channels that fall outside of the operating wavelength range

3.23
switching time
when switching from isolated state to conducting state, switching time (t_s) is defined as follows

$$t_s = t_l + t_f + t_b$$

where

t_l is latency time;

t_f is rise time;

t_b is bounce time.

Note 1 to entry: When switching from conducting state to isolated state, switching time (t_s') is defined as follows:

$$t_s' = t_l' + t_f + t_b'$$

where

t_l' is latency time;

t_f is fall time;

t_b' is bounce time.

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV

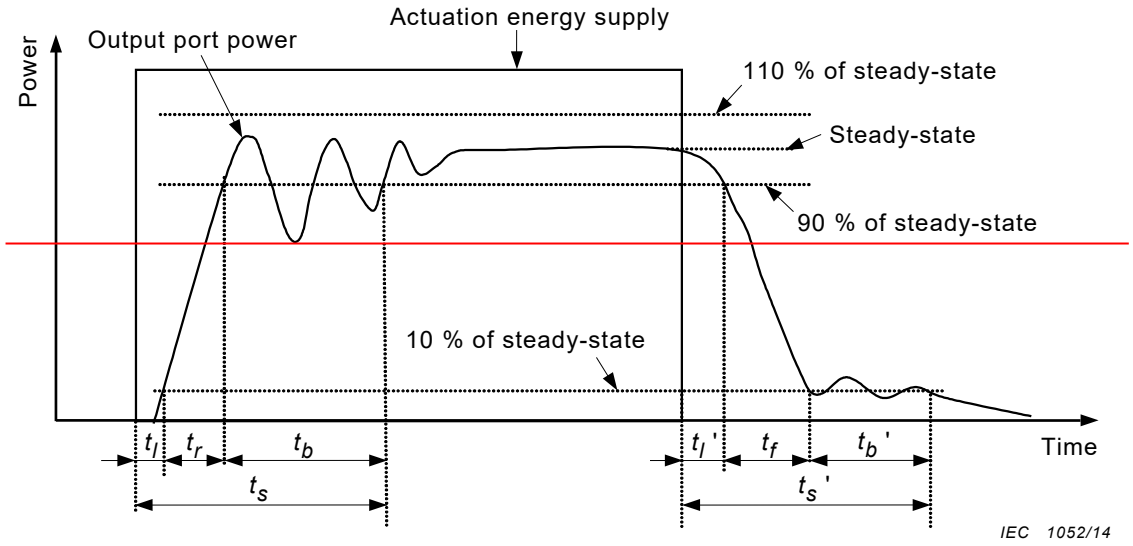

where

t_s, t_s' is the switching time;

t_l, t_l' is the latency time;

t_r is the rise time;

t_f is the fall time;

t_b, t_b' is the bounce time.

Figure 4 – Illustration of latency time, rise time, fall time, bounce time, and switching time

Note 2 to entry: If, for any reason, the steady-state power of the isolated state is not zero, all the power levels leading to the definitions of latency time, rise time, fall time, bounce time, and thus of switching time, should be normalized subtracting from them the steady-state power of the isolated state, before applying such definitions.

3.24
polarization dependent loss
PDL
maximum variation of insertion loss due to a variation of the state of polarization (SOP) over all the SOPs

3.25
polarization mode dispersion
PMD
change in the shape and r.m.s. width of a pulse due to the average delay of the travelling time between the two principal states of polarization (PSP), differential group delay (DGD), and/or to the waveform distortion for each PSP

Note 1 to entry: PMD, together with polarization dependent loss (PDL) and polarization dependent gain (PDG), when applicable, may introduce waveform distortion leading to unacceptable bit error increase.

3.26
group delay ripple
maximum peak-to-peak variation of the group delay approximated by a desired function as wavelength (or frequency), typically a linear fit, within a channel wavelength (or frequency) range

3.27
phase ripple
maximum peak-to-peak variation in measured phase spectrum when compared to a quadratic fit within a channel wavelength (or frequency) range

Documents
Document Sharing Hub
Full document details: IEC 62343-3-3 2020 RLV