


IEEE Standard for Ferroresonant Voltage Regulators

IEEE STANDARDS
ARCHIVES
DO NOT REMOVE

ANSI/IEEE Std 449-1984

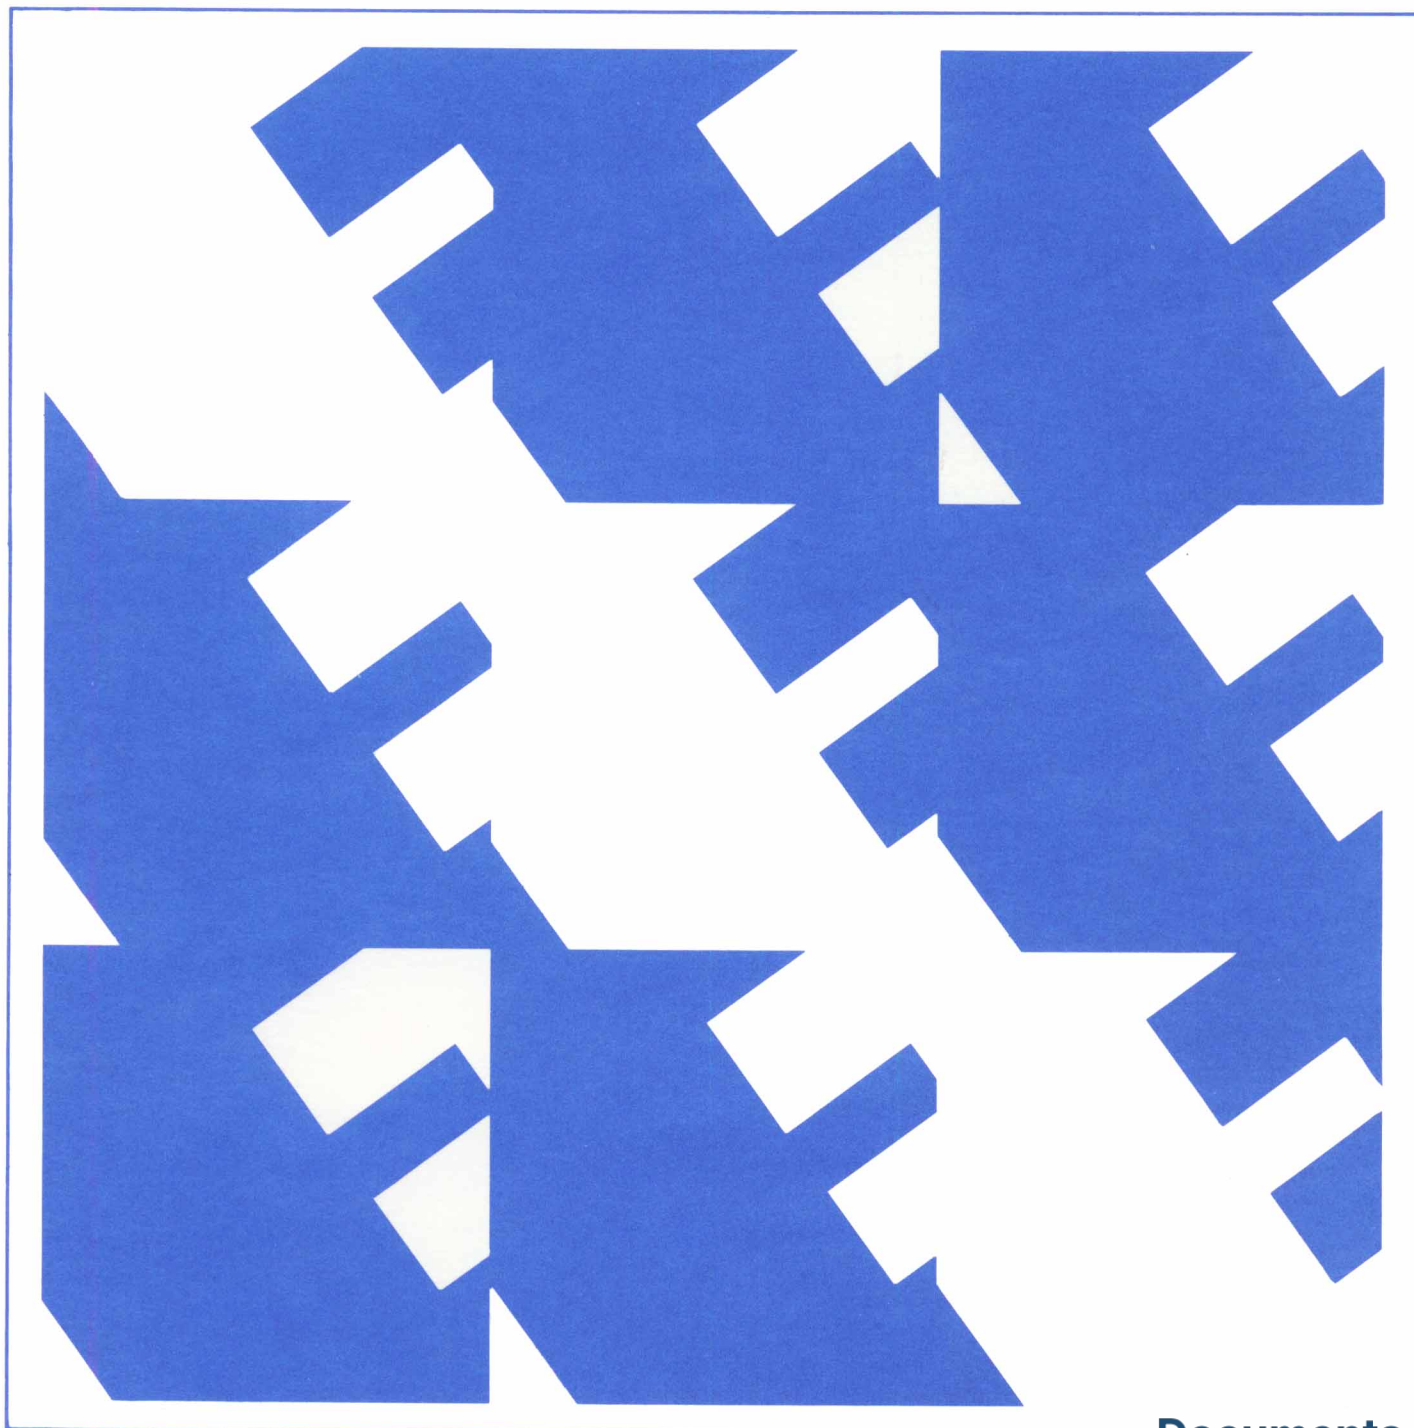

Published by The Institute of Electrical and Electronics Engineers, Inc 345 East 47th Street, New York, NY 10017, USA
February 17, 1984
Authorized licensed use limited to: Tsinghua University. Downloaded on February 25, 2026 at 15:04:44 UTC from IEEE Xplore. Restrictions apply.



Documents

**ANSI/IEEE
Std 449-1984**

An American National Standard

**IEEE Standard for
Ferroresonant Voltage Regulators**

Sponsor
**Electronic Transformers Technical Committee
of the
IEEE Magnetics Society**

Approved September 23, 1982
IEEE Standards Board

Approved November 28, 1984
American National Standards Institute

© Copyright 1984 by

**The Institute of Electrical and Electronics Engineers, Inc
345 East 47th Street, New York, NY 10017**

*No part of this publication may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.*

IEEE Standards documents are developed within the Technical Committees of the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Board. Members of the committees serve voluntarily and without compensation. They are not necessarily members of the Institute. The standards developed within IEEE represent a consensus of the broad expertise on the subject within the Institute as well as those activities outside of IEEE which have expressed an interest in participating in the development of the standard.

Use of an IEEE Standard is wholly voluntary. The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least once every five years for revision or reaffirmation. When a document is more than five years old, and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of all concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason IEEE and the members of its technical committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration.

Comments on standards and requests for interpretations should be addressed to:

Secretary, IEEE Standards Board
345 East 47th Street
New York, NY 10017
USA

Foreword

(This Foreword is not a part of IEEE Std 449-1984, IEEE Standard for Ferroresonant Voltage Regulators.)

The purpose of this standard is to provide a common ground of understanding between engineers involved in the design, manufacture, sale, and use of ferroresonant transformers. It pertains to ferroresonant transformers used as regulators in electronic power supplies and in other equipment where the inherent properties of voltage regulation and current limiting are useful.

At the time this standard was approved, the Ferroresonant Transformers Subcommittee of the Electronics Transformers Technical Committee of the IEEE Magnetics Society had the following membership:

C. H. Nicholson, *Chairman*

J. H. Adams
L. Anderson
E. D. Belanger
A. A. Brown
W. C. Emerson
H. Fickenscher
W. J. Field
P. K. Goethe
N. R. Grossner

D. V. Leppert, *Secretary*

H. P. Hart
A. D. Hasley
P. L. Hunter
S. Joseph
O. Kiltie
H. Liepins
H. W. Lord
W. E. Lucarz
H. S. Mitsanas

J. D. Schwartz
R. L. Sell
W. B. Smith
J. Tardy
R. M. Taylor
H. I. Tillinger
P. S. Venkatraman
J. P. Whistler
R. G. Wolpert

When this standard was approved on September 23, 1982, the IEEE Standards Board had the following membership:

Irwin N. Howell, *Chairman*

G. Y. R. Allen
J. J. Archambault
James H. Beall
John T. Boettger
J. V. Bonucchi
Edward J. Cohen
Len S. Corey

Edward Chelotti, *Vice Chairman*

Sava I. Sherr, *Secretary*

Donald C. Fleckenstein
Jay Forster
Kurt Greene
Joseph L. Koepfinger
Irving Kolodny
John E. May
Donald T. Michael*

A. R. Parsons
J. P. Riganati
Frank L. Rose
Robert W. Seelbach
Jay A. Stewart
Clifford O. Swanson
Robert E. Weiler

*Member emeritus

Contents

SECTION	PAGE
1. Scope	7
2. References	7
3. Definitions, Symbols, and Circuit Schematics	7
3.1 Electrical Terms	7
3.2 Symbols	7
3.3 Definitions	7
3.4 Auxiliary Circuits to Provide Special Features	12
4. Service Conditions	16
4.1 Environmental	16
4.2 Mechanical	16
5. Ratings	16
5.1 Input Rating	16
5.2 Output Rating	17
5.3 Resonant Section Rating	17
5.4 Thermal Rating	17
5.5 Electric Strength	17
5.6 Magnetic Radiation	17
5.7 Acoustical Noise	18
5.8 Corona	18
6. Nameplate and Other Markings	18
6.1 Nameplate	18
6.2 Nameplate Information	18
6.3 Termination Markings	19
7. Test Procedure	19
7.1 Electric Strength Tests	19
7.2 Input Characteristics (Resonating Capacitor Connected)	20
7.3 Output Characteristics	20
7.4 Overload Characteristics	21
7.5 Transient Excursions (Overshoot and Undershoot)	21
7.6 Temperature Rise	21
7.7 External Flux Field	21
7.8 Audible Sound-Level Tests	21
7.9 Polarity	22
8. Application Guide	22
8.1 Introduction	22
8.2 Shunt-Type Ferroresonant Regulators	23
8.3 Specific Applications	24
9. Maintenance Guide	26
FIGURES	
Fig 1 Basic Series Ferroresonant Voltage Regulator	8
Fig 2 Basic Series Parallel Ferroresonant Voltage Regulator	8
Fig 3 A Common Form of the Ferroresonant Transformer Voltage Regulator	9

FIGURES	PAGE
Fig 4 Schematic of Fig 3	9
Fig 5 Controlled Ferroresonant Regulator Schematic	10
Fig 6 Output Versus Input Voltage with Jump Resonance	10
Fig 7 Reversal Point with Jump Resonance	11
Fig 8 Output Versus Input Voltage without Jump Resonance	11
Fig 9 Reversal Point without Jump Resonance	11
Fig 10 Overload Characteristic with Unsaturated Series Inductance.	12
Fig 11 Overload Characteristic with Saturated Series Inductance.	12
Fig 12 Magnetically Coupled Tuned-Cancellation Type Harmonic Filter	13
Fig 13 Electrically Coupled Tuned-Cancellation Type Harmonic Filter.	13
Fig 14 Tuned-Type Harmonic Filter	14
Fig 15 Two-Core Ferroresonant Circuit with Compensating Winding	14
Fig 16 Ferroresonant Transformer Circuit with Compensating Winding.	14
Fig 17 Ferroresonant Transformer Circuit with Frequency Compensating Network	15
Fig 18 Power Factor Compensation using Series Capacitance	15
Fig 19 Power Factor Compensation using Transformer Coupled Capacitance	15
Fig 20 Additive Polarity (If X1 and X2 are Reversed, the Polarity is Subtractive)	22
Fig 21 Isolated Single-Phase Loads	25
Fig 22 Separate Single-Phase Loads Connected in a Four-Wire Wye	25
Fig 23 Ferroresonant Regulator with Multiple Inputs	26

TABLE

Table 1 Sound-Level Corrections for Noise Tests	22
---	----

IEEE Standard for Ferroresonant Voltage Regulators

1. Scope

This standard pertains to ferroresonant voltage regulators which operate at relatively constant frequencies and provide substantially constant output voltages in spite of relatively large changes of input voltage, and to controlled ferroresonant regulators which maintain substantially constant output voltages regardless of variations, within limits, of input voltage, temperature, frequency, and output load. Guides to application and test procedures are included. Provision is made for relating the characteristics of ferroresonant regulators to associated rectifiers and circuits. Definitions pertaining to ferroresonance and ferroresonant regulators which have not been found elsewhere are included with an appropriate discussion.

This standard includes, but is not limited to, the following types of ferroresonant regulators:

- (1) Series ferroresonant regulators
- (2) Series-parallel ferroresonant regulators (electrically connected)
- (3) Ferroresonant transformer regulators (magnetically coupled)
- (4) Controlled ferroresonant regulators

2. References

- [1] ANSI S1.4-1971 (R1976), Specification for Sound Level Meters.¹
- [2] ANSI/IEEE Std 100-1977, IEEE Standard Dictionary of Electrical and Electronics Terms.
- [3] ANSI/IEEE Std 260-1978, IEEE Standard Letter Symbols for Units of Measurement (SI Units, Customary Inch-Pound Units, and Certain Other Units).

¹ANSI documents are available from the Sales Department of American National Standards Institute, 1430 Broadway, New York, NY 10018.

- [4] ANSI/IEEE Std 280-1968, IEEE Standard Letter Symbols for Quantities used in Electrical Science and Electrical Engineering.

- [5] IEEE Std 389-1979, IEEE Recommended Practice for Testing Electronic Transformers and Inductors.

- [6] IEEE Std 436-1977, IEEE Guide for Making Corona (Partial Discharge) Measurements on Electronics Transformers.

3. Definitions, Symbols, and Circuit Schematics

3.1 Electrical Terms. The electrical terms used in this standard shall be in accordance with those given in ANSI/IEEE Std 100-1977[2].²

3.2 Symbols. The letters and graphic symbols used in this standard shall be in accordance with ANSI/IEEE Std 260-1978[3] and ANSI/IEEE Std 280-1968[4] insofar as they apply, except as herein stated.

3.3 Definitions

3.3.1 ferroresonance. The steady-state mode of operation that exists when an alternating voltage of sufficient magnitude is applied to a circuit consisting of capacitance and ferromagnetic inductance causing changes in the ferromagnetic inductance which are repeated each half cycle.

NOTE: When certain critical relations exist among the circuit parameters, self-sustaining subharmonic or harmonic oscillations may also be excited in the circuit.

3.3.2 ferroresonant voltage regulation. The effect obtained by the limiting action of the saturation characteristic of the magnetic material in a ferroresonant circuit, which regulates the

²The numbers in brackets correspond to those of the references listed in Section 2.

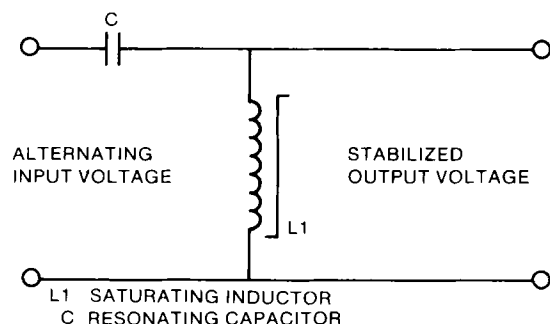


Fig 1
Basic Series Ferroresonant Voltage Regulator

output voltage over a specified range of input voltages and a specified frequency of excitation.

NOTE: This effect regulates the half-cycle average value of the output voltage.

3.3.3 Ferroresonant Voltage Regulators

3.3.3.1 basic series ferroresonant voltage regulator. This regulator consists of a series connection of a saturating inductor and a capacitor connected across the source. The load is inductively or conductively coupled to the saturating inductor. See Fig 1.

NOTE: Applications of this circuit are limited by the requisite large ratio of reactive to real powers.

3.3.3.2 basic series parallel ferroresonant voltage regulator. This regulator consists of an essentially linear inductor connected in series with a parallel combination of a nonlinear inductor and a capacitor. This combination is connected across the source as shown in Fig 2. Load voltage is derived by inductive or conductive coupling to the nonlinear inductor.

3.3.4 ferroresonant voltage regulator transformer.³ A high-reactance transformer employing magnetic shunts that allow the magnetic functions of the basic series parallel ferroresonant regulator circuits to be combined into a single magnetic component. See Figs 3 and 4.

3.3.4.1 primary winding. The winding of the ferroresonant transformer to which the input voltage is applied.

3.3.4.2 output winding. The winding of the ferroresonant transformer used to provide the regulated output voltage.

NOTE: It is wound on the secondary section of the core and separated from the primary by a magnetic shunt.

3.3.4.3 resonating winding. The winding of the ferroresonant transformer used to connect the resonating capacitance to the circuit.

NOTE: It is wound on the secondary section of the core and is separated from the primary winding by a magnetic shunt. It may itself be the output winding or a portion of the output winding.

3.3.4.4 primary section of the core. The section of the core of a ferroresonant transformer on which the primary winding is wound.

3.3.4.5 secondary section of the core. The section of the ferroresonant transformer on which the output and resonating windings are wound. In steady-state operation, this section of the core is normally driven into magnetic saturation.

³Hereafter referred to as a ferroresonant transformer.

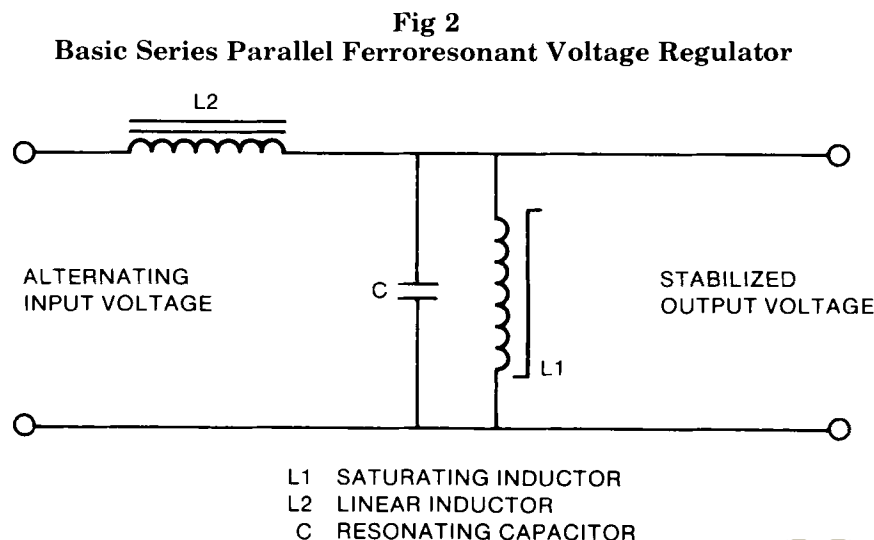


Fig 2

Basic Series Parallel Ferroresonant Voltage Regulator