

Ref:	NR/L2/ELP/27009/MOD C65
Issue:	1
Date:	03/12/2011
Compliance date:	03/03/2012
Page	1 of 6

OVERHEAD LINE CAMPAIGN CHANGES – DATA SHEET


65

RENEW 'KOREAN' STYLE REGISTRATION ARMS IN TUNNEL ASSEMBLIES.

COMPONENT 'Korean' style registration supports in tunnels. These are shown on the following OLEMI drawings:

Component drawings	123/040, 121/040
Assembly drawings	111/017, 111/018, 199/195

PROBLEM The insulation with these supports degrades over time and will lead to 25kV flashover.

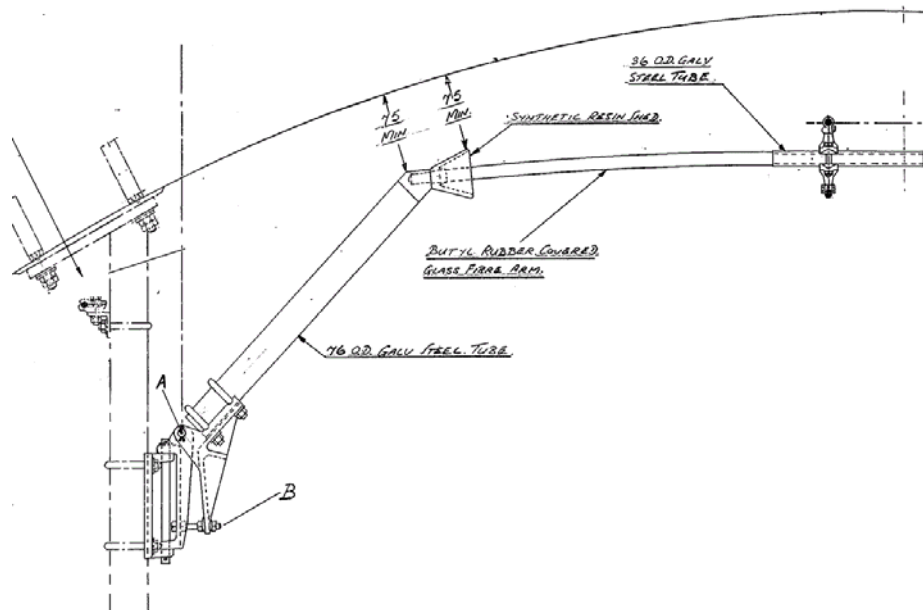

Reference Information

Ellipse standard job number	13065
Ellipse standard job description	Renew 'Korean' style tunnel registration arm
Category	Registration arm
Priority	No
Types of OLE affected	Mk3a
Original equipment dates	After 2002



Documents
Document Sharing Hub

Ref:	NR/L2/ELP/27009/MOD C65
Issue:	1
Date:	03/12/2011
Compliance date:	03/03/2012
Page	2 of 6

OVERHEAD LINE CAMPAIGN CHANGES – DATA SHEET	
65	RENEW 'KOREAN' STYLE REGISTRATION ARMS IN TUNNEL ASSEMBLIES.
ACTION REQUIRED	<ol style="list-style-type: none"> 1. Replace original 'Korean' arm with new replacement. The original arms are obsolete but replacements can be manufactured if required. 2. Replace with Siemens elasticated support arm to OLEMI drawings 1/121/864 or UK1/121/493.
	