



ISO/IEC 14165-151

Edition 1.0 2017-11

INTERNATIONAL STANDARD



Information technology –Fibre channel –
Part 151: Fibre Channel BaseT (FC-BaseT)





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2017 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.



ISO/IEC 14165-151

Edition 1.0 2017-11

INTERNATIONAL STANDARD



**Information technology –Fibre channel –
Part 151: Fibre Channel BaseT (FC-BaseT)**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-5100-3

Warning! Make sure that you obtained this publication from an authorized distributor.



Information Technology — Fibre Channel — Part 151: BaseT

Technologies de l'information — Fibre Channel — Partie 151 (FC-BaseT)

Contents	Page
FOREWORD	7
INTRODUCTION	9
1 Scope	10
2 Normative references	10
3 Terms, definitions, abbreviations, symbols, and conventions	11
3.1 Terms and definitions	11
3.2 Editorial conventions	14
3.3 Abbreviations, acronyms, and symbols	14
3.4 Keywords	15
3.5 State Diagram notation	16
3.5.1 State Diagram conventions	16
3.5.2 State Diagram variables	17
3.5.3 State Diagram timers	17
3.5.4 State transitions	17
3.5.5 Operators	18
4 Structure and concepts	19
4.1 Overview	19
4.2 Relationship with other standards	20
4.3 FC-BaseT PHY logical model	21
4.4 FC-BaseT usage of XGMII	22
4.5 Operation of FC-BaseT	23
4.5.1 Overview	23
4.5.2 PCS overview	24
4.5.3 PMA overview	25
4.6 FC-BaseT service primitives and interfaces	25
4.6.1 Overview	25
4.6.2 PMA service interface	25
4.6.3 Management function interface	30
4.7 FC-BaseT Nomenclature	31
5 Physical Coding Sublayer (PCS)	32
5.1 Overview	32
5.2 PCS reset function	32
5.3 PCS transmit function	33
5.3.1 Overview	33
5.3.2 36/33 transcoding	34
5.3.3 Error detecting code	36
5.3.4 PCS scrambling	37
5.3.5 Schläfli Lattice coding	39
5.3.6 Trellis coding	40
5.3.7 Generation of PMA training sequences	41
5.4 PCS receive function	42
5.4.1 Overview	42
5.4.2 Decoding	43
5.4.3 PCS descrambling	44
5.4.4 33/36 transcoding	45
5.4.5 PCS synchronization	46
5.5 State Diagrams	46

6 PMA Sublayer and Medium Dependent Interface	48
6.1 PMA Overview	48
6.2 PMA Functions	49
6.2.1 PMA Reset function	49
6.2.2 PMA Transmit function	49
6.2.3 PMA Receive Function	49
6.2.4 PHY Control Function	50
6.2.5 Link Monitor Function	53
6.2.6 Clock Recovery Function	53
6.2.7 State Diagrams	53
6.3 PMA Electrical Specification	56
6.3.1 Isolation and EMC Requirements	56
6.3.2 Test Modes	56
6.3.3 Transmitter Electrical Specifications	59
6.3.4 Receiver Electrical Specifications	64
6.4 MDI Specification	66
6.4.1 Overview	66
6.4.2 MDI Mechanical Specification	66
6.4.3 Automatic MDI/MDI-X Configuration	67
6.4.4 MDI Electrical Specification	67
6.4.5 MDI Fault tolerance	67
6.5 Link Segment Characteristics	67
6.5.1 Overview	67
6.5.2 FC-BaseT Link Topology	68
6.5.3 FC-BaseT Cable Plant Requirements	68
7 Elasticity FIFO	69
7.1 Overview	69
7.2 Ordered sets processing	70
7.3 Clock skew compensation	71
8 PHY startup procedure	73
8.1 Overview	73
8.2 Host speeds determination	73
8.3 Host synchronization	73
8.4 FC-BaseT auto-negotiation	74
8.4.1 Overview	74
8.4.2 FC-BaseT support	75
8.4.3 Master-Slave relationship	76
8.4.4 Cable length estimation	77
8.4.5 Tentative Operating Speed Determination	78
8.4.6 Configuration resolution	79
8.5 Speed downshift function	80
8.6 State diagrams	80
9 Port management	86
9.1 Overview	86
9.2 FC-BaseT management registers	86
9.3 Control Register	88
9.4 Status Register	91
9.5 Speed Downshift Register	93
9.6 Test Register	94
9.7 SNR Margin Registers	94
9.8 Auto-Negotiation Pages Registers	95

Annex A (informative) Additional 36/33 Mappings	98
A.1 Overview.	98
A.2 Notation	98
A.3 Additional mappings	98
Annex B (informative) Schläfli Lattice coding	100
Annex C (informative) Recommended 4GFC-BaseT power schedule	102
Bibliography	103

Figure	Page
Figure 1	State diagram notation example. 16
Figure 2	FC-BaseT topology 19
Figure 3	FC-BaseT relationship to the OSI Reference Model, the Fibre Channel Levels, and the IEEE 802.3 LAN Model. 20
Figure 4	An FC-BaseT PHY logical model 21
Figure 5	PCS and PMA functional block diagram 24
Figure 6	PCS and PMA service interfaces 26
Figure 7	FC-BaseT nomenclature 31
Figure 8	PCS reference diagram 32
Figure 9	PCS transmit bit ordering 33
Figure 10	Side-stream scrambler for the Master PHY 37
Figure 11	Side-stream scrambler for the Slave PHY 38
Figure 12	4D PAM-8 Schläfli Lattice encoder. 39
Figure 13	4D PAM-8 Trellis encoder 40
Figure 14	Generation of PMA training PAM-2 sequences 41
Figure 15	PCS receive bit ordering 42
Figure 16	4D PAM-8 Schläfli Lattice decoder. 43
Figure 17	Side-stream descrambler for the Master PHY 44
Figure 18	Side-stream descrambler for the Slave PHY 44
Figure 19	PCS synchronization state diagram 47
Figure 20	PMA Reference Diagram 48
Figure 21	Example of Link Establishment 52
Figure 22	PHY Control State Diagram 55
Figure 23	Link Monitor State Diagram 56
Figure 24	Transmitter Test Fixture A 58
Figure 25	Transmitter Test Fixture B 58
Figure 26	Test Mode 1 Output (not to scale) 59
Figure 27	4GFC-BaseT Transmitter PSD at 5dBm 61
Figure 28	2GFC-BaseT Transmitter PSD at 5dBm 62
Figure 29	1GFC-BaseT Transmitter PSD at 5dBm 63
Figure 30	MDI Jack Connector. 66
Figure 31	Balanced Cabling Plug Connector 66
Figure 32	FC-BaseT Link Topology 68
Figure 33	FC-BaseT elasticity FIFO. 69
Figure 34	Example of E-FIFO implementation 70
Figure 35	FC-BaseT clock skew compensation 71
Figure 36	Base page encoding. 75
Figure 37	Unformatted page encoding 76
Figure 38	Clock detect state diagram. 84
Figure 39	Clock loopback state diagram 85
Figure B.1	4D symbol error rate in function of SNR. 100

Table	Page
Table 1 ISO and American Conventions	14
Table 2 State Diagram Operators.	18
Table 3 FC-BaseT design goals for data rates and cable reaches for the cabling channels specified by ISO/IEC 11801:2002/AMD2:2010	20
Table 4 XGMII frequencies for FC-BaseT	22
Table 5 XGMII characters.	22
Table 6 FC-BaseT symbol and data rates	23
Table 7 Fibre Channel words	34
Table 8 XGMII representation of Fibre Channel words	35
Table 9 36/33 transcoding	35
Table 10 36/33 transcoding examples	35
Table 11 Bit to symbols mapping	40
Table 12 PMA training sequences	41
Table 13 PCS synchronization state variables.	46
Table 14 Idle2 and Idle3 Ordered Sets.	51
Table 15 PHY Control and Link Monitor State Variables	53
Table 16 PHY Control and Link Monitor Timers.	54
Table 17 Management Register Settings for Test Modes	57
Table 18 Disturbing Signal Frequency	59
Table 19 Droop Requirements	59
Table 20 Transmitter Power Schedule	64
Table 21 Transmitter Frequency Requirements.	64
Table 22 Receiver Frequency Requirements.	65
Table 23 Alien Noise Requirements.	65
Table 24 Assignment of PMA Signals to MDI and MDI-X Contacts	67
Table 25 FC-BaseT MDI Electrical Requirements	67
Table 26 FC-BaseT Cable Plant Requirements	68
Table 27 Extended Fill Words	70
Table 28 Technology Ability Field.	75
Table 29 Unformatted code field of the first unformatted page	76
Table 30 Master-Slave seed assignment.	77
Table 31 Unformatted code field of the second unformatted page.	78
Table 32 Unformatted code field of the third unformatted page	79
Table 33 Cable length estimation state variables.	81
Table 34 Cable length estimation timers	83
Table 35 FC-BaseT registers	86
Table 36 FC-BaseT control register bits.	88
Table 37 FC-BaseT status register bits	91
Table 38 FC-BaseT speed downshift register bits	93
Table 39 FC-BaseT test register bits	94
Table 40 FC-BaseT SNR margin registers bits	94
Table 41 FC-BaseT auto-negotiation pages registers bits	96
Table A.1 Additional 36/33 mappings.	98
Table A.2 6-bit encoding of XGMII control characters	99
Table C.1 Recommended transmitter power schedule	102

INFORMATION TECHNOLOGY – FIBRE CHANNEL –

Part 151: Fibre Channel BaseT (FC-BaseT)

FOREWORD

- 1) ISO (International Organization for Standardization) and IEC (International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards. Their preparation is entrusted to technical committees; any ISO and IEC member body interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with ISO and IEC also participate in this preparation.
- 2) In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.
- 3) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO member bodies.
- 4) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 5) In order to promote international uniformity, IEC and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 6) ISO and IEC provide no marking procedure to indicate their approval and cannot be rendered responsible for any equipment declared to be in conformity with an ISO/IEC publication.
- 7) All users should ensure that they have the latest edition of this publication.
- 8) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 9) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 10) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 14165-151 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

The list of all currently available parts of the ISO/IEC 14165 series, under the general title *Information technology – Fibre Channel*, can be found on the IEC web site.

This International Standard has been approved by vote of the member bodies and the voting results may

be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IMPORTANT - The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This part of ISO/IEC 14165 describes extensions to the Fibre Channel signaling and physical layer requirements defined in ANSI INCITS 404-2005, Fibre Channel - Physical Interfaces 2, to transport Fibre Channel over the commonly available 4-pair balanced copper cabling specified in ISO/IEC 11801:2002 and TIA/EIA-568-B.2-2001. This document is one of the Fibre Channel family of standards.

INFORMATION TECHNOLOGY — FIBRE CHANNEL —

Part 151: Fibre Channel BaseT (FC-BaseT)

1 Scope

This part of ISO/IEC 14165 describes extensions to the Fibre Channel signaling and physical layer requirements defined in ISO/IEC 14165-142, Fibre Channel - Physical Interfaces 2, to transport Fibre Channel over the commonly available 4-pair balanced copper cabling specified in ISO/IEC 11801:2002 and TIA/EIA-568-B.2-2001. This standard is one of the Fibre Channel family of standards.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60603-7-2, *Connectors for electronic equipment – Part 7-2: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 100 MHz*

IEC 60603-7-3, *Connectors for electronic equipment – Part 7-3: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 100 MHz*

IEC 60603-7-4, *Connectors for electronic equipment – Part 7-4: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*

IEC 60603-7-5, *Connectors for electronic equipment – Part 7-5: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*

ISO/IEC 14165-122, *Information technology - Fibre Channel - Part 122: Arbitrated Loop - 2 (FC-AL-2)* [ANSI INCITS 332-1999 including ANSI INCITS 332-1999/AM1-2003 and ANSI INCITS 332-1999/AM2-2006]

ISO/IEC 11801:2002, *Information technology - Generic cabling for customer premises*

ISO/IEC 11801:2002/AMD1:2008

ISO/IEC 11801:2002/AMD2:2010

ISO/IEC TR 24750, *Information technology - Assessment and mitigation of installed balanced cabling channels in order to support 10GBASE-T*

ANSI INCITS 404-2006, *Information technology - Fibre Channel - Part 142: Physical Interfaces - 2 (FC-PI-2)*

ANSI INCITS 424-2007, *Information technology - Fibre Channel - Framing and Signaling - 2 (FC-FS-2)*

IEEE Std 802.3-2005, *Standard for information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements - Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications*

IEEE Std 802.3an-2006, *Physical Layer and Management Parameters for 10 Gb/s Operation, Type 10GBASE-T*

3 Terms, definitions, abbreviations, symbols, and conventions

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1.1

10 Gigabit Media Independent Interface

XGMII

interface defined in IEEE 802.3-2005 for 10 Gbit/s operations but used in this standard for lower speeds operations (see 4.4)

3.1.2

Auto-Negotiation

algorithm that allows two devices at either end of a link segment to negotiate common data service functions

3.1.3

balanced cable

cable consisting of one or more metallic symmetrical cable elements (e.g., twisted pairs)

3.1.4

bit error rate

BER

ratio of the number of bits received in error to the total number of bits received

3.1.5

dimension

component of the PHY that generates locally and recovers from the link partner a logical sequence of symbols

Note 1 to entry: A transmit or receive dimension is a logical reference for a wire pair, independent from the specific wire pair where symbols are sent or received.

Note 2 to entry: Dimensions A, B, C, and D are respectively associated with sequences A_n , B_n , C_n , and D_n (see 4.3).

3.1.6

jitter

variations of signal transitions from their ideal positions in time. Jitter may be characterized by its spectral properties and its distribution in time

3.1.7

link

transmission path between any two interfaces of generic cabling

3.1.8**link segment**

point-to-point full-duplex medium connection between two and only two Medium Dependent Interfaces (MDIs)

3.1.9**Master PHY**

PHY that uses an external clock for generating its clock signals to determine the timing of transmitter and receiver operations

Note 1 to entry: It also uses the Master transmit scrambler generator polynomial for side-stream scrambling.

3.1.10**Medium Dependent Interface****MDI**

mechanical and electrical interface between the transmission medium and the Physical Layer device

3.1.11**Ordered Set**

word composed of a special character in its first (left-most) position and data characters in its remaining positions (see FC-FS-2)

3.1.12**Physical Coding Sublayer****PCS**

portion of the Physical Layer that couples the XGMII and the Physical Medium Attachment (PMA)

Note 1 to entry: The PCS contains the functions to encode data bits for transmission via the PMA and to decode the received conditioned signal from the PMA.

3.1.13**Physical Layer device****PHY**

portion of the Physical Layer between the Medium Dependent Interface (MDI) and the XGMII, consisting of the Physical Coding Sublayer (PCS) and the Physical Medium Attachment (PMA)

Note 1 to entry: The PHY contains the functions that transmit, receive, and manage the encoded signals that are impressed on and recovered from the physical medium.

3.1.14**Physical Medium Attachment sublayer****PMA sublayer**

portion of the Physical Layer that contains the functions for transmission, reception, clock recovery and skew alignment

3.1.15**Scrambler**

randomizing mechanism that is used to eliminate long strings of consecutive identical transmitted symbols and avoid the presence of spectral lines in the signal spectrum without changing the signaling rate

3.1.16**Side-stream scrambler**

scrambler in which the state of the scrambler is dependent only on the prior state of the scrambler and not on the transmitted data

3.1.17**Slave PHY**

PHY that recovers its clock from the received signal and uses it to determine the timing of transmitter operations

Note 1 to entry: It also uses the Slave transmit scrambler generator polynomial for side-stream scrambling.

3.1.18**Symbol**

smallest unit of data transmission on the medium

3.1.19**Symbol period**

time interval for transmission of one symbol

3.1.20**Symbol rate**

total number of symbols per second transferred to or from the Medium Dependent Interface (MDI) on a single wire pair

3.1.21**twisted-pair cable**

bundle of multiple twisted pairs within a single protective sheath

3.1.22**word**

<when used to indicate a size> 32 contiguous bits

3.2 Editorial conventions

In this standard, a number of conditions, mechanisms, sequences, parameters, events, states, or similar terms are printed with the first letter of each word in uppercase and the rest lowercase (e.g., Exchange, Class). Any lowercase uses of these words have the normal technical English meanings.

Lists sequenced by letters (e.g., a-red, b-blue, c-green) show no ordering relationship between the listed items. Numbered lists (e.g., 1-red, 2-blue, 3-green) show an ordering relationship between the listed items.

The ISO convention of numbering is used (i.e., the thousands and higher multiples are separated by a space and a comma is used as the decimal point.) A comparison of the American and ISO conventions are shown in table 1.

Table 1 – ISO and American Conventions

ISO	American
0,6	0.6
1 000	1,000
1 323 462,9	1,323,462.9

In case of any conflict between figure, table, and text, the text, then tables, and finally figures take precedence.

In all of the figures, tables, and text of this document, the most significant bit of a binary quantity is shown on the left side.

When the value of a bit or field is not relevant, x or xx appears in place of a specific value.

Unless stated otherwise, numbers that are not immediately followed by lower-case b or h are decimal values, numbers immediately followed by lower-case b (xxb) are binary values, and numbers or upper case letters immediately followed by lower-case h (xxh) are hexadecimal values.

A numeric range is indicated by listing the two extremes separated by “..” (e.g., “1 .. 6” indicates the range from 1 to 6, including 1 and 6).

3.3 Abbreviations, acronyms, and symbols

Abbreviations, acronyms, and symbols applicable to this standard are listed. Definitions of several of these items are included in 3.1.

⊕	The XOR operator
	concatenation symbol (e.g., A B represents the concatenation of A and B)
4D	4-dimensional
BER	bit error rate
dB	Decibel
E-FIFO	Elasticity FIFO
EDC	Error Detecting Code
EIA	Electronic Industries Association
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
FEXT	Far-end crosstalk
FLP	Fast Link Pulse
I2C	Inter-Integrated Circuit bus

IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers
ISO	International Organization for Standardization
LAN	Local Area Network
MDI	Medium Dependent Interface
MDIO	Management Data Input/Output Interface
MII	Media Independent Interface
NEXT	Near-end crosstalk
NLP	Normal Link Pulse
OSI	Open Systems Interconnection
PAM	Pulse Amplitude Modulation
PAM-2	2-level Pulse Amplitude Modulation
PAM-8	8-level Pulse Amplitude Modulation
PCS	Physical Coding Sublayer
PHY	Physical Layer device
PMA	Physical Medium Attachment
ppm	Parts per million
PSD	Power Spectral Density
RF	Remote Fault
RX	Receiver
SNR	Signal to Noise Ratio
TIA	Telecommunication Industries Association
TX	Transmitter
XGMII	10 Gigabit Media Independent Interface

3.4 Keywords

3.4.1 expected: A keyword used to describe the behavior of the hardware or software in the design models assumed by this standard. Other hardware and software design models may also be implemented.

3.4.2 ignored: A keyword used to describe an unused bit, byte, word, field or code value. The contents or value of an ignored bit, byte, word, field or code value shall not be examined by the receiving device and may be set to any value by the transmitting device.

3.4.3 invalid: A keyword used to describe an illegal or unsupported bit, byte, word, field or code value. Receipt of an invalid bit, byte, word, field or code value shall be reported as an error.

3.4.4 mandatory: A keyword indicating an item that is required to be implemented as defined in this standard.

3.4.5 may: A keyword that indicates flexibility of choice with no implied preference (equivalent to “may or may not”).

3.4.6 may not: A keyword that indicates flexibility of choice with no implied preference (equivalent to “may or may not”).

3.4.7 obsolete: A keyword indicating that an item was defined in prior Fibre Channel standards but has been removed from this standard.

3.4.8 optional: A keyword that describes features that are not required to be implemented by this standard. However, if any optional feature defined by this standard is implemented, then it shall be implemented as defined in this standard.

3.4.9 reserved: A keyword referring to bits, bytes, words, fields and code values that are set aside for future standardization. A reserved bit, byte, word or field shall be set to zero, or in accordance with a future extension to this standard. Recipients are not required to check reserved bits, bytes, words or fields for zero values.

3.4.10 restricted: A keyword referring to bits, bytes, words, and fields that are set aside for use in other Fibre Channel standards. A restricted bit, byte, word, or field shall be treated as a reserved bit, byte, word or field for the purposes of the requirements defined in this standard.

3.4.11 shall: A keyword indicating a mandatory requirement. Designers are required to implement all such mandatory requirements to ensure interoperability with other products that conform to this standard.

3.4.12 should: A keyword indicating flexibility of choice with a strongly preferred alternative; equivalent to the phrase “it is strongly recommended”.

3.4.13 x or xx: The value of the bit or field is not relevant.

3.5 State Diagram notation

3.5.1 State Diagram conventions

The operation of a protocol may be described by subdividing the protocol into a number of interrelated functions. The operation of the functions may be described by state diagrams. Each diagram represents the domain of a function and consists of a group of connected, mutually exclusive states. Only one state of a function is active at any given time (see figure 1).

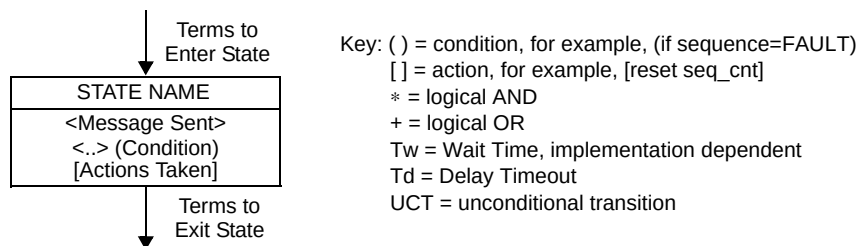


Figure 1 – State diagram notation example

Each state that the function is able to assume is represented by a rectangle. These are divided into two parts by a horizontal line. In the upper part the state is identified by a name in capital letters. The lower part contains the name of any ON signal that is generated by the function. Actions are described by short phrases and enclosed in brackets.

All permissible transitions between the states of a function are represented graphically by arrows between them. A transition that is global in nature (e.g., an exit condition from all states to the IDLE or RESET state) is indicated by an open arrow. Labels on transitions are qualifiers that shall be fulfilled before the transition is taken. The label UCT designates an unconditional transition. Qualifiers described by short phrases are enclosed in parentheses.

State transitions and sending and receiving of messages occur instantaneously. The actions inside a state block execute instantaneously. Actions inside state blocks are atomic (i.e., uninterruptible). When a state is entered and after performing all the actions listed in a state block one time, the state block then continuously evaluates its exit conditions until one is satisfied, at which point control passes through a transition arrow to

the next block. While the state awaits fulfillment of one of its exit conditions, the actions inside do not implicitly repeat.

Valid state actions may include .indication and .request messages. No actions are taken outside of any state block.

The following convention is used to describe a term-assignment statement that is associated with a transition:

- a) The character ":" (colon) is a delimiter used to denote that a term assignment statement follows; and
- b) The character "←" (left arrow) denotes assignment of the value following the arrow to the term preceding the arrow.

The state diagrams contain the authoritative statement of the functions they depict. When apparent conflicts between descriptive text and state diagrams arise, the state diagrams are to take precedence. However, such precedence does not override any explicit description in the text that has no parallel in the state diagrams.

The models presented by state diagrams are intended as the primary specifications of the functions to be provided. However, it is important to distinguish between a model and a real implementation. The models are optimized for simplicity and clarity of presentation, while any realistic implementation may place heavier emphasis on efficiency and suitability to a particular implementation technology. It is the functional behavior of any unit that shall match the standard, not its internal structure. The internal details of the model are useful only to the extent that they specify the external behavior clearly and precisely.

3.5.2 State Diagram variables

State variables are of two types, variables with no default value and variables with a default value. Variables with no default value, once set retain their value as long as succeeding blocks contain no references to them. Variables with default value evaluate to the variable default value in each state where the variable value is not explicitly set.

3.5.3 State Diagram timers

All timers operate in the same fashion. A timer is reset and starts counting upon entering a state where "start x_timer" is asserted. Time "x" after the timer has been started, "x_timer_done" is asserted and remains asserted until the timer is reset. At all other times, "x_timer_not_done" is asserted. When explicitly entering a state where "start x_timer" is asserted, the timer is reset and restarted even if the entered state is the same as the exited state. In addition, a timer is reset and stops counting upon entering a state where "stop timer" is asserted.

3.5.4 State transitions

The following terms are valid transition qualifiers:

- a) Boolean expressions;
- b) An event such as the expiration of a timer: timer_done;
- c) An event such as the reception of a message: PMA_UNITDATA.indication;
- d) An unconditional transition: UCT;

- e) A branch taken when other exit conditions are not satisfied: ELSE.

Any open arrow (an arrow with no source block) represents a global transition. Global transitions are evaluated continuously whenever any state is evaluating its exit conditions. When a global transition becomes true, it supersedes all other transitions, including UCT, returning control to the block pointed to by the open arrow.

3.5.5 Operators

The state diagram operators are shown in table 2.

Table 2 – State Diagram Operators

Character	Meaning
*	Boolean AND
+	Boolean OR
$\wedge$	Boolean XOR
!	Boolean NOT
<	Less than
$\leq$	Less than or equal to
=	Equals (a test of equality)
$\neq$	Not equals
$\geq$	Greater than or equal to
>	Greater than
()	Indicates precedence
$\Leftarrow$	Assignment operator
$\in$	Indicates membership
$\notin$	Indicates nonmembership
	Catenate
ELSE	No other state condition is satisfied

4 Structure and concepts

4.1 Overview

A vast infrastructure of installed twisted-pair copper cabling systems exists today. High volume has driven down the cost for copper PHYs and cabling systems to a fraction of their original cost. FC-BaseT is intended to leverage this economy of scale by permitting communication of Fibre Channel data streams at 1 Gbit/s, 2 Gbit/s, or 4 Gbit/s over balanced twisted-pair copper cabling systems.

1000BASE-T (see IEEE 802.3-2005) pioneered the use of coded multi-level baseband signaling to permit high data rates to be carried over the relatively narrow bandwidth available on balanced twisted-pair copper cabling. FC-BaseT uses a simplified version of the field proven and well understood line code of 1000BASE-T.

Twisted-pair cabling systems have limited usable bandwidth available for data transmission. FC data are de-multiplexed spatially across four physical wire pairs to reduce the data rate per wire by 75%. In addition, hybrids are employed to permit signals to be transmitted and received on the same wire pair enabling full-duplex point-to-point transmission. Figure 2 illustrates the full duplex, four wire configuration used for FC-BaseT.

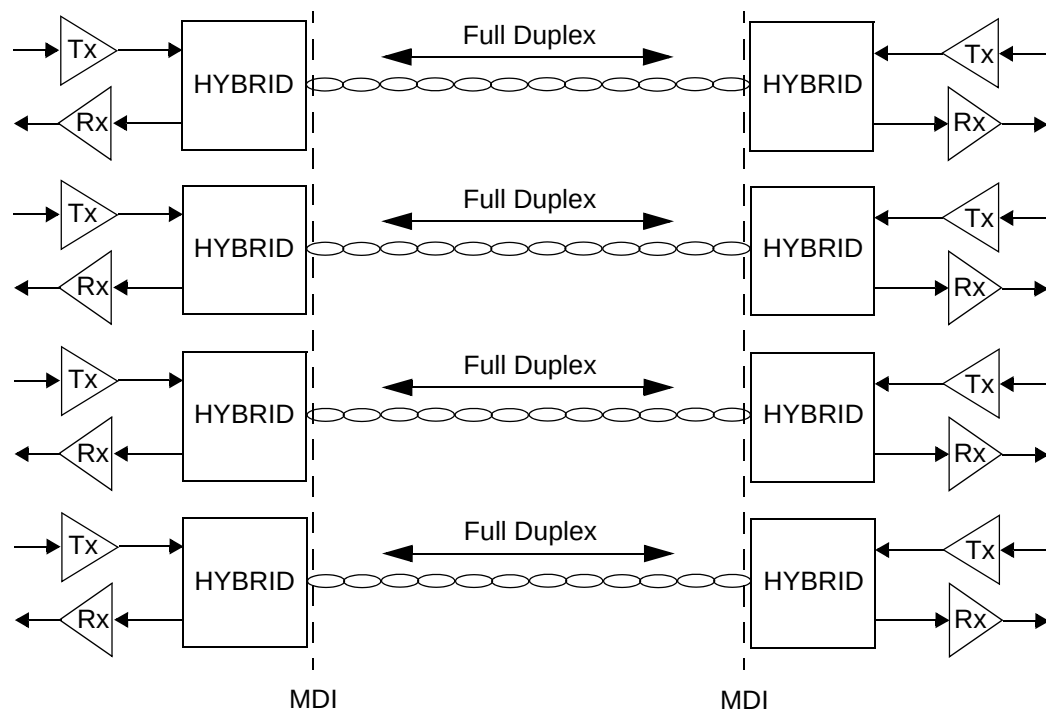


Figure 2 – FC-BaseT topology

Multi-level baseband signaling (i.e., Pulse Amplitude Modulation or PAM) is used on each of the wire pairs. In a multi-level transmission scheme, multiple bits are transmitted each clock interval. Data rate (i.e., bits per second) is transformed into symbol rate (i.e., symbols per second).

The following are the objectives of FC-BaseT:

- a) bit error rate (BER) better than 10^{-12} (e.g., $\leq 10^{-15}$);

- b) PHY delay lower than 1 μ s;
- c) Meet or exceed FCC Class A/CISPR EMC requirements;
- d) Support IEEE 802.3-2005 Auto-Negotiation;
- e) Support data rates, cable types and lengths as per table 3.

Table 3 – FC-BaseT design goals for data rates and cable reaches for the cabling channels specified by ISO/IEC 11801:2002/AMD2:2010


FC Data Rate	Class D Reach ^a	Class E Reach ^a	Class E _A to F _A Reach ^a
1GFC-BaseT	100 m	100 m	100 m
2GFC-BaseT	60 m	70 m	100 m
4GFC-BaseT	30 m ^b	40 m	100 m

^a Similar channels up to Class E_A are specified in TIA/EIA standards as Category 5e, Category 6 and Category 6a (see Annex D).

^b Expected performance, not guaranteed. 4GFC-BaseT exceeds the rated frequency performance of Class D channels (see ISO/IEC TR 24750).

4.2 Relationship with other standards

Figure 3 shows the model of the FC-BaseT FC-0 level, and its relationship with the ISO Reference model and the IEEE 802.3 LAN Model.

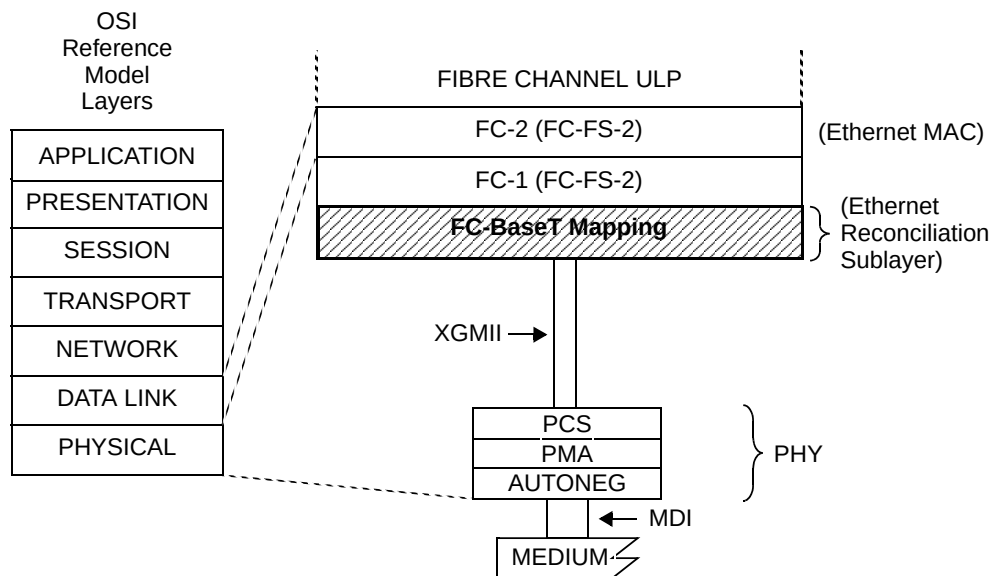

MAC = MEDIA ACCESS CONTROL
MDI = MEDIUM DEPENDENT INTERFACE
PHY = PHYSICAL LAYER DEVICE
XGMII = 10 GIGABIT MEDIA INDEPENDENT INTERFACE (optional)

PCS = PHYSICAL CODING SUBLAYER
PMA = PHYSICAL MEDIUM ATTACHMENT
AUTONEG = AUTONEGOTIATION

Figure 3 – FC-BaseT relationship to the OSI Reference Model, the Fibre Channel Levels, and the IEEE 802.3 LAN Model

An optional XGMII interface is used in this specification because it allows an easy representation of Fibre Channel data characters and control codes. Implementations are not required to expose nor use this interface. The XGMII interface is used in this standard as specified in 4.4.

4.3 FC-BaseT PHY logical model

The logical model of a possible FC-BaseT PHY implementation is shown in figure 4.

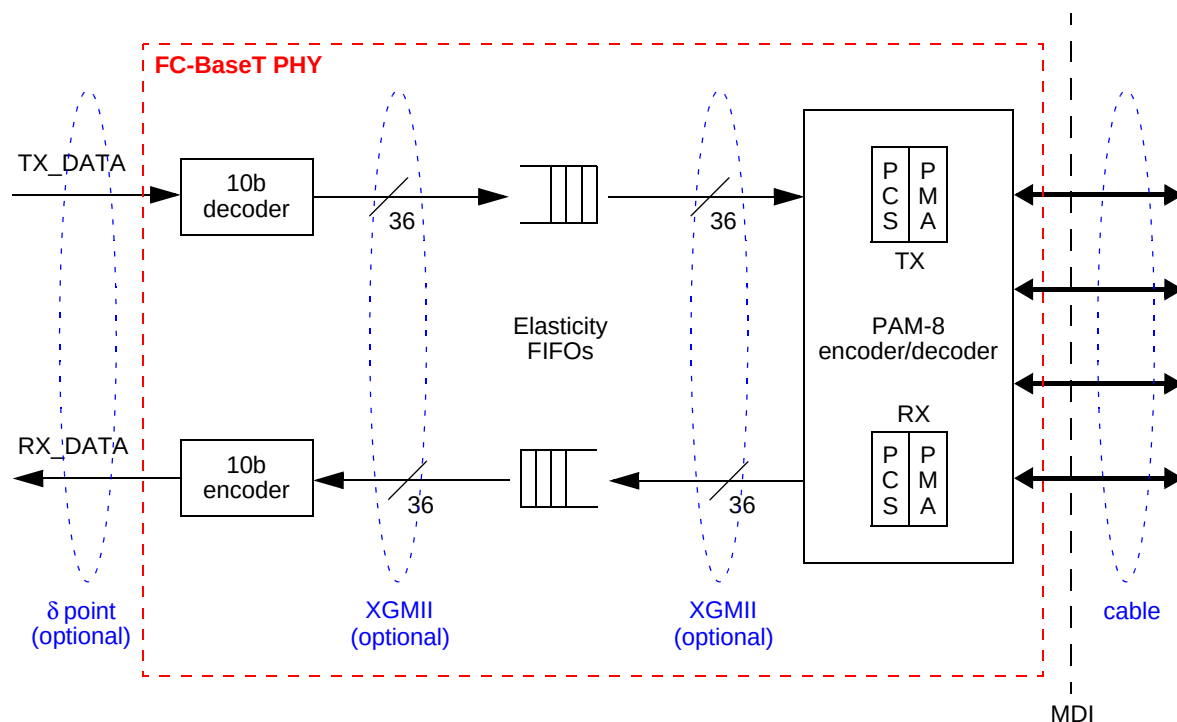


Figure 4 – An FC-BaseT PHY logical model

Fibre Channel is a full duplex continuously transmitting technology (i.e., when no data are to be sent, Idles and other Ordered Sets are transmitted by the upper layers). An FC-BaseT PHY transmits on the cable a continuous stream of data coming from the upper layers and receives a continuous stream of data from the cable. A Fibre Channel data stream is composed of frames and Ordered Sets. In some cases (e.g., when the particular Fibre Channel logical topology is an Arbitrated Loop, see FC-AL-2) Ordered Sets are used continuously in an information stream.

An FC-BaseT PHY may use the same electrical interface specified for the δ points (see FC-PI-2) for the various Fibre Channel speeds. In this case, on entering the FC-BaseT PHY the 10b encoding of the FC serial stream is removed and the FC data are converted in an internal stream of 36-bit XGMII words, as shown in figure 4.

The Elasticity FIFOs resolve potential clock skews between two connected PHYs and retime the data stream to be compliant with the FC-PI-2 jitter specification.

The PAM-8 encoder/decoder converts each 36-bit word on the XGMII interface in three 4-dimensional (4D) PAM-8 symbols. Each 4D symbol is a 4-tuple (A_n, B_n, C_n, D_n) of 1-dimensional signals, each taken from the set $\{-7, -5, -3, -1, +1, +3, +5, +7\}$. Each 4D symbol is sent as an 8-level pulse amplitude modulated signal on each of the four wire pairs, called BI_DA, BI_DB, BI_DC, and BI_DD.

This standard defines the FC-BaseT γ point (see FC-PI-2) at the MDI, and does not specify requirements for the host to PHY interface. Implementation of δ points is optional (e.g., a PHY may implement a different host to PHY interface, or the PHY may be integrated in a protocol ASIC). When an FC-BaseT PHY is integrated in a protocol ASIC, it may be coupled directly with the FC-1 level. System operation from the perspective of signals at the MDI and management objects shall be independent from the host to PHY interface.

4.4 FC-BaseT usage of XGMII

The XGMII interface is defined in IEEE 802.3-2005 to support 10 Gbit/s operations, but is used in this standard to support the Fibre Channel speeds of 4 Gbit/s, 2 Gbit/s, and 1 Gbit/s with the clock frequencies shown in table 4.

Table 4 – XGMII frequencies for FC-BaseT

FC Speed	XGMII Frequency
4GFC-BaseT	53,125 MHz
2GFC-BaseT	26,562 5 MHz
1GFC-BaseT	13,281 25 MHz

XGMII is a 36-bit interface carrying four characters at a time. Each character is represented as eight data bits (called TXD in the transmit direction, RXD in the receive direction) and one control bit (called TXC in the transmit direction, RXC in the receive direction). The XGMII characters are summarized in table 5.

Table 5 – XGMII characters

XGMII TXC/RXC	XGMII TXD/RXD	10b Character	Description
0b	00h .. FFh	Dxx.y	Data characters
1b	07h	^a	XGMII Idle character (/I/)
1b	1Ch	K28.0	Reserved XGMII character
1b	3Ch	K28.1	Reserved XGMII character
1b	5Ch	K28.2	Primitive XGMII character (/P/)
1b	7Ch	K28.3	Reserved XGMII character
1b	9Ch	K28.4	Sequence XGMII character (/Q/)
1b	BCh	K28.5	Reserved XGMII character
1b	DCh	K28.6	Reserved XGMII character
1b	F7h	K23.7	Reserved XGMII character
1b	FBh	K27.7	Start XGMII character (/S/)
1b	FCh	K28.7	Reserved XGMII character
1b	FDh	K29.7	Terminate XGMII character (/T/)
1b	FEh	K30.7	Error XGMII character (/E/)
1b	all others	K30.7	Invalid XGMII character (/E/)

^a The XGMII Idle character, denoted as K07, does not have a 10b representation. IEEE 802.3-2005, clause 36.2.4.12, defines how to encode the K07 character for transmission in a 10b encoded serial stream.

4.5 Operation of FC-BaseT

4.5.1 Overview

FC-BaseT employs full duplex baseband transmission over four pairs of balanced cabling. The aggregate data rate is achieved by transmitting in each direction simultaneously on each wire pair, as shown in figure 2. Baseband 8-level PAM signaling is used on each of the wire pairs. Transmitted levels on each wire pair are selected from a 4-dimensional 8-level signal constellation. Each 4-dimensional symbol is a 4-tuple (A_n , B_n , C_n , D_n) of 1-dimensional signals, each taken from the set $\{-7, -5, -3, -1, +1, +3, +5, +7\}$. This modulation scheme is called 4D PAM-8. The FC-BaseT data rate, symbol rate and symbol period per each of the supported FC-BaseT speeds is shown in table 6.

Table 6 – FC-BaseT symbol and data rates

FC Speed	FC0 Data Rate	FC-BaseT Data Rate	FC-BaseT Symbol Rate per Wire	Symbol Period
4GFC-BaseT	4,25 Gbit/s	3,4 Gbit/s	318,75 Ms/s	~3,137 ns ^a
2GFC-BaseT	2,125 Gbit/s	1,7 Gbit/s	159,375 Ms/s	~6,274 ns ^b
1GFC-BaseT	1,062 5 Gbit/s	0,85 Gbit/s	79,687 5 Ms/s	~12,549 ns ^c
^a The exact symbol period is 160/51 ns. ^b The exact symbol period is 320/51 ns. ^c The exact symbol period is 640/51 ns.				

Data and control characters are encoded at a rate of 2,75 information bits per PAM-8 symbol. Data and control characters are embedded in a framing scheme that runs continuously after startup of the link. PHY blocks consisting of three 4D PAM-8 symbols are continuously transmitted after link startup.

An FC-BaseT PHY may operate either as a Master PHY or as a Slave PHY. The Master-Slave relationship between two stations sharing a link segment is established during Auto-Negotiation (see 8.4). The Master PHY uses a local clock to determine the timing of transmitter operations. The Slave PHY recovers the clock from the received signal and uses it to determine the timing of transmitter operations (i.e., it performs loop timing).

An FC-BaseT PHY may be functionally decomposed in a Physical Coding Sublayer (PCS) and a Physical Medium Attachment (PMA) sublayer, summarized respectively in 4.5.2 and 4.5.3. Figure 5 shows the functional block diagram of the PCS and PMA sublayers.

All FC-BaseT PHY implementations shall be compatible at the MDI (see figure 4). Designers are free to implement circuitry within the PCS and PMA in an application-dependent manner provided that the MDI specification is met. Physical implementation of the XGMII is optional. System operation from the

The diagram illustrates the internal structure and data flow of the PCS and PMA layers. It is divided into three main horizontal sections by dashed lines: the XGMII INTERFACE at the top, the PMA SERVICE INTERFACE in the middle, and the MEDIUM DEPENDENT INTERFACE (MDI) at the bottom.

PCS Layer:

- PCS RECEIVE:** Receives data from the XGMII INTERFACE (RXD<31:0>, RXC<3:0>, RX_CLK) and sends it to the PMA RECEIVE block. It also receives a 'config' signal from the PHY CONTROL block.
- PCS TRANSMIT:** Receives data from the PMA TRANSMIT block and sends it to the XGMII INTERFACE (TXD<31:0>, TXC<3:0>, TX_CLK). It also receives a 'tx_mode' signal from the PHY CONTROL block.

PMA Service Interface:

- PCS RECEIVE to PCS TRANSMIT:** Sends 'link_status' and 'rem_rcvr_status' signals.
- PCS TRANSMIT to PCS RECEIVE:** Sends 'loc_rcvr_status' and 'scr_status / pcs_status' signals.
- PCS RECEIVE to PMA RECEIVE:** Sends 'PMA_UNITDATA.indication (tx_symb_vector)'.
- PCS TRANSMIT to PMA TRANSMIT:** Sends 'PMA_UNITDATA.request (tx_symb_vector)'.

PMA Layer:

- CLOCK RECOVERY:** Receives 'recovered_clock' from the PMA RECEIVE block and sends 'received clock' back to it.
- PMA RECEIVE:** Receives data from the PMA TRANSMIT block and sends it to the MDI. It also receives 'PMA_LINK.request (link_control)' and 'PMA_LINK.indication (link_status)' from the PHY CONTROL block.
- PMA TRANSMIT:** Receives data from the PMA RECEIVE block and sends it to the MDI. It also receives 'PMA_LINK.request (link_control)' and 'PMA_LINK.indication (link_status)' from the PHY CONTROL block.
- LINK MONITOR:** Receives 'link_status' from the PCS RECEIVE block and sends 'PMA_LINK.request (link_control)' and 'PMA_LINK.indication (link_status)' to the PHY CONTROL block.
- PHY CONTROL:** Receives 'PMA_LINK.request (link_control)' and 'PMA_LINK.indication (link_status)' from the LINK MONITOR and sends 'PMA_LINK.request (link_control)' and 'PMA_LINK.indication (link_status)' to the PMA RECEIVE and PMA TRANSMIT blocks.

MDI (Medium Dependent Interface):

- Receives data from the PMA RECEIVE block (BI_DA+, BI_DA-, BI_DB+, BI_DB-, BI_DC+, BI_DC-, BI_DD+, BI_DD-).
- Sends data to the PMA TRANSMIT block (BI_DA+, BI_DA-, BI_DB+, BI_DB-, BI_DC+, BI_DC-, BI_DD+, BI_DD-).

4.5.2 PCS overview

In the transmit direction, in normal mode (see 5.3), the PCS transcodes each 36-bit XGMII word in a 33-bit block. Each 33-bit block is divided into three 11-bit transmission characters that are individually scrambled. Each 11-bit scrambled transmission character is then either Schläfli lattice or Trellis encoded in 12 bits (see 5.3.5 and 5.3.6). The defined Schläfli lattice coding defined in 5.3.5 is a proper subset of the Trellis coding defined in 5.3.6. The encoding to be used by the local PHY is dictated by the link partner PHY during

Auto-Negotiation. The 12 bits obtained after encoding are in turn divided in four groups of three bits, each identifying a symbol in the PAM-8 symbol set {-7, -5, -3, -1, +1, +3, +5, +7}. The obtained 4D PAM-8 symbols are passed on to the PMA as a PMA_UNITDATA.request primitive.

In the receive direction, in normal mode (see 5.4), the PCS processes code-groups received from the remote PHY via the PMA and maps them to the XGMII service interface in the receive path. In this receive processing scheme, symbol clock synchronization is done by the PMA receive function.

4.5.3 PMA overview

The PMA sublayer couples messages from the PMA service interface onto the balanced cabling physical medium and provides the link management and PHY Control functions. The PMA provides full duplex communications over four pairs of balanced cabling.

The PMA Transmit function (see 6.2.2) comprises four independent transmitters to generate PAM-8 signals on each of the four pairs BI_DA, BI_DB, BI_DC, and BI_DD.

The PMA Receive function (see 6.2.3) comprises four independent receivers for PAM-8 signals on each of the four pairs BI_DA, BI_DB, BI_DC and BI_DD. The receivers are responsible for acquiring symbol timing and, when operating in normal mode, for cancelling echo, near-end crosstalk, far-end crosstalk, and equalizing the signal. The 4D PAM-8 symbols are provided to the PCS receive function via the PMA_UNITDATA.indication primitive. The PMA also contains functions for Link Monitor.

The PHY Control function (see 6.2.4) generates signals that control the PCS and PMA sublayer operations. PHY Control begins following the completion of Auto-Negotiation and provides the start-up functions required for successful FC-BaseT operation. It determines whether the PHY operates in normal mode, enabling data transmission over the link segment, or whether the PHY sends special PAM-2 code-groups that are used in training mode.

4.6 FC-BaseT service primitives and interfaces

4.6.1 Overview

FC-BaseT transfers data and control information across the following four service interfaces:

- a) XGMII Service Interface (see 4.4);
- b) PMA Service Interface (see 4.6.2);
- c) Medium Dependent Interface (see 6.4); and
- d) Management Function Interface (see 4.6.3).

4.6.2 PMA service interface

4.6.2.1 Overview

FC-BaseT uses the following service primitives to exchange symbol vectors, status indications, and control signals across the PMA service interface:

- a) PMA_TXMODE.indication (tx_mode);
- b) PMA_CONFIG.indication (config);

- c) PMA_UNITDATA.request (tx_symb_vector);
- d) PMA_UNITDATA.indication (rx_symb_vector);
- e) PMA_SCRSTATUS.request (scr_status);
- f) PMA_PCSSTATUS.request (pcs_status);
- g) PMA_RXSTATUS.indication (loc_rcvr_status); and
- h) PMA_REMRXSTATUS.request (rem_rcvr_status).

These service primitives are summarized in figure 6.

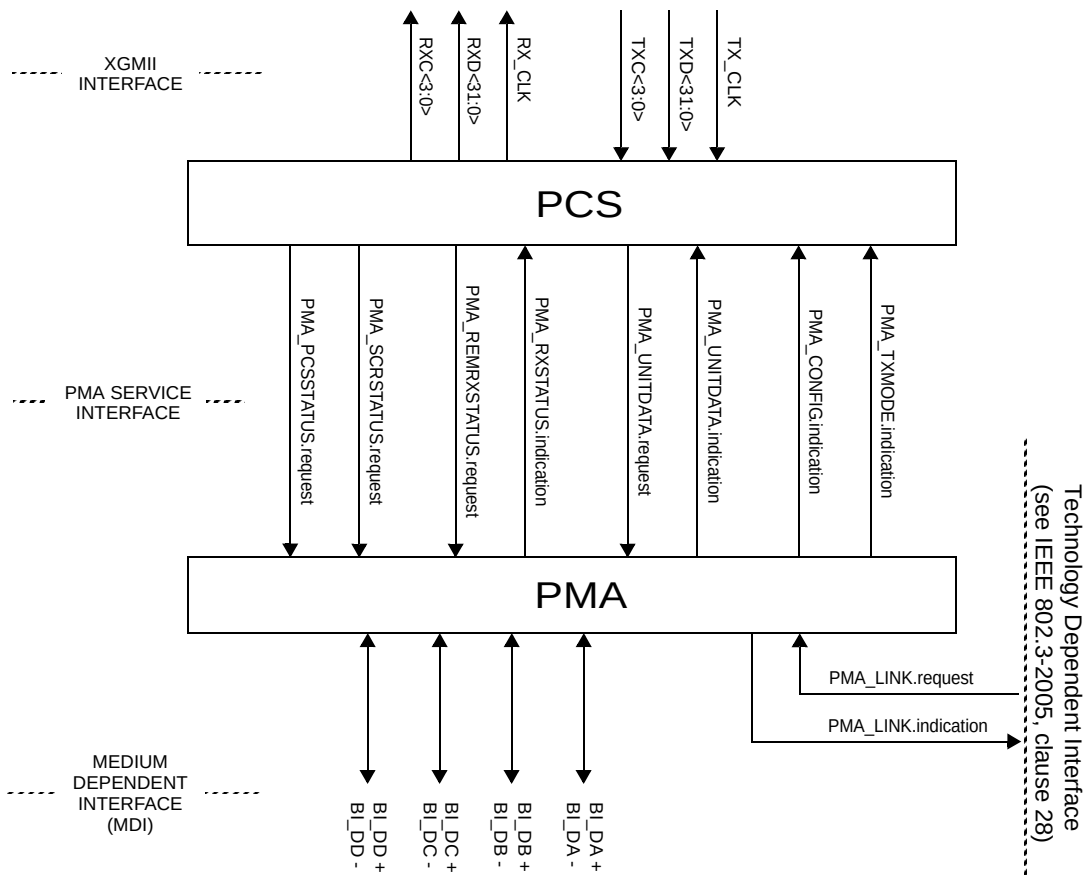


Figure 6 – PCS and PMA service interfaces

4.6.2.2 PMA_TXMODE.indication

Semantics of the primitive: PMA_TXMODE.indication (tx_mode)

This primitive specifies to PCS Transmit via the parameter tx_mode what sequence of code-groups the PCS should be transmitting.

The parameter tx_mode may assume one of the following values:

- a) SEND_Z: This value is continuously asserted when the transmitters are required to be silent;
- b) SEND_T1: This value is continuously asserted when transmission of sequences of 4D Type-1 PAM-2 symbols representing the training mode is to take place;
- c) SEND_T2: This value is continuously asserted when transmission of sequences of 4D Type-2 PAM-2 symbols representing the trained mode is to take place;
- d) SEND_I2: This value is continuously asserted when transmission of sequences of 4D PAM-8 symbols representing the scrambled Idle2 Ordered Set is to take place;
- e) SEND_I3: This value is continuously asserted when transmission of sequences of 4D PAM-8 symbols representing the scrambled Idle3 Ordered Set is to take place; or
- f) SEND_N: This value is continuously asserted when transmission of 4D PAM-8 symbols representing scrambled XGMII words or scrambled Idle3 Ordered Sets in normal mode is to take place.

When generated: The PHY Control function generates PMA_TXMODE.indication messages to indicate a change in tx_mode.

Effect of receipt: Upon receipt of this primitive, the PCS performs its Transmit function (see 5.3).

4.6.2.3 PMA_CONFIG.indication

Semantics of the primitive: PMA_CONFIG.indication (config)

This primitive specifies to the PCS and PMA Transmit functions via the parameter config whether the PHY operates as a Master PHY or as a Slave PHY. The Master-Slave configuration is determined during Auto-Negotiation.

The parameter config may assume one of the following values:

- a) MASTER: This value is continuously asserted when the PHY operates as a Master PHY; or
- b) SLAVE: This value is continuously asserted when the PHY operates as a Slave PHY.

When generated: The PMA generates PMA_CONFIG.indication messages to indicate a change in config.

Effect of receipt: PCS and PMA Clock Recovery perform their functions in Master or Slave configuration according to the value assumed by the parameter config.

4.6.2.4 PMA_UNITDATA.request

Semantics of the primitive: PMA_UNITDATA.request (tx_symb_vector)

This primitive defines the transfer of code-groups in the form of the tx_symb_vector parameter from the PCS to the PMA. The code-groups are obtained in the PCS Transmit function using the encoding rules defined in 5.3 to represent XGMII data and control streams or other sequences. The PMA_UNITDATA.request simultaneously conveys to the PMA via the parameter tx_symb_vector the value of the symbols to be sent over each of the four transmit pairs BI_DA, BI_DB, BI_DC, and BI_DD.

The tx_symb_vector parameter takes on the form:

- a) SYMB_4D: A vector of four multi-level symbols, one for each of the four transmit pairs BI_DA, BI_DB, BI_DC, and BI_DD. Each symbol may assume one of the values in the set $\{-7, -5, -3, -1, +1, +3, +5, +7\}$.

The symbols that are elements of tx_symb_vector are called, according to the pair on which each is transmitted, tx_symb_vector[BI_DA], tx_symb_vector[BI_DB], tx_symb_vector[BI_DC], and tx_symb_vector[BI_DD].

When generated: The PCS generates PMA_UNITDATA.request (SYMB_4D) synchronously with every transmit clock cycle.

Effect of receipt: Upon receipt of this primitive the PMA transmits on the MDI the signals corresponding to the indicated symbols. The parameter tx_symb_vector is also used by the PMA Receive function to process the signals received on pairs BI_DA, BI_DB, BI_DC, and BI_DD for cancelling the echo and near-end crosstalk (NEXT).

4.6.2.5 PMA_UNITDATA.indication

Semantics of the primitive: PMA_UNITDATA.indication (rx_symb_vector)

This primitive defines the transfer of code-groups in the form of the rx_symb_vector parameter from the PMA to the PCS. The PMA_UNITDATA.indication simultaneously conveys to the PCS via the parameter rx_symb_vector the values of the symbols detected on each of the four receive pairs BI_DA, BI_DB, BI_DC, and BI_DD.

The rx_symb_vector parameter takes on the form:

- a) SYMB_4D: A vector of four multi-level symbols that is the receiver's best estimate of the symbols that were sent by the remote transmitter across the four pairs. Each symbol may assume one of the values in the set $\{-7, -5, -3, -1, +1, +3, +5, +7\}$.

The symbols that are elements of rx_symb_vector are called, according to the pair upon which each symbol is received, rx_symbol_vector[BI_DA], rx_symbol_vector[BI_DB], rx_symbol_vector[BI_DC], and rx_symbol_vector[BI_DD].

When generated: The PMA generates PMA_UNITDATA.indication (SYMB_4D) messages synchronously with signals received at the MDI. The nominal rate of the PMA_UNITDATA.indication primitive is governed by the recovered clock.

Effect of receipt: The effect of receipt of this primitive is specified in 5.4.1.

4.6.2.6 PMA_SCRSTATUS.request

Semantics of the primitive: PMA_SCRSTATUS.request (scr_status)

This primitive is generated by PCS Receive to communicate the status of the descrambler for the local PHY. The parameter scr_status conveys to the PMA Receive and PHY Control functions the information that the descrambler has achieved synchronization.

The scr_status parameter may assume one of the following values:

- a) OK: The descrambler has achieved synchronization; or
- b) NOT_OK: The descrambler is not synchronized.

When generated: PCS Receive generates PMA_SCRSTATUS.request messages to indicate a change in scr_status.

Effect of receipt: The effect of receipt of this primitive is specified in 6.2.3 and 6.2.4.

4.6.2.7 PMA_PCSSTATUS.request

Semantics of the primitive: PMA_PCSSTATUS.request (pcs_status)

This primitive is generated by PCS Receive to indicate the fully operational state of the PCS for the local PHY. The parameter pcs_status conveys to the PMA Receive, PHY Control and Link Monitor functions the information that the PCS is operating reliably in data mode.

The pcs_status parameter may assume one of the following values:

- a) OK: The PCS is operating reliably in data mode; or
- b) NOT_OK: The PCS is not operating reliably in data mode.

When generated: PCS Receive generates PMA_PCSSTATUS.request messages to indicate a change in pcs_status.

Effect of receipt: The effect of receipt of this primitive is specified in 6.2.4.

4.6.2.8 PMA_RXSTATUS.indication

Semantics of the primitive: PMA_RXSTATUS.indication (loc_rcvr_status)

This primitive is generated by PMA Receive to indicate the status of the receive link at the local PHY. The parameter loc_rcvr_status conveys information on the status of the receive link to the PCS Transmit, PCS Receive, PHY Control, and Link Monitor functions. The criterion for setting the parameter loc_rcvr_status is left to the implementor. It may be based, for example, on observing the mean-square error at the decision point of the receiver and detecting errors during reception of symbol streams.

The loc_rcvr_status parameter may assume one of the following values:

- a) INIT: This value is asserted when operation of the receive link for the local PHY is unreliable;
- b) READY: This value is asserted when the convergence of the local PHY receiver's adaptive filter parameters is completed, but PCS block synchronization is not yet achieved or the link bit error rate has not yet been evaluated; or
- c) OK: This value is asserted when operation of the receive link for the local PHY is reliable.

When generated: PMA Receive generates PMA_RXSTATUS.indication messages to indicate a change in loc_rcvr_status.

Effect of receipt: The effect of receipt of this primitive is specified in 6.2.4.

4.6.2.9 PMA_REMRXSTATUS.request

Semantics of the primitive: PMA_REMRXSTATUS.request (rem_rcvr_status)

This primitive is generated by PCS Receive to indicate the status of the receive link at the remote PHY (see 6.2.4). The parameter rem_rcvr_status conveys to the PHY Control function the information on whether

reliable operation of the remote PHY is detected or not. Beyond the conditions specified in 6.2.4, the criterion for setting the parameter `rem_rcvr_status` is left to the implementor. It may be based, for example, on asserting `rem_rcvr_status` as INIT until `loc_rcvr_status` is OK and then asserting the detected value of `rem_rcvr_status` after proper PCS receive decoding is achieved.

The `rem_rcvr_status` parameter may assume one of the following values:

- a) INIT: This value is asserted when reliable operation of the receive link for the remote PHY is not detected;
- b) READY: This value is asserted when a sequence of code-groups representing a 4D Type-2 PAM-2 sequence is detected at the MDI; or
- c) OK: This value is asserted when reliable operation of the receive link for the remote PHY is detected.

When generated: The PCS generates `PMA_REMRXSTATUS.request` messages to indicate a change in `rem_rcvr_status` on the basis of signals received at the MDI.

Effect of receipt: The effect of receipt of this primitive is specified in 6.2.4.

4.6.3 Management function interface

4.6.3.1 Overview

FC-BaseT uses the following service primitives to exchange status indications and control signals across the Technology Dependent Interface as specified in IEEE 802.3-2005, clause 28:

- a) `PMA_LINK.request` (`link_control`); and
- b) `PMA_LINK.indication` (`link_status`).

4.6.3.2 PMA_LINK.request

See IEEE 802.3-2005, clause 28.2.6.2.

4.6.3.3 PMA_LINK.indication

See IEEE 802.3-2005, clause 28.2.6.1.