

INTERNATIONAL STANDARD



AMENDMENT 1

**Information technology – Implementation and operation of customer premises cabling –
Part 3: Testing of optical fibre cabling**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2009 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00



ISO/IEC 14763-3

Edition 1.0 2009-11

INTERNATIONAL STANDARD



AMENDMENT 1

**Information technology – Implementation and operation of customer premises
cabling –
Part 3: Testing of optical fibre cabling**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE



ICS 35.200

ISBN 2-8318-1068-4

FOREWORD

Amendment 1 to International Standard ISO/IEC 14763-3 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

2 Normative references

Delete the following references:

IEC 60793-1-20, *Optical fibres – Part 1-20: Measurement methods and test procedures – Fibre geometry*

IEC/PAS 61300-3-43, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-43: Examination and measurements – Mode Transfer Function Measurement for fibre optic sources*

Add the following new references:

IEC 61280-1-4, *Fibre optic communication subsystem test procedures – Part 1-4: General communication subsystems – Light source encircled flux measurement method*

IEC 61280-4-1, *Fibre optic communication subsystem test procedures – Part 4-1: Cable plant and links – Multimode fibre-optic cable plant attenuation measurement*

IEC/PAS 62614, *Fibre optics – Launch condition requirements for measuring multimode attenuation*

3.1 Definitions

Replace the existing term and definition 3.1.7 by the following:

3.1.7

field calibration cord

test cord used for referencing when using the three test cord reference test method

Delete the following terms and definitions:

3.1.5

coupled power ratio (CPR)

3.1.14

relative power distribution

Add, after 3.1.19, the following new terms and definitions:

3.1.20

attenuation

reduction of optical power induced by transmission through a medium such as optical fibre; this is sometimes called insertion loss, L , and is given in dB as $L = 10 \log_{10}(P_{\text{in}}/P_{\text{out}})$, where P_{in} and P_{out} are the power, typically measured in mW, into and out of the cabling

3.1.21

encircled flux

EF

fraction of cumulative near-field power to the total output power as a function of radial distance from the optical centre of the core

3.1.22

OTDR dead zone

distance in which an OTDR cannot detect an event following a reflective event

3.2 Abbreviations

Add, in the existing list, the following:

EF Encircled flux

Remove, from the existing list, the following:

CPR, MPD and RPD

5.4 Documentation

Replace the existing item d) by the following:

d) optical fibre cabling details (fibre core size/MFD; fibre type, e.g. A1a, A1b, A1a.2, B1.1, B1.3)

6.1.3 Power meters

Add, after the first paragraph, the following new paragraphs and NOTE:

When the test set-up (LSPM) is used for a link or channel attenuation, the measurement uncertainty shall not be greater than $\pm 0,02$ dB.

When the test set-up (LSPM) is used for a field check of the reference connectors by measuring the attenuation, the measurement uncertainty should be $< 0,02$ dB.

NOTE It is therefore recommended to use a power meter with a power resolution of at least 2 decimal places.

6.3.2 Reference connector requirements

Add, after Table 3, the following new paragraphs and NOTE:

When the test set-up (LSPM) is also used for a link or channel attenuation the measurement uncertainty should be $< 0,2$ dB.

When the test set-up (LSPM) is used for a field check of the reference connectors by measuring the attenuation, the measurement uncertainty should be $<0,02$ dB.

NOTE It is therefore recommended to use a power meter with a power resolution of at least 2 decimal places.

6.3.3.6 OTDR launch cord

Replace the second paragraph by the following new text:

The launch cord shall be

- longer than the attenuation dead zone of the OTDR (see Annex C for further details),
- long enough for a reliable straight-line fit to be made to the backscatter trace following the dead zone (C1 to C2 in Figure 11) so that reliable insertion loss measurements may be carried out. For example, in multimode fibre installations the length of the launch cord should be at least 75 m,
- terminated at one end with one or more connectors suitable for attachment to the OTDR,
- terminated at the other end with one or more reference connectors compatible with the interface to the installed cabling.

6.3.3.7 OTDR tail cord

Replace the first paragraph by the following new text:

The tail cord shall be

- of a different length than the corresponding launch cord (but longer than the attenuation dead zone of the OTDR, see Annex C or further details),
- long enough for a reliable straight-line fit to be made to the backscatter trace following the dead zone (C3 to C4 in Figure 11), so that reliable insertion loss measurements may be made). For example, in multimode installations the length of the tail cord should be at least 75 m,
- terminated at one end with one or more reference connectors compatible with the interface to the installed cabling.

6.3.4.6 OTDR launch cord

Replace the first paragraph by the following new text:

The launch cord shall be

- longer than the attenuation dead zone of the OTDR,
- long enough for a reliable straight-line fit to be made to the backscatter trace following the dead zone (C1 to C2 in Figure 11), so that reliable insertion loss measurements may be carried out. For example, in single-mode installations the length of the launch cord should be at least 150 m,
- terminated at one end with one or more connectors suitable for attachment to the OTDR, see Annex C for further details,
- terminated at the other end with one or more single-mode reference connectors compatible with the interface to the installed cabling.

6.3.4.7 OTDR tail cord

Replace the first paragraph by the following new text:

The tail cord shall be


- of a different length than the corresponding launch cord (but longer than the attenuation dead zone of the OTDR, see Annex C for further details),
- long enough for a reliable straight-line fit to be made to the backscatter trace following the dead zone (C3 to C4 in Figure 11), so that reliable insertion loss measurements may be carried out. For example, in single-mode installations the length of the tail cord should be at least 150 m,
- terminated at one end with one or more reference connectors compatible with the interface to the installed cabling.

8.1.2 Reference planes

Replace the third paragraph by the following new text:

The test configuration reference planes of a channel are within the equipment cords next to, but excluding, the connections of the equipment cords into the test cords (see Figure 8). The test configuration reference planes of a permanent link are within the test cords next to, and including, the test cord connections which mate to the termination points of the permanent link under test (see Figure 8).

Replace the existing Figure 8 by the following new Figure 8:

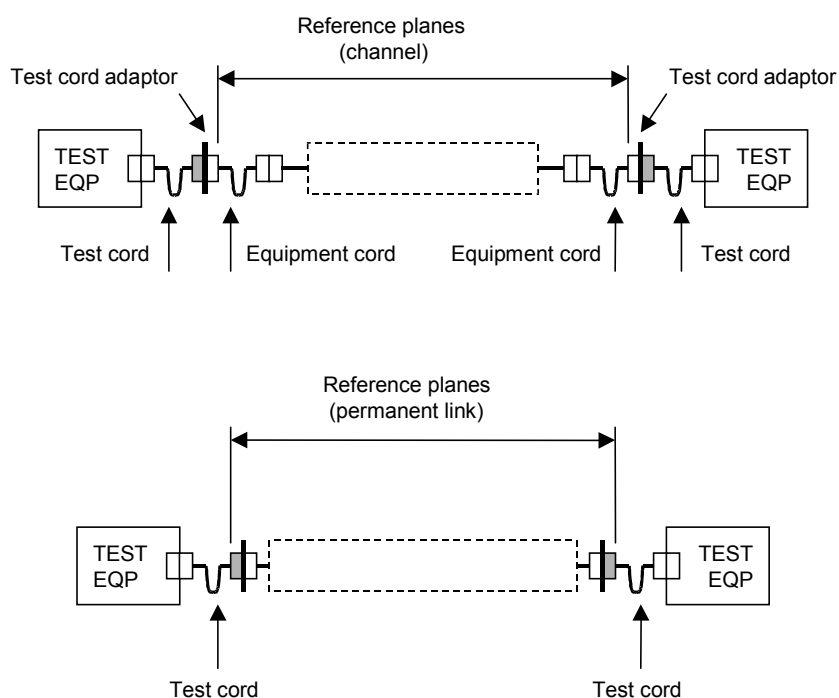

NOTE The dotted area contains cable and may contain splices and additional connections.

Figure 8 – Channel and permanent link test configuration

In the second bullet point after Figure 8 replace “this variable factor” by “these variations”

9.1.1.2 Test method

Replace, in the first paragraph, "3-jumper" by "three test cord reference".

Replace, in the second paragraph, "1-jumper" by "one test cord reference".

Replace the fifth paragraph by the following new text:

The reference measurement, P_0 , shall be recorded in watts or dBm.

Replace the ninth paragraph by the following new text:

The cabling under test shall be connected between the launch and tail cords and the test measurement, P_1 , shall be recorded in watts or dBm.

Figure 9 LSPM 3-jumper attenuation measurement of installed cabling

Replace the title of Figure 9 by the following:

Figure 9 – SSPM three test cord attenuation measurement of installed cabling

Figure 10 LSPM 1-jumper attenuation measurement of installed link

Replace the title of Figure 10 by the following:

Figure 10 – SSPM one test cord attenuation measurement of installed cabling

9.1.1.3 Test result

Replace the first paragraph by the following new text:

For a given wavelength and in a given direction, measured loss is calculated using P_0 and P_1 as follows:

$$L = P_0 - P_1 \quad (\text{dB}) \quad (1)$$

where P_1 and P_0 are expressed in dBm.

Add, before the last paragraph, the following new paragraph:

For example, if the reference power level P_0 is –20 dBm (0,01 mW) and the measured power level P_1 is –23 dBm (0,005 mW) then the loss is 3 dB.

9.1.1.5 Treatment of channel test results

Add, before the existing paragraph, the following new text:

The use of reference terminations on the test cords affects the calculation of limits of testing for channel attenuation. The referencing procedure involves the interconnection of reference terminations in accordance with Table 2. The measurement of the channel includes connection of the test cords to non-reference terminations, which for ISO/IEC 11801 compliant connecting hardware, are specified in Table 4.

Using the default three test cord reference method specified in 9.1.1.2, the limit of testing for channel attenuation is