



RULES FOR BUILDING AND CLASSING

STEEL VESSELS 2018

PART 5A & 5B SPECIFIC VESSEL TYPES

Common Structural Rules for Bulk Carriers and Oil Tankers

(These Rules are applicable for those vessels having construction contracts signed 1 July 2017 to 30 June 2018)

**American Bureau of Shipping
Incorporated by Act of Legislature of
the State of New York 1862**

**© 2017 American Bureau of Shipping. All rights reserved.
ABS Plaza
16855 Northchase Drive
Houston, TX 77060 USA**

**(Copyright in these Rules is also owned by the
other IACS members as at 1st July 2012.
Copyright © 1st July IACS 2012)**

Foreword

These Rules published on 1 July 2017 consist of:

Common Structural Rules for Bulk Carriers and Oil Tankers – 1 January 2017
Corrigenda No. 1 (to 1 January 2017 version) – effective 1 July 2017

In association with the harmonization of the Common Structural Rules (CSR) for Bulk Carriers and Oil Tankers, the three Sub-parts, 5A, 5B, and 5C, of Part 5 of the *Rules for Building and Classing Steel Vessels*, 2017 are as follows:

Contents

Part 5A:	General Hull Requirements (IACS CSR Part 1)
Part 5B:	Ship Types (IACS CSR Part 2)
Part 5C:	This Part is divided into two separate booklets as follows:
Chapters 1 to 6:	Tankers and Bulk Carriers not covered by Part 5A and Part 5B and Container Carriers
Chapters 7 to 13:	Passenger Vessels, Liquefied Gas Carriers, Chemical Carriers, Vessels Intended to Carry Vehicles, Water Carriers, Membrane Tank LNG Carriers, and Vessels Using Gases or other Low-Flashpoint Fuels.

Application – Oil Tankers

The structural requirements in Part 5A, Pt 1 and Part 5B, Pt 2, Ch 2 of the Rules are applicable for double hull oil tankers of 150 m in length and upward, with structural arrangements as specified in Part 5A, Pt 1, Ch 1, Sec 1, [1.3].

For oil tankers with structural arrangements not covered by Part 5A, Pt 1 and Part 5B, Pt 2, Ch 2, the requirements in Part 5C, Chapters 1 or 2, are to be complied with.

Application – Bulk Carriers

The structural requirements in Part 5A, Pt 1 and Part 5B, Pt 2, Ch 1 of the Rules are applicable for single side skin and double side skin bulk carriers of 90m in length and upward, with structural arrangements as specified in Part 5A, Pt 1, Ch 1, Sec 1, [1.2].

For vessels intended to carry ore or bulk cargoes, other than the single side skin or double side skin bulk carriers of 90 m in length and upward with structural arrangements as specified in Part 5A, Pt 1 and Part 5B, Pt 2, Ch 1, the requirements in Part 5C, Chapters 3 or 4 are to be complied with.

Application – ABS Construction Monitoring Program

These compulsory requirements for **CSR** notation are specified in Part 5C, Appendix 2.


Application – Onboard Systems for Oil Tankers and Bulk Carriers

The onboard systems for all tankers are to comply with the requirements of Part 5C, Chapter 1, Section 7, and for all bulk carriers are to comply with the requirements of Part 5C, Chapter 3, Section 7 of the Rules.

Application – References

Other Parts of the ABS Rules that are referenced within Part 5A, 5B, or 5C are also to be applied.

The following flow chart indicates the application of the Rules and typical Class Notations for tanker and bulk carrier vessels, of which arrangements and scantlings are in full compliance with the Rules:

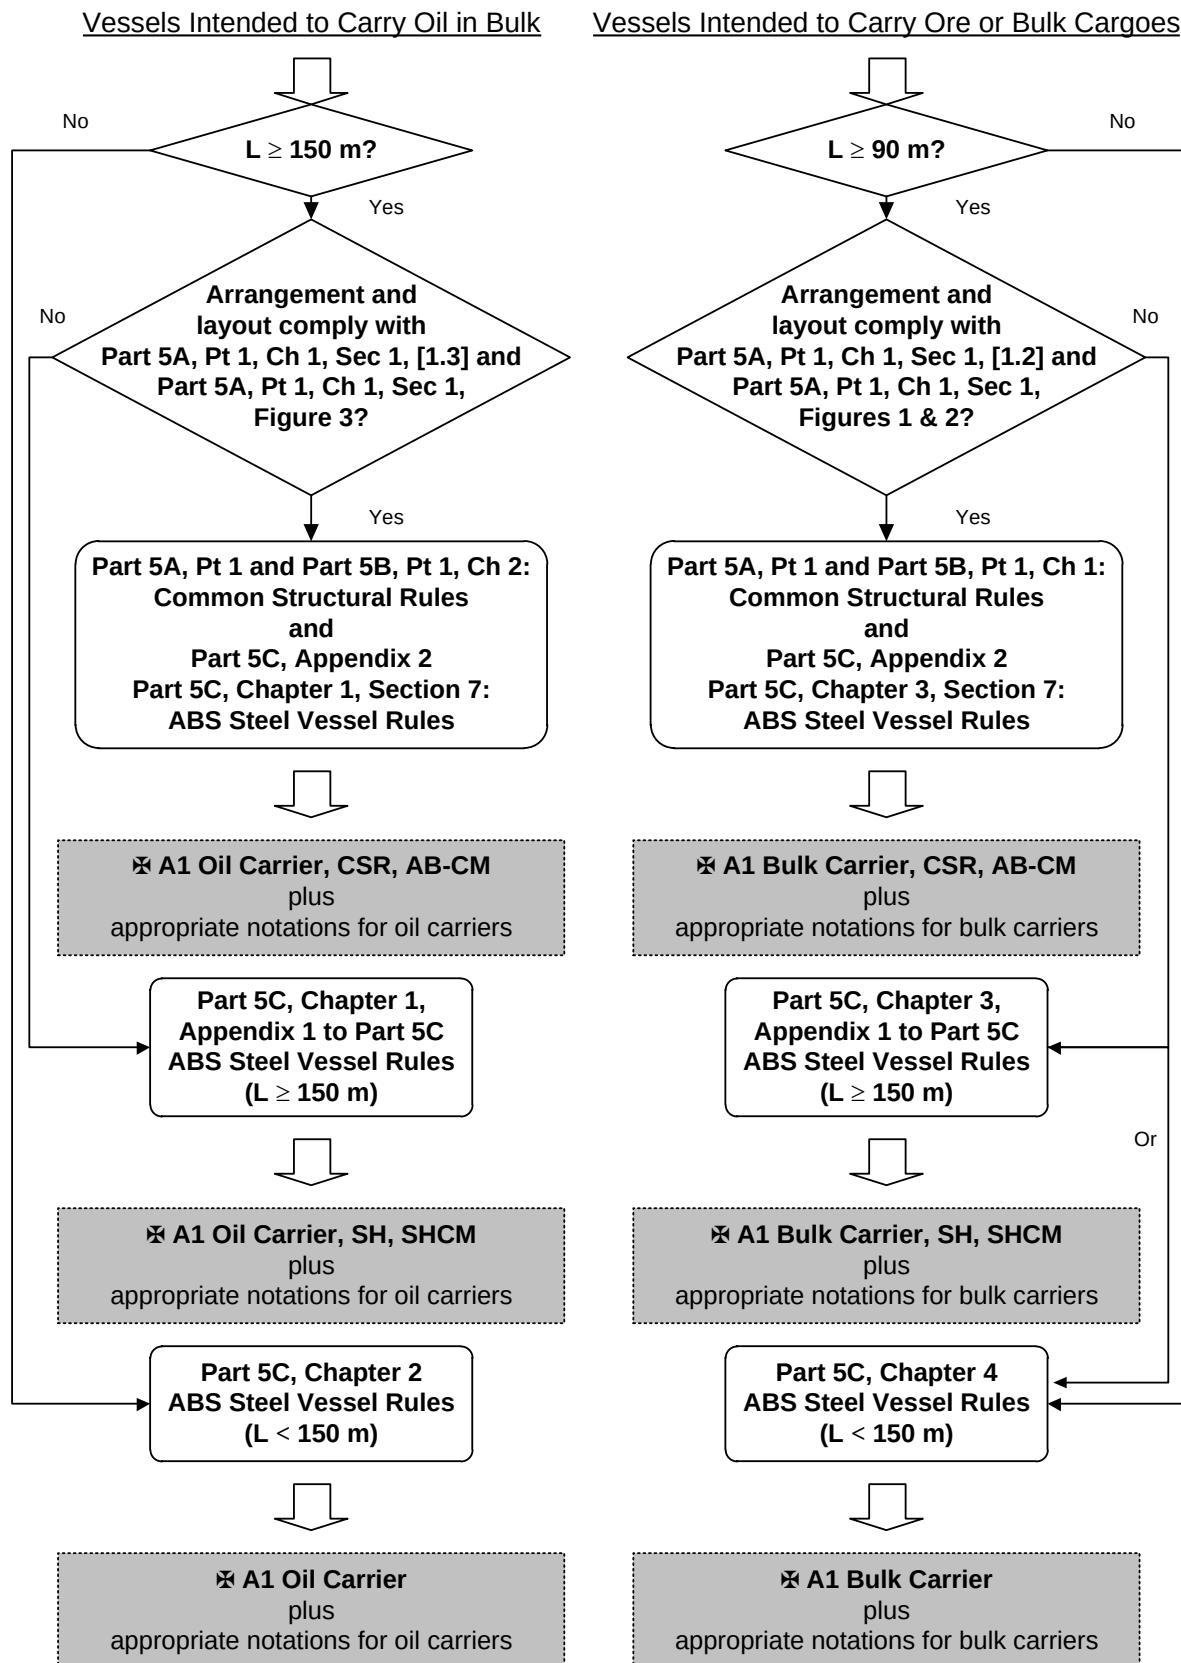

COMMON STRUCTURAL RULES

Full Revision History for CSR BC & OT

Summary of changes from the 01 JAN 2014 Rules

	Amendment Type / No.	Adoption Date	Rule Version Date	Effective Date
1	Rule Change Notice 1	22 DEC 2014	01 JAN 2014	01 JUL 2015
2	Urgent Rule Change Notice 1	22 DEC 2014	01 JAN 2014	01 JUL 2015
3	Corrigenda 1	20 JAN 2016	01 JAN 2015	01 JUL 2015
4	Urgent Rule Change Notice 1 (2016)	09 DEC 2016	01 JAN 2015	01 JUL 2017
5	Corrigenda 1 (2017)	26 APRIL 2017	01 JAN 2017	01 JUL 2017

Common Structural Rules for Bulk Carriers and Oil Tankers

Corrigenda 1 to 01 January 2017 version

Note: This Corrigenda enters into force on **1st July 2017**.

Copyright in these Common Structural Rules is owned by each IACS Member as at 1st January 2014.
Copyright © IACS 2014.

The IACS members, their affiliates and subsidiaries and their respective officers, employees or agents (on behalf of whom this disclaimer is given) are, individually and collectively, referred to in this disclaimer as the "IACS Members". The IACS Members assume no responsibility and shall not be liable whether in contract or in tort (including negligence) or otherwise to any person for any liability, or any direct, indirect or consequential loss, damage or expense caused by or arising from the use and/or availability of the information expressly or impliedly given in this document, howsoever provided, including for any inaccuracy or omission in it. For the avoidance of any doubt, this document and the material contained in it are provided as information only and not as advice to be relied upon by any person.

Any dispute concerning the provision of this document or the information contained in it is subject to the exclusive jurisdiction of the English courts and will be governed by English law.

CONTENTS

PART 1 GENERAL HULL REQUIREMENTS	3
CHAPTER 1 RULE GENERAL PRINCIPLES	3
SECTION 2 RULE PRINCIPLES	3
SECTION 5 LOADING MANUAL AND LOADING INSTRUMENTS	4
CHAPTER 3 STRUCTURAL DESIGN PRINCIPLES	5
SECTION 6 STRUCTURAL DETAIL PRINCIPLES	5
CHAPTER 4 LOADS	7
SECTION 4 HULL GIRDER LOADS	7
SECTION 6 INTERNAL LOADS	7
SECTION 8 LOADING CONDITIONS	10
CHAPTER 5 HULL GIRDER STRENGTH	11
SECTION 1 HULL GIRDER YIELDING STRENGTH	11
APPENDIX 1 DIRECT CALCULATION OF SHEAR FLOW	12
APPENDIX 2 HULL GIRDER ULTIMATE CAPACITY	13
CHAPTER 7 DIRECT STRENGTH ANALYSIS	14
SECTION 2 CARGO HOLD STRUCTURAL STRENGTH ANALYSIS	14
CHAPTER 8 BUCKLING	16
SECTION 2 SLENDERNESS REQUIREMENTS	16
SECTION 5 BUCKLING CAPACITY	17
CHAPTER 9 FATIGUE	18
SECTION 1 GENERAL CONSIDERATION	18
SECTION 3 FATIGUE EVALUATION	18
SECTION 6 DETAIL DESIGN STANDARD	19
CHAPTER 10 OTHER STRUCTURES	20
SECTION 1 FORE PART	20
SECTION 2 MACHINERY SPACE	21
SECTION 3 AFT PART	22
SECTION 4 TANKS SUBJECT TO SLOSHING	22
CHAPTER 12 CONSTRUCTION	24
SECTION 3 DESIGN OF WELD JOINTS	24
CHAPTER 13 SHIP IN OPERATION-RENEWAL CRITERIA	25
SECTION 1 PRINCIPLES AND SURVEY REQUIREMENTS	25
PART 2 SHIP TYPES	26
CHAPTER 1 BULK CARRIERS	26
SECTION 2 STRUCTURAL DESIGN PRINCIPLES	26
SECTION 3 HULL LOCAL SCANTLINGS	27
SECTION 4 HULL LOCAL SCANTLINGS FOR BULK CARRIERS L<150M	28
SECTION 5 CARGO HATCH COVERS	29
CHAPTER 2 OIL TANKERS	30
SECTION 3 HULL LOCAL SCANTLING	30

PART 1 GENERAL HULL REQUIREMENTS

CHAPTER 1 RULE GENERAL PRINCIPLES

SECTION 2 RULE PRINCIPLES

Table 1 : Load scenarios and corresponding rule requirements

Operation	Load type	Design load scenario ~~(specified in Ch 4, See 7)~~	Acceptance criteria ~~(specified in Ch 6 and Ch 7)~~
Seagoing operations			
Transit	Static and dynamic loads in heavy weather	S + D	AC-SD
	Impact loads in heavy weather	Impact (I)	AC-I
	Internal sloshing loads	Sloshing (SL)	AC-S
	Cyclic wave loads	Fatigue (F)	-
BWE by flow through or sequential methods	Static and dynamic loads in heavy weather	S + D	AC-SD
Harbour and sheltered operations			
Loading, unloading and ballasting	Typical maximum loads during loading, unloading and ballasting operations	S	AC-S
Tank testing	Typical maximum loads during tank testing operations	S	AC-S
Special conditions in harbour	Typical maximum loads during special operations in harbour, e.g. propeller inspection afloat or dry-docking loading conditions	S	AC-S
Accidental condition			
Flooded conditions	Typically maximum loads on internal watertight subdivision structure in accidental flooded conditions	A	AC-SD AC-S

SECTION 5 LOADING MANUAL AND LOADING INSTRUMENTS

2 LOADING MANUALS

2.3 Requirements specific to bulk carriers

2.3.2

The loading manual is to describe:

- Envelope results and permissible limits of still water bending moments and shear forces in the ~~hold~~ flooded condition~~s~~ according to Ch 4, Sec 4,
- The cargo hold(s) or combination of cargo holds that might be empty at full draught. If no cargo hold is allowed to be empty at full draught, this is to be clearly stated in the loading manual,
- Maximum allowable and minimum required mass of cargo and double bottom contents of each hold as a function of the draught at mid-hold position as defined in Ch 4, Sec 8, [4.3],
- Maximum allowable and minimum required mass of cargo and double bottom contents of any two adjacent holds as a function of the mean draught in way of these holds. This mean draught may be calculated by averaging the draught of the two mid-hold positions as defined in Ch 4, Sec 8, [4.3],
- Maximum allowable tank top loading together with specification of the nature of the cargo for cargoes other than bulk cargoes,
- Maximum allowable load on deck and hatch covers. If the ship is not approved to carry load on deck or hatch covers, this is to be clearly stated in the loading manual,
- Maximum rate of ballast change together with the advice that a load plan is to be agreed with the terminal on the basis of the achievable rates of change of ballast.

CHAPTER 3

STRUCTURAL DESIGN PRINCIPLES

SECTION 6 STRUCTURAL DETAIL PRINCIPLES

10 BULKHEAD STRUCTURE

10.4 Corrugated bulkhead


10.4.2 Construction

The main dimensions a , b_{f-cg} , R , e , b_{w-cg} , d_{cg} , t_f , t_w , s_{cg} of corrugated bulkheads are defined in Figure 21.

The corrugation angle ϕ is not to be less than 55° .

When welds in a direction parallel to the bend axis are provided in the zone of the bend, the welding procedures are to be submitted to the Society for approval.

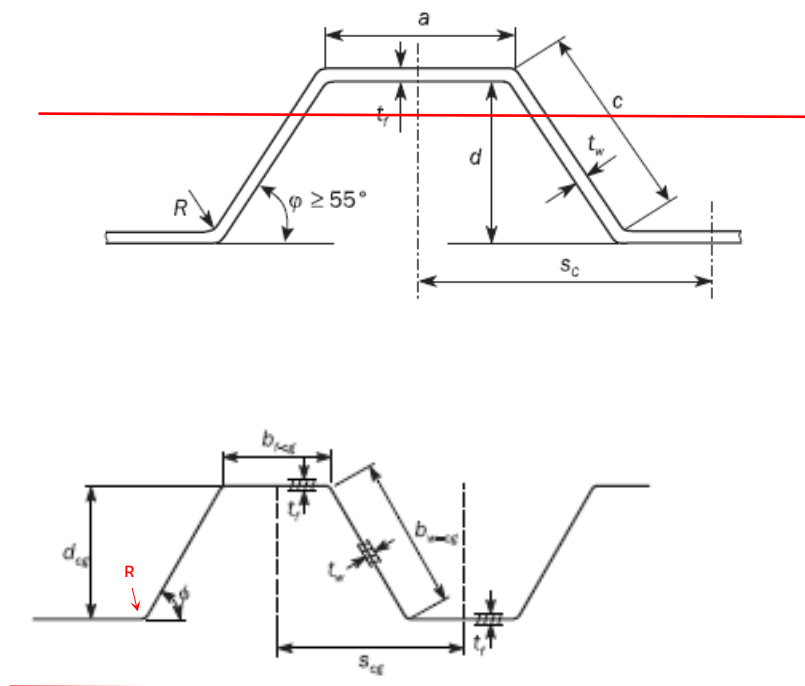Figure 21 : Dimensions of a corrugated bulkhead



10.4.3 Corrugated bulkhead depth

$$d = \frac{1000 \ell_c}{C}$$

The depth of the corrugation, d_{cg} , in mm, is not to be less than:

$$d_{cg} = \frac{1000 \ell_c}{C}$$

where:

ℓ_c : Mean span of considered corrugation, in m, as defined in [10.4.5].

C : Coefficient to be taken as:

C = 15 for tank and water ballast cargo hold bulkheads.

C = 18 for dry cargo hold bulkheads.

10.4.4 Actual section modulus of corrugations

The net section modulus of a corrugation may be obtained, in cm³, from the following formula:

$$Z = \left[\frac{d(3at_f + ct_w)}{6} \right] 10^{-3}$$

$$Z = \left[\frac{d_{cg}(3b_{f-cg}t_f + b_{w-cg}t_w)}{6} \right] 10^{-3}$$

where:

t_f, t_w : Net thickness of the plating of the corrugation, in mm, shown in Figure 21.

$d_{cg}, b_{f-cg}, b_{w-cg}$: Dimensions of the corrugation, in mm, shown in Figure 21.

Where the web continuity is not ensured at ends of the bulkhead, the net section modulus of a corrugation is to be obtained, in cm³, from the following formula:

$$Z = 0.5 a t_f d 10^{-3}$$

$$Z = 0.5 b_{f-cg} t_f d_{cg} 10^{-3}$$

CHAPTER 4

LOADS

SECTION 4 HULL GIRDER LOADS

SYMBOLS

...

C_w : Wave coefficient, ~~in m~~ to be taken as:

$$C_w = 10.75 - \left(\frac{300 - L}{100} \right)^{1.5} \quad \text{for } 90 \text{ m} \leq L \leq 300 \text{ m}$$

$$C_w = 10.75 \quad \text{for } 300 \text{ m} < L \leq 350 \text{ m}$$

$$C_w = 10.75 - \left(\frac{L - 350}{150} \right)^{1.5} \quad \text{for } 350 \text{ m} < L \leq 500 \text{ m}$$

....


SECTION 6 INTERNAL LOADS

6 SLOSHING PRESSURES IN TANKS

6.3 Sloshing pressure due to longitudinal liquid motion

6.3.4 Sloshing pressure on internal web frames or transverse stringers adjacent to a transverse bulkhead

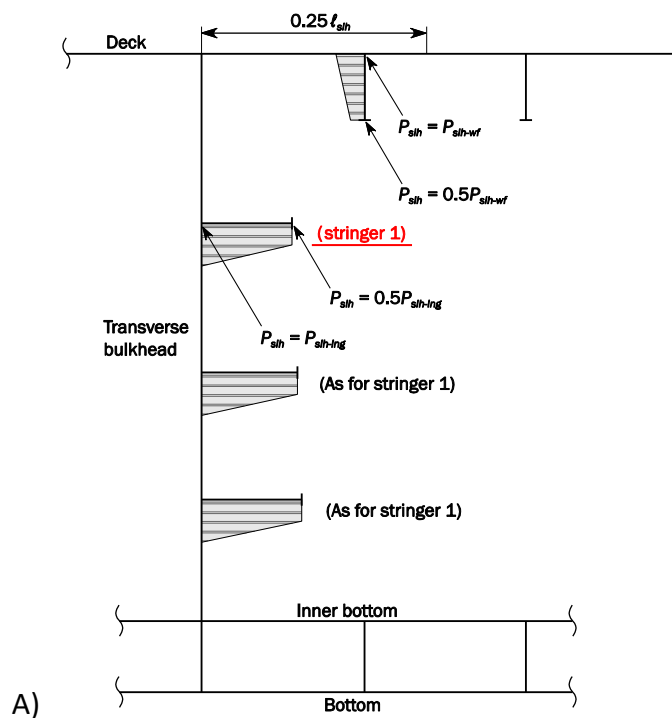Figure 13 : Sloshing pressure distribution on transverse stringers and web frames



6.4.3 Sloshing pressure in way of longitudinal bulkheads

The sloshing pressure in way of longitudinal bulkheads including wash bulkheads due to transverse liquid motion, P_{slh-t} , in kN/m², for a particular filling level, is to be taken as:

$$P_{slh-t} = 7 \rho_{slh} g f_{slh} \left(\frac{b_{slh}}{B} - 0.3 \right) GM^{0.75}$$

where:

b_{slh} : Effective sloshing breadth defined in [6.4.2].


GM : Metacentric height, given in Ch 4, Sec 3, [2.1.1].

For the calculation of sloshing pressure in ballast tanks the 'ballast condition' is to be used for oil tankers and the 'normal ballast condition' for bulk carriers.

For the calculations of sloshing pressure in cargo tanks of oil tankers, the 'partial load condition' is to be used.

f_{slh} : Coefficient defined in [6.3.3].

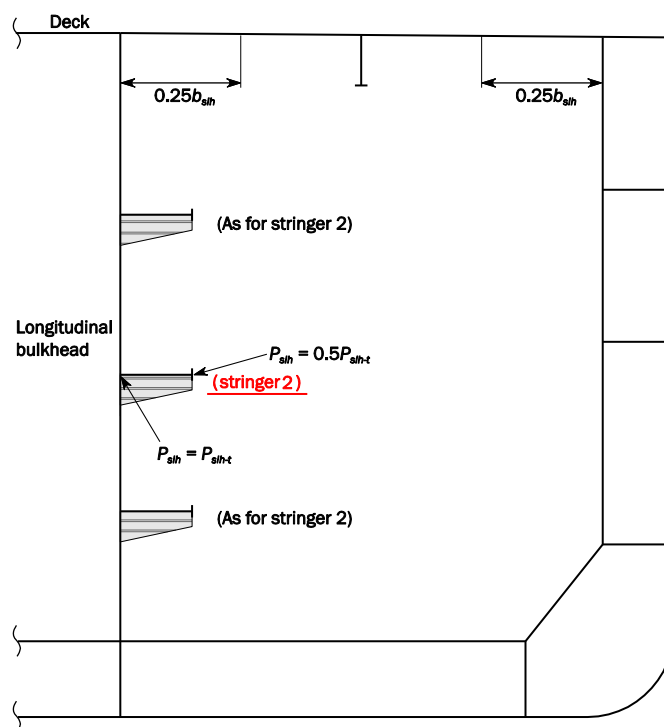Figure 14 : Sloshing pressure distribution on longitudinal stringers and girders



7 DESIGN PRESSURE FOR TANK TESTING

7.1 Definition

7.1.1

The actual strength testing is to be carried out in accordance with Ch 1, Sec 2, [3.8.4]. In order to assess the structure, static design pressures are to be applied.

The design pressure for tank testing, P_{ST} , in kN/m², is to be taken as:

$$P_{ST} = 10 (z_{ST} - z)$$

where:

z_{ST} : Design testing load height, in m, as defined in Table 13.

Table 13 : Design testing load height z_{ST}

Compartment	z_{ST}
Hopper side tanks, topside tanks, double side tanks, fore and aft peaks used as tank, ~~cofferdams~~	The greater of the following: $z_{ST} = z_{top} + h_{air}$ $z_{ST} = z_{top} + 2.4$

(partial table shown only)

SECTION 8 LOADING CONDITIONS

3 OIL TANKERS

3.1 Specific design loading conditions

3.1.1 Seagoing conditions

The following seagoing loading conditions are to be included, as a minimum, in the loading manual:

a) Heavy ballast condition where the ballast tanks may be full, partially full or empty. Where ballast tanks are partially full, the conditions in [2.2.1] are to be complied with. The fore peak water ballast tank is to be full, if fitted. If upper and lower fore peak tanks are fitted, the lower is required to be full and the upper tank may be full, partially full or empty. All the cargo tanks are to be empty including cargo tanks suitable for the carriage of water ballast at sea. The draught at the forward perpendicular is not to be less than that for the normal ballast condition. The propeller is to be fully immersed. The trim is to be by the stern and is not to exceed 0.015 ~~L~~L.

4 BULK CARRIERS

4.1 Specific design loading condition

4.1.1 Seagoing conditions

The following seagoing loading conditions are to be included, as a minimum, in the loading manual:

a) Cargo loading conditions as defined in [4.1.2] to [4.1.4].

b) Heavy ballast condition where the ballast tanks may be full, partially full or empty. Where ballast tanks are partially full, the conditions in [2.2.1] are to be complied with. The propeller immersion/ D_p is to be at least 60%. The trim is to be by the stern and is not to exceed 0.015 ~~L~~L. The moulded forward draught is not to be taken less than the smaller of 0.03 L or 8 m.

CHAPTER 5

HULL GIRDER STRENGTH

SECTION 1 HULL GIRDER YIELDING STRENGTH

3 HULL GIRDER SHEAR STRENGTH ASSESSMENT

3.4 Effective net thickness for longitudinal bulkheads between cargo tanks of oil tankers

3.4.4 Shear force correction for a ship with two longitudinal bulkheads between the cargo tanks

...

f_3 : Shear force distribution factor, as defined in Table 57.

A_{1-n50} , A_{2-n50} , A_{3-n50} : Net areas, as defined in ~~Table 5~~ Table 7, in m^2 .

3.5 Effective net thickness for longitudinal bulkheads between cargo tanks of oil tankers - Correction due to loads from transverse bulkhead stringers

3.5.1

In way of transverse bulkhead stringer connections, within areas as specified in ~~Figure 7~~ Figure 8, the equivalent net thickness of plate, $t_{sti-k-n50}$ in mm, where the index k refers to the identification number of the stringer, is not to be taken greater than:

APPENDIX 1

DIRECT CALCULATION OF SHEAR FLOW

1 CALCULATION FORMULA

1.2 Determinate shear flow

1.2.2

Assuming the cross section is composed of line segments as shown in Figure 1, the determinate shear flow can be calculated by the following equation.

$$q_{Dk} = q_D(\ell) = -\frac{t_{n50} \ell}{2 \times 10^6 I_{y-n50}} (z_k + z_i - 2z_n) + q_{Di}$$


where:

q_{Dk}, q_{Di} : Determinate shear flow at node k and node i respectively, in N/mm.

ℓ : Length of line segments, in m.

z_k, z_i : Z coordinate of the end point of line segment, in m, as defined in Figure 1.

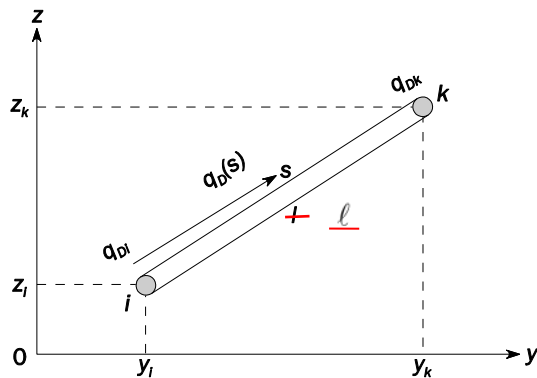Figure 1 : Definition of line segment



APPENDIX 2 HULL GIRDER ULTIMATE CAPACITY

SYMBOLS

For symbols not defined in this article, refer to Ch 1, Sec 4.

I_{y-n50} : Moment of inertia, in m^4 , of the hull transverse section around its horizontal neutral axis, to be calculated according to Ch 5, Sec 1.

Z_{B-n50}, Z_{D-n50} : Section moduli, in m^3 , at bottom and deck, respectively, defined in Ch 5, Sec 1.

R_{eHs} : Minimum yield stress, in N/mm^2 , of the material of the considered stiffener.

R_{eHp} : Minimum yield stress, in N/mm^2 , of the material of the considered plate.

A_{s-n50} : Net sectional area, in cm^2 , of stiffener, without attached plating.

A_{p-n50} : Net sectional area, in cm^2 , of attached plating.

z_i : z coordinate, in m, of centre of gravity of the i^{th} element.

CHAPTER 7

DIRECT STRENGTH ANALYSIS

SECTION 2 CARGO HOLD STRUCTURAL STRENGTH ANALYSIS

4 LOAD APPLICATION

4.4 Procedure to adjust hull girder shear forces and bending moments

4.4.8 Procedure to adjust vertical and horizontal bending moments for midship cargo hold region

...

$M_{line\ load}$: Vertical bending moment, in kNm, at position x , due to application of vertical line loads at frames according to method 2, to be taken as:

$$M_{line\ load} = - (x - x_{aft}) F - \sum_i (x - x_i) \delta w_i \text{ when } x_i < x$$

F : Reaction force, in kN, at model ends due to application of vertical loads to frames as defined in Table 7.

X : X-coordinate, in m, of frame in way of the mid-hold.

δw_i : vertical load, in kN, at web frame station i applied to generate required shear force.

$\delta w_i = - \delta w_1$ when frame i is within after hold

$\delta w_i = \delta w_2$ when frame i is within mid-hold

$\delta w_i = - \delta w_3$ when frame i is within forward hold

In case the target horizontal bending moment needs to be reached, an additional horizontal bending moment is to be applied at the ends of the cargo tank FE model to generate this target value within the mid-hold. The additional horizontal bending moment is to be taken as:

...

4.5 Procedure to adjust hull girder torsional moments

4.5.2 Torsional moment due to local loads

Torsional moment, in kNm, at longitudinal station i due to local loads, M_{T-FEMi} in kNm, is determined by the following formula (see Figure 20):

$$M_{T-FEMi} = \sum_k [f_{hik}(z_{ik} - z_r)] - \sum_k (f_{vik}y_{ik})$$

where:

M_{T-FEMi} : Lumped torsional moment, in kNm, due to local load at longitudinal station i .

z_r : Vertical coordinate of torsional reference point, in m:

For bulk carrier, $z_r = 0$.

For oil tanker, $z_r = z_{sc}$, shear centre at the middle of the mid-hold.

f_{hik} : Horizontal nodal force, in kN, of node k at longitudinal station i .

f_{vik} : Vertical nodal force, in kN, of node k at longitudinal station i .

y_{ik} : Y-coordinate, in m, of node k at longitudinal station i .

z_{ik} : Z-coordinate, in m, of node k at longitudinal station i .

M_{T-FEM0} : Lumped torsional moment, in kNm, due to local load at aft end of the FE model (forward end for foremost cargo hold model), taken as:

$$M_{T-FEM0} = -\sum_k [f_{h0k}(z_{0k} - z_r)] + \sum_k (f_{v0k}y_{0k}) + R_{H_fwd}(z_{ind} - z_r) \text{ for foremost cargo hold model}$$

$$M_{T-FEM0} = \sum_k [f_{h0k}(z_{0k} - z_r)] - \sum_k (f_{v0k}y_{0k}) + R_{H_aft}(z_{ind} - z_r) \text{ for the other cargo hold models}$$

R_{H_fwd} : Horizontal reaction forces, in kN, at the forward end, as defined in [4.4.3].

R_{H_aft} : Horizontal reaction forces, in kN, at the aft end, as defined in [4.4.3].

z_{ind} : Vertical coordinate, in m, of independent point as defined in [2.5.3].

CHAPTER 8

BUCKLING

SECTION 2 SLENDERNESS REQUIREMENTS

5 BRACKETS

5.3 Edge reinforcement

5.3.1 Edge reinforcements of bracket edges

The depth of stiffener web, h_w in mm, of edge stiffeners in way of bracket edges is not to be less than:

$$h_w = C l_b / \sqrt{1000} \sqrt{\frac{R_{eH}}{235}} \quad \text{or 50 mm, whichever is greater.}$$

where:

C : Slenderness coefficient taken as:

$C = 75$ for end brackets.

$C = 50$ for tripping brackets.

R_{eH} : Specified minimum yield stress of the stiffener material, in N/mm².



SECTION 5 BUCKLING CAPACITY

3 BUCKLING CAPACITY OF OTHER STRUCTURES (RCN1 TO 01 JAN 2014)

3.1 Struts, pillars and cross ties

3.1.3 Elastic torsional buckling stress

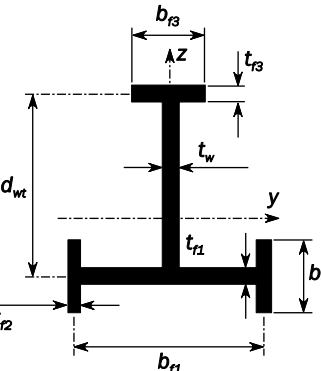Table 7 Cross sectional properties

	~~$I_{sv-n50} = \frac{1}{3}(b_{fu}t_f^3 + 2d_{wt}t_w^3)10^{-4}$~~ $I_{sv} = \frac{1}{3}(b_{fu}t_f^3 + 2d_{wt}t_w^3)10^{-4}$	cm ⁴
	$y_0 = 0$	cm
	$z_0 = -\frac{d_{wt}^2t_w10^{-1}}{2d_{wt}t_w + b_ft_f} - \frac{0.5d_{wt}^2t_w10^{-1}}{d_{wt}t_w + b_ft_f/6}$	cm
	$c_{warp} = \frac{b_{fu}^2d_{wt}^3t_w(3d_{wt}t_w + 2b_ft_f)}{12(6d_{wt}t_w + b_ft_f)}10^{-6}$	cm ⁶
	$I_{sv} = \frac{1}{3}(b_{f1}t_{f1}^3 + 2b_{f2}t_{f2}^3 + b_{f3}t_{f3}^3 + d_{wt}t_w^3)10^{-4}$	cm ⁴
	$y_0 = 0$	cm
	$z_0 = z_s - \frac{(b_{f3}d_{wt}t_{f3} + 0.5d_{wt}^2t_w)10^{-1}}{d_{wt}t_w + b_{f1}t_{f1} + 2b_{f2}t_{f2} + b_{f3}t_{f3}}$	cm
	$c_{warp} = \left(I_{f1}z_s^2 + \frac{I_{f2}b_{f1}^2}{200} + I_{f3}\left(\frac{d_{wt}}{10} - z_s\right)^2 \right)$	cm ⁶
	$I_{f1} = \left(\frac{(b_{f1} - t_{f2})^3t_{f1}}{12} + \frac{b_{f2}t_{f2}b_{f1}^2}{12 \cdot 2} \right)10^{-4}$	cm ⁴
	$I_{f2} = \frac{b_{f2}^3t_{f2}}{12}10^{-4}$	cm ⁴
	$I_{f3} = \frac{b_{f3}^3t_{f3}}{12}10^{-4}$	cm ⁴
	$z_s = \frac{I_{f3}d_{wt}}{I_{f1} + I_{f3}}10^{-1}$	cm

CHAPTER 9

FATIGUE

SECTION 1 GENERAL CONSIDERATION

6 LOADING CONDITIONS

6.3 Loading conditions for bulk carriers

6.3.1

Table 3 Fraction of time for each loading condition of bulk carriers

Ship length	Loading conditions	$\alpha_{(j)}$	
		BC-A	BC-B, BC-C
L < 200 m	Homogeneous	0.60	0.70
	Alternate	0.10	-
	Normal Ballast ⁽¹⁾	0.15	0.05
	Heavy Ballast ⁽¹⁾	0.15	0.25
L ≥ 200 m	Homogeneous	0.25	0.50
	Alternate	0.25	-
	Normal Ballast	0.20	0.20
	Heavy Ballast	0.30	0.30
(1) For BC-B and BC-C without heavy ballast cargo hold, fraction of time $\alpha_{(j)}$ for normal ballast is ~~30%~~ <u>0.30</u> and for heavy ballast ~~0%~~ .			

SECTION 3 FATIGUE EVALUATION

3.2 Mean stress effect

3.2.1 Correction factor for mean stress effect

...

$\sigma_{mean, i(j)}$: Fatigue mean stress, in N/mm², for base material calculated according to [3.2.2] or welded joint calculated according to ~~[3.2.2],~~ [3.2.3] or [3.2.4] as applicable.






SECTION 6 DETAIL DESIGN STANDARD

4 HOPPER KNUCKLE CONNECTION

4.1 Design standard C to H

4.1.6

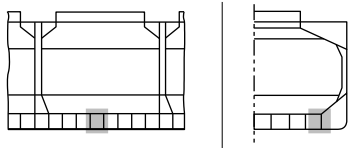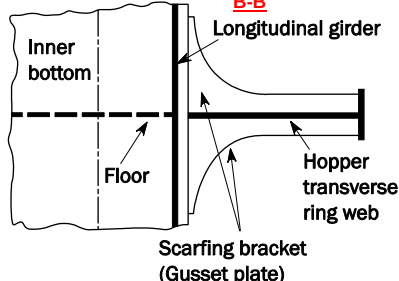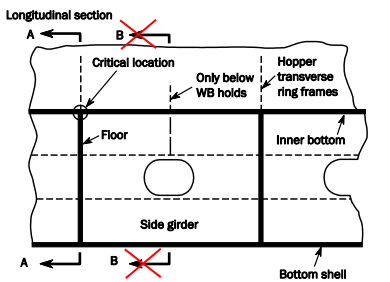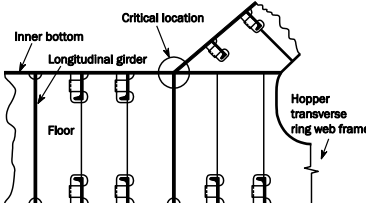Table 5 Design standard E – hopper knuckle connection detail, welded, bulk carrier

Connections of floors in double bottom tanks to hopper tanks	
Welded knuckle connection of hopper tank sloping plating to inner bottom plating	
Critical areas	Design standard E
	a) Improvement at the knuckles No scallop. Full or partial penetration weld Scarfig bracket  Partial penetration weld Scarfig bracket arrangement (Section C-C) 
Critical locations	
Longitudinal section  Transverse section A-A 	
(omitted)	

CHAPTER 10

OTHER STRUCTURES

SECTION 1 FORE PART

2 STRUCTURAL ARRANGEMENT

2.1 Floors and bottom girders

2.1.2 Bottom girders

A supporting structure is to be provided at the centreline either by extending the centreline girder to the stem or by providing a deep girder or centreline bulkhead.

Where a centreline girder is fitted, the minimum depth and thickness is not to be less than that required for the depth of the double bottom in the neighbouring cargo ~~tank~~ hold region, and the upper edge is to be stiffened.

In case of transverse framing, the spacing of bottom girders is not to exceed 2.5 m.

In case of longitudinal framing, the spacing of bottom girders is not to exceed 3.5 m.

3 STRUCTURE SUBJECTED TO IMPACT LOADS

3.2.7 Primary supporting members

b) Simplified calculation of slamming shear force

For simple arrangements of primary supporting members, where the grillage ~~affect~~ effect may be ignored, the shear force, Q_{SL} , in kN, is given by:

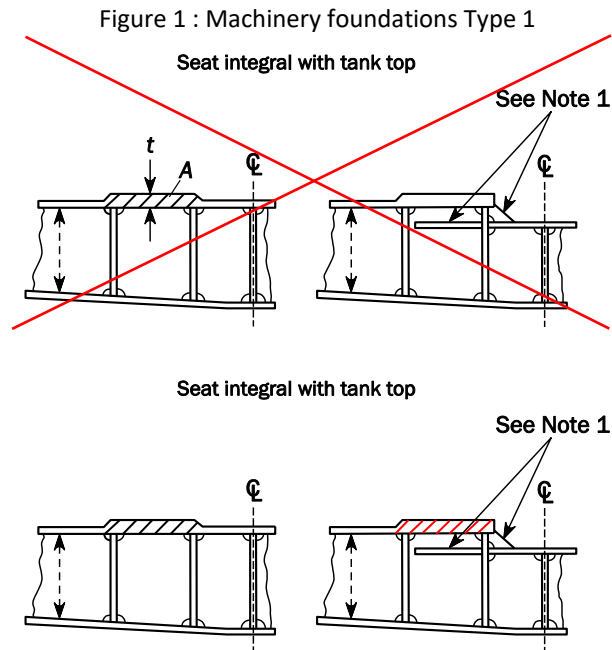
$$Q_{SL} = f_{pt} f_{dist} F_{SL}$$

SECTION 2 MACHINERY SPACE

3 MACHINERY FOUNDATIONS

3.1 General

3.1.2



SECTION 3 AFT PART

3 STERN FRAMES

3.1 General

3.1.2

Cast steel and fabricated stern frames are to be strengthened by adequately spaced plates with gross thickness not less than 80% of required thickness for stern frames, t_1 , as defined in Table 1 or Table 2. Abrupt changes of section are to be avoided in castings; all sections are to have adequate tapering radius.




3.2 Propeller posts

3.2.1 Gross scantlings of propeller posts

The gross scantlings of propeller posts are not to be less than those obtained from the formulae in Table 1 for single screw ships and Table 2 for twin screw ships.

Scantlings and proportions of the propeller post which differ from those above may be considered acceptable provided that the section modulus of the propeller post section about its longitudinal axis is not less than that calculated with the propeller post scantlings in Table 1 or Table 2, as applicable.

Table 1 : Single screw ships - Gross scantlings of propeller posts

Gross scantlings of propeller posts, in mm	Fabricated propeller post	Cast propeller post	Bar propeller post, cast or forged, having rectangular section
			
a	$50 L_1^{1/2}$	$33 L_1^{1/2}$	$10 \sqrt{7.2L - 256}$
b	$35 L_1^{1/2}$	$23 L_1^{1/2}$	$10 \sqrt{4.6L - 164}$
t_1	$2.5 L_1^{1/2}$	$3.2 L_1^{1/2}$	-
t_2	-	$4.4 L_1^{1/2}$	-
t_d	$1.3 L_1^{1/2}$	$2.0 L_1^{1/2}$	-
R	-	50 mm	-

3.3 Connections

3.3.4 Connection with centre-keelson girder

Where the stern frame is made of cast steel, the lower part of the stern frame is to be fitted, as far as practicable, with a longitudinal web for connection with the centre-keelson girder.

SECTION 4 TANKS SUBJECT TO SLOSHING

1 GENERAL

1.3 Application of sloshing pressure

1.3.5 Application of design sloshing pressure due to transverse liquid motion

The design sloshing pressure due to transverse liquid motion, $P_{shl-t} + P_{slh-t}$, as defined in Ch 4, Sec 6, [6.4.3], is to be applied to the following members as shown in Figure 2.

Copyright American Bureau of Shipping
Provided by IHS
No reproduction or networking permitted without license from IHS

CHAPTER 12

CONSTRUCTION


SECTION 3 DESIGN OF WELD JOINTS

2 TEE OR CROSS JOINT

2.5 Weld size criteria

2.5.3

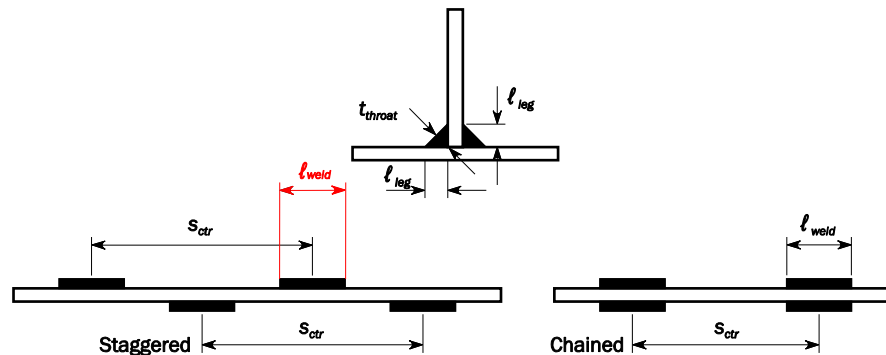Figure 4 : Weld scantlings definitions



4 OTHER TYPES OF JOINTS

4.1 Lapped joints

4.1.3 Overlaps for lugs

The overlaps for lugs and collars in way of cut-outs for the passage of stiffeners through webs and bulkhead plating are not to be less than three times the thickness of the lug but need not be greater than 50 mm.

CHAPTER 13

SHIP IN OPERATION-RENEWAL CRITERIA

SECTION 1 PRINCIPLES AND SURVEY REQUIREMENTS

1.3 Requirements for documentation

1.3.2 Hull girder sectional properties

The Midship section plan to be supplied onboard the ship is to include the minimum required hull girder sectional properties, as defined in Ch 5, Sec 1, for the typical transverse sections of all cargo holds.

PART 2

SHIP TYPES

CHAPTER 1

BULK CARRIERS

SECTION 2 STRUCTURAL DESIGN PRINCIPLES

3 STRUCTURAL DETAIL PRINCIPLES

3.3 Deck structures

3.3.4 Openings in strength deck- Corner of hatchways

a) Within the cargo hold region

For cargo hatchways located within the cargo hold region, insert plates, ~~whose the~~ thicknesses of which are to be determined according to the formula given after, are to be fitted in way of corners where the plating cutout has a circular profile.

The radius of circular corners is not to be less than 5% of the hatch width, where a continuous longitudinal deck girder is fitted below the hatch coaming.

Corner radius, in the case of the arrangement of two or more hatchways athwartship, is considered by the Society on a case-by-case basis.

For hatchways located within the cargo hold region, insert plates are, in general, not required in way of corners where the plating cut-out has an elliptical or parabolic profile and the half axes of elliptical openings, or the half lengths of the parabolic arch, are not less than:

- 1/20 of the hatchway width or 600 mm, whichever is the lesser, in the transverse direction.
- Twice the transverse dimension, in the fore and aft direction.

Where insert plates are required, their net thickness is to be obtained, in mm, from the following formula:

$$t_{INS} = \left(0.8 + 0.4 \frac{b}{l} \right) t_{off}$$

without being taken less than t_{off} or greater than $1.6 t_{off}$.

where:

l : Width, in m, in way of the corner considered, of the cross deck strip between two consecutive hatchways, measured in the longitudinal direction, see Pt 1, Ch 3, Sec 6, Figure 15.

b : Width, in m, of the hatchway considered, measured in the transverse direction, see Pt 1, Ch 3, Sec 6, Figure 15.

t_{off} : Offered net thickness, in mm, of the deck at the side of the hatchways.

For the extreme corners of end hatchways, insert plates are required. The net thickness of these insert plates is to be 60% greater than the net offered thickness of the adjacent deck plating. A lower thickness may be accepted by the Society on the basis of calculations showing that stresses at hatch corners are lower than permissible values.

Where insert plates are required, the arrangement is shown in Pt 1, Ch 9, Sec 6, Table 15, in which $d1$, $d2$, $d3$ and $d4$ are to be greater than the stiffener spacing.

For ships having length L of 150 m or above, the corner radius, the thickness and the extent of insert plate may be determined by the results of a direct strength assessment according to Pt 1, Ch 7, including buckling check and fatigue strength assessment of hatch corners according to Pt 1, Ch 8 and Pt 1, Ch 9 respectively. For such type of ships it is recommended to arrange circular hatch corners.

b) Outside the cargo hold region

For hatchways located outside the cargo hold region, a reduction in the thickness of the insert plates in way of corners may be considered by the Society on a case-by-case basis.

SECTION 3 HULL LOCAL SCANTLINGS

3 TRANSVERSE VERTICALLY CORRUGATED WATERTIGHT BULKHEADS SEPARATING CARGO HOLDS IN FLOODED CONDITION

3.3.3 Effective shedder plates

Provided that effective shedder plates are fitted as shown in Figure 4, when calculating the section modulus at the lower end of the corrugations (Sections '1' in Figure 4), the net area, in cm^2 , of flange plates may be increased by ~~the factor~~ I_{SH} to be taken as:

3.3.4 Effective gusset plates

Provided that effective gusset plates are fitted, when calculating the section modulus at the lower end of the corrugations (Sections '1' in Figure 5 and Figure 6), the net area, in cm^2 , of flange plates may be increased by ~~the factor~~ I_G to be taken as:

SECTION 4 HULL LOCAL SCANTLINGS FOR BULK CARRIERS L<150M

4 PRIMARY SUPPORTING MEMBERS

4.2 Design load sets

4.2.2 Loading conditions

The severest loading conditions from the loading manual or otherwise specified by the designer are to be considered for the calculation of P_{in} in design load sets BC-911 to BC-1012.

If primary supporting members support deck structure or tank/watertight boundaries, applicable design load sets in Pt 1, Ch 6, Sec 2, Table 1 are also to be considered.

Table 3 : Design load sets for primary supporting members in cargo hold region

Item	Design load set	Load component	Draught	Design load	Loading condition
Bulk cargo hold assigned as ballast hold	WB-4	$P_{in} - P_{ex}^{(1)}$	$T_{BAL-H}^{(3)}$	S+D	Heavy ballast condition
	WB-6	P_{in}	-	S	Harbour/test condition
Bulk cargo hold	BC-911	$P_{in} - P_{ex}^{(1)}$	T_{SC}	S+D	Cargo loading condition
	BC-1012	$P_{in} - P_{ex}^{(1)}$	-	S	Harbour condition
Compartments not carrying liquids	FD-1 (2)	P_{in}	T_{SC}	S+D	Flooded condition
	FD-2 (2)	P_{in}		S	Flooded condition
(1) P_{ex} is to be considered for external shell only. (2) FD-1 and FD-2 are not applicable to external shell. (3) Minimum draught among heavy ballast conditions is to be used.					

4.7 Primary supporting member in bilge hopper tanks and topside tanks

4.7.2 Net section modulus, net shear sectional area and web thickness

The net section modulus Z , in cm^3 , the net shear sectional area A_{shr} , in cm^2 , and the net web thickness t_w , in mm, subjected to lateral pressure are not to be less than the values obtained from the following formulae:

$$Z = \frac{|P| S \ell_{bdg}^2}{f_{bdg} C_{s-pr} R_{eH}} 10^3$$

$$A_{shr} = \frac{5|P| S \ell_{shr}}{C_{t-pr} \tau_{eH}}$$

$$t_w = 1.75 \sqrt[3]{\frac{h_w C_{t-pr} \tau_{eH}}{10^4 C_5} A_{shr}}$$

where:

P : Design pressure in kN/m^2 , for the design load set being considered according to Pt 1, Ch 6, Sec 2, [2.1.3], calculated at the mid-point of span ℓ of a web frame located midway between transverse bulkheads of holds.

S : Spacing of primary supporting members, in m.

ℓ_{bdg} : Effective bending span, in m, of primary supporting members, measured between the supporting members as defined in Pt 1, Ch 3, Sec 7, [1.1.6].

ℓ_{shr} : Effective shear span, in m, of primary supporting members, measured between the supporting members as defined in Pt 1, Ch 3, Sec 7, [1.1.7].

f_{bdg} : Bending moment factor:

- For continuous stiffeners primary supporting members and where end connections are fitted consistent with idealisation of the stiffener primary supporting members as having

~~as~~-fixed ends and is not to be taken higher than:

$$f_{bdg} = 10.$$


- For ~~stiffener~~ primary supporting members with reduced end fixity, the yield check is to be considered on a case-by-case basis.

SECTION 5 CARGO HATCH COVERS

5 STRENGTH CHECK

5.1.1 Application

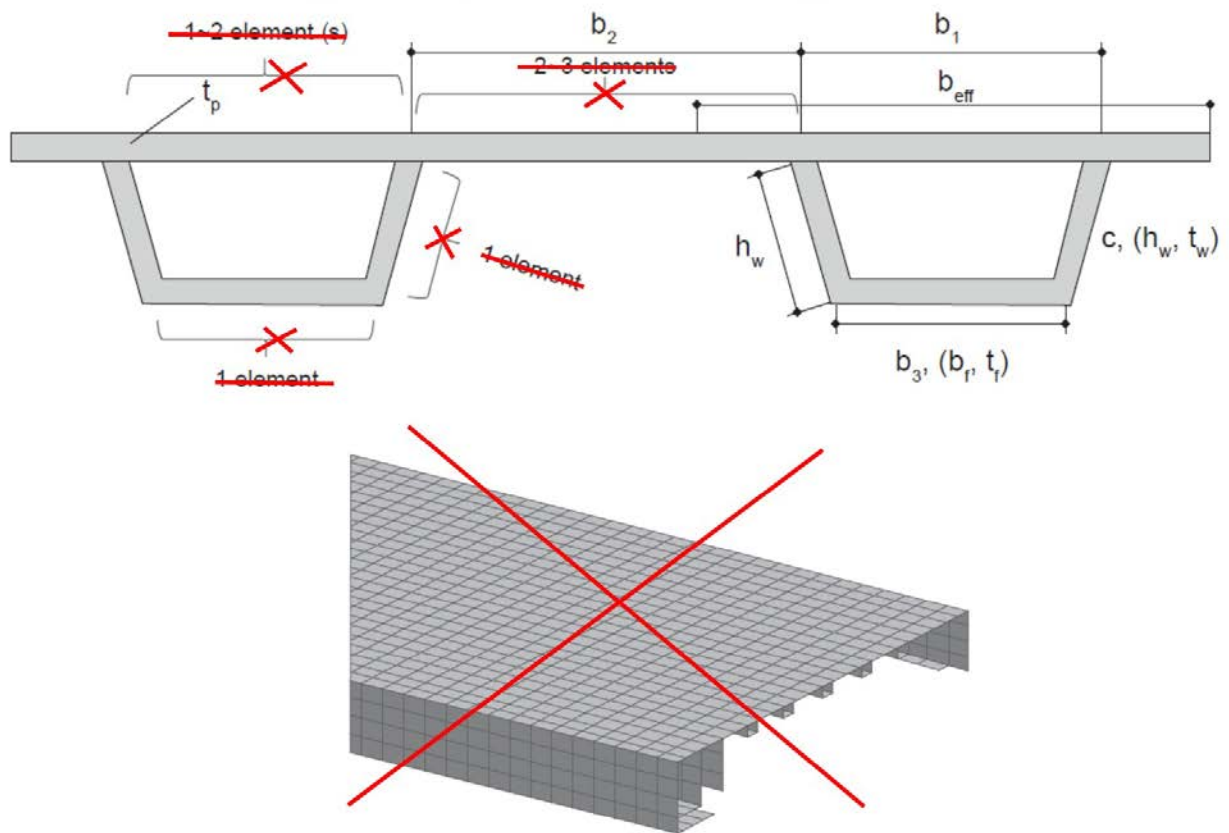Figure 1 : Example of hatch cover fitted with U type stiffener



CHAPTER 2

OIL TANKERS

SECTION 3 HULL LOCAL SCANTLING

1 PRIMARY SUPPORTING MEMBERS IN CARGO HOLD REGION

1.4 Girders in double bottom

1.4.2 Net shear area of centre girders

.....

n_1 : Coefficient taken as:

$$n_1 = 0.00935 \left(\frac{\ell_{shr}}{S} \right)^2 - 0.163 \left(\frac{\ell_{shr}}{S} \right) + 1.289$$

n_2 : Coefficient taken as:

$$n_2 = 1.3 - \left(\frac{S}{12} \right)$$

S : Double bottom floor spacing, in m, as defined in Pt 1 Ch 3 Sec 7 [1.2.2]

1.4.3 Net shear area of side girders

...

n_3 : Coefficient taken as:

$$n_3 = 1.072 - 0.0357 \left(\frac{\ell_{shr}}{S} \right)$$

n_4 : Coefficient taken as:

$$n_4 = 1.2 - \left(\frac{S}{18} \right)$$

S : Double bottom floor spacing, in m, as defined in Pt 1 Ch 3 Sec 7 [1.2.2]

....

Foreword

These Rules enter into force on 1st July 2017 and supersede the following Rules:

- Common Structural Rules for Bulk Carriers and Oil Tankers, January 2015

These Common Structural Rules consist of two parts. Part One provides requirements common to both Double Hull Oil Tankers and Bulk Carriers and Part Two provides additional requirements applied to either Double Hull Oil Tankers or Bulk Carriers.

Summary of changes from the 01 JAN 2015 Rules

	Amendment Type / No.	Adoption Date	Rule Version Date	Effective Date
1	Corrigenda 1	20 JAN 2016	01 JAN 2015	01 JAN 2015
2	Urgent Rule Change Notice 1	09 DEC 2016	01 JAN 2015	01 JUL 2017

Note: Full revision history for Common Structural Rules is available on IACS website, including all previous RCNs and associated TBs.

Guideline of RCN Label

1. RCN (Rule Change Notice) label is used to identify the rule change made since last rule version with the format of "RCN {Number} to {Rule Version Date}", e.g. RCN 1 to 01 JAN 2015.
2. For corrigenda update, the same format will be followed, e.g. CORR 1 to 01 JAN 2015.
3. Modification and addition of rule texts:
 - RCN label is inserted at the end of modified contents.
4. Modification and addition of titles, figures and tables:
 - RCN label is inserted at the end of modified contents.
5. Deletion of rule texts and titles:
 - Replace contents by the word "DELETED".
 - RCN label is inserted at the end of the word "DELETED".
6. Deletion of Table:
 - Replace contents of Table by the word "DELETED" (only shown first row).
 - RCN label is inserted at the second row of Table.
7. Deletion of Figure:
 - Replace Figure by a generic graphic marked "DELETED".
 - RCN label is inserted under the generic graphic.

Disclaimer

Copyright in these Common Structural Rules is owned by each IACS Member as at 1st July 2012.
Copyright © IACS 1st July 2012.

The IACS members, their affiliates and subsidiaries and their respective officers, employees or agents (on behalf of whom this disclaimer is given) are, individually and collectively, referred to in this disclaimer as the "IACS Members". The IACS Members assume no responsibility and shall not be liable whether in contract or in tort (including negligence) or otherwise to any person for any liability, or any direct, indirect or consequential loss, damage or expense caused by or arising from the use and/or availability of the information expressly or impliedly given in this document, howsoever provided, including for any inaccuracy or omission in it. For the avoidance of any doubt, this document and the material contained in it are provided as information only and not as advice to be relied upon by any person.

Any dispute concerning the provision of this document or the information contained in it is subject to the exclusive jurisdiction of the English courts and will be governed by English law.

Copyright American Bureau of Shipping
Provided by IHS
No reproduction or networking permitted without license from IHS

Table of Contents

Part 1

General Hull Requirements 3

Part 2

Ship Types 733

01 Jan 2017

01 Jan 2017

GENERAL HULL REQUIREMENTS

Table of Contents

Chapter 1:	Rule General Principles	13
Chapter 2:	General Arrangement Design	67
Chapter 3:	Structural Design Principles	79
Chapter 4:	Loads	159
Chapter 5:	Hull Girder Strength	327
Chapter 6:	Hull Local Scantling	375
Chapter 7:	Direct Strength Analysis	397
Chapter 8:	Buckling	463
Chapter 9:	Fatigue	525
Chapter 10:	Other Structures	633
Chapter 11:	Superstructure, Deckhouses and Hull Outfitting	663
Chapter 12:	Construction	697
Chapter 13:	Ship in Operation - Renewal Criteria	725

01 Jan 2017



Documents

Document Sharing Hub

Table of Contents

Chapter 1: Rule General Principles	13
SECTION 1	
Application.....	15
1 Scope of Application	15
2 Rule Application	17
3 Class Notations.....	21
4 Application of the Rules of the Society.....	22
SECTION 2	
Rule Principles	23
1 General	23
2 General Assumptions	23
3 Design Basis.....	25
4 Design Principles	28
5 Rule Design Methods	31
SECTION 3	
Verification of Compliance	36
1 General	36
2 Documents to be Submitted	37
3 Scope of Approval	40
4 Workmanship	41
5 Structural Details	41
6 Equivalence Procedures.....	41
SECTION 4	
Symbols and Definitions.....	43
1 Primary Symbols and Units	43
2 Symbols	44
3 Definitions	47
SECTION 5	
Loading Manual and Loading Instruments.....	61
1 General Requirements	61
2 Loading Manuals	61
3 Loading Instrument	64
4 Loading Specific to Bulk Carriers.....	65
Chapter 2: General Arrangement Design.....	67
SECTION 1	
General.....	69
1 General	69
SECTION 2	
Subdivision Arrangement.....	70
1 Watertight Bulkhead Arrangement.....	70
2 Collision Bulkhead	71
3 Aft Peak Bulkhead	71
SECTION 3	
Compartment Arrangement	73
1 Cofferdams.....	73
2 Double Bottom	74
3 Double Side.....	74
4 Fore End Compartments	75
5 Fuel Oil Tanks.....	75
6 Aft End Compartments	75
7 Ballast Tanks.....	76

SECTION 4

Access Arrangement.....	77
1 Closed spaces	77
2 Cargo Area and Forward Spaces.....	77

Chapter 3: Structural Design Principles	79
--	-----------

SECTION 1

Materials.....	81
1 General	81
2 Hull Structural Steel.....	81
3 Steels for Forging and Casting.....	85
4 Aluminium Alloys	86
5 Other Materials and Products	88

SECTION 2

Net Scantling Approach.....	89
1 General	89

SECTION 3

Corrosion Additions	94
1 General	94

SECTION 4

Corrosion Protection	97
1 General	97
2 Sacrificial Anodes.....	97

SECTION 5

Limit States	98
1 General	98
2 Criteria	100
3 Strength Check Against Impact Loads	101

SECTION 6

Structural Detail Principles	103
1 Application	103
2 General Principles.....	103
3 Stiffeners	105
4 Primary Supporting Members (PSM)	108
5 Intersection of Stiffeners and Primary Supporting Members	111
6 Openings.....	118
7 Double Bottom Structure.....	122
8 Double Side Structure	127
9 Deck Structure	128
10 Bulkhead Structure	129
11 Pillars.....	134

SECTION 7

Structural Idealisation	135
1 Structural Idealisation of Stiffeners and Primary Supporting Members	135
2 Plates	152
3 Stiffeners	156
4 Primary Supporting Members	158

Chapter 4: Loads	159
-------------------------------	------------

SECTION 1

Introduction	161
1 General	161

SECTION 2

Dynamic Load Cases	164
1 General	165

2 Dynamic Load Cases for Strength Assessment.....	166
3 Dynamic Load Cases for Fatigue Assessment.....	172

SECTION 3**Ship Motions and Accelerations.....178**

1 General.....	179
2 Ship Motions and Accelerations.....	179
3 Accelerations at any Position.....	182

SECTION 4**Hull Girder Loads.....184**

1 Application.....	184
2 Vertical Still Water Hull Girder Loads.....	185
3 Dynamic Hull Girder Loads.....	188

SECTION 5**External Loads.....193**

1 Sea Pressure.....	194
2 External Pressures on Exposed Decks.....	210
3 External Impact Pressures for the Bow Area.....	213
4 External Pressures on Superstructure and Deckhouses.....	215
5 External Pressures on Hatch Covers.....	217

SECTION 6**Internal Loads.....219**

1 Pressures Due to Liquids.....	222
2 Pressures and Forces Due to Dry Bulk Cargo.....	225
3 Pressures and Forces Due to Dry Cargoes in Flooded Conditions.....	231
4 Steel Coil Loads in Cargo Holds of Bulk Carriers.....	235
5 Loads on Non-Exposed Decks and Platforms.....	240
6 Sloshing Pressures in Tanks.....	241
7 Design Pressure For Tank Testing.....	247

SECTION 7**Design Load Scenarios.....248**

1 General.....	249
2 Design Load Scenarios for Strength Assessment.....	250
3 Design Load Scenarios for Fatigue Assessment.....	251

SECTION 8**Loading Conditions.....252**

1 Application.....	252
2 Common Design Loading Conditions.....	253
3 Oil Tankers.....	255
4 Bulk Carriers.....	274
5 Standard Loading Conditions for Fatigue Assessment.....	306

APPENDIX 1**Hold Mass Curves.....313**

1 General.....	314
2 Maximum and Minimum Masses of Cargo in Each Hold.....	316
3 Maximum and Minimum Masses of Cargo of Two Adjacent Holds.....	322

Chapter 5: Hull Girder Strength..... 327**SECTION 1****Hull Girder Yielding Strength.....329**

1 Strength Characteristics of Hull Girder Transverse Sections.....	330
2 Hull Girder Bending Assessment.....	334
3 Hull Girder Shear Strength Assessment.....	337

SECTION 2**Hull Girder Ultimate Strength.....348**

1 Application.....	348
--------------------	-----

2 Checking Criteria	348
SECTION 3	
Hull Girder Residual Strength	351
1 Application	351
2 Checking Criteria	351
APPENDIX 1	
Direct Calculation of Shear Flow	354
1 Calculation Formula	354
2 Example of Calculations for a Single Side Hull Cross Section	357
APPENDIX 2	
Hull Girder Ultimate Capacity	362
1 General	362
2 Incremental-Iterative Method	363
3 Alternative Methods	373
Chapter 6: Hull Local Scantling	375
SECTION 1	
General	377
1 Application	377
SECTION 2	
Load Application	378
1 Load Combination	378
2 Design Load Sets	379
SECTION 3	
Minimum Thicknesses	381
1 Plating	381
2 Stiffeners and Tripping Brackets	382
3 Primary Supporting Members	382
SECTION 4	
Plating	383
1 Plating Subjected to Lateral Pressure	383
2 Special Requirements	385
SECTION 5	
Stiffeners	389
1 Stiffeners Subject to Lateral Pressure	389
SECTION 6	
Primary Supporting Members and Pillars	392
1 General	392
2 Primary Supporting Members Within Cargo Hold Region	392
3 Primary Supporting Members Outside Cargo Hold Region	393
4 Pillars	395
Chapter 7: Direct Strength Analysis	397
SECTION 1	
Strength Assessment	399
1 General	399
2 Net Scantling	400
3 Finite Element Types	401
4 Submission of Results	401
5 Computer Programs	402
SECTION 2	
Cargo Hold Structural Strength Analysis	403
1 Objective and Scope	403
2 Structural Model	405

3 FE Load Combinations	417
4 Load Application	417
5 Analysis Criteria	434

SECTION 3

Local Structural Strength Analysis.....	438
1 Objective and Scope	438
2 Local Areas to be Assessed by Fine Mesh Analysis	438
3 Screening Procedure	442
4 Structural Modelling	450
5 FE Load Combinations	461
6 Analysis Criteria	461

Chapter 8: Buckling..... 463**SECTION 1**

General.....	465
1 Introduction	465
2 Application.....	465
3 Definitions	466

SECTION 2

Slenderness Requirements.....	469
1 Structural Elements.....	469
2 Plates	469
3 Stiffeners	470
4 Primary Supporting Members	471
5 Brackets	472
6 Other Structures	474

SECTION 3

Prescriptive Buckling Requirements	476
1 General	476
2 Hull Girder Stress.....	477
3 Buckling Criteria.....	479

SECTION 4

Buckling Requirements for Direct Strength Analysis.....	481
1 General	481
2 Stiffened and Unstiffened Panels.....	481
3 Corrugated Bulkhead	491
4 Vertically Stiffened Side Shell of Single Side Skin Bulk Carrier.....	493
5 Struts, Pillars and Cross Ties	494

SECTION 5

Buckling Capacity	495
1 General	497
2 Buckling Capacity of Plates and Stiffeners	497
3 Buckling capacity of other structures.....	515

APPENDIX 1

Stress Based Reference Stresses	519
1 Stress based method	519
2 Reference Stresses	520

Chapter 9: Fatigue..... 525**SECTION 1**

General Considerations	527
1 Rule Application for Fatigue Requirements	527
2 Definition	528
3 Assumptions.....	529
4 Methodology.....	529

5 Corrosion Model.....	531
6 Loading Conditions	531
7 Load Cases	531
SECTION 2	
Structural Details to be Assessed	533
1 Simplified Stress Analysis	533
2 Finite Element Analysis.....	533
SECTION 3	
Fatigue Evaluation.....	547
1 Fatigue Analysis Methodology.....	547
2 Acceptance Criteria	548
3 Reference Stresses for Fatigue Assessment	548
4 S-N Curves	552
5 Fatigue Damage Calculation	557
6 Weld Improvement Methods.....	560
7 Workmanship	562
SECTION 4	
Simplified Stress Analysis.....	564
1 General	564
2 Hot Spot Stress	565
3 Hull Girder Stress.....	566
4 Local Stiffener Stress	567
5 Stress Concentration Factors.....	573
SECTION 5	
Finite Element Stress Analysis	585
1 General	585
2 FE Modelling.....	586
3 Hot Spot Stress for Details Different From Web-Stiffened Cruciform Joints	598
4 Hot Spot Stress for Web-Stiffened Cruciform Joint	600
5 Limitations of Hot Spot Stress Approach	603
6 Screening Fatigue Assessment.....	604
SECTION 6	
Detail Design Standard	607
1 General	607
2 Stiffener-Frame Connections	608
3 Scallops in way of Block Joints	611
4 Hopper Knuckle Connection	611
5 Horizontal Stringer Heel	621
6 Bulkhead Connection to Lower and Upper Stool.....	623
7 Bulkhead Connection to Inner Bottom	629
8 Lower and Upper Toe of Hold Frame.....	629
9 Hatch Corner	631
Chapter 10: Other Structures.....	633
SECTION 1	
Fore Part	635
1 General	635
2 Structural Arrangement.....	635
3 Structure Subjected to Impact Loads.....	637
4 Additional Scantling Requirements	644
SECTION 2	
Machinery Space	646
1 General	646
2 Machinery Space Arrangement.....	646
3 Machinery Foundations	648

SECTION 3

Aft Part	650
1 General	650
2 Aft Peak	650
3 Stern Frames.....	652
4 Special Scantling Requirements for Shell Structure	654

SECTION 4

Tanks Subject to Sloshing	655
1 General	655
2 Scantling Requirements	659

Chapter 11: Superstructure, Deckhouses and Hull Outfitting..... 663

SECTION 1

Superstructures, Deckhouses and Companionways.....	665
1 General	665
2 Structural Arrangement.....	666
3 Scantlings.....	667

SECTION 2

Bulwark and Guard Rails.....	669
1 General Requirements	669
2 Bulwarks.....	669
3 Guard Rails.....	671

SECTION 3

Equipment	672
1 General	672
2 Equipment Number Calculation.....	672
3 Anchoring Equipment	675

SECTION 4

Supporting Structure for Deck Equipment and Fittings.....	682
1 General	682
2 Anchoring Windlass and Chain Stopper	682
3 Mooring Winches	686
4 Cranes, Derricks, Lifting Masts and Life Saving Appliances.....	687
5 Bollards and Bitts, Fairleads, Stand Rollers, Chocks and Capstans.....	689
6 Miscellaneous Deck Fittings	690

SECTION 5

Small Hatchways	691
1 General	691
2 Small Hatchways Fitted on the Exposed Fore Deck	693

Chapter 12: Construction 697

SECTION 1

Construction and Fabrication.....	699
1 General	699
2 Cut-Outs, Plate Edges.....	700
3 Cold Forming	700
4 Hot Forming.....	701
5 Assembly and Alignment	702

SECTION 2

Fabrication by Welding.....	703
1 General	703
2 Welding Procedures, Welding Consumables and Welders	703
3 Weld Joints	703
4 Non-Destructive Examination (NDE).....	705

SECTION 3

Design of Weld Joints	706
1 General	706
2 Tee or Cross Joint.....	707
3 Butt Joint.....	717
4 Other Types of Joints	718
5 Connection Details.....	720

Chapter 13: Ship in Operation - Renewal Criteria.....	725
--	------------

SECTION 1

Principles and Survey Requirements	727
1 Principles	727
2 Hull Survey Requirements.....	728

SECTION 2

Acceptance Criteria.....	729
1 General	729
2 Renewal Criteria.....	730

PART 1 CHAPTER 1

RULE GENERAL PRINCIPLES

Table of Contents

SECTION 1

Application

- 1 Scope of Application
- 2 Rule Application
- 3 Class Notations
- 4 Application of the Rules of the Society

SECTION 2

Rule Principles

- 1 General
- 2 General Assumptions
- 3 Design Basis
- 4 Design Principles
- 5 Rule Design Methods

SECTION 3

Verification of Compliance

- 1 General
- 2 Documents to be Submitted
- 3 Scope of Approval
- 4 Workmanship
- 5 Structural Details
- 6 Equivalence Procedures

SECTION 4

Symbols and Definitions

- 1 Primary Symbols and Units
- 2 Symbols
- 3 Definitions

SECTION 5

Loading Manual and Loading Instruments

- 1 General Requirements
- 2 Loading Manuals
- 3 Loading Instrument
- 4 Loading Specific to Bulk Carriers

