

Electromagnetic compatibility (EMC) —

**Part 3-6: Limits — Assessment of
emission limits for the connection of
distorting installations to MV, HV and
EHV power systems**

ICS 33.100.10

National foreword

This Published Document is the UK implementation of IEC/TR 61000-3-6:2008. It supersedes BS IEC 1000-3-6:1996 which is withdrawn.

The UK participation in its preparation was entrusted by Technical Committee GEL/210, EMC — Policy committee, to Subcommittee GEL/210/12, EMC basic, generic and low frequency phenomena standardization.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 April 2008

© BSI 2008

ISBN 978 0 580 58713 9

Amendments/corrigenda issued since publication

Date	Comments

TECHNICAL REPORT

BASIC EMC PUBLICATION

**Electromagnetic compatibility (EMC) –
Part 3-6: Limits – Assessment of emission limits for the connection of distorting
installations to MV, HV and EHV power systems**

CONTENTS

INTRODUCTION.....	4
ACKNOWLEDGMENT	5
1 Scope.....	6
2 Normative references	7
3 Terms and definitions	7
4 Basic EMC concepts related to harmonic distortion	11
4.1 Compatibility levels	11
4.2 Planning levels.....	12
4.3 Illustration of EMC concepts.....	14
4.4 Emission levels	15
5 General principles	16
5.1 Stage 1: simplified evaluation of disturbance emission	16
5.2 Stage 2: emission limits relative to actual system characteristics.....	17
5.3 Stage 3: acceptance of higher emission levels on a conditional basis.....	17
5.4 Responsibilities	17
6 General guidelines for the assessment of emission levels	18
6.1 Point of evaluation.....	18
6.2 Definition of harmonic emission level.....	18
6.3 Assessment of harmonic emission levels.....	19
6.4 System harmonic impedance.....	20
7 General summation law	22
8 Emission limits for distorting installations connected to MV systems.....	23
8.1 Stage 1: simplified evaluation of disturbance emission	23
8.2 Stage 2: emission limits relative to actual system characteristics.....	25
8.3 Stage 3: acceptance of higher emission levels on a conditional basis.....	29
8.4 Summary diagram of the evaluation procedure	30
9 Emission limits for distorting installations connected to HV-EHV systems	31
9.1 Stage 1: simplified evaluation of disturbance emission	31
9.2 Stage 2: emission limits relative to actual system characteristics.....	31
9.3 Stage 3: acceptance of higher emission levels on a conditional basis.....	34
10 Interharmonics	34
Annex A (informative) Envelope of the maximum expected impedance	36
Annex B (informative) Guidance for allocating planning levels and emission levels at MV	37
Annex C (informative) Example of calculation of global MV+LV contribution	43
Annex D (informative) Method for sharing planning levels and allocating emission limits in meshed HV – EHV systems	44
Annex E (informative) List of symbols and subscripts.....	52
Bibliography.....	55

Figure 1 – Illustration of basic voltage quality concepts with time/ location statistics covering the whole system	15
Figure 2 – Illustration of basic voltage quality concepts with time statistics relevant to one site within the whole system	15
Figure 3 – Illustration of the emission vector U_{hi} and its contribution to the measured harmonic vector at the point of evaluation	18
Figure 4 – Example of a system for sharing global contributions at MV	26
Figure 5 – Diagram of evaluation procedure at MV	30
Figure 6 – Determination of S_i for a simple HV or EHV system	31
Figure 7 – Allocation of planning level to a substation in HV-EHV system	32
Figure A.1 – Example of maximum impedance curve for a 11 kV system	36
Figure B.1 – Example of an MV distribution system showing the MV transformer and feeders 1-6	40
Figure D.1 – HV-EHV system considered for the connection of a new distorting installation at node 1 substation	46
Figure D.2 – Harmonic Impedance at node 1	47
Figure D.3 – Harmonic Impedance at node 5 'Uranus 150 kV', when the capacitor banks at Jupiter 150 kV are switched off	48
Table 1 – Compatibility levels for individual harmonic voltages in low and medium voltage networks (percent of fundamental component) reproduced from IEC 61000-2-2 [5] and IEC 61000-2-12 [6]	12
Table 2 – Indicative planning levels for harmonic voltages (in percent of the fundamental voltage) in MV, HV and EHV power systems	13
Table 3 – Summation exponents for harmonics (indicative values)	23
Table 4 – Weighting factors W_j for different types of harmonic producing equipments	25
Table 5 – Indicative values for some odd order harmonic current emission limits relative to the size of a customer installation	26
Table B.1 – Feeder characteristics for the system under consideration	41
Table B.2 – Determination of F and S_{xl} values for the feeders	41
Table C.1 – Acceptable global contribution G_{hMV+LV} of the MV and LV installations to the MV harmonic voltages if the transfer coefficient from the HV-EHV system is considered to be unity	43
Table D.1 – Influence coefficients K_{hj-1} between node j and node 1	47
Table D.2 – Reduction factors	49
Table D.3 – Global contributions G_{hB1} at node 1	50

INTRODUCTION

IEC 61000 is published in separate parts according to the following structure:

Part 1: General

General considerations (introduction, fundamental principles)

Definitions, terminology

Part 2: Environment

Description of the environment

Classification of the environment

Compatibility levels

Part 3: Limits

Emission limits

Immunity limits

(in so far as they do not fall under the responsibility of product committees)

Part 4: Testing and measurement techniques

Measurement techniques

Testing techniques

Part 5: Installation and mitigation guidelines

Installation guidelines

Mitigation methods and devices

Part 6: Generic standards**Part 9: Miscellaneous**

Each part is further subdivided into several parts published either as International Standards or as technical specifications or technical reports, some of which have already been published as sections. Others will be published with the part number followed by a dash and a second number identifying the subdivision (example: IEC 61000-6-1).

ACKNOWLEDGMENT

In 2002, the IEC subcommittee 77A made a request to CIGRE Study Committee C4 and CIRED Study Committee S2, to organize an appropriate technical forum (joint working group) whose main scope was to prepare, among other tasks, the revision of the technical report IEC 61000-3-6 concerning emission limits for harmonics for the connection of distorting installations to public supply systems at MV, HV and EHV.

To this effect, joint working group CIGRE C4.103/ CIRED entitled “*Emission Limits for Disturbing Installations*” was appointed in 2003. Some previous work produced by CIGRE JWG C4.07-Cired has been used as an input to the revision, in particular the planning levels and associated indices. In addition, using experience since the technical report IEC 61000-3-6 was initially published in 1996, WG C4.103 reviewed the procedure used to determine emission limits and the assessment methods used to evaluate emission levels for installations.

Subsequent endorsement of the document by IEC was the responsibility of SC 77A.

ELECTROMAGNETIC COMPATIBILITY (EMC) –**Part 3-6: Limits –****Assessment of emission limits for the connection of distorting installations to MV, HV and EHV power systems****1 Scope**

This Technical Report, which is informative in its nature, provides guidance on principles which can be used as the basis for determining the requirements for the connection of distorting installations to MV, HV and EHV public power systems (LV installations are covered in other IEC documents). For the purposes of this report, a distorting installation means an installation (which may be a load or a generator) that produces harmonics and/or interharmonics. The primary objective is to provide guidance to system operators or owners on engineering practices, which will facilitate the provision of adequate service quality for all connected customers. In addressing installations, this document is not intended to replace equipment standards for emission limits.

The report addresses the allocation of the capacity of the system to absorb disturbances. It does not address how to mitigate disturbances, nor does it address how the capacity of the system can be increased.

Since the guidelines outlined in this report are necessarily based on certain simplifying assumptions, there is no guarantee that this approach will always provide the optimum solution for all harmonic situations. The recommended approach should be used with flexibility and judgment as far as engineering is concerned, when applying the given assessment procedures in full or in part.

The system operator or owner is responsible for specifying requirements for the connection of distorting installations to the system. The distorting installation is to be understood as the customer's complete installation (i.e. including distorting and non-distorting parts).

Problems related to harmonics fall into two basic categories.

- Harmonic currents that are injected into the supply system by converters and harmonic sources, giving rise to harmonic voltages in the system. Both harmonic currents and resulting voltages can be considered as conducted phenomena.
- Harmonic currents that induce interference into communication systems. This phenomenon is more pronounced at higher order harmonic frequencies because of increased coupling between the circuits and because of the higher sensitivity of the communication circuits in the audible range.

This report gives guidance for the co-ordination of the harmonic voltages between different voltage levels in order to meet the compatibility levels at the point of utilisation. The recommendations in this report do not address harmonic interference phenomena in communication circuits (i.e. only the first of the above categories is addressed). These disturbances need to be addressed in terms of international directives concerning the Protection of Telecommunication Lines against Harmful Effects from Electric Power and Electrified Railway Lines, International Telecommunication Union, ITU-T Directives [1]² or in terms of locally applicable standards such as [2], [3] or [4].

² Figures in square brackets refer to the bibliography.

NOTE The boundaries between the various voltage levels may be different for different countries (see IEC 601-01-28 [32]). This report uses the following terms for system voltages:

- low voltage (LV) refers to $U_n \leq 1 \text{ kV}$;
- medium voltage (MV) refers to $1 \text{ kV} < U_n \leq 35 \text{ kV}$;
- high voltage (HV) refers to $35 \text{ kV} < U_n \leq 230 \text{ kV}$;
- extra high voltage (EHV) refers to $230 \text{ kV} < U_n$.

In the context of this report, the function of the system is more important than its nominal voltage. For example, a HV system used for distribution may be given a "planning level" which is situated between those of MV and HV systems.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050(161), *International Electrotechnical Vocabulary – Chapter 161: Electromagnetic compatibility*

3 Terms and definitions

For the purposes of this document, the following definitions apply as well as the definitions in IEC 60050(161).

3.1

agreed power

value of the apparent power of the disturbing installation on which the customer and the system operator or owner agree. In the case of several points of connection, a different value may be defined for each connection point

3.2

customer

person, company or organisation that operates an installation connected to, or entitled to be connected to, a supply system by a system operator or owner

3.3

(electromagnetic) disturbance

any electromagnetic phenomenon which, by being present in the electromagnetic environment, can cause electrical equipment to depart from its intended performance

3.4

disturbance level

the amount or magnitude of an electromagnetic disturbance measured and evaluated in a specified way

3.5

distorting installation

an electrical installation as a whole (i.e. including distorting and non-distorting parts) which can cause distortion of the voltage or current into the supply system to which it is connected

NOTE For the purpose of this report, all references to distorting installations not only include linear and non-linear loads, but generating plants, and any source of non-sinusoidal current emissions such as regenerative braking systems,

3.6

electromagnetic compatibility (EMC)

ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment

NOTE 1 Electromagnetic compatibility is a condition of the electromagnetic environment such that, for every phenomenon, the disturbance emission level is sufficiently low and immunity levels are sufficiently high so that all devices, equipment and systems operate as intended.

NOTE 2 Electromagnetic compatibility is achieved only if emission and immunity levels are controlled such that the immunity levels of the devices, equipment and systems at any location are not exceeded by the disturbance level at that location resulting from the cumulative emissions of all sources and other factors such as circuit impedances. Conventionally, compatibility is said to exist if the probability of the departure from intended performance is sufficiently low. See Clause 4 of IEC 61000-2-1 [33].

NOTE 3 Where the context requires it, compatibility may be understood to refer to a single disturbance or class of disturbances.

NOTE 4 Electromagnetic compatibility is a term used also to describe the field of study of the adverse electromagnetic effects which devices, equipment and systems undergo from each other or from electromagnetic phenomena.

3.7

(electromagnetic) compatibility level

specified electromagnetic disturbance level used as a reference level in a specified environment for co-ordination in the setting of emission and immunity limits

NOTE By convention, the compatibility level is chosen so that there is only a small probability (for example 5 %) that it will be exceeded by the actual disturbance level.

3.8

emission

phenomenon by which electromagnetic energy emanates from a source of electromagnetic disturbance

[IEV 161-01-08 modified]

NOTE For the purpose of this report, emission refers to phenomena or conducted electromagnetic disturbances that can distort the supply voltage waveform.

3.9

emission level

level of a given electromagnetic disturbance emitted from a particular device, equipment, system or disturbing installation as a whole, assessed and measured in a specified manner

3.10

emission limit

maximum emission level specified for a particular device, equipment, system or disturbing installation as a whole

3.11

generating plant

any equipment that produces electricity together with any directly connected or associated equipment such as a unit transformer or converter

3.12

immunity (to a disturbance)

ability of a device, equipment or system to perform without degradation in the presence of an electromagnetic disturbance

3.13

immunity level

the maximum level of a given electromagnetic disturbance on a particular device, equipment or system for which it remains capable of operating with a declared degree of performance

3.14

non-linear load or equipment (see also distorting installation)

any load or equipment that draws a non-sinusoidal current when energised by a sinusoidal voltage

3.15

normal operating conditions

operating conditions of the system or of the disturbing installation typically including all generation variations, load variations and reactive compensation or filter states (e.g. shunt capacitor states), planned outages and arrangements during maintenance and construction work, non-ideal operating conditions and normal contingencies under which the considered system or the disturbing installation have been designed to operate

NOTE Normal system operating conditions typically exclude: conditions arising as a result of a fault or a combination of faults beyond that planned for under the system security standard, exceptional situations and unavoidable circumstances (for example: force majeure, exceptional weather conditions and other natural disasters, acts by public authorities, industrial actions), cases where system users significantly exceed their emission limits or do not comply with the connection requirements, and temporary generation or supply arrangements adopted to maintain supply to customers during maintenance or construction work, where otherwise supply would be interrupted.

3.16

planning level

level of a particular disturbance in a particular environment, adopted as a reference value for the limits to be set for the emissions from the installations in a particular system, in order to co-ordinate those limits with all the limits adopted for equipment and installations intended to be connected to the power supply system

NOTE Planning levels are considered internal quality objectives to be specified at a local level by those responsible for planning and operating the power supply system in the relevant area.

3.17

point of common coupling (PCC)

point in the public supply system, which is electrically closest to the installation concerned, at which other installations are, or could be, connected. The PCC is a point located upstream of the considered installation

NOTE A supply system is considered as being public in relation to its use, and not its ownership.

3.18

point of connection (POC)

point on a public power supply system where the installation under consideration is, or can be connected

NOTE A supply system is considered as being public in relation to its use, and not its ownership.

3.19

point of evaluation (POE)

point on a public power supply system where the emission levels of a given installation are to be assessed against the emission limits. This point can be the point of common coupling (PCC) or the point of connection (POC) or any other point specified by the system operator or owner or agreed upon

NOTE A supply system is considered as being public in relation to its use, and not its ownership.

3.20

short circuit power

a theoretical value expressed in MVA of the initial symmetrical three-phase short-circuit power at a point on the supply system. It is defined as the product of the initial symmetrical short-circuit current, the nominal system voltage and the factor $\sqrt{3}$ with the aperiodic component (DC) being neglected

3.21**spur**

a feeder branch off a main feeder (typically applied on MV and LV feeders)

3.22**supply system**

all the lines, switchgear and transformers operating at various voltages which make up the transmission systems and distribution systems to which customers' installations are connected

3.23**system operator or owner**

the entity responsible for making technical connection agreements with customers who are seeking connection of load or generation to a distribution or transmission system

3.24**transfer coefficient (influence coefficient)**

the relative level of disturbance that can be transferred between two busbars or two parts of a power system for various operating conditions

3.25**voltage unbalance (imbalance)**

in a polyphase system, a condition in which the magnitudes of the phase voltages or the phase angles between consecutive phases are not all equal (fundamental component) [IEV 161-08-09 modified]

NOTE In three phase systems, the degree of the inequality is usually expressed as the ratio of the negative and zero sequence components to the positive sequence component. In this technical report, voltage unbalance is considered in relation to three-phase systems and negative sequence only.

3.26**phenomena related definitions**

the definitions below that relate to harmonics are based on the analysis of system voltages or currents by the Discrete Fourier Transform method (DFT). This is the practical application of the Fourier transform as defined in IEC 101-13-09 [28]

NOTE 1 The Fourier Transform of a function of time, whether periodic or non-periodic, is a function in the frequency domain and is referred to as the frequency spectrum of the time function, or simply spectrum. If the time function is periodic the spectrum is constituted of discrete lines (or components). If the time function is not periodic, the spectrum is a continuous function, indicating components at all frequencies.

NOTE 2 For simplicity the definitions given in this report refer only to (inter)harmonic components, however, these should not be interpreted as a restriction on the use of other definitions given in other IEC documents, for example, IEC 61000-4-7 [11] where the reference to (inter)harmonic groups or subgroups are more appropriate for measuring rapidly varying signals.

3.26.1**fundamental frequency**

frequency in the spectrum obtained from a Fourier transform of a time function, to which all the frequencies of the spectrum are referred. For the purpose of this technical report, the fundamental frequency is the same as the power supply frequency

NOTE In the case of a periodic function, the fundamental frequency is generally equal to the frequency corresponding to the period of the function itself.

3.26.2**fundamental component**

component whose frequency is the fundamental frequency

3.26.3

harmonic frequency

frequency which is an integer multiple of the fundamental frequency. The ratio of the harmonic frequency to the fundamental frequency is the harmonic order (recommended notation: “h”)

3.26.4

harmonic component

any of the components having a harmonic frequency. For brevity, such a component may be referred to simply as a harmonic

3.26.5

interharmonic frequency

any frequency which is not an integer multiple of the fundamental frequency

NOTE 1 By extension from harmonic order, the interharmonic order is the ratio of an interharmonic frequency to the fundamental frequency. This ratio is not an integer. (Recommended notation “m”).

NOTE 2 In the case where $m < 1$ the term subharmonic frequency may be used.

3.26.6

interharmonic component

component having an interharmonic frequency. For brevity, such a component may be referred to simply as an “interharmonic”

3.26.7

total harmonic distortion – THD

ratio of the r.m.s. value of the sum of all the harmonic components up to a specified order (H) to the r.m.s. value of the fundamental component

$$\text{THD} = \sqrt{\sum_{h=2}^H \left(\frac{Q_h}{Q_1} \right)^2}$$

where

Q represents either current or voltage,

Q_1 is the r.m.s. value of the fundamental component,

h is the harmonic order,

Q_h is the r.m.s. value of the harmonic component of order h,

H is generally 40 or 50 depending on the application.

4 Basic EMC concepts related to harmonic distortion

The development of emission limits (voltage or current) for individual equipment or a customer's installation should be based on the effect that these emission limits will have on the quality of the voltage. Some basic concepts are used to evaluate voltage quality. In order for these concepts to be used for evaluation at specific locations, they are defined in terms of where they apply (locations), how they are measured (measurement duration, sample times, averaging durations, statistics), and how they are calculated. These concepts are described hereafter and illustrated in Figures 1 and 2. Definitions may be found in IEC 60050(161).

4.1 Compatibility levels

These are reference values (see Table 1) for co-ordinating the emission and immunity of equipment which is part of, or supplied by, a supply system in order to ensure the EMC in the whole system (including system and connected equipment). Compatibility levels are generally based on the 95 % probability levels of entire systems, using statistical distributions which represent both time and space variations of disturbances. There is allowance for the fact that

the system operator or owner cannot control all points of a system at all times. Therefore, evaluation with respect to compatibility levels should be made on a system-wide basis and no assessment method is provided for evaluation at a specific location.

The compatibility levels for harmonic voltages in LV and MV systems are reproduced below from references IEC 61000-2-2 [5] and IEC 61000-2-12 [6]. These compatibility levels shall be understood to relate to quasi-stationary or steady-state harmonics, and are given as reference values for both long-term effects and very-short-term effects.

- The long-term effects relate mainly to thermal effects on cables, transformers, motors, capacitors, etc. They arise from harmonic levels that are sustained for 10 min or more.
- Very short-term effects relate mainly to disturbing effects on electronic devices that may be susceptible to harmonic levels sustained for 3 s or less. Transients are not included.

With reference to long-term effects, the compatibility levels for individual harmonic components of the voltage are given in Table 1. The compatibility level for the total harmonic distortion is $THD = 8 \%$.

Table 1 – Compatibility levels for individual harmonic voltages in low and medium voltage networks (percent of fundamental component) reproduced from IEC 61000-2-2 [5] and IEC 61000-2-12 [6]

Odd harmonics non-multiple of 3		Odd harmonics multiple of 3		Even harmonics	
Harmonic order h	Harmonic voltage %	Harmonic order h	Harmonic voltage %	Harmonic order h	Harmonic voltage %
5	6	3	5	2	2
7	5	9	1,5	4	1
11	3,5	15	0,4	6	0,5
13	3	21	0,3	8	0,5
$17 \leq h \leq 49$	$2,27 \cdot \frac{17}{h} - 0,27$	$21 < h \leq 45$	0,2	$10 \leq h \leq 50$	$0,25 \cdot \frac{10}{h} + 0,25$
NOTE The compatibility level for the total harmonic distortion is $THD = 8 \%$.					

With reference to the very-short term effects (3 s or less), the compatibility levels for individual harmonic components of the voltage are the values given in Table 1 multiplied by a factor k_{hvs} , where k_{hvs} is calculated as follows:

$$k_{hvs} = 1,3 + \frac{0,7}{45} \cdot (h - 5) \quad (1)$$

The compatibility level for the total harmonic distortion for very short-term effects is $THD = 11 \%$.

Compatibility levels are not defined in IEC for HV and EHV systems.

4.2 Planning levels

4.2.1 Indicative values of planning levels

These are harmonic voltage levels that can be used for the purpose of determining emission limits, taking into consideration all distorting installations. Planning levels are specified by the system operator or owner for all system voltage levels and can be considered as internal quality objectives of the system operator or owner and may be made available to users in

customers on request. Planning levels for harmonics are equal to or lower than compatibility levels and they should allow co-ordination of harmonic voltages between different voltage levels. Only indicative values may be given because planning levels will differ from case to case, depending on system structure and circumstances. Indicative values of planning levels for harmonic voltages are shown in Table 2.

Table 2 – Indicative planning levels for harmonic voltages (in percent of the fundamental voltage) in MV, HV and EHV power systems

Odd harmonics non-multiple of 3			Odd harmonics multiple of 3			Even harmonics		
Harmonic order h	Harmonic voltage %		Harmonic order h	Harmonic voltage %		Harmonic order h	Harmonic voltage %	
	MV	HV-EHV		MV	HV-EHV		MV	HV-EHV
5	5	2	3	4	2	2	1,8	1,4
7	4	2	9	1,2	1	4	1	0,8
11	3	1,5	15	0,3	0,3	6	0,5	0,4
13	2,5	1,5	21	0,2	0,2	8	0,5	0,4
$17 \leq h \leq 49$	$1,9 \cdot \frac{17}{h} - 0,2$	$1,2 \cdot \frac{17}{h}$	$21 < h \leq 45$	0,2	0,2	$10 \leq h \leq 50$	$0,25 \cdot \frac{10}{h} + 0,22$	$0,19 \cdot \frac{10}{h} + 0,16$

The indicative planning levels for the total harmonic distortion are
 $THD_{MV} = 6,5\%$ and $THD_{HV-EHV} = 3\%$

NOTE 1 For some higher order harmonics, care should be exercised when specifying very low values such as 0,2 % because of practical limitations of measurement accuracy mainly at HV-EHV. Furthermore, depending on system characteristics a margin should exist between MV, HV and EHV planning levels in order to allow coordinating emission of disturbances between different voltage levels (measurement results can be used as a basis to determine appropriate margin).

NOTE 2 The planning levels in Table 2 are not intended to control harmonics arising from exceptional events such as geomagnetic storms, etc.

NOTE 3 In some countries, planning levels are defined in national standards or guidelines.

NOTE 4 Voltage characteristics that are quasi-guaranteed levels exist in some countries for MV and HV systems. They are generally selected to be higher than the planning levels [7].

With reference to very short term effects of harmonics (3 s or less), planning levels for individual harmonics should be multiplied by a factor k_{hvs} as given by Equation (1).

Where national circumstances make it appropriate depending on system characteristics, intermediate values of planning levels may be needed between the MV, HV and EHV values due to the possibly wide range of voltage levels included in HV-EHV (>35 kV). Additionally, an apportioning of planning levels between HV and EHV may also be necessary to take account of the impact on HV systems of disturbing installations connected at EHV. In this case, planning levels at EHV should be set at lower values than those given in the above table.

More guidance for adapting MV planning levels to specific system characteristics can be found in Annex B. An example of the method for sharing planning levels between different parts of an HV-EHV system is also given in Annex D.

The remainder of this report outlines procedures for using these planning levels to establish the emission limits for individual customer distorting installations.

4.2.2 Assessment procedure for evaluation against planning levels

The measurement method to be used for harmonic and inter-harmonic measurements is the class A method specified in IEC 61000-4-30 [12] and related IEC 61000-4-7 [11]. The data flagged in accordance with IEC 61000-4-30 should be removed from the assessment. For clarity, where data is flagged the percentile used in calculating the indices defined below is calculated using only the valid (unflagged) data.

The minimum measurement period is one week of normal business activity. The monitoring period should include some part of the period of expected maximum harmonic levels.

One or more of the following indices may be used to compare the actual harmonic levels with the planning levels. More than one index may be needed for planning levels in order to assess the impact of higher emission levels allowed for shorter periods of time such as during bursts or start-up conditions.

- The 95 % weekly value of U_{hsh} (r.m.s. value of individual harmonics over "short" 10 min periods) should not exceed the planning level.
- The greatest 99 % probability daily value of U_{hvs} (r.m.s. value of individual harmonic components over "very short" 3 s periods) should not exceed the planning level times the multiplying factor k_{hvs} given in Equation (1) with reference to the compatibility levels given for very short time effects of harmonics.

NOTE 1 Harmonics are generally measured up to the 40th or 50th, depending on the application. In most cases, this is adequate for evaluating the distorting effects of power disturbances. However, higher order harmonics up to the 100th order can be an important concern in some cases. Examples include:

- large converters with voltage notching;
- large installations with converters of high pulse numbers (e.g. aluminium plants);
- power electronic equipment with PWM converters interfacing with the power system.

Such cases can result in induced noise interference in neighbouring sensitive appliances (e.g. sensors, communication systems, etc.). It is generally found that higher order harmonics vary more with location and with time than lower order harmonics. In many cases, high order harmonics are produced by a single disturbing installation, often in combination with power system resonance. There may be a need for more extensive evaluations when higher order harmonics are a concern.

NOTE 2 For harmonic measurement, the accuracy of the whole measurement chain needs to be considered. Apart from the monitor itself, transducers should be suitable for harmonic measurements (avoid clipping and distortion for the magnitude and frequency range to be measured). The existing current and voltage transformers for metering and protection purposes on MV and HV-EHV systems are not always suitable for harmonic measurements (especially when frequency is above 1 kHz).

4.3 Illustration of EMC concepts

The basic concepts of planning and compatibility levels are illustrated in Figure 1 and Figure 2. They are intended to emphasize the most important relationships between the basic variables.

Within an entire power system it is inevitable that some level of interference will occur on some occasions, hence there is a risk of overlapping between the distributions of disturbance levels and immunity levels (see Figure 1). Planning levels for harmonics are generally equal to or lower than the compatibility level. They are specified by the system operator or owner. Immunity test levels are specified by relevant standards or agreed upon between manufacturers and customers.

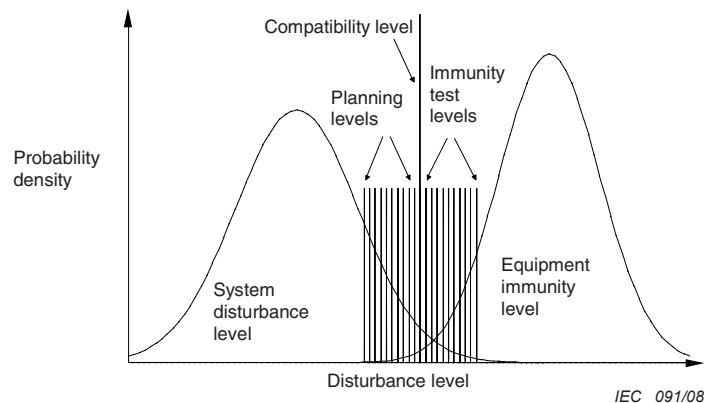


Figure 1 – Illustration of basic voltage quality concepts with time/location statistics covering the whole system

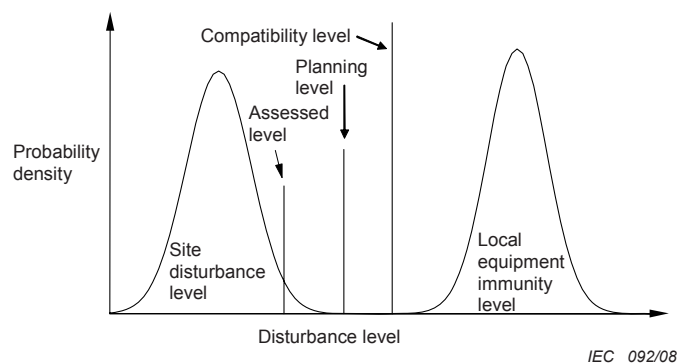


Figure 2 – Illustration of basic voltage quality concepts with time statistics relevant to one site within the whole system

As Figure 2 illustrates, the probability distributions of disturbance and immunity levels at any one site are normally narrower than those in the whole power system, so that at most locations there is little or no overlap of disturbance and immunity level distributions. Interference is therefore not generally a major concern, and equipment is anticipated to function satisfactorily. Electromagnetic compatibility is therefore more probable than Figure 1 appears to suggest.

4.4 Emission levels

The co-ordination approach recommended in this report relies on individual emission levels being derived from the planning levels. For this reason, the same indices are applied both when evaluating actual measurements against the emission limits and against the planning levels.

One or more of the following indices can be used to compare the actual emission level with the customer's emission limit. More than one index may be needed in order to assess the impact of higher emission levels allowed for short periods of time such as during bursts or start-up conditions.

- The 95 % weekly value of U_{hsh} (or I_{hsh}), the r.m.s. value of individual harmonics over "short" 10 min periods, should not exceed the emission limit.

- The greatest 99 % probability daily value of U_{hvs} (or I_{hvs}), the r.m.s. value of individual harmonic components over "very short" 3 s periods, should not exceed the emission limit multiplied by the factor k_{hvs} given in Equation 1. With reference to very short time effects of harmonics, use of the very-short time index for assessing emissions is only needed for installations having a significant impact on the system, so use of this index could be dependant on the ratio between the agreed power of the installation and the short-circuit power of the system (i.e. S_I/S_{sc}).

In order to compare the level of harmonic emissions from a customer's installation with the emission limits, the minimum measurement period should be one week. However, shorter measurement periods might be needed for assessing emissions under specific conditions. Such shorter periods should represent the expected operation over the longer assessment period (i.e. a week). In any case, the measurement period shall be of sufficient duration to capture the highest level of harmonic emissions which is expected to occur. If the harmonic level is dominated by one large item of equipment, the period should be sufficient to capture at least two complete operating cycles of this equipment. If the harmonic level is caused by the summation of several items of equipment, the period should be at least one operating shift.

Where significant, the following factors should also be taken into account (see also 6.2 , 6.3 and subclauses).

- Distorting equipment with normally expected non-ideal characteristics (normally power electronic) due to defects in manufacturing, operation and control.
- Harmonic filter detuning.
- Capacitor banks within the installation and their contribution to harmonic resonances.
- Interactions between different equipment within the installation.

The measurement method to be used is the class A measurement method defined in IEC 61000-4-30 [12] and associated IEC 61000-4-7 [11] for harmonics and inter-harmonics. The data flagged in accordance with IEC 61000-4-30 should be removed from the assessment. For clarity, where data is flagged the percentile used in calculating the indices defined above is calculated using only the valid (unflagged) data. When the signal to be analysed is rapidly varying (e.g. the current drawn by an arc furnace) the measurement of (inter) harmonic groups and subgroups should be used as described in IEC 61000-4-7, rather than the harmonic components.

At each (inter)harmonic frequency, the emission level from a distorting installation is the (inter)harmonic voltage (or current) assessed according to Clause 6.

5 General principles

The proposed approach for setting emission limits of distorting installations depends on the agreed power of the customer, the power of the harmonic-generating equipment, and the system characteristics. The objective is to limit the harmonic injection from the total of all distorting installations to levels that will not result in voltage distortion levels that exceed the planning levels. Three stages of evaluation are defined which may be used in sequence or independently.

5.1 Stage 1: simplified evaluation of disturbance emission

It is generally acceptable for a customer to install small appliances without specific evaluation of harmonic emission by the system operator or owner. Manufacturers of such appliances are generally responsible for limiting the emissions. For instance, IEC 61000-3-2 [8] and IEC 61000-3-12 [9] are product family standards that define harmonic emission limits for equipment connected to LV systems. There are currently no emission standards for MV equipment for the following reasons:

- medium voltage varies between 1 kV and 35 kV; and