

Orifice Metering of Natural Gas and Other Related Hydrocarbon Fluids— Concentric, Square-edged Orifice Meters

Part 2: Specification and Installation Requirements



American Gas Association

AGA Report No. 3
Part 2



AMERICAN PETROLEUM INSTITUTE

Manual of Petroleum
Measurement Standards
Chapter 14.3.2

American Gas Association
400 North Capitol Street, NW
Washington, DC 20001

American Petroleum Institute
1220 L Street, NW
Washington, DC 20005

FIFTH EDITION, MARCH 2016

An American National Standard

ANSI/API MPMS Ch. 14.3.2/AGA Report No. 3, Part 2

Special Notes

This AGA/API publication necessarily addresses problems of a general nature. With respect to particular circumstances, local, state, and federal laws and regulations should be reviewed.

Neither AGA and API nor any of AGA's or API's employees, subcontractors, consultants, committees, or other assignees make any warranty or representation, either express or implied, with respect to the accuracy, completeness, or usefulness of the information contained herein, or assume any liability or responsibility for any use, or the results of such use, of any information or process disclosed in this publication. Neither AGA and API nor any of AGA's or API's employees, subcontractors, consultants, or other assignees represent that use of this publication would not infringe upon privately owned rights.

Users of this publication should not rely exclusively on the information contained in this document. Sound business, scientific, engineering, and safety judgment should be used in employing the information contained herein.

This AGA/API publication may be used by anyone desiring to do so. Every effort has been made by AGA/API to assure the accuracy and reliability of the data contained in it; however, AGA/API makes no representation, warranty, or guarantee in connection with this publication and hereby expressly disclaims any liability or responsibility for loss or damage resulting from its use or for the violation of any authorities having jurisdiction with which this publication may conflict.

This AGA/API publication is published to facilitate the broad availability of proven, sound engineering and operating practices. It is not intended to obviate the need for applying sound engineering judgment regarding when and where this publication should be utilized. The formulation and publication of this AGA/API publication is not intended in any way to inhibit anyone from using any other practices.

Any manufacturer marking equipment or materials in conformance with the marking requirements of an API standard is solely responsible for complying with all the applicable requirements of that standard. API does not represent, warrant, or guarantee that such products do in fact conform to the applicable API standard.

All rights reserved. No part of this work may be reproduced, translated, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from either the American Gas Association, 400 N. Capitol St., NW, Washington, DC 20001 or API Publishing Services, 1220 L Street, NW, Washington, DC 20005.

Copyright © 2016 American Gas Association and American Petroleum Institute

Foreword

Nothing contained in this AGA/API publication is to be construed as granting any right, by implication or otherwise, for the manufacture, sale, or use of any method, apparatus, or product covered by letters patent. Neither should anything contained in the publication be construed as insuring anyone against liability for infringement of letters patent.

Shall: As used in a standard, “shall” denotes a minimum requirement in order to conform to the specification.

Should: As used in a standard, “should” denotes a recommendation or that which is advised but not required in order to conform to the specification.

This document was produced under API standardization procedures that ensure appropriate notification and participation in the developmental process and is designated as API *Manual of Petroleum Measurement Standard (MPMS)* Chapter 14.3.1 and AGA Report No. 3, Part 1. Questions concerning the procedures under which this publication was developed should be directed in writing to the Director of Standards, American Petroleum Institute, 1220 L Street, NW, Washington, DC 20005. Questions concerning the interpretation of the content of this publication should be directed to the Director of Standards, American Petroleum Institute, 1220 L Street, NW, Washington, DC 20005 and to the Vice President, Operations and Engineering, American Gas Association, 400 N. Capitol Street, NW, Washington, DC 20001, and shall be handled in accordance with API's *Procedures for Standards Development*. Requests for permission to reproduce or translate all or any part of the material published herein should also be addressed to the Director of Standards, American Petroleum Institute (as above) or the Vice President, Operations and Engineering, American Gas Association (as above).

This AGA/API publication is reviewed and revised, reaffirmed, or withdrawn at least every five years. A one-time extension of up to two years may be added to this review cycle. Status of the publication can be ascertained from the API Standards Department, telephone (202) 682-8000. A catalog of API publications and materials is published annually by API, 1220 L Street, NW, Washington, DC 20005.

A catalog of AGA Operations and Engineering publications, which is published and updated as needed and can be obtained by contacting AGA Operations and Engineering Department, phone (202) 824-7000 or web site <http://www.aga.org/knowledgecenter>.

Suggested revisions are invited and should be submitted to the Standards Department, API, 1220 L Street, NW, Washington, DC 20005, standards@api.org or Operations and Engineering Department, American Gas Association, 400 North Capitol Street, NW, Washington, DC 20001, <http://www.aga.org/knowledgecenter>.

Contents

	Page
1 Scope	1
1.1 General	1
1.2 Construction and Installation Requirements	1
2 Normative References	1
3 Terms, Definitions, and Symbols	2
3.1 Definitions	2
3.2 Symbols/Nomenclature	4
4 Orifice Plate Specifications	6
4.1 General	6
4.2 Orifice Plate Faces	6
4.3 Orifice Plate Bore Edge	8
4.4 Orifice Plate Bore Diameter (d_m , d_f) and Roundness	8
4.5 Orifice Plate Bore Thickness (e)	10
4.6 Orifice Plate Thickness (E)	10
4.7 Orifice Plate Bevel (θ)	13
5 Meter Tube Specifications	13
5.1 Description	13
5.2 Orifice Plate Holders	17
5.3 Orifice Fittings Considerations	18
5.4 Pressure Taps	19
5.5 Flow Conditioners	21
6 Installation Requirements	23
6.1 General	23
6.2 Orifice Plate	23
6.3 Meter Tube	31
6.4 Acceptable Pulsation Environment	31
6.5 Thermometer Wells	32
6.6 Insulation	32
Annex A (informative) Research Projects and Tests Conducted Between 1922 and 1999	33
Annex B (informative) Orifice Meter Inspection Guidelines	52
Annex C (normative) Specific Installation Calibration Test	56
Annex D (normative) Flow Conditioner Performance Test	58
Annex E (normative) Maximum Allowable Orifice Plate Differential Pressure	62
Figures	
1 Symbols for Orifice Plate Dimensions	6
2a Orifice Plate Departure from Flatness (Measured at Edge of Orifice Bore and Within Inside Pipe Diameter)	7
2b Alternative Method for Determination of Orifice Plate Departure from Flatness (Departure from Flatness = $h_2 - h_1$)	7

Contents

	Page
2c Maximum Orifice Plate Departure from Flatness	7
3 Allowable Variations in Pressure Tap Hole Location	19
4 1998 Uniform Concentric 19-Tube Bundle Flow Straightener	22
5 Eccentricity Measurements (Sample Method)	24
6 Orifice Meter Tube Layout for Flanged or Welded Inlet	27
 Tables	
1 Roundness Tolerance for Orifice Plate Bore Diameter, d_m	9
2 Linear Coefficient of Thermal Expansion	9
3 Orifice Plate Thickness and Maximum Allowable Differential Pressure Based on the Structural Limit	11
4 Example Meter Tube Internal Diameter—Roundness Tolerances Within First Mean Meter Tube Diameter Upstream of Orifice Plate	16
5 Example Meter Tube Internal Diameter Roundness Tolerances—All Upstream Meter Tube Individual Internal Diameter Measurements	17
6 Maximum Tolerance of Orifice Plate Bore Eccentricity (ϵ_x)	25
7 Orifice Meter Installation Requirements Without a Flow Conditioner	28
8a Orifice Meter Installation Requirements With 1998 Uniform Concentric 19-Tube Bundle Flow Straightener for Meter Tube Upstream Length of $17D_j \leq UL < 29D_j$	29
8b Orifice Meter Installation Requirements With 1998 Uniform Concentric 19-Tube Bundle Flow Straightener for Meter Tube Upstream Length of $UL \geq 29D_j$	30
E-1 Maximum Allowable Calculated Differential Pressure Across 304/316SS Orifice Plate at 150 °F	63

Orifice Metering of Natural Gas and Other Related Hydrocarbon Fluids— Concentric, Square-edged Orifice Meters Part 2: Specification and Installation Requirements

1 Scope

1.1 General

This document establishes design and installation parameters for measurement of fluid flow using concentric, square-edged, flanged tapped orifice meters.

1.2 Construction and Installation Requirements

This document outlines the various design parameters that shall be considered when designing metering facilities using orifice meters. The mechanical tolerances found in this document encompass a wide range of orifice diameter ratios for which experimental results are available.

For all existing installations, the decision to upgrade to meet the requirements of this standard shall be at the discretion of the parties involved. The parties should be cognizant that if a meter installation is not upgraded to meet this standard, measurement bias errors may exist due to inadequate flow conditioning and upstream straight pipe lengths.

Use of the calculation procedures and techniques shown in the API *MPMS* Ch.14.3.1/AGA Report No. 3, Part 1 and API *MPMS* Ch.14.3.3/AGA Report No. 3, Part 3, with existing equipment is recommended, since these represent significant improvements over the previous methods. The uncertainty levels for flow measurement using existing equipment may be different from those quoted in API *MPMS* Chapter 14.3.1/AGA Report No. 3, Part 1.

Use of orifice meters at the extremes of their diameter ratio (β_r) ranges should be avoided whenever possible. Good metering design and practice tend to be somewhat conservative. This means that the use of the tightest tolerances in the mid-diameter ratio (β_r) ranges would have the highest probability of producing the best measurement. An indication of this is found in the section on uncertainty in API *MPMS* Chapter 14.3.1/AGA Report No. 3, Part 1.

This standard is based on β_r between 0.10 and 0.75. Minimum uncertainty of the orifice plate coefficient of discharge (C_d) is achieved with β_r between 0.2 and 0.6 and orifice bore diameters greater than or equal to 0.45 inch. Diameter ratios and orifice bore diameters outside of this range may be used; the user should consult the uncertainty section in API *MPMS* Chapter 14.3.1/AGA Report No. 3, Part 1 for limitations.

Achieving the best level of measurement uncertainty begins with, but is not limited to, proper design. Two other aspects of the measurement process have to accompany the design effort; otherwise it is of little value. These aspects are the application of the metering system and the maintenance of the meters, neither of which is considered directly in this standard. These aspects cannot be governed by a single standard as they cover metering applications that can differ widely in flow rate, fluid type, and operational requirements. The user shall determine the best meter selection for the application and the level of maintenance for the measurement system under consideration.

2 Normative References

No other document is identified as indispensable or required for the application of this standard.

3 Terms, Definitions, and Symbols

3.1 Definitions

The definitions are given to emphasize the particular meaning of the terms as used in this standard.

3.1.1

diameter ratio (β)

The calculated orifice plate bore diameter (d) divided by the calculated meter tube internal diameter (D).

3.1.2

diameter ratio (β_m)

The measured orifice plate bore diameter (d_m) divided by the measured meter tube internal diameter (D_m).

3.1.3

diameter ratio (β_r)

The reference orifice plate bore diameter (d_r) divided by the reference meter tube internal diameter (D_r).

3.1.4

differential pressure (ΔP)

The static pressure difference measured between the upstream and the downstream flange taps.

3.1.5

average differential pressure (ΔP_{avg})

A time mean of the static pressure difference measured between the upstream and downstream flange taps.

3.1.6

instantaneous differential pressure (ΔP_t)

A single measurement of ΔP at any instance in time.

3.1.7

root mean square differential pressure (ΔP_{rms})

The r square root of the sum of squares of the difference between the instantaneous differential pressure (ΔP_t) and time mean differential (ΔP_{avg}).

3.1.8

flange taps

A pair of tap holes positioned as follows:

- a) the upstream tap center is located 1 in. upstream of the nearest plate face;
- b) the downstream tap center is located 1 in. downstream of the nearest plate face;
- c) the upstream and downstream taps shall be in the same radial position.

3.1.9

flow conditioners

Flow conditioners can be classified into two categories: flow straighteners or flow conditioners.

Flow straighteners are devices that effectively remove or reduce the swirl component of a flowing stream, but may have limited ability to produce the flow conditions necessary to accurately replicate the orifice plate coefficient of discharge database values. See Table 8a and Table 8b for installation requirements.

Flow conditioners, which have successfully completed the recommended performance test protocol in Annex D, are devices that effectively remove the swirl component from the flowing stream while redistributing the stream to

produce a pseudo fully developed flow profile and the flow conditions that accurately replicate the orifice plate coefficient of discharge database values.

3.1.10

meter tube

The straight sections of pipe, including all segments that are integral to the orifice plate holder, upstream and downstream of the orifice plate, as specified in 5.1.

3.1.11

meter tube internal diameter (D)

The inside diameter of the upstream section of the meter tube computed at flowing temperature (T_f), as specified in 1.6.3 of API *MPMS* Ch.14.3.1/AGA Report No. 3, Part 1. The calculated meter tube internal diameter (D) is used in the diameter ratio and Reynolds number equations.

3.1.12

published meter tube internal diameter (D_i)

The inside diameter as published in standard handbooks for engineers. This internal diameter is used for determining the required meter run length in Table 7, Table 8a, and Table 8b.

3.1.13

measured meter tube internal diameter (D_m)

The average inside diameter of the upstream section of the meter tube measured 1 in. upstream of the adjacent face of the orifice plate and at the temperature of the meter tube (T_m) at the time of internal diameter measurements, as specified in 5.1.2.

3.1.14

reference meter tube internal diameter (D_r)

The inside diameter of the upstream section of the meter tube calculated at the reference temperature (T_r), as specified in 5.1.2. The reference meter tube internal diameter is the certified meter tube internal diameter.

3.1.15

orifice plate

A thin square-edged plate with a machined circular bore, concentric with the meter tube ID , when installed.

3.1.16

orifice plate bore diameter (d)

The internal diameter of the orifice plate measuring aperture (bore) computed at flowing temperature (T_f), as specified in 1.6.2 in API *MPMS* Ch.14.3.1/AGA Report No. 3, Part 1. The calculated orifice plate bore diameter (d) is used in the flow equation for the determination of flow rate.

3.1.17

measured orifice plate bore diameter (d_m)

The measured internal diameter of the orifice plate measuring aperture at the temperature of the orifice plate (T_m) at the time of bore diameter measurements, determined as specified in 4.4.

3.1.18

reference orifice plate bore diameter (d_r)

The internal diameter of the orifice plate measuring aperture at reference temperature (T_r), calculated as specified in 4.4. The reference orifice plate bore diameter is the certified or stamped orifice plate bore diameter.

3.1.19

orifice plate holder

A pressure containing piping element, such as a set of orifice flanges also known as an OFU (orifice flange union) or an orifice fitting, used to contain and position the orifice plate in the piping system.

3.1.20**primary element**

The orifice plate, the orifice plate holder with its associated differential pressure sensing taps, the meter tube, and the flow conditioner, if used.

3.1.21**roughness average (R_a)**

The roughness average (R_a) used in this standard is that given in ANSI B46.1, and is “the arithmetic average of the absolute values of the measured profile height deviation taken within the sampling length and measured from the graphical centerline” of the surface profile.

3.1.22**tap hole**

A hole drilled radially in the wall of the meter tube or through the orifice fitting and perpendicular to the centerline of the meter tube or orifice plate holder, the inside edge of which is flush and without any burrs.

3.1.23**temperature measurement (T_f)**

The flowing fluid temperature measured at the designated location, as specified in 6.5.

In flow measurement, the temperature sensing device is inserted in the flowing stream to obtain the flowing temperature. If the fluid velocity is higher than 25 % of the fluid sound speed at the point of measurement, which rarely occurs, corrections for the increase in temperature due to dynamic effects will need to be applied. Care should be taken to ensure that the temperature sensing elements are coupled to the flowing stream and not to the steel in the meter tube. This practice is recommended for all orifice meter installations. The sensed temperature is assumed to be the static temperature of the flowing fluid.

3.1.24**measured temperature (T_m)**

The measured temperature of the orifice plate and/or the meter tube at the time of the diameter measurements, as specified in 4.4 and 5.1.2.

3.1.25**reference temperature (T_r)**

The reference temperature used to determine the reference orifice plate bore diameter (d_r) and/or the reference internal meter tube diameter (D_r), as specified in 4.4 and 5.1.2.

3.2 Symbols/Nomenclature

This standard reflects orifice meter application to fluid flow measurement with symbols in general technical use.

Symbol	Represented Quantity
c	Speed of sound
C_d	Orifice plate coefficient of discharge
$C_d(FT)$	Flange tap orifice plate coefficient of discharge
$\Delta C_d(FT)/C_d$	Percent difference between baseline C_d and installation effect C_d
d	Orifice plate bore diameter calculated at flowing temperature, T_f
d_m	Orifice plate bore diameter measured at temperature, T_m
d_r	Orifice plate bore diameter calculated at reference temperature, T_r
D	Meter tube internal diameter calculated at flowing temperature, T_f
D_i	Published meter tube internal pipe diameter

DL	Meter tube length downstream of orifice plate in multiples of published internal pipe diameters (see Figure 6)
D_m	Meter tube internal diameter measured at T_m
D_n	Nominal pipe diameter
D_r	Meter tube internal diameter calculated at reference temperature, T_r
e	Orifice plate bore thickness
E	Orifice plate thickness
f	Frequency
$^{\circ}\text{F}$	Temperature, in degrees Fahrenheit
l	Recommended lengths of gauge line
NPS	Nominal Pipe Size
ΔP	Orifice plate differential pressure
ΔP_{avg}	Average orifice plate differential pressure
ΔP_{rms}	Root mean square of the fluctuating differential pressure
ΔP_t	Instantaneous orifice plate differential pressure
P_f	Static pressure of the fluid at the pressure tap
$^{\circ}\text{R}$	Temperature, in degrees Rankine
R_a	Absolute roughness average
Re	Reynolds number
T_f	Temperature of fluid at flowing conditions
T_m	Temperature of the orifice plate and/or meter tube at time of diameter measurements
T_r	Reference temperature (68 $^{\circ}\text{F}$) of orifice plate bore diameter and/or meter tube internal diameter
UL	Meter tube length upstream of orifice plate in multiples of published internal pipe diameters (see Figure 6)
$UL1$	$UL - UL2$
$UL2$	Meter tube length from flow conditioner exit to orifice plate in multiples of published internal pipe diameters
α	Linear coefficient of thermal expansion
α_1	Linear coefficient of thermal expansion of the orifice plate material
α_2	Linear coefficient of thermal expansion of the meter tube material
β	Ratio of orifice plate bore diameter to meter tube internal diameter (d/D) also known as beta ratio or diameter ratio calculated at flowing temperature, T_f
β_m	Ratio of orifice plate bore diameter to meter tube internal diameter (d_m/D_m) calculated at temperature, T_m
β_r	Ratio of orifice plate bore diameter to meter tube internal diameter (d_r/D_r) calculated at reference temperature, T_r
ε	Orifice plate bore eccentricity
θ	Orifice plate bevel angle

4 Orifice Plate Specifications

4.1 General

The symbols for the orifice plate dimensions are shown in Figure 1.

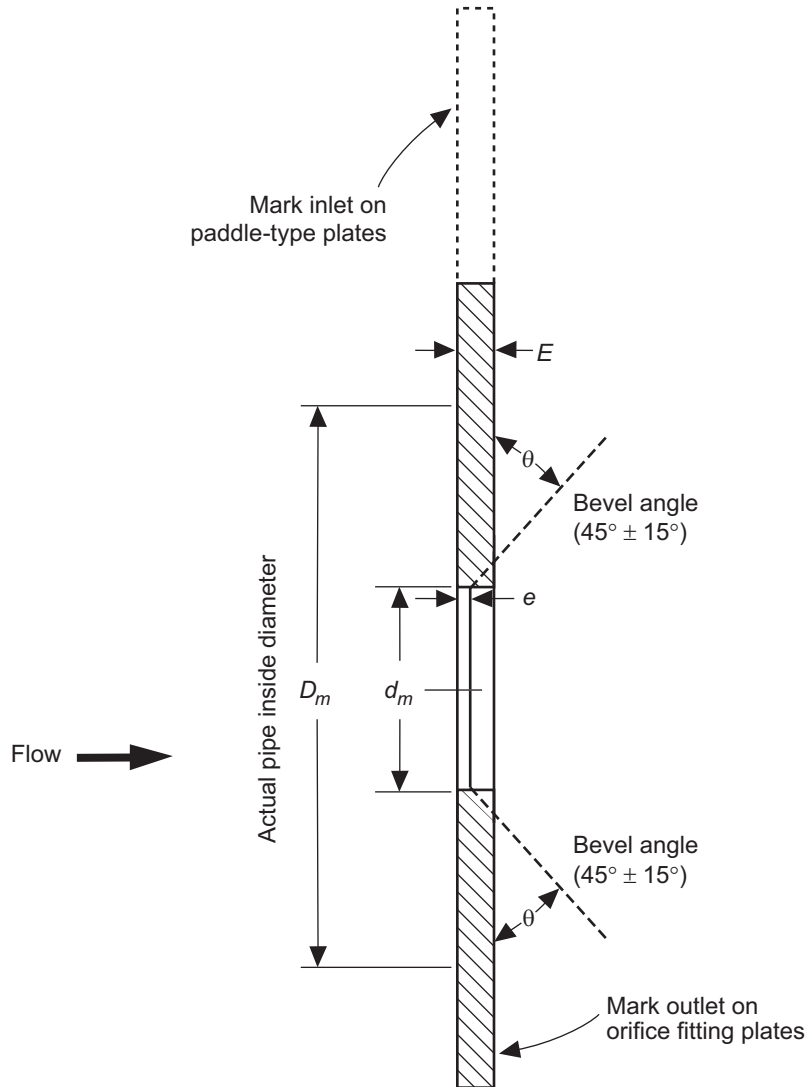


Figure 1—Symbols for Orifice Plate Dimensions

4.2 Orifice Plate Faces

The upstream and downstream faces of the orifice plate shall be flat. Deviations from flatness on the orifice plate of less than or equal to 1 % of dam height (that is, 0.010 in. per in. of dam height) under non-flowing conditions are allowed. The dam height can be calculated from the formula $(D_m - d_m)/2$. This criterion for flatness applies to any two points on the orifice plate within the dimensions of the inside diameter of the pipe. The departure from flatness is illustrated in Figure 2a, Figure 2b, and Figure 2c.

The surface roughness of the upstream and downstream faces of the orifice plate shall have no abrasions or scratches visible to the naked eye that exceed 50 microinches R_a .

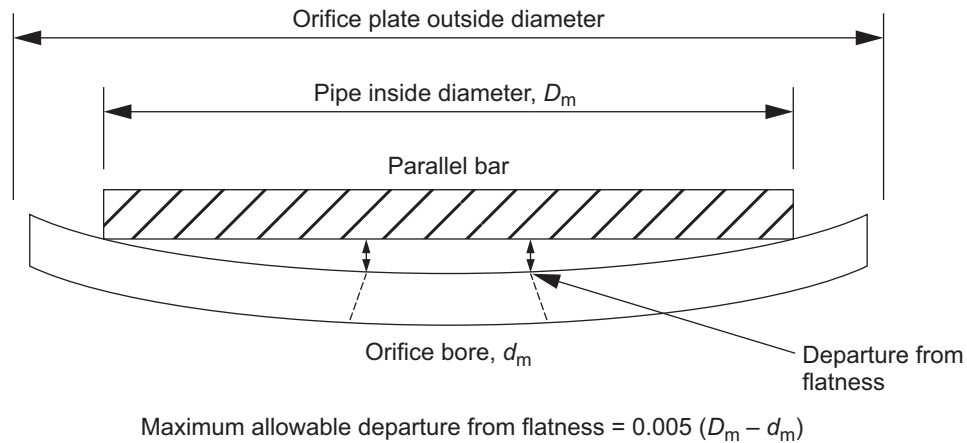


Figure 2a—Orifice Plate Departure from Flatness (Measured at Edge of Orifice Bore and Within Inside Pipe Diameter)

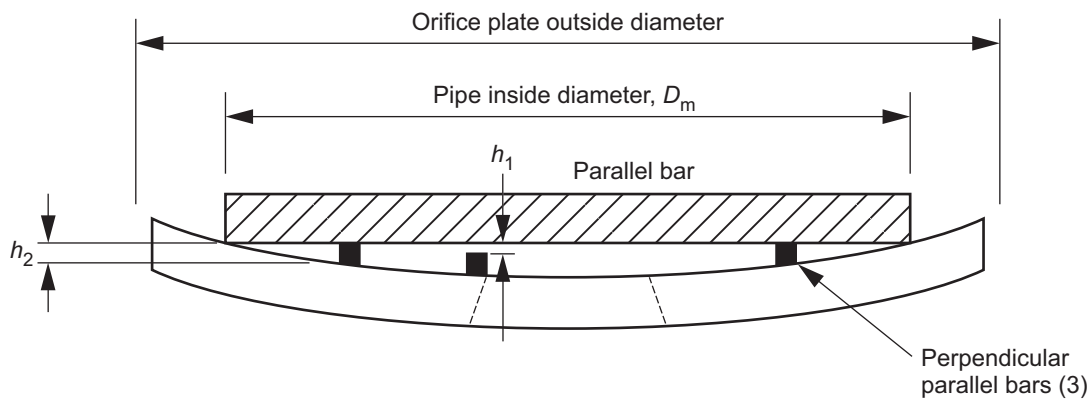


Figure 2b—Alternative Method for Determination of Orifice Plate Departure from Flatness (Departure from Flatness = $h_2 - h_1$)

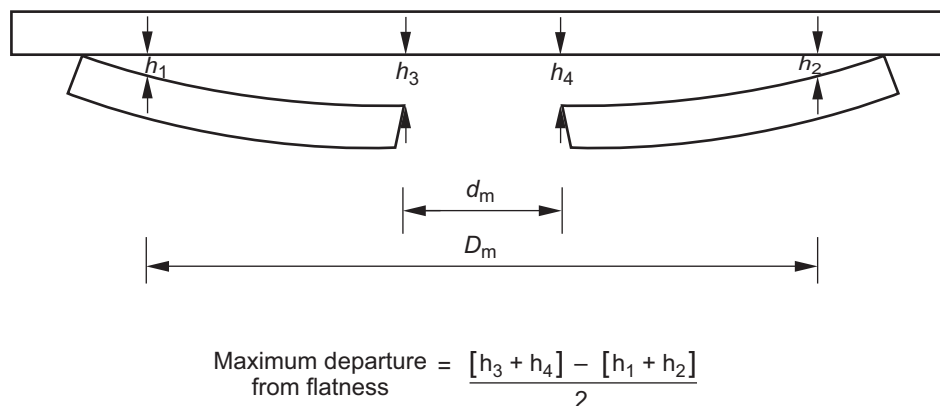


Figure 2c—Maximum Orifice Plate Departure from Flatness

The orifice plate surface roughness may be verified by using an electronic-averaging-type surface roughness instrument with a cutoff value of not less than 0.03 inch. Other surface roughness devices (for example, a visual comparator) are acceptable for determining orifice plate surface roughness if the same repeatability and reproducibility as those of the electronic-averaging-type surface roughness instrument can be demonstrated.

Due care shall be exercised to keep the plate clean and free from accumulation of dirt, ice, grit, grease, oil, free liquid, and other extraneous materials by instituting a regular inspection schedule (daily, weekly, monthly, quarterly, etc., depending on the service conditions). Damage and/or accumulation of extraneous materials on the orifice plate may result in a greater uncertainty for the orifice plate coefficient of discharge [$C_d (FT)$]. After any inspection of the plate, it shall be thoroughly cleaned (free from accumulations as stated above) prior to being placed back in service.

4.3 Orifice Plate Bore Edge

The upstream edge of the orifice plate bore shall be square and sharp. The orifice plate bore edge is considered too dull for accurate flow measurement if the upstream edge reflects a beam of light when viewed without magnification or if the upstream edge shows a beam of light when checked with an orifice edge gauge.

An estimation of suitable sharpness can be made by comparing the orifice plate bore edge with the bore edge of a properly sharp reference orifice plate of the same nominal diameter. The orifice plate bore edge being evaluated should feel and look the same as the edge of the reference orifice plate.

The upstream and downstream edges of the orifice plate bore shall be free from defects visible to the naked eye, such as flat spots, feathered texture, roughness, burrs, bumps, nicks, and notches.

If there is any doubt about whether the edge has sufficient quality for accurate metering, the orifice plate should be replaced.

4.4 Orifice Plate Bore Diameter (d_m , d_r) and Roundness

The measured orifice bore diameter (d_m) is defined as the mean (arithmetic average) of four or more evenly spaced diameter measurements at the inlet edge. None of the four or more diameter measurements may vary from the mean value by more than the tolerances given in Table 1. The orifice plate temperature shall be recorded at the time the bore diameter measurements are made. These measurements shall be made under thermally stable conditions; i.e. during the measurement, the temperature should be constant within $\pm 1^\circ\text{F}$ ($\pm 0.5^\circ\text{C}$).

The orifice plate bore diameter (d_r) is defined as the calculated reference diameter at reference temperature (T_r) and can be determined using the following equation:

$$d_r = d_m [1 + \alpha_1 (T_r - T_m)] \quad (1)$$

where

α_1 is the linear coefficient of thermal expansion for the orifice plate material (see Table 2);

d_r is the orifice plate bore diameter calculated at reference temperature (T_r);

d_m is the orifice plate bore diameter measured at T_m ;

T_m is the temperature of the orifice plate at time of diameter measurements;

T_r is the reference temperature of the orifice plate bore diameter.

NOTE α_1 , T_m , and T_r have to be in consistent units. For the purpose of this standard, T_r is assumed to be 68°F .

The orifice plate bore diameter (d_r) calculated at T_r is the reference diameter used to calculate the bore diameter (d) at flowing conditions, as specified in API MPMS Ch.14.3.1/AGA Report No. 3, Part 1.

Table 1—Roundness Tolerance for Orifice Plate Bore Diameter, d_m

Office Bore Diameter, d_m (inches)	Tolerance ($\pm$ inches)
$\leq 0.250^a$	0.0003
0.251 to 0.375 ^a	0.0004
0.376 to 0.500 ^a	0.0005
0.501 to 0.625	0.0005
0.626 to 0.750	0.0005
0.751 to 0.875	0.0005
0.876 to 1.000	0.0005
> 1.000	0.0005 in. per in. of diameter
^a Use of diameters below 0.45 in. are not prohibited, but may result in uncertainties greater than those specified in API MPMS Ch.14.3.1/AGA Report No. 3, Part 1.	

Table 2—Linear Coefficient of Thermal Expansion

Material	Linear Coefficient of Thermal Expansion (α)	
	USC (in./in. °F)	Metric Units (mm/mm °C)
Type 304/316 stainless steel ^c	0.00000925	0.0000167
Type 304 stainless steel ^a	0.00000961	0.0000173
Type 316 stainless steel ^a	0.00000889	0.0000160
Monel 400 ^a	0.00000772	0.0000139
Carbon steel ^b	0.00000620	0.0000112
NOTE For flowing temperature limits or other materials, refer to the American Society for Metals (ASM) <i>Metals Handbook</i>, <i>Engineering Properties of Steel</i>, and <i>Handbook of Stainless Steels</i>. ^a For flowing conditions between +32 °F and +212 °F for stainless steels and +68 °F and +212 °F for Monel. ^b For flowing conditions between –7 °F and +154 °F, refer to API MPMS Ch. 12.2.1. ^c Type 304/316 stainless steel linear coefficient of thermal expansion is the average of the type 304 and type 316 stainless steel coefficients. NOTE Over a temperature range from 32 °F to 130 °F the maximum difference in calculated flow between use of the 304/316 average coefficient and either the 304 or 316 coefficient is less than 0.005 % (50 ppm).		

4.5 Orifice Plate Bore Thickness (e)

The inside surface of the orifice plate bore shall be in the form of a constant-diameter cylinder having no defects, such as grooves, ridges, pits, or lumps, visible to the naked eye. The length of the cylinder is the orifice plate bore thickness (e).

The minimum allowable orifice plate bore thickness (e) is defined by $e \geq 0.01d_r$ or $e > 0.005$ in., whichever is larger.

The maximum allowable value for the orifice plate bore thickness (e) is defined by $e \leq 0.02D_r$ or $e \leq 0.125d_r$, whichever is smaller, but e shall not be greater than the maximum allowable orifice plate thickness (E).

When the orifice plate thickness (E) exceeds the orifice bore thickness (e), a bevel (see 4.7) is required on the downstream side of the orifice bore. Use of an unbeveled orifice plate with bore thickness (e) that exceeds the limits specified in Table 3 is outside of the scope of this standard.

NOTE Existing orifice plates, whose edge thickness meets the value defined by $e < 0.033D_m$, need not be rebeveled unless reconditioning is required for other reasons.

For ease in machining, the next smaller values of e , in multiples of 0.03125 ($1/32$ in.), may be used.

Orifice plate bores that demonstrate any convergence from inlet to outlet are unacceptable.

Bi-directional flow through an orifice meter tube requires a specially configured meter tube and the use of an unbeveled orifice plate. As a result, bi-directional flow measurement is not covered by this standard.

4.6 Orifice Plate Thickness (E)

4.6.1 General

The minimum, maximum, and recommended values of orifice plate thickness (E) for Types 304 and 316 stainless steel orifice plates are given in Table 3.

Maximum allowable differential pressures for the recommended orifice plate thicknesses in Table 3 are for operating temperatures not exceeding 150 °F. For operating conditions, orifice diameter ratios, meter tube sizes, and orifice plate thicknesses not covered in Table 3, see the tables found in Annex E. If a specific application is not covered by Table 3 or Annex E, the orifice plate and/or holding device manufacturer should be contacted for specific information on deflection (see Annex F in the 2000 version of this standard, *AGA Engineering Technical Note—High Differential Pressure Across Orifice Fittings*) for a given diameter ratio, temperature, orifice plate material, orifice plate holder, and differential pressure.

The use of an orifice plate thickness other than the recommended thickness is acceptable in either new or existing orifice plate holding devices as long as the thickness is within the maximum and minimum range shown in Table 3; and the orifice plate eccentricity, bore thickness, differential pressure tap hole, and expansion-factor pressure-ratio tolerances and limits are satisfied.

For incompressible fluids, the maximum differential pressure across the plate is limited by the structural integrity of the fitting design. The maximum differential pressure should be limited to those shown in Table 3 and Annex E. If the maximum differential pressure is to exceed the limits specified, the manufacturer should be consulted for allowable maximum pressure for the fitting design. In addition, the flowing conditions downstream of the orifice plate have to remain above the local vapor pressure of the flowing fluid.

Orifice fitting manufacturers should be consulted to determine the maximum allowable differential pressure during the changing of orifice plates under flowing conditions. The high forces associated with using high differential pressures may make it difficult to remove the plate, and may possibly result in damage to the orifice plate or fitting.

Table 3—Orifice Plate Thickness and Maximum Allowable Differential Pressure Based on the Structural Limit

Nominal Pipe Size (NPS)	Published Inside Pipe Diameter	Orifice Plate Thickness, E (inches)			Maximum Allowable ΔP (in.-H ₂ O)	Maximum Allowable ΔP (in.-H ₂ O)
		Minimum	Maximum	Recommended	Orifice Fitting	Orifice Flanges
2	1.687	0.115	0.130	0.125	1000	1000
	1.939	0.115	0.130	0.125	1000	1000
	2.067	0.115	0.130	0.125	1000	1000
3	2.300	0.115	0.130	0.125	1000	1000
	2.624	0.115	0.130	0.125	1000	1000
	2.900	0.115	0.130	0.125	1000	1000
	3.068	0.115	0.130	0.125	1000	1000
4	3.152	0.115	0.130	0.125	1000	1000
	3.438	0.115	0.130	0.125	1000	1000
	3.826	0.115	0.130	0.125	1000	1000
	4.026	0.115	0.130	0.125	1000	1000
6	4.897	0.115	0.163	0.125	345	1000
	5.187	0.115	0.163	0.125	345	1000
	5.761	0.115	0.192	0.125	345	1000
	6.065	0.115	0.192	0.125	345	1000
8	7.625	0.115	0.254	0.250	1000	1000
	7.981	0.115	0.319	0.250	1000	1000
	8.071	0.115	0.319	0.250	1000	1000
10	9.562	0.115	0.319	0.250	570	1000
	10.020	0.115	0.319	0.250	570	1000
	10.136	0.115	0.319	0.250	570	1000
12	11.374	0.175	0.379	0.250	285	1000
	11.938	0.175	0.398	0.250	285	1000
	12.090	0.175	0.398	0.250	285	1000
16	14.688	0.175	0.490	0.375	465	1000
	15.000	0.175	0.500	0.375	465	1000
	15.025	0.175	0.500	0.375	465	1000
20	18.812	0.240	0.505	0.375	235	1000
	19.000	0.240	0.505	0.375	235	1000
	19.250	0.240	0.505	0.375	235	1000
24	22.624	0.240	0.505	0.500	360	1000
	23.000	0.240	0.562	0.500	360	1000
	23.250	0.240	0.562	0.500	360	1000

Table 3—Orifice Plate Thickness and Maximum Allowable Differential Pressure Based on the Structural Limit (Continued)

Nominal Pipe Size (NPS)	Published Inside Pipe Diameter	Orifice Plate Thickness, E (inches)			Maximum Allowable ΔP (in.-H ₂ O)	Maximum Allowable ΔP (in.-H ₂ O)
		Minimum	Maximum	Recommended	Orifice Fitting	Orifice Flanges
30	28.750	0.370	0.562	0.500	180	1000
	29.000	0.370	0.578	0.500	180	1000
	29.250	0.370	0.578	0.500	180	1000
NOTE 1 Maximum allowable differential pressure is limited to 1000 in. of water column, which is the limit of the coefficient of discharge database. For further details on the limit of maximum allowable differential pressure, please refer to the text in 4.6. NOTE 2 Maximum allowable differential pressure is calculated for worst-case diameter ratio (typically $\beta = 0.55 - 0.65$). Other diameter ratios may be able to go to higher differential pressures (see Annex E). NOTE 3 The maximum differential pressure applies to stainless steel plates at a maximum temperature of 150 °F, and for the recommended plate thickness. NOTE 4 Maximum allowable differential pressure for other plate thicknesses refer to Annex E. NOTE 5 For single- or dual-chamber fittings, the orifice plate seal ring was assumed to deflect under axi-symmetric conditions without plastic deformation. As such, the effect on the seal ring was not investigated. NOTE 6 Especially at very high differential pressures, the user should carefully consider the associated thermodynamic effects, such as temperature changes resulting from the Joule-Thompson effect as the stream passes through the orifice, and the limits on $\Delta P/P_f$, in particular, at low pressures. The sudden reduction of pressure will result in temperature and density changes.						

The use of high differential pressures ($\Delta P/P_f > 0.7$ in. of water/psia, where the ΔP is in inches of water at 60 °F and P_f is in psia) will result in expansion factor uncertainties in excess of 0.1 % (see 12.4.2 of API MPMS Ch.14.3.1/AGA Report No. 3, Part 1).

Operators should be aware, for a given orifice plate size, that when there is a wide swing from high to low flows, significant measurement errors will occur during the low-flow period if the orifice plate remains unchanged. Generally, operation between 10 % and 90 % of the calibrated differential span is considered good practice. Rangeability can also be increased using today's digital (electronic) transmitters. The effects on the accuracy of transducers and/or transmitters used for wide range should be evaluated versus savings on installation cost.

For the full range of orifice plate thicknesses, the maximum allowable orifice plate differential pressure can be obtained from Annex E.

Higher differential pressures will result in higher meter-run gas velocities and higher permanent pressure losses. It is recommended that the gas velocities be evaluated on an individual installation basis for such things as noise, erosion, and thermowell vibration. The meter run velocity is dependent on several different factors, and each individual user will have different practices and limits on velocity. The allowable maximum differential pressures, shown in Table 3, do not consider meter-run gas velocity.

4.6.2 Permanent Pressure Drop

The permanent pressure drop is significant because the energy has been lost to transport the fluid through the pipeline. Several technical books list the permanent pressure loss versus β ratio for the concentric, square-edged, flange-tapped orifice meter.

The permanent pressure loss $\cong \Delta P(1 - \beta^2)$

β	Losses as a % of ΔP
0.20	96
0.30	91
0.40	84
0.50	75
0.60	64
0.70	51
0.75	44

Examples:

- If the user chooses to use a β of 0.30 at a ΔP of 400 inches of H_2O , then the permanent pressure loss would be approximately 91 % of 400 in. of H_2O , which is about 364 in. of H_2O or approximately 13 psi.
- If the user chooses to use a β of 0.50 at a ΔP of 100 in. of H_2O , then the permanent pressure loss would be approximately 75 % of 100 in. of H_2O , which is about 75 in. of H_2O (about 3 psi).

4.7 Orifice Plate Bevel (θ)

The plate bevel angle (θ) is defined as the angle between the bevel and the downstream face of the plate. The allowable value for the plate bevel angle (θ) is 45 degrees $\pm$ 15 degrees.

The surface of the plate bevel shall have no defects visible to the naked eye, such as grooves, ridges, pits, or lumps.

If a bevel is required, its minimum dimension, ($E-e$), measured along the axis of the bore shall not be less than 0.0625 ($1/16$) inch.

5 Meter Tube Specifications

5.1 Description

The meter tube consists of the straight upstream pipe of the same diameter length UL of the installation Table 7 and Table 8, (see Figure 6), including the flow straightener/conditioner, if used; the orifice plate holder; and the similar downstream pipe (length DL of the installation Table 7, Table 8a, and Table 8b[see Figure 6]) beyond the orifice plate. The upstream section of the meter tube is defined as the length of straight pipe extending from the upstream face of the orifice plate to the nearest upstream change in cross-sectional area (not including flanged fittings allowed in the standard) or change in the axis of the pipe centerline.

The length of the upstream and downstream pipe sections is addressed in 6.3.1. The tolerances for the diameter and the restrictions for the inside surface of the meter tube are specified in 5.1.1, 5.1.2, and 5.1.3.

There shall be no pipe connections within the specified upstream and downstream meter tube sections other than the pressure taps specified in 5.4 (and pipe taps as defined in Annex 3-D of API *MPMS* Ch.14.3.3/AGA Report No. 3, Part 3); temperature probes specified in 6.5; flow conditioner attachments (either flanged or in-line); orifice plate holders (welded or flanged on the downstream or upstream end as specified in 5.3.2); and in-line meter tube flanges necessary to connect sections of the meter tube. Any downstream flange connection or weld shall be at least 2 in. away from the downstream face of the orifice plate. Any downstream weld within 0.5D or 2 in. from the downstream face of the orifice plate shall be ground and/or machined to meet the downstream out-of-roundness and the inside surface roughness requirements specified in 5.1.3.2 and 5.1.1, respectively. For any downstream flange connection within 0.5D or 2 in., care has to be taken to avoid any protrusion of the gasket into the line. The closest an in-line

meter tube flange can come to the orifice plate, in the upstream meter tube section, should be the designated flow conditioner location, or $10D_i$ for meter tubes without flow conditioner (not including flanged fittings allowed in the standard). All flanges and flange attachments within the designated meter tube lengths shall meet all meter tube requirements contained in 5.1.1, 5.1.2, 5.1.3, and 5.1.4.

5.1.1 Inside Surface

The sections of the meter tube to which the orifice plate holder is attached, or the adjacent pipe sections that constitute part of the meter tube, as defined in 5.1, shall comply with 5.1.1.1, 5.1.1.2, and 5.1.1.3. Due to the increased upstream meter tube length requirements of Table 7 and Table 8, and in keeping with the coefficient of discharge database lengths, the upstream meter tube section required to comply with 5.1.1.1, 5.1.1.2, and 5.1.1.3 shall be limited to the lengths shown in Table 7 and Table 8, or 17 published internal pipe diameters, whichever is less. The piping roughness R_a upstream of this length should not be greater than 600 microinches ($\mu\text{in.}$).

5.1.1.1 The internal surface roughness of the meter tube should be measured at approximately the same internal axial locations as those used to determine and verify the meter tube internal diameter (see 5.1.2). The R_a values specified in the items below are the arithmetic average roughness obtained using an electronic-averaging-type surface roughness instrument with a cutoff value of not less than 0.03 inch. Other surface roughness devices are acceptable for determining meter-tube surface roughness if the same repeatability and reproducibility as those of the electronic-averaging-type surface roughness instrument can be demonstrated. A minimum of four roughness measurements shall be made.

The mean (arithmetic average) of these four or more roughness measurements is defined as the meter tube internal surface roughness.

For meter runs with nominal diameters of 12 in. or smaller:

- a) The maximum meter-tube roughness shall not exceed 300 $\mu\text{in.}$ R_a if the diameter ratios (β_r) are less than 0.6.
- b) The maximum meter-tube roughness shall not exceed 250 $\mu\text{in.}$ R_a if the diameter ratios (β_r) are greater than or equal to 0.6.
- c) The minimum roughness shall not be less than 34 $\mu\text{in.}$ for all diameter ratios.

For meter runs with nominal diameters larger than 12 in.:

- a) The maximum meter-tube roughness shall not exceed 600 $\mu\text{in.}$ R_a if the diameter ratios (β_r) are less than 0.6.
- b) The maximum meter-tube roughness shall not exceed 500 $\mu\text{in.}$ R_a if the diameter ratios (β_r) are greater than or equal to 0.6.
- c) The minimum meter-tube roughness shall not be less than 34 $\mu\text{in.}$ for all diameter ratios.

NOTE The use of lower diameter ratios (β_r) reduces the effect of pipe roughness on uncertainty.

Carefully selected smooth commercial pipe may be used. To improve smoothness within the meter tube, the inside pipe walls may be machined, ground, or coated to meet the required specifications.

5.1.1.2 Irregularities such as grooves, scoring, or ridges resulting from seams, welding distortion, offsets, and the like, that affect the inside diameter by more than the tolerances in 5.1.3, shall not be permitted. The existence of pits in the surface of the meter tube, although undesirable, is allowed provided their individual measurements do not exceed the surface roughness and/or diameter tolerance requirements of the meter tube and do not compromise the meter tube's pressure integrity. When these tolerances are exceeded, the irregularities shall be corrected.

5.1.1.3 Due care shall be exercised to keep the meter tube interior clean and free from accumulation of dirt, ice, grit, grease, oil, free liquid and other extraneous materials. Damage and/or accumulation of extraneous materials in the meter tube may result in a greater uncertainty for the orifice plate coefficient of discharge [$C_d(F)$].

5.1.2 Meter Tube Diameter (D_m , D_r)

The measured internal diameter of the meter tube (D_m) shall be determined as specified in 5.1.2.1, 5.1.2.2, 5.1.2.3, 5.1.2.4, and 5.1.2.5.

5.1.2.1 A minimum of four equally spaced individual internal diameter measurements shall be made in a plane 1 inch upstream from the upstream face of the orifice plate. The mean (arithmetic average) of these four or more individual measurements is defined as the measured meter tube internal diameter (D_m).

5.1.2.2 Individual check measurements of the internal diameter of the upstream section (UL in Table 7 and Table 8) of the meter tube (excluding the orifice plate gasket or sealing device diameter) shall be made at a minimum of two additional cross-sections. The actual locations of the individual internal diameter check measurements, around the circumference and along the axis of the meter tube, are not specified. These individual checks should be made at points that will indicate the maximum and minimum dimensions of the internal diameter of the meter tube's upstream section.

One of these individual check measurements should be made in a region at least two pipe diameters from the face of the orifice plate, or past the orifice plate holder weld or flange, whichever is the greater distance. Other individual measurements should be made at selected points within the UL dimension.

Individual check measurements are used to verify the uniformity of the internal diameter of the upstream section of the meter tube (see 5.1.3), but do not become a part of the determination of the mean meter tube internal diameter.

5.1.2.3 Individual check measurements of the meter tube internal diameter (D_m) shall be made in the downstream section of the meter tube in a plane 1-inch downstream from the downstream face of the orifice plate (see 5.1.3).

Additional individual check measurements of the internal diameter (D_m) (excluding the orifice plate gasket or sealing device diameter), shall be made at a minimum of two other cross-sections in the downstream section of the meter tube (see 5.1.3), similar to the measurements specified in 5.1.2.2.

5.1.2.4 Meter tube internal diameters are not limited to published nominal inside pipe diameters. All applicable regulations and piping codes shall be followed.

5.1.2.5 The meter tube temperature to the nearest degree Fahrenheit (0.5 degree Celsius) should be recorded when the internal diameter measurements are made. These measurements shall be made under thermally stable conditions; i.e. during the measurement, temperature should be constant within 5 °F (2.5 °C).

The reference meter tube internal diameter (D_r) is defined as the calculated meter tube internal diameter at reference temperature (T_r), and can be determined using the following equation:

$$D_r = D_m[1 + \alpha_2(T_r - T_m)] \quad (2)$$

where

α_2 is the linear coefficient of thermal expansion for the meter tube material (see Table 2);

D_m is the meter tube internal diameter measured at temperature (T_m);

D_r is the reference meter tube internal diameter calculated at reference temperature (T_r);

T_m is the temperature of the meter tube at the time of the diameter measurements;

T_r is the reference temperature of the meter tube internal diameter.

NOTE α_2 , T_m , and T_r have to be in consistent units. For the purpose of this standard, T_r is assumed to be 68 °F (20 °C).

The reference meter tube internal diameter (D_r), calculated at reference temperature (T_r), is used to calculate the meter tube internal diameter (D) at the flowing temperature, as specified in API MPMS Ch.14.3.1/AGA Report No. 3, Part 1.

5.1.3 Tolerances and Restrictions

The tolerances for the diameter and the restrictions for the internal surface of the meter tube are specified in 5.1.3.1, 5.1.3.2, and 5.1.3.3.

5.1.3.1 Meter Tube Internal Diameter Roundness Tolerance

5.1.3.1.1 Within the First Mean Meter Tube Diameter (D_m) Upstream of the Orifice Plate

The absolute value of the percentage difference between the measured meter tube internal diameter (D_m) and any individual diameter measurement within a distance of one meter tube diameter (D_m) on the upstream side of the orifice plate shall not exceed 0.25% of D_m . The measurement resolution shall be to the nearest thousandth of an inch (0.001 in.) or better.

$$\left| \frac{(\text{Any diameter within one } D_m) - D_m}{D_m} \times 100 \right| \leq 0.25\% \quad (3)$$

An example of this situation is provided in Table 4. All measurements within one meter tube diameter upstream of the orifice plate face are within 0.25 % of the 2.0695 mean.

**Table 4—Example Meter Tube Internal Diameter—Roundness Tolerances
Within First Mean Meter Tube Diameter Upstream of Orifice Plate**

Dimensions in inches

Position	Meter Tube Internal Diameter Measurements				
	A	B	C	D	Mean, D_m
1-in. upstream plate	2.0696	2.0694	2.0694	2.0696	2.0695
Within one D_m	2.0700	2.0676	2.0671	2.0655	N/A
Percent deviation from mean D_m	0.024 %	0.092 %	0.116 %	0.193 %	N/A

5.1.3.1.2 For All Upstream Meter Tube Individual Internal Diameter Measurements, Including Those Within One Meter Tube Diameter Upstream of the Orifice Plate

The percentage difference between the maximum measured individual internal diameter measurement and the minimum measured individual internal diameter measurement of all upstream meter tube individual internal diameter measurements, including those within the first meter tube diameter upstream of the orifice plate, shall not exceed 0.5% of D_m :

$$\left| \frac{\text{Maximum diameter} - \text{Minimum diameter}}{D_m} \times 100 \right| \leq 0.5\% \quad (4)$$

An example of this situation is provided in Table 5.

The calculation to verify that the measurements meet the tolerance criterion is as follows:

$$\frac{2.0700 - 2.0655}{2.0695} \times 100 = 0.22\%$$

**Table 5—Example Meter Tube Internal Diameter Roundness Tolerances—
All Upstream Meter Tube Individual Internal Diameter Measurements**

Dimensions in inches

Position	Meter Tube Internal Diameter Measurements				
	A	B	C	D	Mean, D_m
1-inch upstream plate	2.0696	2.0694	2.0694	2.0696	2.0695
Within one D_m	2.0700	2.0676	2.0671	2.0655	N/A
Upstream check measurement	2.0621	2.0620	2.0613	2.0601	N/A

All upstream meter tube individual internal diameter measurements, including those within one meter tube diameter (D_m) upstream of the orifice plate are within 0.5 % of D_m .

5.1.3.2 Internal Roundness Tolerance for the Downstream Section of Meter Tube

The absolute value of the percentage difference between the measured meter tube diameter (D_m) and any individual internal diameter on the downstream side shall not exceed 0.5 % of D_m :

$$\left| \frac{(\text{Any downstream diameter}) - D_m}{D_m} \times 100 \right| \leq 0.5\% \quad (5)$$

5.1.3.3 General Meter Tube Restrictions

Abrupt changes of the inside meter tube surface (shoulders, offsets, ridges, welding seams, and the like) shall not exist in meter tubes, with the exception of those allowed in 5.1 and 5.5.

5.1.4 Orifice Plate Gasket or Sealing Device Recesses and Protrusions

The orifice plate gasket or sealing device tolerances and restrictions specified in 5.1.4.1 through 5.1.4.5 shall apply at locations immediately upstream and downstream of the orifice plate face.

5.1.4.1 Protrusions resulting from an orifice plate gasket or sealing device that extend into the pipe bore are not permitted.

5.1.4.2 A recess resulting from an orifice plate gasket or sealing device, of 0.25 in. or less in length, as measured parallel to the pipe axis, does not require recess depth restriction, diameter ratio (β_r) limitation, or additional uncertainty.

5.1.4.3 A recess resulting from an orifice plate gasket or sealing device, of more than 0.25 in. but less than or equal to 0.5 in. in axial length, does not require diameter ratio (β_r) limitation or additional uncertainty if the depth of the recess is within the limitations of 5.1.3 (0.005 D_m).

5.1.4.4 All orifice plate sealing devices shall be of the same nominal inside pipe diameter (within the limits specified in 5.1.4.1, 5.1.4.2, and 5.1.4.3) as the orifice plate holder in which they are used.

5.1.4.5 For recesses larger than those described in 5.1.4.2 and 5.1.4.3, additional uncertainty may be required.

5.2 Orifice Plate Holders

5.2.1 Orifice flanges also referred to as Orifice Flange Unions (OFUs) a type of orifice plate holder for orifice meter tube installations should be constructed and attached to the pipe so that all of the mechanical specifications in 5.1.1 and 5.1.4 are met.