



DPC: 13 / 30290462 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: + 44 (0)20 8996 9000

Fax: + 44 (0)20 8996 7400

www.bsigroup.com

Date: 10 September 2013

Origin: International

Latest date for receipt of comments: 4 November 2013

Project No. 2013/02665

Responsible committee: EPL/47 Semiconductors

Interested committees:

Title: Draft BS EN 60191-1 Mechanical standardization of semiconductor devices -
Part 1: General rules for the preparation of outline drawings of discrete devices

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 4 November 2013**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: + 44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Responsible Committee Secretary: **Committee Service Centre (BSI)**
Direct tel: **020 8996 7009**
E-mail: **csc@bsigroup.com**

Introduction

This draft standard is based on international discussions in which the UK has taken an active part. Your comments on this draft are welcome and will assist in the preparation of the consequent standard. There is a high probability that this text could be adopted by CENELEC as a reference document for harmonization or as a European Standard. Recipients of this draft are requested to comment on the text bearing in mind this possibility.

UK Vote

Please indicate whether you consider the UK should submit a negative (with reasons) or positive vote on this draft.

Submission of Comments

- The guidance given below is intended to ensure that all comments receive efficient and appropriate attention by the responsible BSI committee. **Annotated drafts are not acceptable and will be rejected.**
- All comments must be submitted, preferably electronically, to the Responsible Committee Secretary at the address given on the front cover. Comments should be compatible with version 6.0 or version 97 of Microsoft Word for Windows, if possible; otherwise comments in ASCII text format are acceptable. **Any comments not submitted electronically should still adhere to these format requirements.**
- All comments submitted should be presented as given in the example below. Further information on submitting comments and how to obtain a blank electronic version of a comment form are available from the BSI website at: <http://drafts.bsigroup.com/>

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	-------------------------------

1	2	(3)	4	5	(6)	(7)
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/ Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



47D/842/CD

COMMITTEE DRAFT (CD)

IEC/TC or SC: SC47D		Project number IEC 60191-1 Ed.3	
Title of TC/SC: Semiconductor devices packaging		Date of circulation 2013-09-06	Closing date for comments 2013-12-06
Also of interest to the following committees		Supersedes document 47D/841/RR	
Proposed horizontal standard ☐ Other TC/SCs are requested to indicate their interest, if any, in this CD to the TC/SC secretary			
Functions concerned: ☐ Safety ☐ EMC ☐ Environment ☐ Quality assurance			
Secretary: Hiroyoshi YOSHIDA		THIS DOCUMENT IS STILL UNDER STUDY AND SUBJECT TO CHANGE. IT SHOULD NOT BE USED FOR REFERENCE PURPOSES. RECIPIENTS OF THIS DOCUMENT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.	

Title:

IEC 60191-1 Ed.3: Mechanical standardization of semiconductor devices - Part 1: General rules for the preparation of outline drawings of discrete devices

(Titre) :

Introductory note

Copyright © 2013 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

FOREWORD.....	4
1 Scope and object.....	6
2 Normative references	6
3 Terms and definitions	6
4 General rules for all drawings.....	8
4.1 Drawing layout	8
4.2 Dimensions and tolerances	8
4.3 Methods for locating the datum	10
4.4 Numbering of terminals	10
5 Additional rules	12
5.1 Rules for device and case outline drawings	12
5.2 Rules to specify the dimensions and positions of terminals.....	12
5.3 Rules for gauge drawings.....	13
6 Inter-conversion of inch and millimetre dimensions and rules for rounding off.....	13
7 Rules for coding	14
Annex A (informative) Reference letter symbols.....	15
Annex B (normative) Standardization philosophy	18
Annex C (informative) Rules to specify the dimensions and positions of terminals on a base drawing	23
Annex D (normative) General philosophy of flat base devices	30
Annex E (informative) Examples of semiconductor device drawing	32
Annex F (informative) Former rules for rounding off	36
Annex G (informative) Former rules for coding.....	38
Bibliography.....	39
Figure 1 – Numbering of terminals of lozenge – shaped bases.....	11
Figure 2 – System to indicate the dimensions of the terminals	13
Figure B.1 – Example of rigid lug device	21
Figure B.2 – Example of flexible terminal device	22
Figure C.1 – Circular base outline with no tab.....	27
Figure C.2 – Tolerances of terminals	27
Figure C.3 – Gauge for a circular base outline with no tab	28
Figure C.4 – Circular base outline with tab.....	29
Figure C.5 – Gauge for a circular base outline with tab	29
Figure D.1 – Example of flat base outline.....	31
Figure E.1 – Long form package	32
Figure E.2 – 3 types of post/stud mount packages	32
Figure E.3 – 2 types of cylindric packages	33
Figure E.4 – Oval package, terminals in line	34

Figure E.5 – Cylindric package with different terminations 34

Figure E.6 – Flange mount package..... 34

Figure E.7 – Disk button package with 3 terminations 35

Figure E.8 – Special shape for bolt-fixture 35

Table A.1 – Dimensions of reference letter symbols..... 15

INTERNATIONAL ELECTROTECHNICAL COMMISSION

MECHANICAL STANDARDIZATION OF SEMICONDUCTOR DEVICES –

Part 1: General rules for the preparation of outline drawings of discrete devices

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60191-1 has been prepared by subcommittee 47D: Mechanical standardization for semiconductor devices, of IEC technical committee 47: Semiconductor devices.

This second edition cancels and replaces the first edition published in 1966 together with supplements 60191-1A:1969, 60191-1B:1970 and 60191-1C:1974 and constitutes a technical revision. The main changes from the previous edition are as follows:

- requirement added for SI-dimensions for new drawings to be published;
- former rules concerning inch-dimensions are given in an informative annex;
- former rules for coding are given in an informative annex;
- incorporation of the supplements;
- updating of references;
- restructuring and renumbering.

The text of this standard is based on the following documents:

FDIS	Report on voting
47D/678/FDIS	47D/682/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The IEC 60191 series, published under the general title *Mechanical standardization of semiconductor devices*, comprises the following parts:

- Part 1: General rules for the preparation of outline drawings of discrete devices
- Part 2: Dimensions
- Part 3: General rules for the preparation of outline drawings of integrated circuits
- Part 4: Coding system and classification into forms of package outlines for semiconductor device packages
- Part 5: Recommendations applying to integrated circuit packages using tape automated bonding (TAB)
- Part 6: General rules for the preparation of outline drawings of surface mounted semiconductor device packages

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

MECHANICAL STANDARDIZATION OF SEMICONDUCTOR DEVICES –

Part 1: General rules for the preparation of outline drawings of discrete devices

1 Scope and object

This part of IEC 60191 gives guidelines on the preparation of outline drawings of discrete devices. **to be added: ..., including discrete surface-mounted semiconductor devices with lead count less than 8.**

NOTE For preparation of outline drawings of surface mounted discrete devices, IEC 60191-6 should be referred to as well.

with lead count of greater or equal to 8

The primary object of these drawings is to indicate the space which should be allowed for devices in an equipment, together with other dimensional characteristics required to ensure mechanical interchangeability.

It should be noted that complete interchangeability involves other considerations such as the electrical and thermal characteristics of the semiconductor devices concerned.

The international standardization represented by these drawings therefore encourages the manufacturers of devices to comply with the tolerances shown on the drawings in order to extend their range of customers internationally. It also gives equipment designers an assurance of mechanical interchangeability between the devices obtained from suppliers in different countries, provided they allow the space in their equipment that is indicated by the drawings and take note of the more precise information on bases, studs, etc.

NOTE Additional details on the standardization philosophy used in this standard are given in Annex B.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60191-2:1966, *Mechanical standardization of semiconductor devices – Part 2: Dimensions* (including all supplements and amendments)

IEC 60191-4, *Mechanical standardization of semiconductor devices – Part 4: Coding system and classification into forms of package outlines for semiconductor device packages*

ISO 370, *Toleranced dimensions – Conversion from inches to millimetres and vice versa (withdrawn 2000-05)*

3 Terms and definitions

For the purposes of this document, the following definitions apply.

3.1

device outline drawing

drawing which includes all dimensional characteristics required for the mechanical interchangeability of the complete device. It includes the case or body, all terminals and the locating tab if present

to be reviewed for state of the art packages

3.2**terminal**

that part of the semiconductor device primarily used in making an electrical, mechanical or thermal connection. Examples of terminals are flexible leads, rigid leads, pins, studs, etc.

3.3**case outline drawing**

drawing which includes all dimensional characteristics required for the mechanical interchangeability of the case or body. It does not include the dimensions of the terminals or the locating tab if present, but their positions are shown by dotted lines

3.4**base drawing**

drawing which includes all dimensional characteristics required for the mechanical interchangeability of the terminals and mechanical index

NOTE 1 Examples of these characteristics are: lead length, lead diameters with controlled zones, lead spacing, pitch circle diameter, thickness, width and length of a tab, etc

NOTE 2 The diameter or major axis of the case outline should not be given on the base drawing.

NOTE 3 Many semiconductor devices have identical cases, but differ in the number or the length of terminals. It is also possible to have the same type of base associated with cases which are not identical.

Consequently, there are advantages in having:

a) a single drawing including only the dimensional characteristics of the case outline and separate drawings for the various bases which can be associated with this case outline,

or

b) a single drawing including only the dimensional characteristics of the base and separate drawings for the various case outlines which can be associated with this base.

3.5**mechanical index**

locating feature, or that portion of the device specifically designed to provide orientation.

NOTE Examples of a mechanical index are: key, keyway, locating tab, etc.

3.6**visual index**

any single terminal (or omission of) readily distinguished by the eye from others or any distinctive boss, stippled pattern or colour mark adjacent to a terminal

3.7**datum**

a theoretically exact geometric reference (such as axes, planes, straight lines etc.) to which toleranced features are related. Datums may be based on one or more datum features of a part

[ISO 5459:1981, definition 3.1]

3.8**seating plane or seating base**

reference plane from which, in general, outline and base dimensions are given

3.9**seated height or mounted height**

distance from the seating plane to the top of any exposed tip or rigid terminal present, otherwise to the top of the outline. Flexible terminals should not be included as part of the seated height, but the mounted height should include a minimum allowance necessary for an axially mounted flexible lead to be bent at right angles

3.10

controlled cylindrical zone

zone which defines a portion of the body of minimum length over which the diameter is controlled to closer tolerances than is allowed over the full length of the body

4 General rules for all drawings


NOTE General rules for the preparation of outline drawings of surface mounted semiconductor device packages are given in IEC 60191-6.

to be deleted

4.1 Drawing layout

General rules for the drawing layout are as follows.

- a) A drawing should show all dimensions required to ensure mechanical interchangeability.
- b) The drawing using third angle projection, should include:
 - a suitable side-view;
 - suitable end-views, where appropriate;
 - such additional views and details as are required to show any special configuration or features.
- c) The following information should be put in the cartouche, at the bottom of the page:
 - the projection method where there is more than one view, indicated as follows:



- date of publication of the drawing;
 - IEC code number;
 - country of origin and code of that country indicated by sign Δ ;
- NOTE This is no longer in practice.
- other interested countries and codes of those countries.
- d) When a drawing is re-issued because of modifications, the changes made should be indicated by arrows in the margin. The date of publication of the revised issue and of the superseded issue should be stated.
 - e) While drawings need not to be drawn to scale, they should be roughly in proportion and, where necessary for clarity, enlarged detail drawing(s) should be used.

4.2 Dimensions and tolerances

Application of dimensions and tolerances are as follows.

- a) Dimensions of bases, outlines, etc. quoted shall apply to the finished product. They should, therefore, not quote manufacturing tolerances, but give customers acceptance limits.

b) The following types of dimension may be used on the drawings as appropriate:

i) Toleranced dimensions

A toleranced dimension can be expressed:

- preferably by both minimum and maximum limits (example: $L_{\min} = 5,77 \text{ mm}$, $L_{\max} = 5,82 \text{ mm}$); or
- by a nominal value and maximum and minimum limits. Such a nominal value need not necessarily be the average of two limits (example: $L = 6^{+0,4}_{-0,2} \text{ mm}$).

ii) Untoleranced dimensions

- Untoleranced limiting dimensions
i.e.: minimum only or maximum only
(example: $L_{\max} = 5,85 \text{ mm}$).
- Untoleranced nominal dimensions
These dimensions may be used:
 - either for general information as an actual nominal figure;
 - or to specify true geometrical position (by means of linear or angular dimensions). Such dimensions shall be indicated by an asterisk (*) after the numerical value, the asterisk in this sense meaning "true geometrical position"
(example: $L_{\text{nom}} = 5,85 \text{ mm}$).

c) Single minimum, single maximum or single nominal (where not given for general information) dimensions should be stated in decimals to such a number of places as is considered adequate to express the degree of accuracy appropriate for that dimension; e.g. if measurement to the nearest 0,001 mm is considered appropriate, the dimension should be expressed to the third decimal place (for example 0,500 mm), but if the measurement to the nearest 0,01 mm is sufficient, the dimension should be expressed to the second decimal place (for example 0,50 mm) and so on. Similar consideration should be given to the number of decimal places necessary when an original dimension is expressed in millimetres.

d) Limiting values or nominal value and limits of a toleranced dimension should be stated with the same number of decimal places (e.g. 0,016 mm min. – 0,017 mm nom. – 0,019 mm max.).

e) The use of fractional mm dimensions is permitted to describe nominal hexagon sizes.

f) Numerical dimensions should not be shown directly on the figure(s). They should be shown in tabular form under the figure(s) and correspond to the reference letter symbols on the figure(s). The letter symbols on the figure(s) should be upright. Upper case letters should be used for device outline and case outline dimensions and lower case letters for base dimensions. If confusion could arise, upper case letters should preferably be used throughout.

g) In the case of a diameter, the symbol "Ø" should appear in front of the reference letter concerned both on the figure(s) and in the table. In cases where the cross-section is uncontrolled (not necessarily round), the "Ø" symbol should not be used.

h) The table shall give dimensions in millimetres. The basic dimensions and system (millimetres or inches) will be indicated immediately above the table.

NOTE Outline drawings published in IEC 60191-2 before this document came into effect may give dimensions in inches.

i) The dimensions and limits which should normally be given and their corresponding reference letter symbols are contained in Annex A. Some examples of drawings prepared in accordance with these rules are given in Annex E.

Where a particular reference letter is to be used for more than one dimension on the same drawing, use should be made of a suffix to identify the dimensions.

Annex A cannot be expected to include all dimensions likely to be necessary for mechanical standardization, more particularly in the future. A distinction has been made between primary and secondary reference letter symbols, primary reference letter symbols being those which are used most frequently, secondary reference letter symbols being those which are used less frequently and which can, if necessary, be associated with dimensions other than those given in the table.

- j) Where it is self-evident that several angles are equal, it is not necessary to show more than one angle on the figure(s).
- k) Notes will be numbered and placed under the table of dimensions, which will have a "notes" column on the right-hand side. The note reference will be placed opposite the dimension to which the note refers in the table or, when this dimension does not appear in the table, on the figure(s). The numerical sequence of the notes should follow the alphabetical sequence of the dimensional reference letters to which the notes refer. Notes referring to the figure(s) should follow notes referring to dimensions given in the table.

4.3 Methods for locating the datum

These methods are listed below in order of preference. When more than one of these methods is possible for a given device, the method appearing earliest in the list should be used. When none of the following methods is possible, the method best suited to the device should be used.

The datum is to be checked

- a) the radial line through the centre of the mechanical or visual index;
- b) the radial line midway between the two terminals which obviously comprise a gap in an otherwise equally spaced circular terminal array;
- c) the radial line 180° from the locating radius of the most isolated terminal;
- d) the radial line 180° from the mid-point of, in order of preference:
 - the two most widely spaced terminals;
 - the two most closely spaced terminals;
- e) the radial line through the centre of the index terminal. In order of preference, the index terminal is defined as that having:
 - the smallest cross-sectional area at the point of emergence from the case;
 - the greatest axial length, when one terminal is noticeably longer than the others;
 - the smallest axial length, when one terminal is noticeably shorter than the others.

4.4 Numbering of terminals

4.4.1 General

Where possible, device terminals should be identified by numbers according to the system outlined in 4.4.2 to 4.4.7. In all instances terminals are considered as being viewed from their free ends.

4.4.2 Single-ended devices with terminals in a linear array

4.4.2.1 Symmetrical linear array

The terminal nearest the reference mark should be numbered as No.1, the other terminals should be numbered progressively from terminal No.1.

4.4.2.2 Asymmetrical linear array

The terminals should be numbered progressively from the end having the most terminals.

4.4.3 Single-ended devices with terminals in a circular array

- The terminal, the centre of which is past the datum, should be numbered as No.1, the other terminals should be numbered progressively and in a clockwise sequence from No.1.
- Where a terminal is situated in the centre of the base, this should be known as the centre terminal and shall not be given a number.
- Where omission of one terminal in an otherwise equally spaced array identifies the datum, the position of the omitted terminal should not be numbered; but, in a fixed modular circular array, any location of omitted terminal which does not define a datum should be numbered.

4.4.4 Double-ended devices

Terminals on both end views should be numbered without duplication of numbers.

4.4.5 Devices with terminals disposed in a square or rectangular periphery

Visual identification of the top of the device should be provided. The means of identification of terminal position number one should also be provided. These identifications may be combined.

The terminal positions should be around the periphery of the device. The first position shall be the first position anti-clockwise from the means of identification.

To be changed or amended in the light of automatic handling: For automatic handling of SMD devices it is essential to have a significant optical identification of terminal position one on the bottom side of the device.

Each terminal shall be identified by the number of its position. Terminals may not necessarily be present in all the numbered positions but those present shall have the number of the position.


4.4.6 Particular case of lozenge – shaped bases

Given two orthogonal axes, X'X and Y'Y, the device is oriented so that:

- the greatest diagonal of the base coincides with the Y'Y axis, whereas the smallest diagonal coincides with the X'X axis;
- the greatest number of terminals is in the upper half (Figure 1A, 1B, 1C) or in the right-hand half (Figure 1D).

The numeration is clockwise, starting from the quadrant in the upper left-hand side.

If the terminals are disposed in a cross on the axis (Figure 1E), it is necessary to mark on the body with a visual index the terminal which shall be considered as the first in the clockwise numeration.

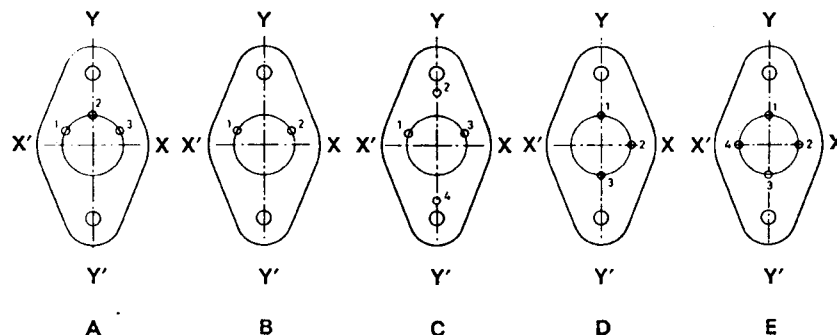

IEC 575/07