



DPC: 21 / 30439747 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 09 July 2021
Origin: International**Latest date for receipt of comments: 31 July 2021**

Project No. 2021/01627

Responsible committee: PEL/121/1 Low voltage switchgear and controlgear

Interested committees:

Title: Draft BS EN 60947-5-7 Low-voltage switchgear and controlgear - Part 5-7: Control circuit devices and switching elements - Requirements for proximity devices with analogue output

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 31 July 2021**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Responsible Committee Secretary: **Mr Simon Bounds (BSI)**
Direct tel: **0208 996 7281**
E-mail: simon.bounds@bsigroup.com

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



121A/433/CD

COMMITTEE DRAFT (CD)

PROJECT NUMBER: IEC 60947-5-7 ED2	
DATE OF CIRCULATION: 2021-07-02	CLOSING DATE FOR COMMENTS: 2021-08-27
SUPERSEDES DOCUMENTS: 121A/432/RR	

IEC SC 121A : LOW-VOLTAGE SWITCHGEAR AND CONTROLGEAR	
SECRETARIAT: France	SECRETARY: Mr Michaël LAHEURTE
OF INTEREST TO THE FOLLOWING COMMITTEES: SC 65B	PROPOSED HORIZONTAL STANDARD: ☐ Other TC/SCs are requested to indicate their interest, if any, in this CD to the secretary.
FUNCTIONS CONCERNED: ☒ EMC ☐ ENVIRONMENT ☐ QUALITY ASSURANCE ☒ SAFETY	

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

TITLE:

Low-voltage switchgear and controlgear - Part 5-7: Control circuit devices and switching elements - Requirements for proximity devices with analogue output

NOTE FROM TC/SC OFFICERS:

SC121A Officers support circulation of CD1 for project IEC 60947-5-7 ED2.

Secretary Note: NC experts are kindly requested to refer their comments to line number.

Copyright © 2021 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

1	FOREWORD	4
2		
3	1 Scope	6
4	2 Normative references	6
5	3 Terms and definitions	7
6	3.1 Basic definitions	7
7	3.2 Operation of a proximity device	7
8	3.3 Output element characteristics	10
9	4 Classification	12
10	4.1 General	12
11	5 Analogue Characteristics	12
12	5.1 General	12
13	5.3 Rated and limiting values for the proximity device and output elements	12
14	5.3.1 Voltages	12
15	5.3.2 Currents	13
16	5.3.3 Load conditions	13
17	5.3.7 Linearity	13
18	6 Product information	13
19	6.1 Identification	13
20	6.1.1 Adding information	13
21	6.1.2 Specific information of 6.1.1 ba) Output characteristics	14
22	7 Normal service, mounting and transport conditions	14
23	8 Constructional and performance requirements	14
24	8.1 General	14
25	8.1.1 Load conditions	14
26	8.2 Performance requirements	14
27	8.5 Analogue output limit values	15
28	8.5.1 Environmental test conditions	15
29	9 Tests	16
30	9.1 General	16
31	9.3.1 Test sequences	16
32	9.6 Verification of the electromagnetic compatibility	16
33	9.8 Additional requirements for proximity switches with analogue output	17
34	9.8.1 Requirements for test programs and proper functioning verification procedures (PFVPs)	17
35	9.8.2 Verification of analogue output	17
36	9.8.3 Accuracy and related factors	19
37	9.9 Testing of operating distances or other physical measurements (e.g. (rotational) speed, ...) (in preparation for CD2)	19
38	9.9.3 Conformity(to be discussed)	19
39	Annex G (informative) Example of the determination of the conformity	21
40	G.1 Example 1 of the determination of the conformity of a distance sensor, with linear output characteristics	21
41	G.2 Example 2 of the determination of the conformity of a position sensor, with nonlinear output characteristics	23
42	G.3 Test report and technical documentation	26

48	G.3.1	Test report.....	26
49	G.3.2	Technical documentation	26
50	G.3.3	Total probable error TPE	26
51	Annex H (normative) Additional requirements for proximity switches with analogue		
52	output incorporating a built-in communication interface complying with		
53	IEC 61131-9		27
54	H.1	Scope	27
55	H.2	Normative references	27
56	H.3	Terms and definitions.....	27
57	H.3.1	Basic definitions	27
58	H.3.3	Output element characteristics.....	27
59	H.5	Characteristics	27
60	H.5.4	Rated and limiting values for SDCI	27
61	H.6	Product information.....	28
62	H.8	Constructional and performance requirements	28
63	H.8.1	General	28
64	H.8.2	Performance requirements.....	28
65	H.9	Tests	28
66	H.9.1	General	28
67	Bibliography.....		29
68			
69	Figure 1 – Proximity device with analogue output, schematic block diagram structure		6
70	Figure 2 – Principle diagram of time values and their meanings		11
71	Figure 3 – Principle diagram of limit values and their ranges.....		12
72	Figure 2a) – Analogue output limit values, example 4..20 mA		15
73	Figure 2b) – Analogue output limit values, example 0..10 V		15
74	Figure G.1 – Output values diagram corresponding to example of Table G.1		22
75	Figure G.2 – Error curves corresponding to example of Table G.1		23
76	Figure G.3 – Output values diagram corresponding to example of Table G.2		25
77	Figure G.4 – Error curves corresponding to example of Table G.2		26
78			
79	Table 1 – Range of analogue voltage signals (<i>to be modified</i>).....		12
80	Table 2 – Range of analogue current signals		13
81	Table 3 – Load conditions		13
82	Table 4 – Analogue output static characteristics		14
83	Table 5 – Analogue output dynamic characteristics.....		14
84	Table 6 – Analogue output overload immunity test		18
85	Table 7 – Number of measurement cycles and number and position of test points		19
86	Table G.1 – Example table for the errors of a linear sensor.....		21
87	Table G.2 – Example table for the errors of a nonlinear sensor		24
88	Table H.1 – Electrical characteristics of a Master port class B		28

INTERNATIONAL ELECTROTECHNICAL COMMISSION

LOW-VOLTAGE SWITCHGEAR AND CONTROLGEAR –

**Part 5-7: Control circuit devices and switching elements –
Proximity devices with analogue output**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60947-5-7 has been prepared by subcommittee 121A: Low-voltage switchgear and controlgear, of IEC technical committee 121: Switchgear and controlgear and their assemblies for low voltage.

A list of all the parts in the IEC 60947 series, under the general title *Low-voltage switchgear and controlgear*, can be found on the IEC website.

The text of this standard is based on the following documents:

Draft	Report on voting
121A/XX/FDIS	121A/XX/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The main changes with respect to the previous Edition 1 are the followings:

- New structure;

- 143 – Update and expansion of definitions on analogue output properties;
- 144 – Expanded performance requirements on analogue output;
- 145 – Update and new normative references;
- 146 – Update of EMC requirements;
- 147 – Harmonization with IEC 62828 series;
- 148 – Harmonization with IEC 62683 definitions;
- 149 – Harmonization with IEC 61131-2 requirements;
- 150 – Update of the annexes

151 The language used for the development of this International Standard is English.

152 This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in
153 accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available
154 at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are
155 described in greater detail at www.iec.ch/standardsdev/publications.

156 The committee has decided that the contents of this document will remain unchanged until the
157 stability date indicated on the IEC website under webstore.iec.ch in the data related to the
158 specific document. At this date, the document will be

- 159 • reconfirmed,
- 160 • withdrawn,
- 161 • replaced by a revised edition, or
- 162 • amended.

163

164

LOW-VOLTAGE SWITCHGEAR AND CONTROLGEAR –

Part 5-7: Control circuit devices and switching elements – Proximity devices with analogue output

1 Scope

This part of IEC 60947 states the requirements for proximity devices with analogue output and/or a digital output to transmit a corresponding digital value representing the detected sensing input. These devices can provide additional parameters. Figure 1 shows the schematic principle of such a device. They may consist of one or more parts.

The requirements of IEC 60947-5-2 (proximity switches) apply with the additions and modifications as stated in this document. The clause numbering in this document follows the clause numbering of IEC 60947-5-2, modified where necessary.

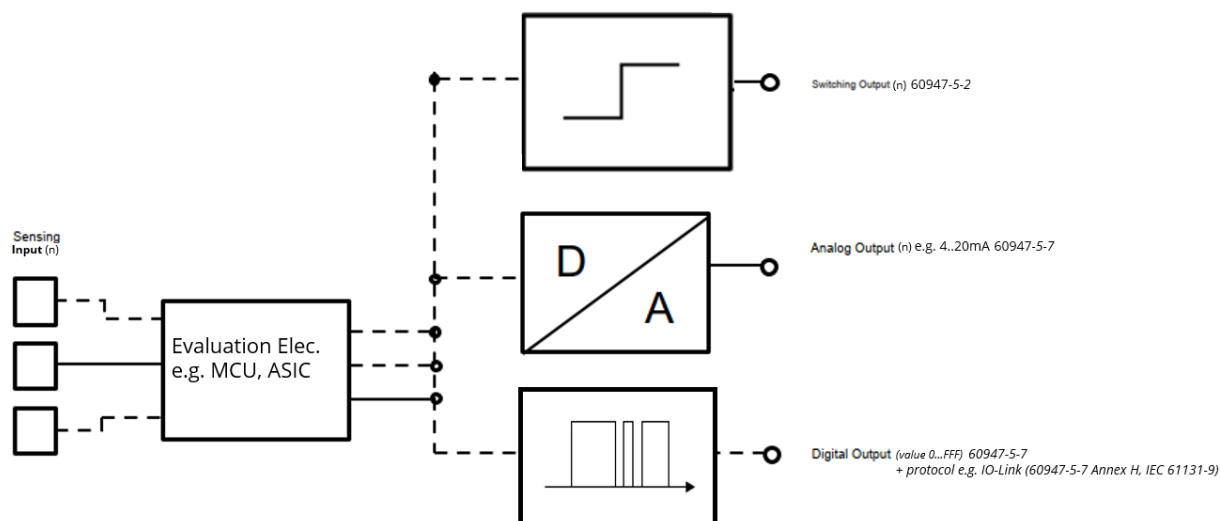


**Figure 1 – Proximity device with analogue output,
schematic block diagram structure**

This document does not apply to industrial process measurement transmitters according IEC 62828 series.

NOTE Analogue proximity devices are not necessarily linear devices.

2 Normative references

The following documents are referred in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60947-5-2:2019, *Low-voltage switchgear and controlgear – Part 5-2: Control circuit devices and switching elements – Proximity switches*

IEC 62683-1:2017, *Low-voltage switchgear and controlgear – Product data and properties for information exchange – Part 1: Catalogue data*

IEC 61131-2:2017, *Industrial-process measurement and control – Programmable controllers – Part 2: Equipment requirements and tests*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in [IEC 60947-5-2:2019 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1 Basic definitions

3.1.1

proximity device with analogue output

device producing an output signal which varies continuously depending on the physical quantity (e.g. distance, speed, rpm...) detected/calculated by the proximity device in relation to its target object(s)

3.1.2

lower range value

minimum stated input value above which the output signal varies continuously

3.1.3

upper range value

maximum stated input value below which the output signal varies continuously

3.1.4

range of input values

defined by lower range value and upper range values of the sensing element detection capability, or calculated value (e.g. distance, speed, rpm...), within which the limits of uncertainty of the proximity device are specified

Note 1 to entry: A principle diagram describing the terms of 3.1.2 to 3.1.4 is given in Figure 3.

3.1.5

span

synonymous: range of input values

algebraic difference between the values of the upper and lower limits of the measuring range

Note 1 to entry: Limit has not to be intend as physical limits regarding the capabilities of the device, rather the upper and lower values defined for the relevant application.

Note 2 to entry: The CDD code of this entry for Electronic Data Exchange is ABB785, modified ("other variables" removed).

[SOURCE: IEC 60050-311:2001, 311-03-13, modified: Notes added]

3.2 Operation of a proximity device

3.2.1

linearity

ability of a proximity device to provide an indication having a linear relationship with a defined quantity other than an influence quantity

Note 1 to entry: The method of expression of lack of linearity is different for different kinds of device and is established in each particular instance.

[SOURCE: IEC 60050-311:2001, 311-06-05]

~~3.2.1~~

~~conformity (to be discussed)~~

~~ability of a proximity device to provide an indication having a specified characteristic curve which can be linear, logarithmic, parabolic, etc.~~

3.2.2**non-linearity**

deviation from ideal behaviour for devices that have a linear input/output relationship, determined from the curve plotted using the overall average of corresponding upscale and downscale errors

Note 1 to entry: Non-linearity can be calculated and expressed in one of three ways: – independent: line positioned so as to minimize the maximum deviation; – terminal-based: line positioned so as to coincide with the actual characteristic curve at the upper and lower range-values; – zero-based: line positioned so as to coincide with the actual characteristic curve at the lower range-value.

Note 2 to entry: The corresponding properties can be found in the CDD.

Note 3 to entry: Linearity is defined in IEC 60050(300), definition 311-06-06.

Note 4 to entry: Non-linearity does not include hysteresis.

Note 5 to entry: Conformity is often used in conjunction with non-linear curves.

[SOURCE: IEC 61987-13:2016, modified: Notes added]

3.2.2**~~non-conformity~~ (“uncertainty”? to be discussed)**

~~deviation from ideal behaviour for devices that have a non-linear input/output relationship, determined from the curve plotted using the overall average of corresponding upscale and downscale errors~~

~~Note 1 to entry: The non-conformity is defined as the closeness with which a calibration curve approximates to a specified characteristic curve (which can be linear, logarithmic, parabolic, etc.).~~

3.2.3**true value (of a physical quantity value)**

value consistent with the definition of a given particular quantity

Note 1 to entry: This term is used in the "true value" approach.

Note 2 to entry: Value that would be obtained by a perfect measurement.

Note 3 to entry: True values are by nature indeterminate.

Note 4 to entry: The indefinite article "a", rather than the definite article "the", is used in conjunction with "true value" because there can be many values consistent with the definition of a given particular quantity.

[SOURCE: VIM 1.19, IEV 311-01-04]

3.2.4**conventional true value (of a physical quantity value)**

value attributed to a particular quantity and accepted, sometimes by convention, as having an uncertainty appropriate for a given purpose

Note 1 to entry: This term is used in the "uncertainty" approach.

Note 2 to entry: The "conventional true value" is sometimes called "assigned value", "best estimate of the value", "conventional value" or "reference value". The term "reference value", in this sense, should not be confused with "reference value" in the sense used in 311-07-01.

Note 3 to entry: Frequently, a large number of results of measurement of a quantity are used to establish a conventional true value.

3.2.5**Inaccuracy**

maximum positive and negative deviation from the specified characteristic curve observed in testing a device under specified conditions and by a specified procedure

Note 1 to entry: Accuracy is defined in IEC 60050-300, definition 311-06-08.

[SOURCE: IEC 61298-1:2008]

3.2.6**long term drift**

drift in output monitored for 30 days at 90 % of span

[SOURCE: IEC 61987-1:2008, 3.22]

3.2.7**long term stability**

drift of zero output signal in percent of full scale limit after a given period of normal operating conditions