



DPC: 23 / 30474270 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 25 May 2023

Origin: International

Latest date for receipt of comments: 14 June 2023

Project No. 2023/01077

Responsible committee: GEL/86/3 Fibre optic systems and active devices

Interested committees:

Title: BS EN IEC 62074-1 Fibre optic interconnecting devices and passive components - Fibre optic WDM devices

Part 1: Generic specification

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 14 June 2023**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



86B/4767/CD

COMMITTEE DRAFT (CD)

PROJECT NUMBER: IEC 62074-1 ED3	
DATE OF CIRCULATION: 2023-05-19	CLOSING DATE FOR COMMENTS: 2023-07-14
SUPERSEDES DOCUMENTS: 86B/4699/CD, 86B/4739A/CC	

IEC SC 86B : FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS	
SECRETARIAT: Japan	SECRETARY: Mr Shigeru Tomita
OF INTEREST TO THE FOLLOWING COMMITTEES:	PROPOSED HORIZONTAL STANDARD: ☐ Other TC/SCs are requested to indicate their interest, if any, in this CD to the secretary.
FUNCTIONS CONCERNED: ☐ EMC ☐ ENVIRONMENT ☐ QUALITY ASSURANCE ☐ SAFETY	

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Recipients of this document are invited to submit, with their comments, notification of any local regulations or technical reasons that may exist and should be considered should this proposal proceed, recognizing that failure to address such requirements could result in the need for new or existing "In Some Countries" clauses. (SEE [AC/22/2007](#) OR [NEW GUIDANCE DOC](#)).

TITLE: Fibre optic interconnecting devices and passive components - Fibre optic WDM devices - Part 1: Generic specification

NOTE FROM TC/SC OFFICERS:

Copyright © 2023 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

1			
2	FOREWORD		5
3	1. Scope		7
4	2. Normative references		7
5	3. Terms and definitions		8
6	3.1 Device terms		8
7	3.2 Performance terms		9
8	4. Requirements		25
9	4.1 Classification		25
10	4.1.1 General		25
11	4.1.2 Technology		25
12	4.1.3 Port configuration		25
13	4.1.4 Wavelength (channel) spacing		25
14	4.1.5 Internal structure		26
15	4.1.6 Wavelength band		26
16	4.1.7 Temperature control		26
17	4.1.8 Interface style		26
18	4.2 Documentation		26
19	4.2.1 Symbols		26
20	4.2.2 Drawings		26
21	4.2.3 Tests and measurements		27
22	4.2.4 Test report		27
23	4.2.5 Instructions for use		27
24	4.3 Standardisation system		27
25	4.3.1 Interface standards		27
26	4.3.2 Performance standards		27
27	4.3.3 Reliability standards		28
28	4.4 Design and construction		28
29	4.4.1 Materials		28
30	4.4.2 Workmanship		28
31	4.5 Quality		28
32	4.6 Performance requirements		28
33	4.7 Identification and marking		28
34	4.7.1 General		28
35	4.7.2 Device marking		28
36	4.7.3 Package marking		29
37	4.8 Packaging		29
38	4.9 Storage conditions		29
39	4.10 Safety		29
40	Annex A (informative) Transfer matrix		30
41	A.1 General		30
42	A.2 Transfer matrix		30
43	A.3 Transfer matrix coefficient		31
44	A.4 Logarithmic transfer matrix		31
45	Annex B (informative) Specific performances of WDM devices for bidirectional		
46	transmission system (example)		33
47	B.1 Generic		

48	B.2	Definition of near-end isolation and near-end crosstalk	34
49	Annex C (informative)	Transfer matrix as applications of WDM devices (example)	35
50	C.1	Generic	35
51	C.2	Wavelength multiplexer	35
52	C.3	Wavelength demultiplexer	36
53	C.4	Wavelength multiplexer/demultiplexer	37
54	C.5	Wavelength router	38
55	C.6	Wavelength channel add/drop	39
56	Annex D (informative)	Example of technology of thin film filter WDM devices	41
57	D.1	General	41
58	D.2	Thin film filter technology	41
59	D.3	Typical characteristics of thin film filter	42
60	Annex E (informative)	Example of technology of fibre fused WDM devices	43
61	E.1	General	43
62	E.2	Typical characteristics of fibre fused WDM devices	44
63	Annex F (informative)	Example of arrayed waveguide grating (AWGs) technology	45
64	F.1	General	45
65	F.2	Typical characteristics of AWG	45
66	Annex G (informative)	Example of FBG filter technology	47
67	G.1	General	47
68	G.2	Typical characteristics of FBG filter	48
69	Annex H (informative)	Example interface style	49
70	Bibliography		50
71			
72	Figure 1 – Illustration of channel wavelength range		9
73	Figure 2– Illustration of insertion loss		10
74	Figure 3 – Illustration of ripple		11
75	Figure 4 – Illustration of channel insertion loss variation		12
76	Figure 5 – Illustration of isolation wavelength		13
77	Figure 6 – Illustration of isolation wavelength range		14
78	Figure 7 – Illustration of adjacent channel isolation		15
79	Figure 8 – Illustration of non-adjacent channel isolation		16
80	Figure 9 – Illustration of maximum adjacent channel crosstalk		17
81	Figure 10 – Illustration of maximum non-adjacent channel crosstalk		18
82	Figure 11 – Illustration of a four-wavelength bidirectional system		21
83	Figure 12 – Illustration of channel extinction ratio		21
84	Figure 13 – Illustration of free spectral range		22
85	Figure 14 – Illustration of polarization dependent centre wavelength (PDCW)		23
86	Figure 15 – Illustration of X dB bandwidth		24
87	Figure A.1 – Example of a six-port device, with two input and four output ports		30
88	Figure A.2 – Illustration of transfer matrix coefficient		31
89	Figure B.1 – Uni-directional and bi-directional transmission system application of a		
90	1 × 2 DM device		33
91	Figure C.1 – Example of a wavelength multiplexer		35
92	Figure C.2 – Example of a wavelength demultiplexer		36

93	Figure C.3 – Example of a wavelength multiplexer/demultiplexer	37
94	Figure C.4 – Example of a wavelength router.....	38
95	Figure C.5 – Example of wavelength channel add/drop	39
96	Figure D.1 – Schematic configuration of a thin film filter WDM device	41
97	Figure D.2 – Structure of multilayer thin film	42
98	Figure D.3 – Typical characteristics of 1 510 nm and C-band WDM device using thin	
99	film filter technology.....	42
100	Figure E.1 – Structure of a fused bi-conical tapered 2x2 coupler.....	43
101	Figure E.2 – Typical scheme for a fused coupler.....	44
102	Figure E.3 – Typical characteristics of a fibre fused WDM device.....	44
103	Figure F.1 – Basic configuration of AWG	45
104	Figure F.2 – Example of AWG characteristics	46
105	Figure G.1 – Usage of fibre Bragg grating filter	47
106	Figure G.2 – Function and mechanism of fibre Bragg grating	47
107	Figure G.3 – Example of FBG filter characteristics	48
108	a) Configuration A – Containing integral fibre optic pigtails, without connectors	49
109	b) Configuration B – Containing integral fibre optic pigtails, with a connector plug on	
110	each pigtail	49
111	c) Configuration C – Containing fibre optic connector receptacles as an integral part	
112	of the device housing.....	49
113	d) Configuration D – Containing some combination of the interfacing features of a) to	
114	c) 49	
115	Figure 19 – Example of interface style for WDM devices.....	49
116		
117	Table 1 – Example of a typical fibre optic circulator classification	25
118		
119		

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING DEVICES AND
PASSIVE COMPONENTS – FIBRE OPTIC WDM DEVICES –****Part 1: Generic specification****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62074-1 has been prepared by subcommittee SC 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition, published in 2014, and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) harmonization of terms and definitions with IEC TS 62627-09;
- b) change of Clause 4 regarding requirements.

172 The text of this standard is based on the following documents:

FDIS	Report on voting
86B/xxxx/FDIS	86B/xxxx/RVD

173
174 Full information on the voting for the approval of this standard can be found in the report on
175 voting indicated in the above table.

176 The French version of this standard has not been voted upon.

177 This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

178 A list of all parts in the IEC 62074 series, published under the general title *Fibre optic*
179 *interconnecting devices and passive components – Fibre optic wdm devices*, can be found on
180 the IEC website.

181 The committee has decided that the contents of this publication will remain unchanged until
182 the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data
183 related to the specific publication. At this date, the publication will be

- 184 • reconfirmed,
185 • withdrawn,
186 • replaced by a revised edition, or
187 • amended.

188

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

189

190

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – FIBRE OPTIC WDM DEVICES –

Part 1: Generic specification

1. Scope

This part of IEC 62074 applies to fibre optic wavelength division multiplexing (WDM) devices. These have all of the following general features:

- they are passive, in that they contain no optoelectronic or other transducing elements; however they can use temperature control only to stabilize the device characteristics; they exclude any optical switching functions;
- they have three or more ports for the entry and/or exit of optical power, and share optical power among these ports in a predetermined fashion depending on the wavelength;
- the ports are optical fibres, or optical fibre connectors.

This document establishes uniform requirements for the following:

- optical, mechanical and environmental properties.

2. Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60027 (all parts), *Letter symbols to be used in electrical technology*

IEC 60050-731, *International Electrotechnical Vocabulary – Chapter 731: Optical fibre communication*

IEC 60695-11-5, *Fire hazard testing – Part 11-5: Test flames – Needle-flame test method – Apparatus, confirmatory test arrangement and guidance*

IEC TS 62627-09, *Fibre optic interconnecting devices and passive components - Vocabulary for passive optical devices*

ISO 129-1, *Technical drawings – Indication of dimensions and tolerances – Part 1: General principles*

ISO 286-1, *Geometrical product specifications (GPS) – ISO coding system for tolerances of linear sizes – Part 1: Bases of tolerances and fits*

ISO 1101, *Geometrical product specifications (GPS) – Geometrical tolerancing – Tolerances of form, orientation, location and run-out*

ISO 8601-1, *Date and time — Representations for information interchange — Part 1: Basic rules*

3. Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-731 and IEC TS 62627-09, as well as the following, apply.

3.1 Device terms

3.1.1

wavelength-selective branching device

passive device with three or more ports that shares optical power among its ports in a predetermined fashion, only depending on the wavelength, in the sense that at least two different wavelength ranges are nominally transferred between two different pairs of ports

[SOURCE IEC TS 62627-09: 2016]

3.1.2

wavelength division multiplexing device

wavelength division multiplexer

WDM device

synonym for a wavelength-selective branching device

Note 1 to entry: The term of wavelength-selective device is the contrast with the term of non-wavelength-selective branching device. The term of WDM device is frequently used.

3.1.3

dense wavelength division multiplexing device

DWDM device

WDM device which is intended to operate for a channel spacing equal or less than 1 000 GHz

Note 1 to entry: The channel spacing is approximately 8 nm at 1 550 nm and 5,7 nm at 1 310 nm.

3.1.4

coarse wavelength division multiplexing device

CWDM device

WDM device which is intended to operate for channel spacing less than 50 nm and greater than 1 000 GHz

3.1.5

wide WDM device

WWDM

WDM device which is intended to operate for channel spacing equal to or greater than 50 nm

3.1.6

wavelength multiplexer

MUX

WDM (DWDM, CWDM or WWDM) device which has n input ports and one output port, and whose function is to combine n different optical signals differentiated by wavelength from n corresponding input ports on to a single output port

3.1.7

wavelength demultiplexer

DEMUX

WDM (DWDM, CWDM or WWDM) device which has one input port and n output ports, and whose function is to separate n different optical signals differentiated by wavelength from a single input port to n corresponding output ports

3.1.8**interleaver**

DWDM device which has three ports, and which function is to separate n different optical signals differentiated by wavelength from a common port and transmit an odd channel signal to one branching port and an even channel signal to the other branching port alternately

Note 1 to entry: An interleaver can operate as a wavelength multiplexer (OMUX) by reversing the demultiplexer.

3.2 Performance terms**3.2.1****operating wavelength**

nominal wavelength λ_h at which a WDM device operates with the specified performance

Note 1 to entry: The term "operating wavelength" includes the wavelength to be nominally transmitting, designated attenuating and isolated.

Note 2 to entry: Operating frequency is also used for DWDM devices.

3.2.2**operating wavelength range**

specified range of wavelengths including all operating wavelengths

Note 1 to entry: It includes all passbands and isolation wavelength ranges corresponding to all channels.

Note 2 to entry: The term "operating wavelength range" is defined for a WDM device, not for each channel or port.

3.2.3**channel wavelength range**

range within which a CWDM or WWDM device operates with less than or equal to a specified optical attenuation for the conducting port pair

Note 1 to entry: For a particular nominal channel centre wavelength, λ_{nom} , this wavelength range from $\lambda_{imin} = (\lambda_{nom} - \Delta\lambda_{max})$ to $\lambda_{imax} = (\lambda_{nom} + \Delta\lambda_{max})$, where $\Delta\lambda_{max}$ is the maximum channel centre wavelength deviation.

Note 2 to entry: For CWDM devices, channel centre wavelengths and maximum channel centre wavelength deviations are defined as nominal central wavelengths and wavelength deviations in ITU-T G 694.2.

Note 3 to entry: An illustration of channel wavelength range is shown in Figure 1.

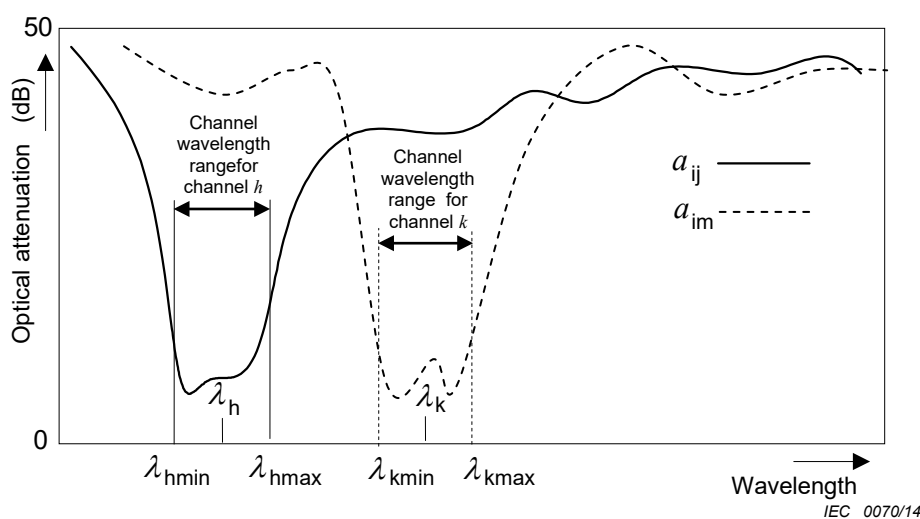


Figure 1 – Illustration of channel wavelength range

3.2.4**channel frequency range**

frequency range within which a DWDM device is required to operate with less than or equal to a specified optical attenuation for the conducting port pair

Note 1 to entry: For a particular nominal channel frequency, f_{nomi} , this frequency range is from $f_{\text{imin}} = (f_{\text{nomi}} - \Delta f_{\text{max}})$ to $f_{\text{imax}} = (f_{\text{nomi}} + \Delta f_{\text{max}})$, where Δf_{max} is the maximum channel centre frequency deviation.

Note 2 to entry: Nominal channel centre frequency and maximum channel centre frequency deviation are defined in ITU-T G.694.1.

3.2.5**passband**

channel passband

synonym for channel wavelength range (channel frequency range)

Note 1 to entry: Passband is frequently used.

Note 2 to entry: There are two or more passbands for WDM devices. Each passband is defined corresponding to each channel.

3.2.6**insertion loss**

maximum value of a_{ij} (where $i \neq j$) within the passband for conducting port pair

Note 1 to entry: It is the optical attenuation from a given port to a port which is another port of conducting port pair of the given port of a WDM device. Insertion loss is a positive value in decibels. It is calculated as:

$$IL = -10 \times \log_{10} \left(\frac{P_{\text{out}}}{P_{\text{in}}} \right)$$

where

P_{in} is the optical power launched into the port;

P_{out} is the optical power received from the other port of the conducting port pair.

Note 2 to entry: An illustration of insertion loss is shown in Figure 2.

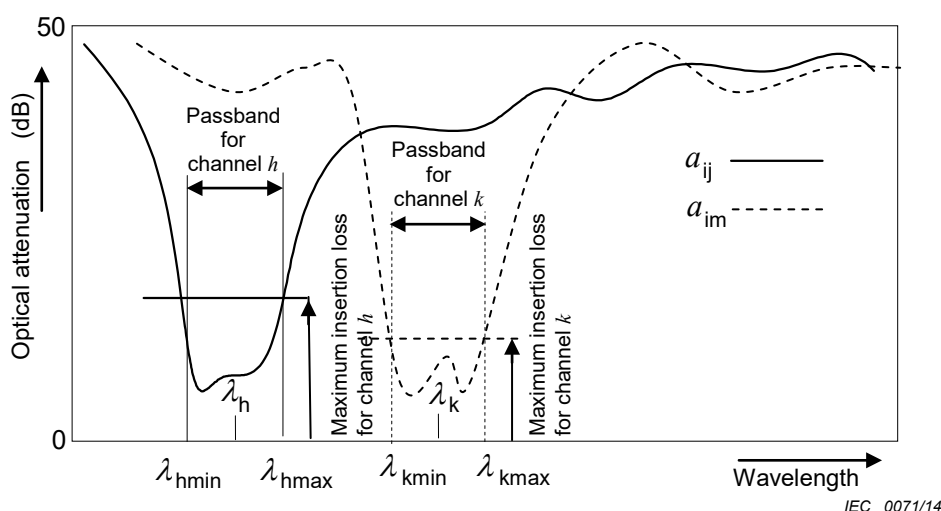


Figure 2– Illustration of insertion loss

Note 3 to entry: For a WDM device, the insertion loss shall be specified as a maximum value of the insertion losses of all channels

3.2.7**channel insertion loss**

insertion loss of the specific channel

Note 1 to entry: The term of insertion loss is used both for a WDM device and channel insertion loss.

3.2.8


passband ripple

maximum peak-to-peak variation of the insertion loss over the passband

Note 1 to entry: Insertion loss is expressed as a positive value.

Note 2 to entry: The term of passband is applied both for the unit of wavelength (WDM and CWDM) and the unit of frequency (DWDM).

Note 3 to entry: Refer to Figure 3.

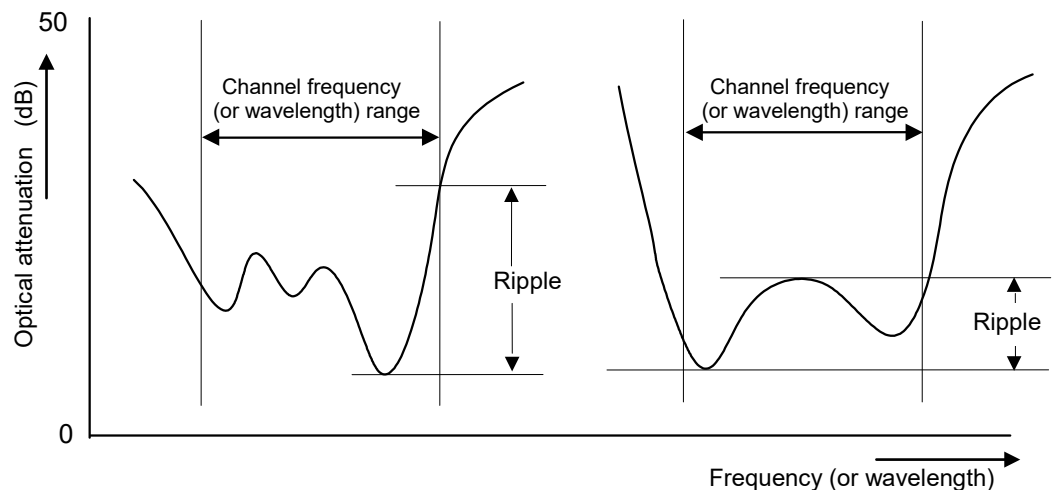

IEC 0072/14

a) – Ripple at band edges

b) – Ripple in band

Figure 3 – Illustration of ripple

3.2.9

maximum channel insertion loss deviation within the passband

maximum variation of the insertion loss

Note 1 to entry: Insertion loss is a positive value.

Note 2 to entry: The channel frequency range for a DWDM device or channel wavelength range for a coarse WDM (CWDM) and a wide WDM (WDM) device can be used for passband.

Note 3 to entry: See Figure 4.

Note 4 to entry: Channel insertion loss deviation should not to be confused with ripple defined in Figure 5 below.

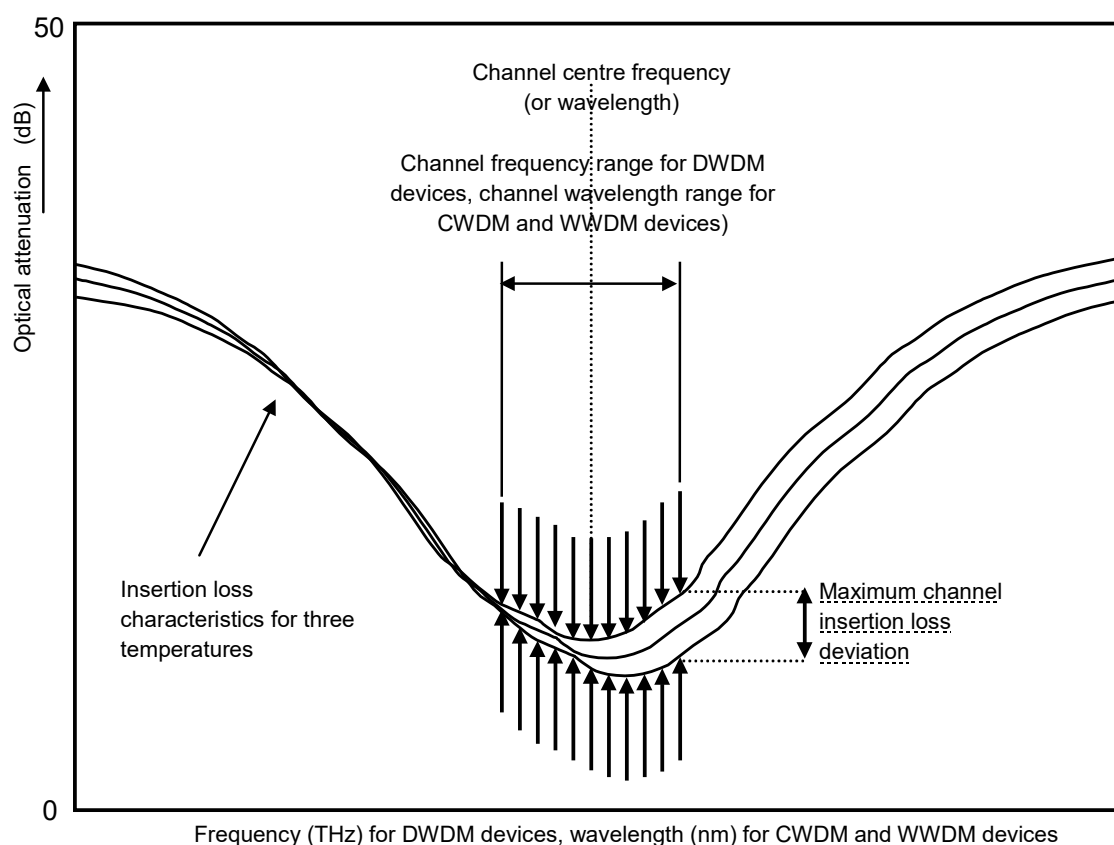


Figure 4 – Illustration of channel insertion loss variation

3.2.10

channel non-uniformity

insertion loss channel non-uniformity

difference between the maximum and the minimum insertion loss at the common port for a specified set of branching ports

Note 1 to entry: Channel non-uniformity is defined for a MUX ($N \times 1$ WDM device) and a DEMUX ($1 \times N$ WDM device). Channel non-uniformity is a positive value, and expressed in dB.

Note 2 to entry: For CWDM and DWDM devices, channel non-uniformity should be defined as the differences between the maximum and the minimum insertion loss at nominal wavelengths (frequencies) of all channels.

3.2.11

centre wavelength deviation

difference between the centre wavelength and nominal wavelength (frequency) of the specified channel for DWDM devices

Note 1 to entry: The centre wavelength is defined as the centre of the wavelength range which is x dB less than the minimum optical attenuation for the specified passband (channel).

Note 2 to entry: 0,5, 1 or 3 are generally used for x .

3.2.12

crosstalk

ratio of the noise power in the specified channel(s) versus the signal power in the specified channel

Note 1 to entry: Crosstalk is a negative value given in dB. The crosstalk is defined for each output port. Crosstalk for WDM devices is defined for a DEMUX ($1 \times N$ WDM device). The crosstalk for port o to port j is subtraction from the insertion loss of port i to o (conducting port pair) to the isolation of port j to o (isolated port pair). Crosstalk for

WDM devices is defined for a DEMUX ($1 \times N$ WDM device). For an $M \times N$ WDM device, crosstalk can be defined to as expanding M of a $1 \times N$ WDM device.

Note 2 to entry: For WDM devices with three or more ports, the crosstalk should be specified as the maximum value of the crosstalk for each output port.

Note 3 to entry: Care should be taken not to confuse crosstalk and isolation.

3.2.13 isolation

minimum value of a_{ij} (where $i \neq j$) within isolation wavelength range for isolated port pair


Note 1 to entry: Isolation is a positive value expressed in dB.

3.2.14 isolation wavelength

for a pair of ports i and j (where $i \neq j$), that are conducting port pair at a wavelength λ_h , a nominal wavelength λ_k (where $\lambda_h \neq \lambda_k$), that is an operating wavelength for a different pair of ports, at which i and j are isolated port pair

Note 1 to entry: Refer to Figure 5.

Note 2 to entry: Isolation frequency is also used for DWDM device.

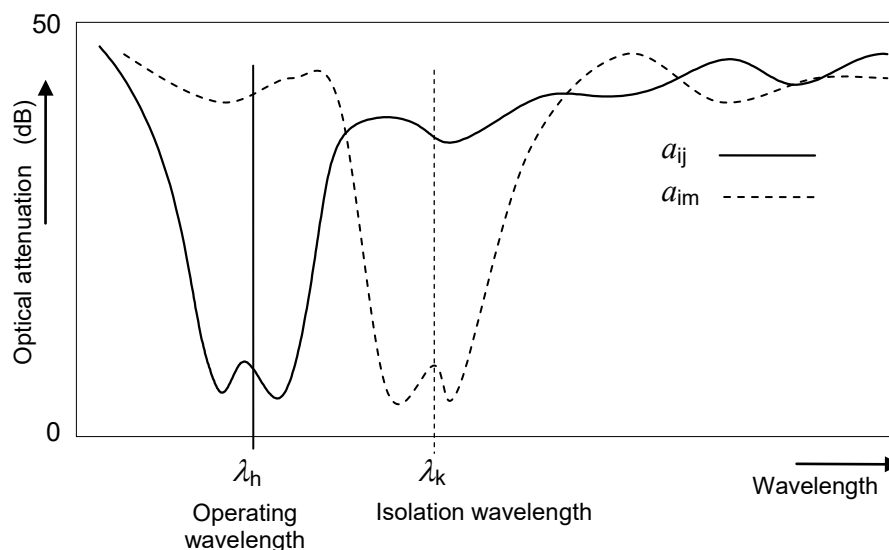

IEC 0074/14

Figure 5 – Illustration of isolation wavelength

3.2.15 isolation wavelength range

for a pair of ports i and j that are a conducting port pair at wavelength λ_h , the range of wavelengths from λ_{kmin} to λ_{kmax} centred about an operating wavelength λ_k that is an operating wavelength for a different pair of ports but at which i and j are an isolated port pair

Note 1 to entry: Refer to Figure 6.

Note 2 to entry: Isolation frequency range is also used for DWDM devices.

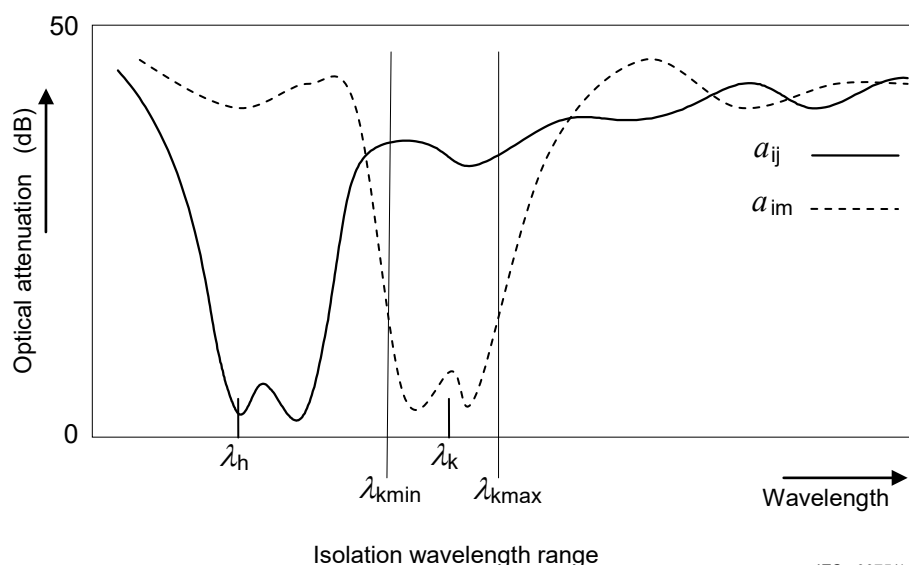


Figure 6 – Illustration of isolation wavelength range

3.2.16

wavelength isolation

value of a_{ij} (where $i \neq j$) in the isolation wavelength range

Note 1 to entry: The wavelength isolation shall be defined as the minimum value of wavelength isolation over the isolation wavelength range.

3.2.17

adjacent channel isolation

isolation with the restriction that x , the isolation wavelength number, is restricted to the channels immediately adjacent to the (channel) wavelength number associated with port o

Note 1 to entry: Adjacent channel isolation is a positive value expressed in dB

Note 2 to entry: This is illustrated in Figure 8 below. The adjacent channel isolation is different from adjacent channel crosstalk. In Figure 7, the upward-pointing arrow indicates a positive value, and the downward-pointing arrow indicates a negative value. Generally, there are two adjacent channel isolations for the shorter wavelength (higher frequency) side and the longer wavelength (lower frequency) side.

3.2.18

adjacent channel crosstalk

crosstalk with the restriction that x , the isolation wavelength number, is restricted to the channels immediately adjacent to the (channel) wavelength number associated with port o

Note 1 to entry: Adjacent channel crosstalk is a negative value expressed in dB.

Note 2 to entry: This is illustrated in Figure 8 below. Adjacent channel crosstalk is different from adjacent channel isolation. In Figure 7, the upward-pointing arrow indicates a positive value, and the downward-pointing arrow indicates a negative value. Generally, there are two adjacent channel crosstalks for the shorter wavelength (higher frequency) side and the longer wavelength (lower frequency) side.