



DPC: 24 / 30500170 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 16 September 2024

Origin: International

Latest date for receipt of comments: 2 October 2024

Project No. 2024/02594

Responsible committee: EPL/47 Semiconductors

Interested committees:

Title: BS EN IEC 62228-7 Integrated circuits - EMC evaluation of transceivers

Part 7: CXPI transceivers

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 2 October 2024**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Introduction

This draft standard is based on national and international discussions. Your comments on this draft are invited and will assist in the preparation of the consequent standard.

For international standards, comments will be reviewed by the relevant UK national committee before sending the consensus UK vote and comments to the international committee, which will then decide appropriate action. If the international standard is approved, it is usual for the text to be published as a British Standard.

For national standards, comments will be reviewed by the relevant UK national committee and the resulting standards published as a British Standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with supporting technical reasons) or positive vote on this draft. Please indicate if you are aware of any reason why this draft standard should not be published as a British Standard.

Submission of Comments

- **Annotated drafts are not acceptable and will be rejected.**
- All comments should be submitted online at <https://standardsdevelopment.bsigroup.com/>. You will need to register in order to comment.

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	------------------------

1	2	(3)	4	5	(6)	7
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/Figure/ Table/Note	Type of comment	Commend (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



47A/1166/CD

COMMITTEE DRAFT (CD)

PROJECT NUMBER: IEC 62228-7 ED2	
DATE OF CIRCULATION: 2024-09-06	CLOSING DATE FOR COMMENTS: 2024-11-01
SUPERSEDES DOCUMENTS: 47A/1165/RR	

IEC SC 47A : INTEGRATED CIRCUITS	
SECRETARIAT: Japan	SECRETARY: Mr Yoshinori FUKUBA
OF INTEREST TO THE FOLLOWING COMMITTEES:	HORIZONTAL FUNCTION(S):
ASPECTS CONCERNED: Electromagnetic Compatibility	

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Recipients of this document are invited to submit, with their comments, notification of any local regulations or technical reasons that may exist and should be considered should this proposal proceed, recognizing that failure to address such requirements could result in the need for new or existing "In Some Countries" clauses. (SEE [AC/22/2007](#) OR [NEW GUIDANCE DOC](#)).

TITLE:

Integrated circuits - EMC evaluation of transceivers - Part 7: CXPI transceivers

NOTE FROM TC/SC OFFICERS:

SC47A decided to start the development of the second edition at SC47a plenary meeting in Frankfurt, Germany on 2023-11-16 (Decision 47A-2023-13 of 47A/1159/RM). CC will be reviewed at the WG9 meeting on 2024-11-25.

Copyright © 2024 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

1		
2		
3	FOREWORD	6
4	1 Scope	8
5	2 Normative references	8
6	3 Terms, definitions and abbreviated terms	9
7	3.1 Terms and definitions	9
8	3.2 Abbreviated terms	9
9	4 General	10
10	5 Test and operating conditions	11
11	5.1 Supply and ambient conditions	11
12	5.2 Test operation modes	12
13	5.3 Test configuration	12
14	5.3.1 General test configuration for functional test	12
15	5.3.2 General test configuration for unpowered ESD test	13
16	5.3.3 Coupling ports and coupling networks for functional tests	13
17	5.3.4 Coupling ports and coupling networks for unpowered ESD tests	15
18	5.3.5 Power supply with decoupling network	15
19	5.4 Test signals	15
20	5.4.1 General	15
21	5.4.2 Test signals for normal operation mode	16
22	5.4.3 Test signal for wake-up from sleep mode	18
23	5.5 Evaluation criteria	18
24	5.5.1 General	18
25	5.5.2 Evaluation criteria in functional operation modes during exposure to	
26	disturbances	18
27	5.5.3 Evaluation criteria in unpowered condition after exposure to	
28	disturbances	20
29	5.5.4 Status classes	21
30	6 Test and measurement	21
31	6.1 Emission of RF disturbances	21
32	6.1.1 Test method	21
33	6.1.2 Test setup	21
34	6.1.3 Test procedure and parameters	22
35	6.2 Immunity to RF disturbances	22
36	6.2.1 Test method	22
37	6.2.2 Test setup	23
38	6.2.3 Test procedure and parameters	24
39	6.3 Immunity to impulses	26
40	6.3.1 Test method	26
41	6.3.2 Test setup	26
42	6.3.3 Test procedure and parameters	27
43	6.4 Electrostatic discharge (ESD)	30
44	6.4.1 Test method	30
45	6.4.2 Test setup	30
46	6.4.3 Test procedure and parameters	32
47	7 Test report	32

48	Annex A (normative) CXPI test circuits	33
49	A.1 General.....	33
50	A.2 CXPI test circuit for functional tests on standard type-A CXPI transceiver ICs.....	33
51	A.3 CXPI test circuit for functional tests on standard type-B CXPI transceiver ICs.....	36
52	A.4 CXPI test circuit for functional tests on ICs with embedded CXPI transceiver	38
53	A.5 CXPI test circuit for unpowered ESD test on a standard type-A CXPI	
54	transceiver IC	41
55	A.6 CXPI test circuit for unpowered ESD test on a standard type-B CXPI	
56	transceiver IC	41
57	Annex B (normative) Test circuit boards	43
58	B.1 Test circuit board for functional tests	43
59	B.2 ESD test	43
60	Annex C (informative) Examples for test limits for CXPI transceiver in automotive	
61	application.....	45
62	C.1 General.....	45
63	C.2 Emission of RF disturbances.....	45
64	C.3 Immunity to RF disturbances.....	46
65	C.4 Immunity to impulse	47
66	C.5 Electrostatic discharge (ESD)	48
67	Annex D (informative) Example of setting for test signals.....	49
68	Annex E (informative) Points to note for impulse immunity measurement for functional	
69	status class A _{IC}	51
70	E.1 General.....	51
71	E.2 Points to note when testing Pulse 1	51
72	Bibliography.....	53
73		
74	Figure 1 – PHY sub-layers overview and CXPI transceiver types	10
75	Figure 2 – General test configuration for tests in functional operation modes	12
76	Figure 3 – General test configuration for unpowered ESD test	13
77	Figure 4 – Coupling ports and networks for functional tests	14
78	Figure 5 – Coupling ports and networks for unpowered ESD tests	15
79	Figure 6 – Principal drawing of the maximum deviation in the I-V characteristic	20
80	Figure 7 – Test setup for measurement of RF disturbances	21
81	Figure 8 – Test setup for DPI tests	23
82	Figure 9 – Test setup for impulse immunity tests	27
83	Figure 10 – Test setup for direct ESD tests.....	31
84	Figure A.1 – General drawing of the circuit diagram of the test network for standard	
85	type-A CXPI transceiver ICs for functional tests	35
86	Figure A.2 – General drawing of the circuit diagram of the test network for standard	
87	type-B CXPI transceiver ICs for functional tests	37
88	Figure A.3 – General drawing of the circuit diagram of the test network for ICs with	
89	embedded CXPI transceiver for functional tests using standard type-A CXPI	
90	transceiver IC as Node1	39
91	Figure A.4 – General drawing of the circuit diagram of the test network for ICs with	
92	embedded CXPI transceiver for functional tests using IC with embedded CXPI	
93	transceiver as Node1	40
94	Figure A.5 – A general drawing of the test circuit diagram for testing direct ESD of	
95	CXPI transceiver in unpowered mode	41

96	Figure A.6 – A general drawing of the test circuit diagram for testing direct ESD of	
97	CXPI standard Type-B transceiver in unpowered mode	42
98	Figure B.1 – Example of IC interconnections of CXPI signal	43
99	Figure B.2 – Example of ESD test board for CXPI transceiver ICs	44
100	Figure C.1 – Example of limits for RF emission – CXPI	45
101	Figure C.2 – Example of limits for RF emission - VBAT	45
102	Figure C.3 – Example of limits for RF immunity for functional status class AIC – CXPI	46
103	Figure C.4 – Example of limits for RF immunity for functional status class AIC – VBAT	46
104	Figure C.5 – Example of limits for RF immunity for functional status class CIC or DIC -	
105	CXPI	47
106	Figure C.6 – Example of limits for RF immunity for functional status class CIC or DIC -	
107	VBAT	47
108	Figure D.1 – Example of signal setting for standard type-A in 2 transceiver	
109	configuration	49
110	Figure D.2 – Example of signal setting for standard type-B in 2 transceiver	
111	configuration	50
112	Figure E.1 – Relationship between ISO 7637-2 Pulse 1 and transceiver VBAT supply	51
113	Figure E.2 – Transceiver VBAT supply image when t_2 time is shortened	52
114		
115	Table 1 – Types for CXPI transceiver	10
116	Table 2 – Overview of required measurement and tests	11
117	Table 3 – Supply and ambient conditions for functional operation	12
118	Table 4 – Definition of coupling ports and coupling network components for functional	
119	tests	14
120	Table 5 – Definitions of coupling ports for unpowered ESD tests	15
121	Table 6 – Communication test signal TX1	16
122	Table 7 – Communication test signal TX2	17
123	Table 8 – Communication test signal TX3	17
124	Table 9 – Wake-up test signal TX4	18
125	Table 10 – Evaluation criteria for standard type-A in functional operation modes	19
126	Table 11 – Evaluation criteria for standard type-B in functional operation modes	19
127	Table 12 – Evaluation criteria for ICs with embedded CXPI transceiver in functional	
128	operation modes	20
129	Table 13 – Parameters for emission measurements	22
130	Table 14 – Settings for the RF measurement equipment	22
131	Table 15 – Specifications for DPI tests	24
132	Table 16 – Required DPI tests for functional status class AIC evaluation of standard	
133	type-A	25
134	Table 17 – Required DPI tests for functional status class AIC evaluation of standard	
135	type-B	25
136	Table 18 – Required DPI tests for functional status class AIC evaluation of ICs with	
137	embedded CXPI transceiver	26
138	Table 19 – Required DPI tests for functional status class CIC, D1IC or D2IC evaluation	
139	of standard CXPI transceiver ICs and ICs with embedded CXPI transceiver	26
140	Table 20 – Specifications for impulse immunity tests	28
141	Table 21 – Parameters for impulse immunity tests	28

142	Table 22 – Required impulse immunity tests for functional status class AIC evaluation	
143	of standard type-A	29
144	Table 23 – Required impulse immunity tests for functional status class AIC evaluation	
145	of standard type-B	29
146	Table 24 – Required impulse immunity tests for functional status class AIC evaluation	
147	of ICs with embedded CXPI transceiver	29
148	Table 25 – Required impulse immunity tests for functional status class CIC, D1IC or	
149	D2IC evaluation of standard CXPI transceiver ICs and ICs with embedded CXPI	
150	transceiver	30
151	Table 26 – Specifications for direct ESD tests	32
152	Table B.1 – Parameter ESD test circuit board	44
153	Table C.1 – Example of limits for impulse immunity for functional status	
154	class C _{IC} or D _{IC}	47
155		
156		

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INTEGRATED CIRCUITS –
EMC EVALUATION OF TRANSCEIVERS –****Part 7: CXPI transceivers****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62228-7 has been prepared by subcommittee 47A: Integrated circuits, of IEC technical committee 47: Semiconductor devices. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
47A/XX/FDIS	47A/XX/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 62228 series, published under the general title *Integrated circuits – EMC evaluation of transceivers*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTEGRATED CIRCUITS – EMC EVALUATION OF TRANSCEIVERS –

Part 7: CXPI transceivers

1 Scope

This part of IEC 62228 specifies test and measurement methods for the EMC evaluation of CXPI transceiver ICs under network condition. It defines test configurations, test conditions, test signals, failure criteria, test procedures, test setups and test boards. This specification is applicable for standard CXPI transceiver ICs and ICs with embedded CXPI transceiver and covers

- the emission of RF disturbances,
- the immunity against RF disturbances,
- the immunity against impulses and
- the immunity against electrostatic discharges (ESD).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61967-1, *Integrated circuits – Measurement of electromagnetic emissions – Part 1: General conditions and definitions*

IEC 61967-4, *Integrated circuits – Measurement of electromagnetic emissions – Part 4: Measurement of conducted emissions – 1 Ω/150 Ω direct coupling method*

IEC 62132-1, *Integrated circuits – Measurement of electromagnetic immunity – Part 1: General conditions and definitions*

IEC 62132-4, *Integrated circuits – Measurement of electromagnetic immunity 150 kHz to 1 GHz – Part 4: Direct RF power injection method*

IEC 62215-3, *Integrated circuits – Measurement of impulse immunity – Part 3: Non-synchronous transient injection method*

IEC 62228-1, *Integrated circuits – EMC evaluation of transceivers – Part 1: General conditions and definitions*

ISO 7637-2, *Road vehicles – Electrical disturbances from conduction and coupling – Part 2: Electrical transient conduction along supply lines only*

ISO 10605, *Road vehicles – Test methods for electrical disturbances from electrostatic discharge*

ISO 20794-4, *Road vehicles – Clock extension peripheral interface (CXPI) – Part 4: Data link layer and physical layer*

262 ISO 20794-7, *Road vehicles — Clock extension peripheral interface (CXPI) — Part 7: Data link*
263 *and physical layer conformance test plan*

264 3 Terms, definitions and abbreviated terms

265 For the purposes of this document, the terms and definitions given in IEC 62228-1, IEC 61967-
266 1 and IEC 62132-1, as well as the following apply.

267 ISO and IEC maintain terminological databases for use in standardization at the following
268 addresses:

- 269 • IEC Electropedia: available at <http://www.electropedia.org/>
- 270 • ISO Online browsing platform: available at <http://www.iso.org/obp>

271 3.1 Terms and definitions

272 3.1.1

273 **global pin**

274 pin that carries a signal or power, which enters or leaves the application board without any
275 active component in between

276 3.1.2

277 **standard CXPI transceiver IC**

278 standalone CXPI transceiver according to ISO 20794-4 or IC with integrated CXPI transceiver
279 cell with access to CXPI RXD and TXD signal

280 3.1.3

281 **IC with embedded CXPI transceiver**

282 IC with integrated CXPI transceiver cell and CXPI protocol handler but with or without access
283 to CXPI RXD or TXD signal

284 3.1.4

285 **mandatory components, pl**

286 components needed for proper function of IC as specified by the IC manufacturer

287 3.2 Abbreviated terms

ASSP	application specific standard product
CRC	cyclic redundancy check
CXPI	Clock Extension Peripheral Interface
DLL	data link layer
EN	enable
FI	frame information
IBS	inter byte space
NRZ	non-return to zero
PCB	printed circuit board
PID	protected identifier
PMA	physical media attachment
PS	physical signalling
PWM	pulse width modulation
RX _{PWM}	output signal for receiver in CXPI bus-line driver
RXD _{NRZ}	output signal for receiver in CXPI codec circuit

TX_{PWM} input signal for transmitter in CXPI bus-line driver
 TXD_{NRZ} input signal for transmitter in CXPI codec circuit
 UART universal asynchronous receiver / transmitter


4 General

The intention of this document is to evaluate the EMC performance of CXPI transceiver ICs under application conditions in a minimal network. CXPI Transceiver ICs are generally classified into three types, as listed in Table 1.

Figure 1 shows a sample configuration of each type of CXPI transceiver IC. The overview of the PHY sublayers is following ISO 20794-4. Standard type-A comprises a CXPI transceiver IC that contains the PS sublayer and the PMA sublayer. Standard type-B contains only the PMA sublayer. The Embedded type includes a microcontroller or ASSP function, in addition to the functions of Standard type-A. The PMA sublayer transmits and receives communication data on the bus line in the PWM signal format. The PS sublayer has the clock generation function, the encoding and decoding of CXPI frames and the bit-wise collision resolution logic. The microcontroller or ASSP transmits and receives the communication data in the NRZ signal format according to the specifications of the application.

Table 1 – Types for CXPI transceiver

Transceiver classification	CXPI transceiver type	Communication sublayer implementation
Standard CXPI transceiver IC	Standard type-A	with PMA and PS sublayer
	Standard type-B	with PMA sublayer only
IC with embedded CXPI transceiver	Embedded type	with PMA, PS sublayer and DLL

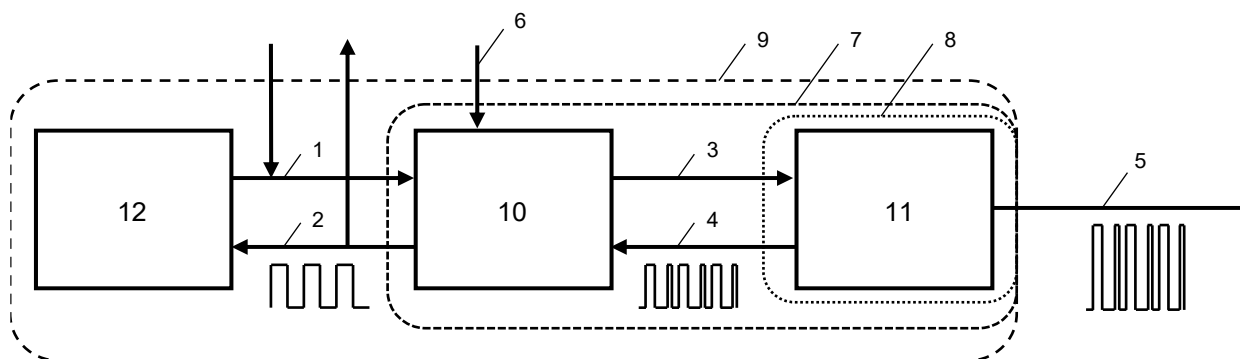

Key

- 1 TXD_{NRZ}
- 2 RXD_{NRZ}
- 3 TX_{PWM}
- 4 RX_{PWM}
- 5 CXPI network
- 6 Clock (commander node only, provided externally or from micro controller)
- 7 Standard type-A
- 8 Standard type-B
- 9 Embedded type
- 10 PS
- 11 PMA
- 12 Microcontroller or ASSP etc. including DLL

Figure 1 – PHY sub-layers overview and CXPI transceiver types

The evaluation of the EMC characteristics of CXPI transceivers shall be performed in functional operation modes under network conditions for RF emission, RF immunity and impulse immunity tests, and on a single unpowered transceiver IC for electrostatic discharge tests.

The aim of these tests is to determine the EMC performance pins of the CXPI transceiver on dedicated global pins, which are considered as EMC relevant in the application. For a standard CXPI transceiver IC and an IC with an embedded CXPI transceiver, these pins are VBAT and CXPI.

The test methods used for EMC characterization are based on the international standards for IC EMC tests and are described in Table 2.

Table 2 – Overview of required measurement and tests

Transceiver mode	Required test	Test method	Evaluation	Functional operation mode
Functional (powered)	RF emission	150 Ω direct coupling (IEC 61967-4)	Spectrum	Normal
	RF immunity	DPI (IEC 62132-4)	Function	Normal
				Sleep
	Impulse immunity	Non-synchronous transient injection (IEC 62215-3)	Function	Normal
				Sleep
Passive (unpowered)	ESD	Contact discharge (ISO 10605)	Damage	Unpowered

The RF emission, RF immunity and impulse immunity test methods are selected for the evaluation of EMC characteristic of transceivers in functional (powered) modes. These three test methods are based on the same approach using conductive coupling. Therefore, it is possible to use the same test board for all tests in functional operation mode, which reduces the effort required and increases the reproducibility and comparability of test results.

The ESD test is performed on passive (unpowered) transceiver IC on a separate test board.

All measurements and tests should be done with soldered transceivers on test boards as described in Annex B, to ensure application like conditions and avoid setup effects by sockets.

Annex C provides example test limits and levels for CXPI transceivers in automotive application.

In general, the test definition is done for standard CXPI transceiver ICs. For ICs with embedded CXPI transceivers some adaptations are necessary which are described in this document. Specific adaptations shall be done individually for the dedicated IC but shall follow the general definitions identified.

5 Test and operating conditions

5.1 Supply and ambient conditions

For all tests and measurements under operating conditions, the settings are based on systems with a 12 V power supply, which is the main application for CXPI transceivers. If a transceiver is designed or targeted for a higher power supply voltage, the test conditions and test targets shall be adapted and documented accordingly. The defined supply and ambient conditions for functional operation are given in Table 3. Although the standard voltage of $V_{CC_{ext}}$ is 5 V, other voltages such as 3,3 V may be supplied depending on the product.

Table 3 – Supply and ambient conditions for functional operation

Parameter	Value
Voltage supply $V_{BAT_{ext}}$	$(14 \pm 0,2)$ V (default)
Voltage supply $V_{CC_{ext}}$	$(5 \pm 0,1)$ V (default), $(3,3 \pm 0,1)$ V
Test temperature	(23 ± 5) °C

For RF emission measurements, the ambient noise floor shall be at least 6 dB below the applied target limit and documented in the test report.

Unpowered ESD tests shall be carried out without any supply voltage, and the requirements of ISO 10605 climatic environmental conditions shall be applied.


5.2 Test operation modes

The CXPI transceiver ICs shall be tested in powered functional operation modes and in the unpowered mode. The functional operation modes are normal mode and sleep mode.

5.3 Test configuration

5.3.1 General test configuration for functional test

The test configuration in general consists of CXPI transceivers with mandatory external components and components for filtering and decoupling ($CXPI_{ext}$ node) in a minimal test network, where filtered power supplies, signals, monitoring probes and coupling networks are connected as shown in Figure 2. Node 1 is defined as the commander node, and Node 2 is defined as the responder node.

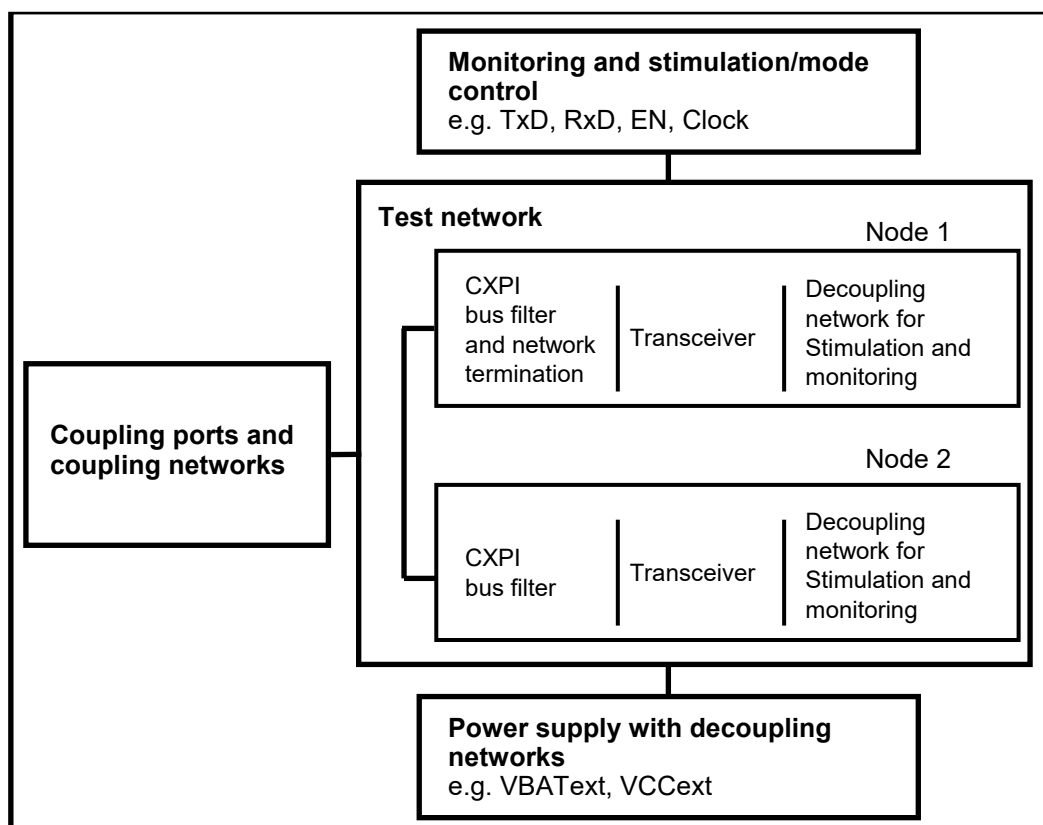**Figure 2 – General test configuration for tests in functional operation modes**

For evaluation of RF emission, RF immunity and the impulse immunity characteristics of a CXPI transceiver in functional operation mode, a minimal CXPI test network consisting of two CXPI transceiver ICs shall be used. Depending on the type of transceiver the following network configurations are defined:

- two transceivers of the same type in case of standard CXPI transceiver IC (DUT), or
- one IC with embedded CXPI transceiver (DUT) and one standard CXPI transceiver IC, or two transceivers of the same type of embedded CXPI transceiver IC (DUT).

NOTE In specific cases or for analyses, a deviation from this setup can be agreed between the users of this document and will be noted in the test report.

The CXPI network termination and bus filter including ESD suppression devices (e.g. zener diode) if used, shall comply with the time constant defined in ISO 20794-4. If an optional ESD suppression device is used (e.g. to achieve a certain ESD or impulse immunity level) it shall be used for all other tests of this document and documented in the test report.

A general drawing of a schematic with more details of the CXPI transceiver test network is given in Annex A.

5.3.2 General test configuration for unpowered ESD test

The general test configuration for unpowered ESD test of CXPI transceiver ICs consists of a single CXPI transceiver IC with mandatory external components and components for filtering on a test board with discharge coupling networks as shown in Figure 3.

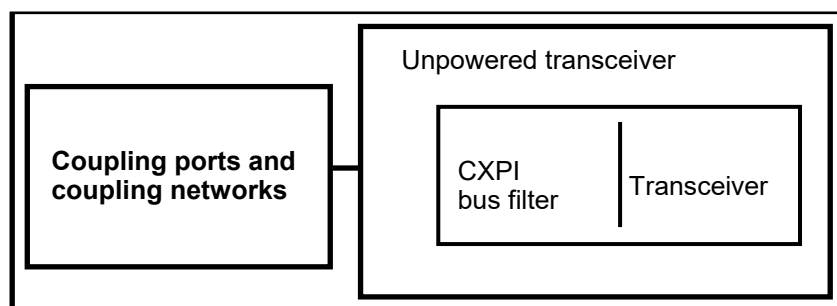
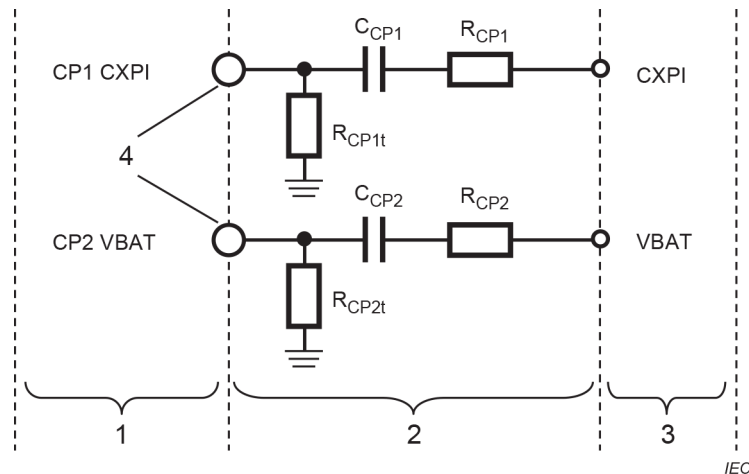


Figure 3 – General test configuration for unpowered ESD test

5.3.3 Coupling ports and coupling networks for functional tests

The coupling ports and coupling networks are used to transfer disturbances to or from the test network with a defined transfer characteristic. The schematic of the coupling ports, networks and pins are shown in Figure 4. The values of the components depend on the test method and are defined in Table 4. The tolerance of the components should be 1 % or less.

**Key**

- 1 Coupling ports
- 2 Coupling networks
- 3 Pin networks (including all external mandatory components for the respective pin)
- 4 RF connector

Figure 4 – Coupling ports and networks for functional tests**Table 4 – Definition of coupling ports and coupling network components for functional tests**

Port	Type	Purpose	Component		
			R_{CP1}, R_{CP2}	C_{CP1}, C_{CP2}	R_{CP1t}, R_{CP2t}
CP1	EMI1	RF emission measurement on CXPI	120 Ω	4,7 nF	51 Ω
	RF1	RF coupling for test on CXPI	0 Ω	4,7 nF	not used
	IMP1	Impulse coupling on CXPI	0 Ω	1,0 nF	not used
CP2	EMI2	RF emission measurement on VBAT	120 Ω	6,8 nF	51 Ω
	RF2	RF coupling for test on VBAT	0 Ω	6,8 nF	not used
	IMP2	Impulse coupling on VBAT	0 Ω	Shorted	not used


The test configurations with coupling ports and coupling networks connected to the CXPI test network are given in the general drawing of schematics in Figure A.1 for standard type-A CXPI transceiver ICs, in Figure A.2 for standard type-B CXPI transceiver ICs and in Figure A.3 and Figure A.4 for ICs with embedded CXPI transceiver.

The characterization of the coupling ports and coupling networks is carried out as follows:

The magnitude of insertion losses (S_{21} measurement) between the ports CP1, CP2 and the respective transceiver signal pads on the test board shall be measured and documented in the test report. For this characterization, the coupling port shall be configured for the RF immunity or emission test and the CXPI transceiver ICs shall be removed. All other components which are directly connected to the coupling port (e.g. filter to power supply or loads) remain on the test board.

5.3.4 Coupling ports and coupling networks for unpowered ESD tests

The coupling ports and coupling networks used for unpowered direct ESD tests connect the discharge points to the CXPI transceiver IC test circuitry. The schematic and definitions of the coupling ports, networks and pins are given in Figure 5 and Table 5.

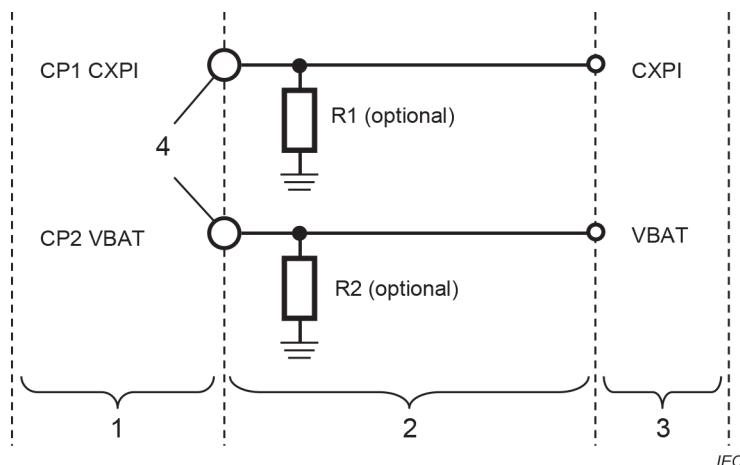

Key

- 1 Coupling ports
- 2 Coupling networks
- 3 Pin networks (including all external mandatory components for the respective pin)
- 4 Discharge point

Figure 5 – Coupling ports and networks for unpowered ESD tests

Table 5 – Definitions of coupling ports for unpowered ESD tests

Port	Type	Purpose	Component
CP1	ESD1	ESD coupling on CXPI	Metal trace for galvanic connection ^a
CP2	ESD2	ESD coupling on VBAT	Metal trace for galvanic connection ^a

^a The optional resistors R1 and R2 with $R \geq 200 \text{ k}\Omega$ are used to avoid static pre-charge at the discharge point caused by the ESD generator. Sparking over at these resistors at high test levels shall be avoided. If a static pre-charge is prevented by the ESD generator construction, these resistors are not needed. Alternatively, an external resistor can be used to remove the pre-charge on each discharge point before each single test.

5.3.5 Power supply with decoupling network

In the general test configurations, decoupling circuits shall be added to the supply lines such as VBAT and VCC.

See Annex A for an example of decoupling circuits on a test configuration with two CXPI transceiver ICs.

5.4 Test signals

5.4.1 General

Depending on the transceiver type, different test signals are defined for communication in normal operation mode and wake-up from sleep mode.