AS/NZS IEC 62226.3.1:2021
IEC 62226-3-1:2007+AMD1:2016 CSV

Australian/New Zealand Standard™

Exposure to electric or magnetic fields in the low and intermediate frequency range — Methods for calculating the current density and internal electric field induced in the human body

Part 3.1: Exposure to electric fields — Analytical and 2D numerical models

Documents
Document Sharing Hub

Full document details: AS NZS IEC 62226.3.1-2021

AS/NZS IEC 62226.3.1:2021

This Joint Australian/New Zealand Standard™ was prepared by Joint Technical Committee TE-007, Human Exposure to Electromagnetic Fields. It was approved on behalf of the Council of Standards Australia on 20 May 2021 and by the New Zealand Standards Approval Board on 04 May 2021.

This Standard was published on 4 June 2021.

The following are represented on Committee TE-007:

Australian Centre for Radiofrequency Bioeffects Research
Australian Industry Group
Australian Mobile Telecommunications Association
Australian Radiation Protection and Nuclear Safety Agency
Commercial Radio Australia
Communications, Electrical and Plumbing Union — Electrical Division
Department of Defence (Australian Government)
Electrical Engineers Association of NZ
Engineers Australia
Ministry of Health (NZ)
National Measurement Institute
National Radiation Laboratory New Zealand
Victoria University of Wellington NZ

This Standard was issued in draft form for comment as DR AS/NZS IEC 62226.3.1:2021.

Keeping Standards up-to-date

Ensure you have the latest versions of our publications and keep up-to-date about Amendments, Rulings, Withdrawals, and new projects by visiting:

www.standards.org.au

www.standards.govt.nz

ISBN 978 1 76113 359 6

Documents
Document Sharing Hub

Full document details: AS NZS IEC 62226.3.1-2021

AS/NZS IEC 62226.3.1:2021
IEC 62226-3-1:2007+AMD1:2016 CSV

Australian/New Zealand Standard™

Exposure to electric or magnetic fields in the low and intermediate frequency range — Methods for calculating the current density and internal electric field induced in the human body

Part 3.1: Exposure to electric fields — Analytical and 2D numerical models

First published as AS/NZS IEC 62226.3.1:2021.

© IEC Geneva Switzerland 2021 — All rights reserved
© Standards Australia Limited/the Crown in right of New Zealand, administered by the New Zealand Standards Executive 2021

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of either the IEC or the publisher, unless otherwise permitted under the Copyright Act 1968 (Cth) or the Copyright Act 1994 (New Zealand). If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please see the contact details on the back cover or the contact us page of the website for further information.

Documents
Document Sharing Hub

Full document details: AS NZS IEC 62226.3.1-2021

Preface

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee TE-007, Human Exposure to Electromagnetic Fields.

The objective of this document is to define in detail the coupling factor *K* — introduced by the AS/NZS IEC 62226 series to enable exposure assessment for complex exposure situations, such as non-uniform magnetic field or perturbed electric field — for the case of simple models of the human body, exposed to uniform electric fields. The coupling factor *K* has different physical interpretations depending on whether it relates to electric or magnetic field exposure. It is the so called "shape factor for electric field".

This document applies to the frequency range for which exposure limits are based on the induction of voltages or currents in the human body when exposed to electric fields.

This document can be used when the electric field can be considered to be uniform, for frequencies up to at least 100 kHz.

This situation of exposure to a "uniform" electric field is mostly found in the vicinity of high voltage overhead power systems. For this reason, illustrations given in this part are given for power frequencies (50 Hz and 60 Hz).

This document is identical with, and has been reproduced from, IEC 62226-3-1:2007+AMD1:2016 CSV, *Exposure to electric or magnetic fields in the low and intermediate frequency range — Methods for calculating the current density and internal electric field induced in the human body — Part 3-1: Exposure to electric fields — Analytical and 2D numerical models*

As this document has been reproduced from an International Standard, the following applies:

(a) In the source text "this part of IEC 62226" should read "this Australian/New Zealand Standard".

(b) A full point substitutes for a comma when referring to a decimal marker.

As this document has been reproduced from an International Standard, a full point substitutes for a comma when referring to a decimal marker.

Australian or Australian/New Zealand Standards that are identical adoptions of international normative references may be used interchangeably. Refer to the online catalogue for information on specific Standards.

The terms "normative" and "informative" are used in Standards to define the application of the appendices or annexes to which they apply. A "normative" appendix or annex is an integral part of a Standard, whereas an "informative" appendix or annex is only for information and guidance.

Documents
Document Sharing Hub

© Standards Australia Limited/Standards New Zealand 2021

Full document details: AS NZS IEC 62226.3.1-2021

NOTES

Documents
Document Sharing Hub

Full document details: AS NZS IEC 62226.3.1-2021

CONTENTS

FOREWORD 5
INTRODUCTION 7
1 Scope 8
2 Exposure to electric field 8
3 General procedure 11
3.1 Shape factor 11
3.2 Procedure 11
4 Human body models 12
4.1 General 12
4.2 Surface area 12
4.3 Semi-spheroidal model 13
4.4 Axisymmetrical body model 15
5 Calculation of induced current 16
5.1 General 16
5.2 Semi-spheroid 16
5.3 Axisymmetrical models 20
5.4 Comparison of the analytical and numerical models 27
6 Influence of electrical parameters 28
6.1 General 28
6.2 Influence of permittivity 28
6.3 Influence of conductivity 28
6.4 Non-homogeneous conductivity 29
7 Measurement of currents induced by electric fields 29
7.1 General 29
7.2 Current flowing to the ground 29
Annex A (normative) Analytical solutions for a spheroid in a uniform electric field 31
Annex B (normative) Human body axisymmetrical model 34
Annex C (informative) Child body model 39
Annex D (informative) Example of use of this standard 41
Annex E (informative) Numerical calculation methods 45
Bibliography 53

Figure 1 – Illustration of the phenomenon of currents induced by electric field in a human body standing on the ground 10
Figure 2 – Potential lines of the electric field generated by an energised wire in the absence of any objects (all distances in metres) 10
Figure 3 – A realistic body model 12
Figure 4 – Scheme of the semi-spheroid simulating a human being standing on a zero potential plane 13
Figure 5 – Equivalent spheroid radius, *R*, versus height, *L*, and for different mass, *M* 15
Figure 6 – The axisymmetrical body model for the reference man (left) and woman (right) 15

Documents
Document Sharing Hub

© Standards Australia Limited/Standards New Zealand 2021

Full document details: AS NZS IEC 62226.3.1-2021

Figure 7 – Conductive spheroid exposed to electric field 16
Figure 8 – Calculation of the *shape factor for electric field* K_E for a spheroid exposed to an unperturbed electric field 17
Figure 9 – Current density J_S induced by an unperturbed electric field (1 kV/m, 50 Hz) in a spheroid versus parameter L/R (values in μA/m²) 18
Figure 10 – Dimensions and mesh of the semi-spheroid 19
Figure 11 – Distortion of power frequency electric field lines close to the conductive semi-spheroid 19
Figure 12 – Calculated induced current density $J_A(h)$ in the body standing in a vertical 50 Hz electric field of 1 kV/m 21
Figure 13 – Computation domain 23
Figure 14 – Mesh of the man body model and distortion of power frequency electric field lines close to model 23
Figure 15 – Distribution of potential lines and 50 Hz electric field magnitude (man model) 24
Figure 16 – Computation of induced currents J_A along a vertical axis, and distribution of induced currents in the man model at 50 Hz 25
Figure 17 – Mesh of the woman body model and distortion of power frequency electric field lines close to model 25
Figure 18 – Distribution of potential lines and 50 Hz electric field magnitude (woman model) 26
Figure 19 – Computation of induced currents J_A along a vertical axis, and distribution of induced currents in the woman model at 50 Hz 27
Figure A.1 – Conductive spheroid exposed to electric field 31
Figure B.1 – Normalised axisymmetrical models. Left: man, Right: woman 36
Figure C.1 – Computation of induced currents J_Z along a vertical axis, and distribution of induced currents in the 10 years reference child model 40
Figure E.1 – Spheroid model 46
Figure E.2 – Space potential model 47
Figure E.3 – Exemple of charge simulation method using rings 48
Figure E.4 – Superficial charges integral equation method, cutting of the body into N elements 49
Figure E.5 – Mesh of the body using finite element method 50
Figure E.6 – Impedance method 51
Figure E.7 – Yee-method: Electric and magnetic grids for spatial discretization 52

Table 1 – Data for reference man and reference woman 13
Table 2 – Values of *arcsin(e) / e* for different values of L/R 14
Table 3 – Derived data using spheroid model at 50 Hz 20
Table 4 – Electric field E_{BR} required to produce basic restrictions J_{BR} or E_{iBR} in the neck at 50 Hz 22
Table 5 – Comparison of values of the shape factor for electric field K_E and corresponding current densities for an unperturbed 50 Hz electric field of 1 kV/m 28
Table B.1 – Measures from antropomorphic survey used to construct vertical dimensions of axisymmetrical model [56] 35

Documents
Document Sharing Hub
© Standards Australia Limited/Standards New Zealand 2021
Full document details: AS NZS IEC 62226.3.1-2021

Table B.2 – Measures from antropomorphic survey used to construct the radial dimensions of axisymmetrical model [56] 35
Table B.3 – Normalised model dimensions 37
Table B.4 – Axisymmetric model dimensions for reference man and reference woman whose mass and height are defined by ICRP [38] and are given in Table 1 38
Table C.1 – Reference values provided by ICRP for male and female children 39
Table C.2 – Dimensions of the reference children (in m excepted SB_R in m²) 39
Table C.3 – Results of analytical method for the reference children 40
Table D.1 – Normalised dimensions of the women model 41
Table D.2 – Calculation of the dimensions for a specific person 42

Documents
Document Sharing Hub

© Standards Australia Limited/Standards New Zealand 2021

Full document details: AS NZS IEC 62226.3.1-2021

INTERNATIONAL ELECTROTECHNICAL COMMISSION

EXPOSURE TO ELECTRIC OR MAGNETIC FIELDS IN THE LOW AND INTERMEDIATE FREQUENCY RANGE – METHODS FOR CALCULATING THE CURRENT DENSITY AND INTERNAL ELECTRIC FIELD INDUCED IN THE HUMAN BODY –

Part 3-1: Exposure to electric fields – Analytical and 2D numerical models

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

DISCLAIMER
This Consolidated version is not an official IEC Standard and has been prepared for user convenience. Only the current versions of the standard and its amendment(s) are to be considered the official documents.

This Consolidated version of IEC 62226-3-1 bears the edition number 1.1. It consists of the first edition (2007-05) [documents 106/125/FDIS and 106/128/RVD] and its amendment 1 (2016-10) [documents 106/376/FDIS and 106/378/RVD]. The technical content is identical to the base edition and its amendment.

Documents
Document Sharing Hub
© Standards Australia Limited/Standards New Zealand 2021
Full document details: AS NZS IEC 62226.3.1-2021

This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.

International Standard IEC 62226-3-1 has been prepared by IEC technical committee 106: Methods for the assessment of electric, magnetic and electromagnetic fields associated with human exposure.

This standard is to be used in conjunction with the first edition of IEC 62226-1:2004, *Exposure to electric or magnetic fields in the low and intermediate frequency range – Methods for calculating the current density and internal electric field induced in the human body – Part 1: General.*

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This International Standard constitutes Part 3-1 of IEC 62226 series, which will regroup several international standards and technical reports within the framework of the calculation of induced current densities and internal electric fields.

A list of all parts of the IEC 62226 series, published under the general title *Exposure to electric or magnetic fields in the low and intermediate frequency range – Methods for calculating the current density and internal electric field induced in the human body,* can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

© Standards Australia Limited/Standards New Zealand 2021

Full document details: AS NZS IEC 62226.3.1-2021

INTRODUCTION

Public interest concerning human exposure to electric and magnetic fields has led international and national organisations to propose limits based on recognised adverse effects.

This standard applies to the frequency range for which the exposure limits are based on the induction of voltages or currents in the human body, when exposed to electric and magnetic fields. This frequency range covers the low and intermediate frequencies, up to 100 kHz. Some methods described in this standard can be used at higher frequencies under specific conditions.

The exposure limits based on biological and medical experimentation about these fundamental induction phenomena are usually called “basic restrictions”. They include safety factors.

The induced electrical quantities are not directly measurable, so simplified derived limits are also proposed. These limits, called “reference levels” are given in terms of external electric and magnetic fields. They are based on very simple models of coupling between external fields and the body. These derived limits are conservative.

Sophisticated models for calculating induced currents in the body have been used and are the subject of a number of scientific publications. These models use numerical 3D electromagnetic field computation codes and detailed models of the internal structure with specific electrical characteristics of each tissue within the body. However such models are still developing; the electrical conductivity data available at present has considerable shortcomings; and the spatial resolution of models is still progressing. Such models are therefore still considered to be in the field of scientific research and at present it is not considered that the results obtained from such models should be fixed indefinitely within standards. However it is recognised that such models can and do make a useful contribution to the standardisation process, specially for product standards where particular cases of exposure are considered. When results from such models are used in standards, the results should be reviewed from time to time to ensure they continue to reflect the current status of the science.

Documents
Document Sharing Hub
© Standards Australia Limited/Standards New Zealand 2021
Full document details: AS NZS IEC 62226.3.1-2021

EXPOSURE TO ELECTRIC OR MAGNETIC FIELDS IN THE LOW AND INTERMEDIATE FREQUENCY RANGE – METHODS FOR CALCULATING THE CURRENT DENSITY AND INTERNAL ELECTRIC FIELD INDUCED IN THE HUMAN BODY –

Part 3-1: Exposure to electric fields – Analytical and 2D numerical models

1 Scope

This part of IEC 62226 applies to the frequency range for which exposure limits are based on the induction of voltages or currents in the human body when exposed to electric fields.

This part defines in detail the coupling factor K – introduced by the IEC 62226 series to enable exposure assessment for complex exposure situations, such as non-uniform magnetic field or perturbed electric field – for the case of simple models of the human body, exposed to uniform electric fields. The coupling factor K has different physical interpretations depending on whether it relates to electric or magnetic field exposure. It is the so called “shape factor for electric field”.

This part of IEC 62226 can be used when the electric field can be considered to be uniform, for frequencies up to at least 100 kHz.

This situation of exposure to a “uniform” electric field is mostly found in the vicinity of high voltage overhead power systems. For this reason, illustrations given in this part are given for power frequencies (50 Hz and 60 Hz).

2 Exposure to electric field

Alternating electric fields are generated by energised conductors (i.e. under voltage). In the immediate vicinity of domestic electrical equipment, such as lights, switches, food mixers and irons, local electric-field strengths about 100 V/m may be found. Such fields are non-uniform, but their strengths are far below the levels recommended in safety guidelines, so there is no need of calculation of induced currents in such exposure situations.

Higher electric-field strengths may be found in the vicinity of high voltage equipment such as electric power line. In the frequency range covered by this standard, it is considered that exposure from power lines is the only significant exposure source for public regarding safety guidelines limits.

Guidelines on human exposure to electric fields are generally expressed in terms of induced current density or internal electric field. These quantities cannot be measured directly and the purpose of this document is to give guidance on how to assess these quantities induced in the human body by external (environmental) electric fields E_0.

Documents
Document Sharing Hub

© Standards Australia Limited/Standards New Zealand 2021

Full document details: AS NZS IEC 62226.3.1-2021

The induced current density J and the internal electric field E_i are closely linked by the simple relation:

$$J = \sigma . E_i \quad (1)$$

where σ is the conductivity of the body tissue under consideration.

Although some guidelines on human exposure to electric fields adopt internal electric field as a limiting parameter, for reason of simplification, the content of this standard is presented mainly in terms of induced current densities J, from which values of internal electric field E_i can be easily derived using the previous formula.

All the calculation developed in this document use the low frequency approximation in which displacement currents are negligible, such that $\varepsilon\omega/\sigma$ is less than 1 in the body. This approximation has been checked using published tissue data [29,31] [1)] in the low frequency range and it has been found to be valid for frequencies up to at least 100 kHz and is probably valid at higher frequencies.

Computations based on sophisticated numerical models of the human body [24] also demonstrate that this assumption is valid at frequencies up to more than 100 kHz by showing that the relationship between the induced current density in the body and the product of frequency and external electric field hardly varies at all between 50 Hz and 1 MHz, and is only slightly altered at 10 MHz.

Analytical models can be used for simple cases of calculations.

Electric fields cause displacement of electric charges in conductive objects (including living bodies) and, because these fields are alternating, the electric charges move backwards and forwards. The result is an “induced” alternating current inside the conductive object. This current depends only on:

– the shape and size of the conducting object;
– the characteristics (magnitude, polarisation, degree of non-uniformity, etc.) of the unperturbed field (field which is measured in the absence of any conducting object);
– the frequency of the field
– the variation of conductivity of the object (in homogeneous media, the current density induced by electric fields does not depend on conductivity).

Figure 1 illustrates this induction phenomenon for the case where the body is in electrical contact with the ground.

1) Figures in square brackets refer to the Bibliography.

Documents
Document Sharing Hub
© Standards Australia Limited/Standards New Zealand 2021
Full document details: AS NZS IEC 62226.3.1-2021

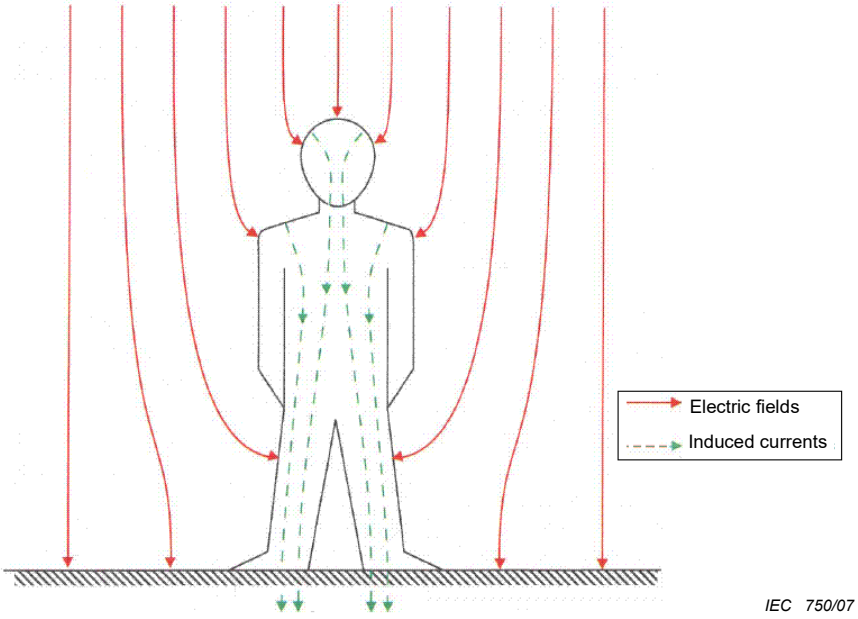

Figure 1 – Illustration of the phenomenon of currents induced by an electric field in a human body standing on the ground

The typical case of public exposure to an electric field is under high voltage power transmission lines. In this case, the distance between the source of field and the human body is large and the field in the zone close to the ground, in the absence of any conductive object, can be considered to be uniform (see Figure 2).

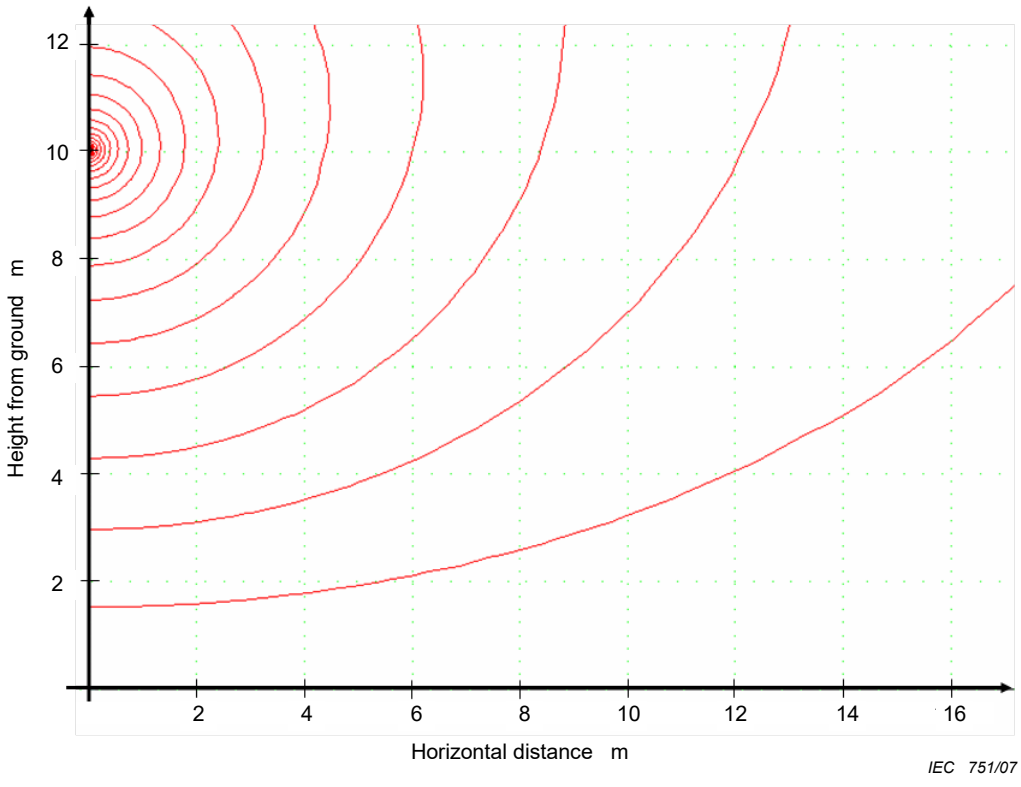

Figure 2 – Potential lines of the electric field generated by an energised wire in the absence of any objects (all distances in metres)

Documents
Document Sharing Hub

© Standards Australia Limited/Standards New Zealand 2021

Full document details: AS NZS IEC 62226.3.1-2021

3 General procedure

3.1 Shape factor

In the low and intermediate frequency range, the relation between the induced current in the human body (J) and a uniform electric field (E_0) can be reduced to:

$$J = K_E . f . E_0 \tag{2}$$

Where:

f is the frequency;

E_0 is the magnitude of the unperturbed electric field;

K_E is defined as the "*shape factor for the electric field*".

K_E is dependant on the size, the conductivity, the form and the position of the model of the human body. It is also dependant on the location within the body where the induced current density is evaluated. K_E is independent of the frequency for analytical assessment of the induced current produced by electric fields (see Annex A).

K_E is given in units of $A \cdot s \cdot V^{-1} \cdot m^{-1}$ or Farad per metre (F/m), which relates to the fact that the exposure to the electric field corresponds physically to a capacitive coupling between the field source and the conductive object exposed to the field.

NOTE The internal electric field E_i can be calculated from the current density J as $E_i = J/\sigma$, where σ is the conductivity of the human model (see equation (1)).

3.2 Procedure

The current density inside an individual can be estimated analytically, following a three stage process. The first stage is to compute the current density in a semi-spheroid, whose dimensions are chosen to best represent the particular body. As it will be shown in 5.3 of this standard, the current density is uniform throughout the spheroid but depends on the ratio L/R of its semi-major axis and semi-minor axis.

The second stage is to use a realistic axisymmetrical model of a human body to determine the current density as a function of vertical position within the body.

The third stage is to convert the current density averaged at a particular height to the local current density in the different tissues at that height. Health guidelines on exposure to EMF refer specifically to current density (or internal electric field) in the central nervous system, so the particular area of interest within the body is the spinal cord in the neck, due to the small cross section of the neck, which concentrates the current (or internal electric field) in that region.

Induced currents are calculated for men and women as well as children using reference values for their height, mass and surface area published by ICRP [38]. Sufficient information is given here to apply the method to persons of any weight and height.

Numerical calculations are also presented demonstrating the validity of the analytical procedure.

Documents
Document Sharing Hub
© Standards Australia Limited/Standards New Zealand 2021
Full document details: AS NZS IEC 62226.3.1-2021

4 Human body models

4.1 General

In scientific literature, many models of different complexity have been used for the assessment of currents and internal fields induced by electric or magnetic field (Figure 3). Examples of such sophisticated calculations are given in the bibliography. It must be emphasised that these computations have been performed using dedicated softwares which require highly specialised competences and are not widely available. Therefore, it is considered that such computational techniques are not relevant with regard to standardisation objectives.

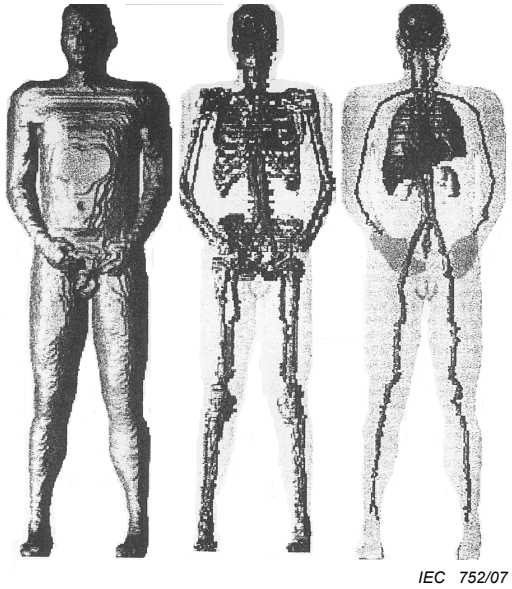

Figure 3 – A realistic body model

Analytical calculations are possible when using simple models, such as the model of a spheroid in a uniform electric field.

4.2 Surface area

The surface area of a body (SB) is used to scale both the spheroidal and the axisymmetrical body models for different sized bodies. It depends on the height and the mass of the body. The report of the ICRP [38], *Basic Anatomical and Physiological Data for Use in Radiological Protection: Reference Values*, provides an algorithm giving the total surface area (SB_{T}) of a person as a function of its height L (in metres) and mass M (in kg):

$$SB_{\mathrm{T}} = 0{,}164\,4\ M^{0{,}514\ 56} L^{0{,}422\ 46} \tag{3}$$

In our case, only the outwards-facing surface area of the body is considered, which is approximately 82 % of the total surface area SB_{T}. The 18 % reduction comprises 3 % for excluding the soles of the feet, 6 % for excluding the touching surface of the legs, and 8 % for excluding the inner surface of the arms and hands and 1 % for the perineum. The reduced surface area (SB_{R}) is therefore:

$$SB_{\mathrm{R}} = 0{,}82\,SB_{\mathrm{T}} \tag{4}$$

Table 1 gives the results for the reference man and the reference woman which are introduced in 4.4 and Annex B.

Documents
Document Sharing Hub

© Standards Australia Limited/Standards New Zealand 2021

Full document details: AS NZS IEC 62226.3.1-2021

Table 1 – Data for reference man and reference woman

	Reference man	Reference woman
Height, m	1,76	1,63
Mass, kg	73	60
Total surface area SB_T, m^2	1,889	1,662
Reduced surface area SB_R, m^2	1,557	1,363

4.3 Semi-spheroidal model

To calculate the induced current density inside a human standing on a conducting plane it is necessary to model the reflection of the body in the ground. Thus the body is represented by half of the spheroid (Figure 4) and the reflection by the other half (Figure 7). The semi-major axis L of the spheroid is set to the height of the person being represented.

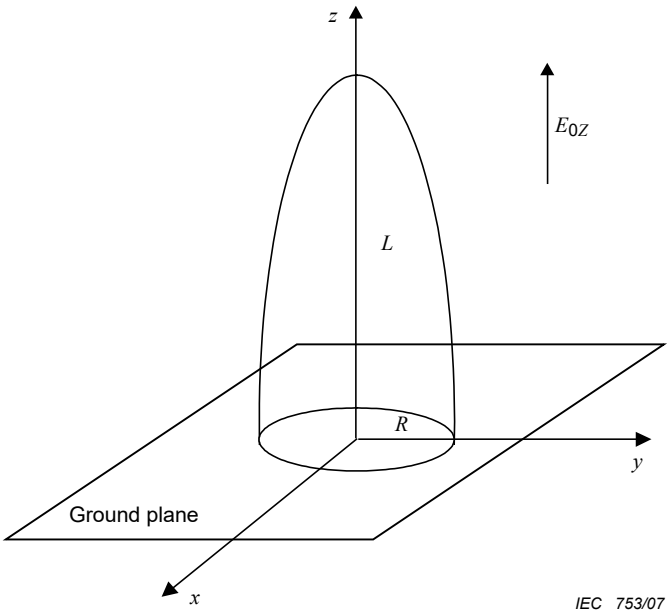

Figure 4 – Scheme of the semi-spheroid simulating a human being standing on a zero potential plane

The semi-minor axis (i.e. the radius) R is chosen to give the same total current flowing into the ground through the feet when the body is grounded as for the body it represents. This is achieved by ensuring that the spheroid has the same outward-facing surface area SB_R as the body it represents.

The surface area SB_S of a half spheroid of height L and radius R is given by:

$$SB_S = \pi R^2 \left[1 + \frac{L}{R} \frac{\arcsin(e)}{e} \right] \quad (5)$$

where e is the eccentricity:

Documents
Document Sharing Hub
© Standards Australia Limited/Standards New Zealand 2021
Full document details: AS NZS IEC 62226.3.1-2021

$$e = \sqrt{1 - \frac{R^2}{L^2}}$$

R is determined from the mass M and L by solving equation (5) for R, with $SB_S = SB_R$, and where SB_R is given by equations (3) and (4). Thus

$$R = -\frac{B}{2} \pm \sqrt{\left(\frac{B}{2}\right)^2 + \frac{SB_S}{\pi}} \tag{6}$$

where

$$B = L\,\frac{\arcsin(e)}{e}$$

B is a function of R, but as $\arcsin(e)/e$ varies only slowly with L/R, as shown in Table 2, B also varies only slowly with L/R, and therefore B can be determined using an approximate value for L/R..

Table 2 – Values of $\arcsin(e)/e$ for different values of L/R

L/R	9,0	9,2	9,4	9,6	9,8	10
Arcsin$(e)/e$	1,469	1,471	1,473	1,474	1,476	1,478

Using $L/R = 9{,}8$ gives

$$B = 1{,}476\,L$$

This is substituted into equation (6) to give the equation for R in terms of L and SB_S:

$$R = -0{,}738L + \sqrt{0{,}545L^2 + \frac{SB_S}{\pi}} \tag{7}$$

Figure 5 presents the result graphically. It can be used to find the radius R from the height L and mass M of a person. For example, the reference man, whose mass is 73 kg and height is 1.76 m, the radius R is 0,178 m and L/R is 9,86.

© Standards Australia Limited/Standards New Zealand 2021

Full document details: AS NZS IEC 62226.3.1-2021

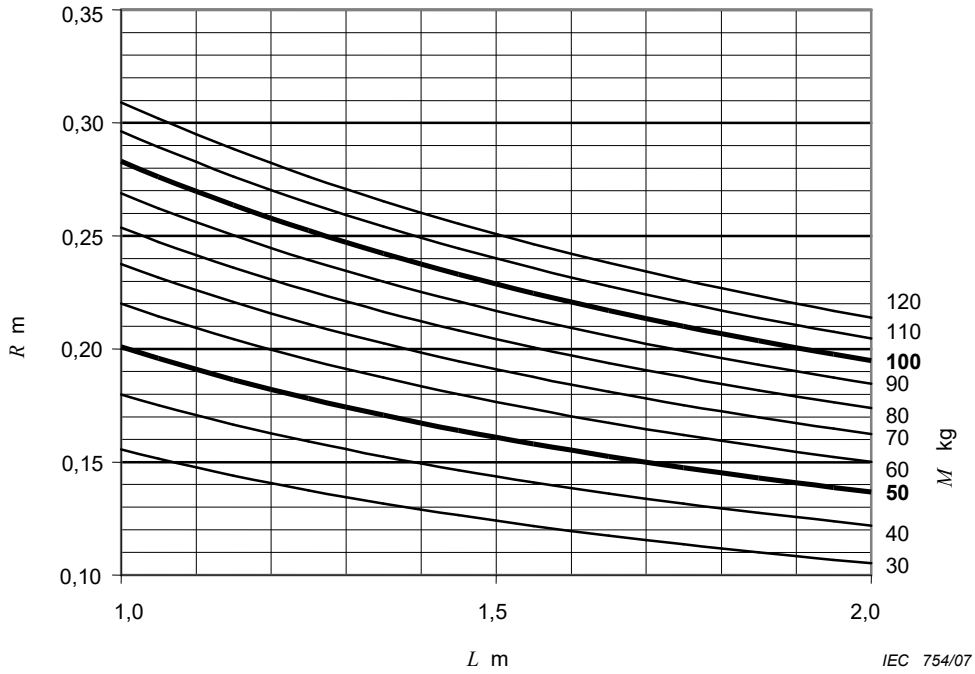

Figure 5 – Equivalent spheroid radius, R, versus height, L, and for different mass, M

4.4 Axisymmetrical body model

The axisymmetrical body model represents the essential features of the body: its height, total surface area, neck dimensions, and approximate vertical profile. However it cannot be a perfect representation of the body because the body is not axisymmetrical. Figure 6 illustrates the radial cross section of the axisymmetrical model for the reference man and woman.

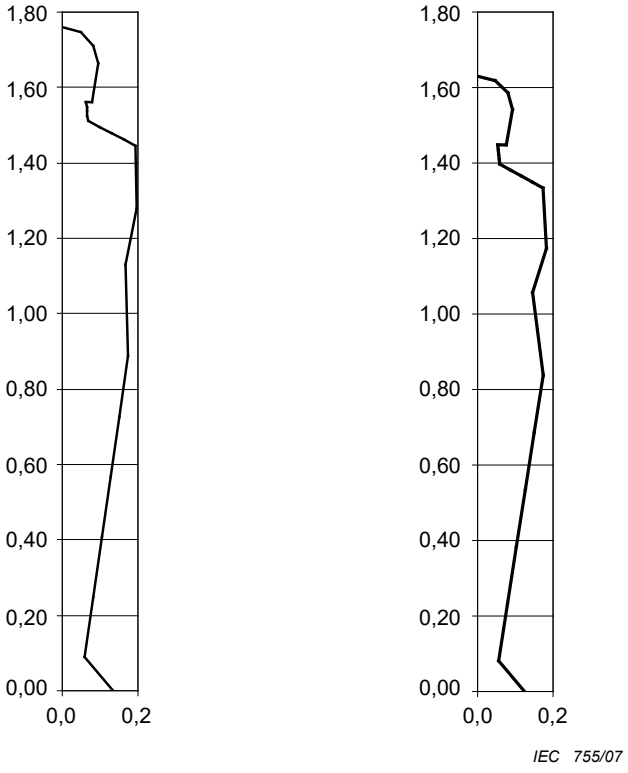

Figure 6 – The axisymmetrical body model for the reference man (left) and woman (right)

Documents
Document Sharing Hub
© Standards Australia Limited/Standards New Zealand 2021
Full document details: AS NZS IEC 62226.3.1-2021