



FED. SUPPLY CLASS

5940

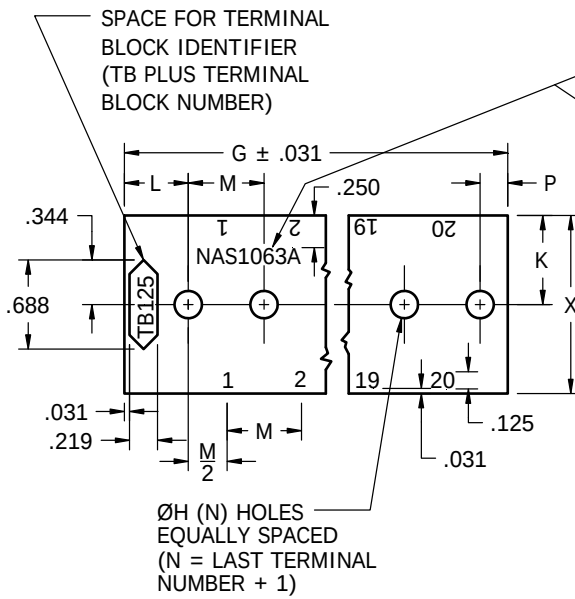

TYPES A, C AND E

BASIC PART NUMBER AND TYPE IN 3/32 HIGH LETTERING

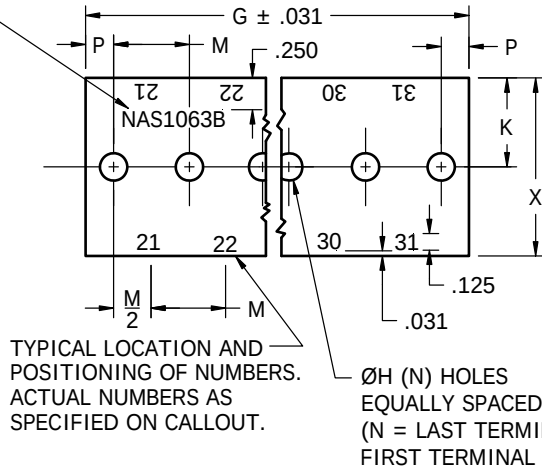

TYPES B, D AND F

TABLE I – DIMENSIONS

TYPE	L	M ± .010	P	K	X	ØH	(G)	FOR USE WITH
A	.500	.594	.219	.531	1.062	.219	.594 (N-1) + .719	NAS1066-1
B		.594	.219	.531	1.062	.219	.594 (N-1) + .438	NAS1066-1
C	.500	.750	.219	.656	1.312	.219	.750 (N-1) + .719	NAS1066-2
D		.750	.219	.656	1.312	.219	.750 (N-1) + .438	NAS1066-2
E	.594	1.500	.312	.812	1.625	.281	1.500 (N-1) + .906	NAS1066-3, -4, -5
F		1.500	.312	.812	1.625	.281	1.500 (N-1) + .625	NAS1066-3, -4, -5

MATERIAL:

STRIP: SILICONE GLASS LAMINATE, .015 ± .003 THICK PER MIL-P-997 MIL-I-24768/17, TYPE GSG.

MARKING: BLACK HEAT RESISTANT AIR DRYING ENAMEL H-16668, RINSHED MASON CO. OR

EQUIVALENT. APPLY PRIOR TO CURING OF ADHESIVE. NUMERALS SHALL BE LEGIBLE AFTER 500 CYCLES ON THE TABOR ABRASION TESTER USING A CS-17 WHEEL WITH A 1,000 GRAM LOAD.

ADHESIVE: DOW CORNING NO. 281 CEMENT OR EQUIVALENT CURED TO MAKE PRESSURE SENSITIVE.

FINISH:

A LAMINATION OF CLEAR HEAT RESISTANT MATERIAL CAPABLE OF WITHSTANDING A TEMPERATURE OF 50 °F MAY BE APPLIED TO THE NUMBERED SIDE OF THE STRIP TO MEET THE ABRASION REQUIREMENTS.

④ COMPLETELY REVISED


THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 4
PROCUREMENT SPECIFICATION NONE	TITLE STRIP, HIGH TEMPERATURE TERMINAL BLOCK, BASE INSULATING	CLASSIFICATION PART STANDARD NAS1063 SHEET 1 OF 2

CODE:


FOR TYPES A, C, AND E, FIRST NUMBER WILL BE 1.
 FOR TYPES A AND B, MAXIMUM TERMINALS PER STRIP: 20
 FOR TYPES C AND D, MAXIMUM TERMINALS PER STRIP: 16
 FOR TYPES E AND F, MAXIMUM TERMINALS PER STRIP: 8
 FOR PARTS WITHOUT TERMINAL BLOCK NUMBER, SPECIFY TYPES B, D, OR F. (THE FIRST NUMBER MAY BE 1 OR ANY OTHER NUMBER).

EXAMPLES OF PART NUMBERS:

TYPES A, C AND E: NAS1063 A 18-125

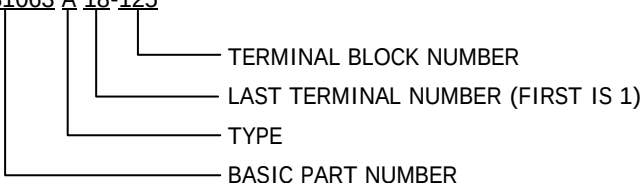

TYPES B, D AND F: NAS1063 B-1-18

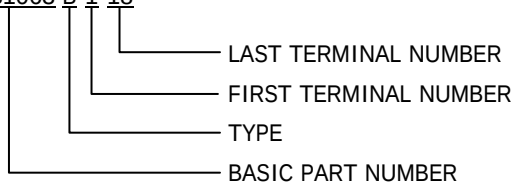

NOTES:

- (1) TEMPERATURE LIMITATION – SEE NAS1066.
- (2) WHEN USING TYPES A, C OR E, THE TERMINAL BLOCK IDENTIFIER MAY BE WRITTEN OR STAMPED ON WITH AIR DRYING ENAMEL SPECIFIED UNDER "MARKING" (WHEN NOT PROCURED WITH THE TERMINAL BLOCK IDENTIFIER INCLUDED).
- (3) ALL NUMERALS AND LETTERS SHALL BE GOTHIC STYLE.
- (4) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (5) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS ± 0.016 ; ANGLES $\pm 1/2^\circ$.
- (6) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (7) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (8) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (9) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.