

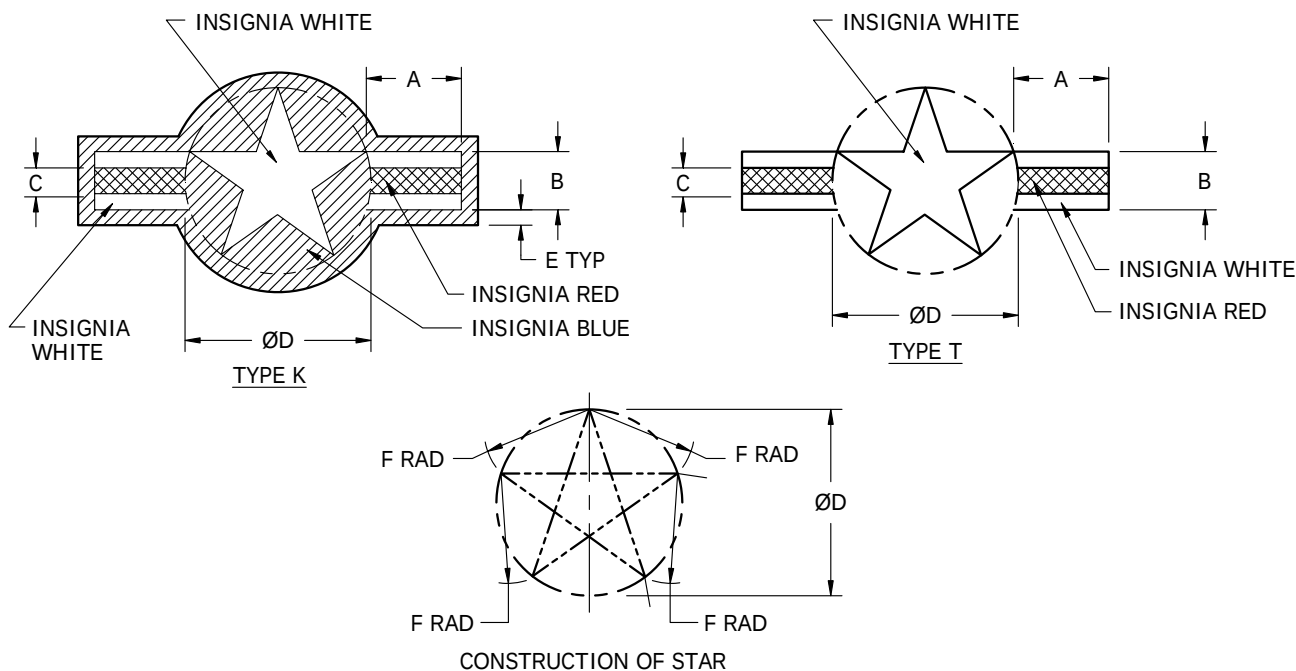


TABLE I – DIMENSIONS

NAS PART NUMBER				ØD	A	B	C	E	F RAD
TYPE K		TYPE T							
GLOSSY	MATTE	GLOSSY	MATTE						
NAS1082K10W	NAS1082K10X	NAS1082T10W	NAS1082T10X	10.000	5.000	2.500	.833	.625	5.900
NAS1082K15W	NAS1082K15X	NAS1082T15W	NAS1082T15X	15.000	7.500	3.750	1.250	.937	8.850
NAS1082K20W	NAS1082K20X	NAS1082T20W	NAS1082T20X	20.000	10.000	5.000	1.667	1.250	11.800
NAS1082K25W	NAS1082K25X	NAS1082T25W	NAS1082T25X	25.000	12.500	6.250	2.083	1.562	14.750
NAS1082K30W	NAS1082K30X	NAS1082T30W	NAS1082T30X	30.000	15.000	7.500	2.500	1.875	17.700
NAS1082K35W	NAS1082K35X	NAS1082T35W	NAS1082T35X	35.000	17.500	8.750	2.917	2.187	20.650
NAS1082K40W	NAS1082K40X	NAS1082T40W	NAS1082T40X	40.000	20.000	10.000	3.333	2.500	23.600
NAS1082K45W	NAS1082K45X	NAS1082T45W	NAS1082T45X	45.000	22.500	11.250	3.750	2.812	26.550
NAS1082K50W	NAS1082K50X	NAS1082T50W	NAS1082T50X	50.000	25.000	12.500	4.167	3.125	29.500
NAS1082K55W	NAS1082K55X	NAS1082T55W	NAS1082T55X	55.000	27.500	13.750	4.583	3.437	32.450
NAS1082K60W	NAS1082K60X	NAS1082T60W	NAS1082T60X	60.000	30.000	15.000	5.000	3.750	35.400

MATERIAL:

ELASTOMERIC PIGMENTED FILM, SEE PROCUREMENT SPECIFICATION.

② COMPLETELY REVISED

THIRD ANGLE PROJECTION		CUSTODIAN	REVISION
		NATIONAL AEROSPACE STANDARDS COMMITTEE	2
PROCUREMENT SPECIFICATION	TITLE	INSIGNIA, NATIONAL	CLASSIFICATION PART STANDARD
			NAS1082 SHEET 1 OF 2
MIL-DTL-43719			

NOTES:

- (1) INSIGNIA MAY BE MANUFACTURED IN SEGMENTS AS REQUIRED BY VENDOR FOR MANUFACTURING AND HANDLING, AND SHALL CONFORM TO THE REQUIREMENTS OF MIL-STD-2161.
- (2) DIMENSIONS IN INCHES.
- (3) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (4) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (5) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (6) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
- (7) TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSION			TOLERANCE
.625	TO	1.999 INCL	±.050
2.000	TO	5.999 INCL	±.100
6.000	TO	19.999 INCL	±.200
20.000	TO	60.000 INCL	±.400

TABLE II – COLOR

COLOR	GLOSSY		MATTE	
	COLOR NUMBER	SPEC	COLOR NUMBER	SPEC
INSIGNIA RED	11136	FED-STD-595	31136	FED-STD-595
INSIGNIA WHITE	17875	FED-STD-595	37875	FED-STD-595
INSIGNIA BLUE	15044	FED-STD-595	35044	FED-STD-595

REVISION

2

② COMPLETELY REVISED



NAS1082
SHEET 2

Document Sharing Hub