

BS EN 60079-11:2012

Incorporating corrigenda January 2012 and November 2014



BSI Standards Publication

Explosive atmospheres

Part 11: Equipment protection by intrinsic safety "i"

bsi.

...making excellence a habit.
AVA **Documents**
Document Sharing Hub

National foreword

This British Standard is the UK implementation of EN 60079-11:2012. It is identical to IEC 60079-11:2011, incorporating corrigendum January 2012. It supersedes BS EN 60079-11:2007 and BS EN 61241-11:2006 which are withdrawn. It also partially supersedes BS EN 60079-27:2008, specifically Clause 4, Apparatus requirements.

The start and finish of text introduced or altered by corrigendum is indicated in the text by tags. Text altered by IEC corrigendum January 2012 is indicated in the text by AC1 AC1.

The UK participation in its preparation was entrusted to Technical Committee EXL/31, Equipment for explosive atmospheres.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014.
Published by BSI Standards Limited 2014

ISBN 978 0 580 88385 9

ICS 13.230; 29.260.20

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2012.

Amendments/corrigenda issued since publication

Date	Text affected
31 August 2012	Implementation of IEC corrigendum January 2012
30 November 2014	Implementation of IEC Interpretation Sheet October 2014 in National Annex NA

National Annex NA (Informative)

SC 31G/IEC 60079-11 (2011), sixth edition/I-SH 01

EXPLOSIVE ATMOSPHERES –

Part 11: Equipment protection by intrinsic safety "i"

INTERPRETATION SHEET 1

This interpretation sheet has been prepared by subcommittee 31G: Equipment for explosive atmospheres – Equipment protection by intrinsic safety "i", of IEC technical committee 31.

The text of this interpretation sheet is based on the following documents:

ISH	Report on voting
31G/235/ISH	31G/238/RVISH

Full information on the voting for the approval of this interpretation sheet can be found in the report on voting indicated in the above table.

Following decision No 16 of the TC 31 meeting in Melbourne in 2011, the issuing of an Interpretation Sheet for IEC 60079-11:2011 (6th edition) was requested, in order to clarify the significance of the changes with respect to the 5th edition.

Question

What are the minor editorial, extensions, and major technical changes of the 6th edition with respect to the 5th edition?

Answer

The following table shows the significance of the changes.

The significance of the changes between IEC Standard, IEC 60079-11, Edition 5, 2006-07 and IEC 60079-11, Edition 6, 2011-06 are as listed below

Significance of changes with respect to IEC 60079-11:2006

Significant Changes	Clause	Type		
		Minor and editorial changes	Extension	Major technical changes
General: Changes to remove specific clause references to other IEC 60079 standards	General	x		
Scope: Expansion to include Group III	1		x	
Scope: Table 1 updated to include references to both IEC 60079-0 Edition 5 and Edition 6	1		x	
Normative references: Deletion of IEC 60079-27, and addition of IEC 61158-2 and IEC 62013-1	2	x		
Terms and definitions: Commonly used definitions moved to IEC 60079-0. Energy limitation definitions moved from IEC 60079-0. New definitions added	3	x		
Spark ignition compliance: Group III ignition requirements added	5.5		x	
Temperature for small components for Group I and Group II: Relocated to IEC 60079-0	5.6.2	x		
Intrinsically safe apparatus and component temperature for Group III	5.6.5		x	
Enclosures for Group I or Group II apparatus	6.1.2	x		
Apparatus complying with Annex F	6.1.2.3 c)	x		
Enclosures for Group III apparatus	6.1.3		x	
Requirements for connections and accessories for IS apparatus when located in the non-hazardous area	6.2.5			C1
Separation of conductive parts	6.3.2	x		
Encapsulation	6.6.1	x		
Encapsulation used for the exclusion of explosive atmospheres	6.6.2			C2
Primary and secondary cells and batteries	7.4.1		x	
Battery construction	7.4.2		x	
Level of Protection "ic"	8.1	x		
Filter capacitors	8.6.2		x	
Wiring, printed circuit board tracks, and connections	8.8 c)	x		
FISCO apparatus	9.2		x	
Handlights and caplights	9.3		x	
Circuits with both inductance and capacitance	10.1.5.2	x		
Electrolyte leakage test for cells and batteries	10.5.2	x		
Spark ignition and surface temperature of cells and batteries	10.5.3	x		
Determination of the acceptability of fuses requiring encapsulation	10.6.2		x	
Optical isolators tests	10.11		x	
Marking	12.1	x		
Encapsulation	Annex D			C2
Fieldbus intrinsically safe concept (FISCO) – Apparatus requirements	Annex G		x	
Ignition testing of semiconductor limiting power supply circuits	Annex H		x	

Explanation of the Types of Significant Changes:

A) Definitions

1. Minor and editorial changes:

- Clarification
- Decrease of technical requirements
- Minor technical change
- Editorial corrections

These are changes which modify requirements in an editorial or a minor technical way. They include changes of the wording to clarify technical requirements without any technical change, or a reduction in level of existing requirement.

2. Extension:

Addition of technical options

These are changes which add new or modify existing technical requirements, in a way that new options are given, but without increasing requirements for equipment that was fully compliant with the previous standard. Therefore, these will not have to be considered for products in conformity with the preceding edition.

3. Major technical changes:

- addition of technical requirements
- increase of technical requirements

These are changes to technical requirements (addition, increase of the level or removal) made in a way that a product in conformity with the preceding edition will not always be able to fulfil the requirements given in the later edition. These changes have to be considered for products in conformity with the preceding edition. For these changes additional information is provided in clause B) below.

NOTE These changes represent current technological knowledge. However, these changes should not normally have an influence on equipment already placed on the market.

B) Information about the background of 'Major technical changes'

C1 – Requirements for external connections, other than battery charging connections, that are designed for use only when an explosive gas or dust atmosphere is not present, for example when in a non-hazardous area or when a gas-free permit is in force, have been added.

C2 – The requirements for encapsulation referenced in 6.6.2 and detailed in Annex D have been changed in terms of the thickness to the free surface and are extended related to moulding. Annex D is changed from informative to normative.

This page deliberately left blank

**Explosive atmospheres -
Part 11: Equipment protection by intrinsic safety "i"
(IEC 60079-11:2011)**

Atmosphères explosives -
Partie 11: Protection de l'équipement par
sécurité intrinsèque "i"
(CEI 60079-11:2011)

Explosionsgefährdete Bereiche -
Teil 11: Geräteschutz durch
Eigensicherheit "i"
(IEC 60079-11:2011)

This European Standard was approved by CENELEC on 2011-08-04. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

Foreword

The text of document 31G/207/FDIS, future edition 6 of IEC 60079-11, prepared by SC 31G, "Intrinsically-safe apparatus", of IEC/TC 31, "Equipment for explosive atmospheres" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 60079-11:2012.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2012-07-06
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2014-08-04

This document supersedes EN 60079-11:2007, EN 61241-11:2006 and partially supersedes EN 60079-27:2008 (see Annex ZY for significant changes).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For the relationship with EU Directive(s) see informative Annex ZZ, which is an integral part of this document.

Endorsement notice

The text of the International Standard IEC 60079-11:2011 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60079-15	NOTE	Harmonized as EN 60079-15.
IEC 61086-1:2004	NOTE	Harmonized as EN 61086-1:2004 (not modified).
IEC 62133	NOTE	Harmonized as EN 62133.

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60079-0	-	Explosive atmospheres - Part 0: Equipment - General requirements	EN 60079-0	-
IEC 60079-7	-	Explosive atmospheres - Part 7: Equipment protection by increased safety "e"	EN 60079-7	-
IEC 60079-25	-	Explosive atmospheres - Part 25: Intrinsically safe electrical systems	EN 60079-25	-
IEC 60085	-	Electrical insulation - Thermal evaluation and designation	EN 60085	-
IEC 60112	-	Method for the determination of the proof and the comparative tracking indices of solid insulating materials	EN 60112	-
IEC 60127	Series	Miniature fuses	EN 60127	Series
IEC 60317-3	-	Specifications for particular types of winding wires - Part 3: Polyester enamelled round copper wire, class 155	-	-
IEC 60317-7	-	Specifications for particular types of winding wires - Part 7: Polyimide enamelled round copper wire, class 220	HD 555.7 S2	-
IEC 60317-8	-	Specifications for particular types of winding wires - Part 8: Polyesterimide enamelled round copper wire, class 180	EN 60317-8	-
IEC 60317-13	-	Specifications for particular types of winding wires - Part 13: Polyester or polyesterimide overcoated with polyamide-imide enamelled round copper wire, class 200	EN 60317-13	-
IEC 60529	-	Degrees of protection provided by enclosures - (IP Code)	-	-
IEC 60664-1	2007	Insulation coordination for equipment within low-voltage systems - Part 1: Principles, requirements and tests	EN 60664-1	2007
IEC 60664-3	2003	Insulation coordination for equipment within low-voltage systems - Part 3: Use of coating, potting or moulding for protection against pollution	EN 60664-3	2003

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61158-2	-	Industrial communication networks - Fieldbus specifications - Part 2: Physical layer specification and service definition	EN 61158-2	-
IEC 62013-1	-	Caplights for use in mines susceptible to firedamp - Part 1: General requirements - Construction and testing in relation to the risk of explosion	EN 62013-1	-
ANSI/UL 248-1	-	Standard for low-voltage fuses - Part 1: General requirements	-	-

Annex ZY (informative)

Significant changes between this European Standard and EN 60079-11:2007

This European Standard supersedes EN 60079-11:2007.

The significant changes with respect to EN 60079-11:2007 are as listed below.

Significant Changes	Clause	Type		
		Minor and editorial changes	Extension	Major technical changes
Inclusion of non-edition specific references to EN 60079-11	Table 1	X		
The merging of the requirements for combustible dust atmospheres from EN 61241-11	e.g. 5.6.5. 6.1.3		X	
The merging of the apparatus requirements for FISCO from EN 60079-27	Annex G		X	
Clarification of the requirements for accessories connected to intrinsically safe apparatus such as chargers and data loggers.	6.2.5 7.4.9		X	
Addition of new test requirements for opto-isolators	10.11		X	
Introduction of Annex H about ignition testing of semiconductor limiting power supply circuits	Annex H		X	

NOTE: The technical changes referred include the significant technical changes from the EN revised but is not an exhaustive list of all modifications from the previous version.

Explanations:

A) Definitions

Minor and editorial changes

clarification
decrease of technical requirements
minor technical change
editorial corrections

Changes in a standard classified as 'Minor and editorial changes' refer to changes regarding the previous standard, which modify requirements in an editorial or a minor technical way. Also changes of the wording to clarify technical requirements without any technical change are classified as 'Minor and editorial changes'.

A reduction in level of existing requirement is also classified as 'Minor and editorial changes'

Extension

addition of technical options

Changes in a standard classified as 'extension' refers to changes regarding the previous standard, which add new or modify existing technical requirements, in a way that new options are given, but without increasing requirements for equipment that was fully compliant with the previous standard. Therefore these 'extensions' will not have to be considered for products in conformity with the preceding edition.

Major technical change

addition of technical requirements
increase of technical requirements

Changes in a standard classified as 'Major technical change' refer to changes regarding the previous standard, which add new or increase the level of existing technical requirements, in a way that a product in conformity with the preceding standard will not always be able to fulfil the requirements given in the standard. 'Major technical changes' have to be considered for products in conformity with the preceding edition. For every change classified as 'Major Technical Change' additional information is provided in clause B) of the Annex ZY.

Note: These changes represent current technological knowledge¹. However, these changes should not normally have an influence on equipment already placed on the market.

B) Information about the background of 'Major Technical Changes'

None.

Instructions:

The manufacturer or his authorised representative in the Community is to draw up the instructions for use in the required Community languages.

Marking:

The marking in this standard is to be supplemented/modified by the marking according to Directive 94/9/EC. Examples are given below.

European marking examples

Directive part	Standard part	Equipment example
 II 1G	Ex ia IIC T4 -25 °C ≤ Ta ≤ +50 °C	Self-contained intrinsically safe apparatus
 II 2G	Ex ib IIB T4 Ui = 24 V li = 80 mA Pi = 0.48 W	Intrinsically safe apparatus designed to be connected to other apparatus
 I (M2)	[Ex ib] I Uo = 20 V Io = 300 mA Po = 1.5 W	Associated apparatus
 II 2 (1) G	Ex ib [ia IIC Ga] IIB T6 Gb Ui = 30 V, Uo = 12 V, Io = 100 mA	Intrinsically safe apparatus Level of Protection 'ib' with 'ia' outputs
 II 2 (1) G	Ex db [ia Ga] IIB T4 Gb Uo = 12 V, Io = 200 mA Po = 0.6 W	Associated apparatus protected by a flameproof enclosure

¹ see also ATEX Guidelines 10.3 and Annex ZZ.

Annex ZZ (informative)

Coverage of Essential Requirements of EU Directives

This European Standard has been prepared under a mandate given to CENELEC by the European Union and the European Free Trade Association and within its scope the standard covers only the following essential requirements out of those given in Annex II of the EU Directive 94/9/EC:

- ER 1.0.1 indent 2, ER 1.0.2 (partly), ER 1.0.3 (partly), ER 1.0.4 (partly), ER 1.0.5 (partly), ER 1.0.6 (partly)
- ER 1.1 (partly)
- ER 1.2.1 (partly), ER 1.2.2 (partly), ER 1.2.4 (partly), ER 1.2.6 (partly), ER 1.2.8 (partly)
- ER 1.3.1 (partly)
- ER 1.4 (partly)
- ER 2.0.1.1 to ER 2.0.1.4
- ER 2.0.2.1 (partly), ER 2.0.2.2, ER 2.0.2.3
- ER 2.1.1.1 to ER 2.1.1.3
- ER 2.1.2.1 to ER 2.1.2.4
- ER 2.2.1.1 to ER 2.2.1.3
- ER 2.2.2.1 to ER 2.2.2.4
- ER 2.3.1.1, ER 2.3.1.2
- ER 2.3.2.1 to ER 2.3.2.3

Compliance with this standard provides one means of conformity with the specified essential requirements of the Directive[s] concerned.

WARNING: Other requirements and other EU Directives may be applicable to the products falling within the scope of this standard.

CONTENTS

FOREWORD.....	7
1 Scope.....	9
2 Normative references.....	14
3 Terms and definitions	15
4 Grouping and classification of intrinsically safe apparatus and associated apparatus	20
5 Levels of protection and ignition compliance requirements of electrical apparatus.....	21
5.1 General	21
5.2 Level of protection "ia"	21
5.3 Level of protection "ib"	22
5.4 Level of protection "ic"	22
5.5 Spark ignition compliance	22
5.6 Thermal ignition compliance	22
5.6.1 General	22
5.6.2 Temperature for small components for Group I and Group II	23
5.6.3 Wiring within intrinsically safe apparatus for Group I and Group II	23
5.6.4 Tracks on printed circuit boards for Group I and Group II	24
5.6.5 Intrinsically safe apparatus and component temperature for Group III	25
5.7 Simple apparatus.....	26
6 Apparatus construction	27
6.1 Enclosures	27
6.1.1 General	27
6.1.2 Enclosures for Group I or Group II apparatus	27
6.1.3 Enclosures for Group III apparatus.....	28
6.2 Facilities for connection of external circuits	28
6.2.1 Terminals	28
6.2.2 Plugs and sockets.....	31
6.2.3 Determination of maximum external inductance to resistance ratio (L_0/R_0) for resistance limited power source	31
6.2.4 Permanently connected cable	32
6.2.5 Requirements for connections and accessories for IS apparatus when located in the non-hazardous area	32
6.3 Separation distances	33
6.3.1 General	33
6.3.2 Separation of conductive parts	33
6.3.3 Voltage between conductive parts	37
6.3.4 Clearance	37
6.3.5 Separation distances through casting compound	37
6.3.6 Separation distances through solid insulation	38
6.3.7 Composite separations	38
6.3.8 Creepage distance.....	38
6.3.9 Distance under coating	40
6.3.10 Requirements for assembled printed circuit boards	40
6.3.11 Separation by earthed screens.....	41
6.3.12 Internal wiring	42
6.3.13 Dielectric strength requirement	42
6.3.14 Relays	42
6.4 Protection against polarity reversal	43

6.5	Earth conductors, connections and terminals	43
6.6	Encapsulation	44
6.6.1	General	44
6.6.2	Encapsulation used for the exclusion of explosive atmospheres	45
7	Components on which intrinsic safety depends	45
7.1	Rating of components	45
7.2	Connectors for internal connections, plug-in cards and components	46
7.3	Fuses	46
7.4	Primary and secondary cells and batteries	47
7.4.1	General	47
7.4.2	Battery construction	48
7.4.3	Electrolyte leakage and ventilation	48
7.4.4	Cell voltages	49
7.4.5	Internal resistance of cell or battery	49
7.4.6	Batteries in equipment protected by other types of protection	49
7.4.7	Batteries used and replaced in explosive atmospheres	49
7.4.8	Batteries used but not replaced in explosive atmospheres	50
7.4.9	External contacts for charging batteries	50
7.5	Semiconductors	50
7.5.1	Transient effects	50
7.5.2	Shunt voltage limiters	50
7.5.3	Series current limiters	51
7.6	Failure of components, connections and separations	51
7.7	Piezo-electric devices	52
7.8	Electrochemical cells for the detection of gases	52
8	Infallible components, infallible assemblies of components and infallible connections on which intrinsic safety depends	53
8.1	Level of Protection “ic”	53
8.2	Mains transformers	53
8.2.1	General	53
8.2.2	Protective measures	53
8.2.3	Transformer construction	53
8.2.4	Transformer type tests	54
8.2.5	Routine test of mains transformers	54
8.3	Transformers other than mains transformers	54
8.4	Infallible windings	55
8.4.1	Damping windings	55
8.4.2	Inductors made by insulated conductors	55
8.5	Current-limiting resistors	56
8.6	Capacitors	56
8.6.1	Blocking capacitors	56
8.6.2	Filter capacitors	57
8.7	Shunt safety assemblies	57
8.7.1	General	57
8.7.2	Safety shunts	57
8.7.3	Shunt voltage limiters	58
8.8	Wiring, printed circuit board tracks, and connections	58
8.9	Galvanically separating components	59
8.9.1	General	59

8.9.2	Isolating components between intrinsically safe and non-intrinsically safe circuits	59
8.9.3	Isolating components between separate intrinsically safe circuits	59
9	Supplementary requirements for specific apparatus.....	60
9.1	Diode safety barriers.....	60
9.1.1	General	60
9.1.2	Construction	60
9.2	FISCO apparatus.....	60
9.3	Handlights and caplights	61
10	Type verifications and type tests	61
10.1	Spark ignition test	61
10.1.1	General	61
10.1.2	Spark test apparatus	61
10.1.3	Test gas mixtures and spark test apparatus calibration current	62
10.1.4	Tests with the spark test apparatus	63
10.1.5	Testing considerations	64
10.2	Temperature tests.....	65
10.3	Dielectric strength tests.....	66
10.4	Determination of parameters of loosely specified components	66
10.5	Tests for cells and batteries	66
10.5.1	General	66
10.5.2	Electrolyte leakage test for cells and batteries	66
10.5.3	Spark ignition and surface temperature of cells and batteries	67
10.5.4	Battery container pressure tests	68
10.6	Mechanical tests	68
10.6.1	Casting compound	68
10.6.2	Determination of the acceptability of fuses requiring encapsulation	68
10.6.3	Partitions.....	68
10.7	Tests for intrinsically safe apparatus containing piezoelectric devices	68
10.8	Type tests for diode safety barriers and safety shunts	69
10.9	Cable pull test.....	70
10.10	Transformer tests	70
10.11	Optical isolators tests.....	70
10.11.1	General.....	70
10.11.2	Thermal conditioning, dielectric and carbonisation test.....	70
10.11.3	Dielectric and short-circuit test	72
10.12	Current carrying capacity of infallible printed circuit board connections	72
11	Routine verifications and tests	73
11.1	Routine tests for diode safety barriers	73
11.1.1	Completed barriers	73
11.1.2	Diodes for 2-diode “ia” barriers.....	73
11.2	Routine tests for infallible transformers	73
12	Marking	74
12.1	General	74
12.2	Marking of connection facilities	74
12.3	Warning markings	75
12.4	Examples of marking	75
13	Documentation	77
Annex A (normative)	Assessment of intrinsically safe circuits.....	78

Annex B (normative) Spark test apparatus for intrinsically safe circuits	100
Annex C (informative) Measurement of creepage distances, clearances and separation distances through casting compound and through solid insulation	108
Annex D (normative) Encapsulation	111
Annex E (informative) Transient energy test	118
Annex F (normative) Alternative separation distances for assembled printed circuit boards and separation of components	121
Annex G (normative) Fieldbus intrinsically safe concept (FISCO) – Apparatus requirements	125
Annex H (informative) Ignition testing of semiconductor limiting power supply circuits	130
Bibliography	141
Figure 1 – Separation of intrinsically safe and non-intrinsically safe terminals	31
Figure 2 – Example of separation of conducting parts	36
Figure 3 – Determination of creepage distances	39
Figure 4 – Creepage distances and clearances on printed circuit boards	41
Figure 5 – Examples of independent and non-independent connecting elements	44
Figure A.1 – Resistive circuits	81
Figure A.2 – Group I capacitive circuits	82
Figure A.3 – Group II capacitive circuits	83
Figure A.4 – Inductive circuits of Group II	84
Figure A.5 – Group I inductive circuits	85
Figure A.6 – Group IIC inductive circuits	86
Figure A.7 – Simple inductive circuit	87
Figure A.8 – Simple capacitive circuit	87
Figure A.9 – Equivalent capacitance	99
Figure B.1 – Spark test apparatus for intrinsically safe circuits	104
Figure B.2 – Cadmium contact disc	105
Figure B.3 – Wire holder	105
Figure B.4 – Example of a practical design of spark test apparatus	106
Figure B.5 – Arrangement for fusing tungsten wires	107
Figure C.1 – Measurement of clearance	108
Figure C.2 – Measurement of composite distances	109
Figure C.3 – Measurement of creepage	110
Figure C.4 – Measurement of composite creepage	110
Figure D.1 – Examples of encapsulated assemblies conforming to 6.3.5 and 6.6	113
Figure D.2 – Applications of encapsulation using casting compound without an enclosure	115
Figure D.3 – Examples of assemblies using moulding conforming to 6.6	116
Figure E.1 – Example of test circuit	119
Figure E.2 – Example of output waveform	120
Figure G.1 – Typical system	129
Figure H.1 – Safety factor vs ignition probability	140

Table 1 – Applicability of specific clauses of IEC 60079-0	9
Table 2 – Temperature classification of copper wiring (in a maximum ambient temperature of 40 °C).....	24
Table 3 – Temperature classification of tracks on printed circuit boards (in a maximum ambient temperature of 40 °C)	25
Table 4 – Maximum permitted power dissipation within a component immersed in dust	26
Table 5 – Clearances, creepage distances and separations	35
Table 6 – Minimum foil thickness or minimum wire diameter of the screen in relation to the rated current of the fuse	54
Table 7 – Compositions of explosive test mixtures adequate for 1,0 safety factor	62
Table 8 – Compositions of explosive test mixtures adequate for 1,5 safety factor	63
Table 10 – Routine test voltages for infallible transformers	73
Table 11 – Text of warning markings	75
Table A.1 – Permitted short-circuit current corresponding to the voltage and the Equipment Group	88
Table A.2 – Permitted capacitance corresponding to the voltage and the Equipment Group	93
Table A.3 – Permitted reduction of effective capacitance when protected by a series resistance	99
Table F.1 – Clearances, creepage distances and separations for Level of Protection "ia" and "ib" when ingress protected, and special conditions of material and installation are fulfilled	123
Table F.2 – Clearances, creepage distances and separations for Level of Protection "ic" when ingress is protected by an enclosure or by special conditions of installation	124
Table G.1 – Assessment of maximum output current for use with 'ia' and 'ib' FISCO rectangular supplies	126
Table G.2 – Assessment of maximum output current for use with 'ic' FISCO rectangular supplies	126
Table H.1 – Sequence of tests	133
Table H.2 – Safety factor provided by several explosive test mixtures that may be used for the tests in Table H.1	135
Table H.3 – Example of a Group I circuit with characteristics described by Curve II of Figure H.1 – This passes the test sequence of Table H.1.....	136
Table H.4 – Example of a Group I circuit with characteristics described by Curve III of Figure H.1 – This does not pass the test sequence of Table H.1	138

INTERNATIONAL ELECTROTECHNICAL COMMISSION

EXPLOSIVE ATMOSPHERES –

Part 11: Equipment protection by intrinsic safety "i"

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60079-11 has been prepared by subcommittee 31G: Intrinsically safe apparatus, of IEC technical committee 31: Equipment for explosive atmospheres.

This sixth edition cancels and replaces the fifth edition of IEC 60079-11 published in 2006, the first edition of IEC 61241-11 published in 2005, and the new Annex G replaces the apparatus requirements of the second edition of IEC 60079-27 published in 2008. This sixth edition constitutes a technical revision of these publications.

NOTE IEC 60079-25 cancels and replaces the remaining subject matter of IEC 60079-27.

The significant changes with respect to the previous edition are listed below:

- Inclusion of non-edition specific references to IEC 60079-0.
- The merging of the apparatus requirements for FISCO from IEC 60079-27.
- The merging of the requirements for combustible dust atmospheres from IEC 61241-11.

- Clarification of the requirements for accessories connected to intrinsically safe apparatus; such as chargers and data loggers.
- Addition of new test requirements for opto-isolators.
- Introduction of Annex H about ignition testing of semiconductor limiting power supply circuits.

The text of this standard is based on the following documents:

FDIS	Report on voting
31G/207/FDIS	31G/213/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This standard supplements and modifies the general requirements of IEC 60079-0, except as indicated in Table 1 (see Scope).

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60079 series, under the general title: *Explosive atmospheres*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

EXPLOSIVE ATMOSPHERES –**Part 11: Equipment protection by intrinsic safety "i"****1 Scope**

This part of IEC 60079 specifies the construction and testing of intrinsically safe apparatus intended for use in an explosive atmosphere and for associated apparatus, which is intended for connection to intrinsically safe circuits which enter such atmospheres.

This type of protection is applicable to electrical equipment in which the electrical circuits themselves are incapable of causing an explosion in the surrounding explosive atmospheres.

This standard is also applicable to electrical equipment or parts of electrical equipment located outside the explosive atmosphere or protected by another Type of Protection listed in IEC 60079-0, where the intrinsic safety of the electrical circuits in the explosive atmosphere may depend upon the design and construction of such electrical equipment or parts of such electrical equipment. The electrical circuits exposed to the explosive atmosphere are evaluated for use in such an atmosphere by applying this standard.

The requirements for intrinsically safe systems are provided in IEC 60079-25.

This standard supplements and modifies the general requirements of IEC 60079-0, except as indicated in Table 1. Where a requirement of this standard conflicts with a requirement of IEC 60079-0, the requirements of this standard shall take precedence.

If requirements in this standard are applicable to both intrinsically safe apparatus and associated apparatus the term "apparatus" is used throughout the standard.

This standard is for electrical equipment only; therefore the term "equipment" used in the standard always means "electrical equipment".

If associated apparatus is placed in the explosive atmosphere, it shall be protected by an appropriate Type of Protection listed in IEC 60079-0, and then the requirements of that method of protection together with the relevant parts of IEC 60079-0 also apply to the associated apparatus.

Table 1 – Applicability of specific clauses of IEC 60079-0

Clause or subclause of IEC 60079-0			IEC 60079-0 clause application to IEC 60079-11		
			Intrinsically safe apparatus		Associated apparatus
Ed. 5.0 (2007) (informative)	Ed. 6.0 (2011) (informative)	Clause / Subclause title (normative)	Group I and Group II	Group III	
1	1	Scope	Applies	Applies	Applies
2	2	Normative references	Applies	Applies	Applies
3	3	Terms and definitions	Applies	Applies	Applies
4	4	Equipment grouping	Applies	Applies	Applies
4.1	4.1	Group I	Applies	Excluded	Applies
4.2	4.2	Group II	Applies	Excluded	Applies

Clause or subclause of IEC 60079-0			IEC 60079-0 clause application to IEC 60079-11		
			Intrinsically safe apparatus		Associated apparatus
Ed. 5.0 (2007) (informative)	Ed. 6.0 (2011) (informative)	Clause / Subclause title (normative)	Group I and Group II	Group III	
4.3	4.3	Group III	Excluded	Applies	Applies
4.4	4.4	Equipment for a particular explosive atmosphere	Applies	Applies	Applies
5.1	5.1	Environmental influences	Applies	Applies	Applies
5.1.1	5.1.1	Ambient temperature	Applies	Applies	Applies
5.1.2	5.1.2	External source of heating or cooling	Applies	Applies	Applies
5.2	5.2	Service temperature	Applies	Applies	Applies
5.3.1	5.3.1	Determination of maximum surface temperature	Applies	Applies	Excluded
5.3.2.1	5.3.2.1	Group I electrical equipment	Applies	Excluded	Excluded
5.3.2.2	5.3.2.2	Group II electrical equipment	Applies	Excluded	Excluded
5.3.2.3	5.3.2.3	Group III electrical equipment	Excluded	Applies	Excluded
5.3.3	5.3.3	Small component temperature for Group I or Group II electrical equipment	Applies	Excluded	Excluded
6.1	6.1	General	Applies	Applies	Applies
6.2	6.2	Mechanical strength of equipment	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
6.3	6.3	Opening times	Excluded	Excluded	Excluded
6.4	6.4	Circulating currents in enclosures (e.g. of large electrical machines)	Excluded	Excluded	Excluded
6.5	6.5	Gasket retention	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
6.6	6.6	Electromagnetic and ultrasonic radiating equipment	Applies	Applies	Excluded
7.1.1	7.1.1	Applicability	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
7.1.2	7.1.2.1	Specification of materials	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
7.1.3	7.1.2.2	Plastic materials	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
7.1.4	7.1.2.3	Elastomers	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
7.2	7.2	Thermal endurance	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied

Clause or subclause of IEC 60079-0			IEC 60079-0 clause application to IEC 60079-11		
			Intrinsically safe apparatus		Associated apparatus
Ed. 5.0 (2007) (informative)	Ed. 6.0 (2011) (informative)	Clause / Subclause title (normative)	Group I and Group II	Group III	
7.3	7.3	Resistance to light	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
7.4	7.4	Electrostatic charges on external non-metallic materials	Applies	Applies	Excluded
NR	7.5	Accessible metal parts	Applies	Applies	Excluded
7.5	NR	Threaded holes	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
8.1	8.1	Material composition	Applies	Applies	Excluded
8.1.1	8.2	Group I	Applies	Excluded	Excluded
8.1.2	8.3	Group II	Applies	Excluded	Excluded
8.1.3	8.4	Group III	Excluded	Applies	Excluded
8.2	NR	Threaded holes	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
9	9	Fasteners	Excluded	Excluded	Excluded
10	10	Interlocking devices	Excluded	Excluded	Excluded
11	11	Bushings	Excluded	Excluded	Excluded
12	12	Materials used for cementing	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
13	13	Ex Components	Applies	Applies	Applies
14	14	Connection facilities and termination compartments	Excluded	Excluded	Excluded
15	15	Connection facilities for earthing or bonding conductors	Excluded	Excluded	Excluded
16	16	Entries into enclosures	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
17	17	Supplementary requirements for rotating machines	Excluded	Excluded	Excluded
18	18	Supplementary requirements for switchgear	Excluded	Excluded	Excluded
19	19	Supplementary requirements for fuses	Excluded	Excluded	Excluded
20	20	Supplementary requirements for plugs, socket outlets and connectors	Excluded	Excluded	Excluded
21	21	Supplementary requirements for luminaires	Excluded	Excluded	Excluded
22	22	Supplementary requirements for caplights and handlights	Modified	Modified	Excluded
23.1	23.1	General	Applies	Applies	Applies

Clause or subclause of IEC 60079-0			IEC 60079-0 clause application to IEC 60079-11		
			Intrinsically safe apparatus		Associated apparatus
Ed. 5.0 (2007) (informative)	Ed. 6.0 (2011) (informative)	Clause / Subclause title (normative)	Group I and Group II	Group III	
23.2	23.2	Batteries	Excluded	Excluded	Excluded
23.3	23.3	Cell types	Applies	Applies	Applies
23.4	23.4	Cells in a battery	Applies	Applies	Applies
23.5	23.5	Ratings of batteries	Applies	Applies	Applies
23.6	23.6	Interchangeability	Applies	Applies	Applies
23.7	23.7	Charging of primary batteries	Applies	Applies	Applies
23.8	23.8	Leakage	Applies	Applies	Applies
23.9	23.9	Connections	Applies	Applies	Applies
23.10	23.10	Orientation	Applies	Applies	Applies
23.11	23.11	Replacement of cells or batteries	Applies	Applies	Applies
23.12	23.12	Replaceable battery pack	Applies	Applies	Applies
24	24	Documentation	Applies	Applies	Applies
25	25	Compliance of prototype or sample with documents	Applies	Applies	Applies
26.1	26.1	General	Applies	Applies	Applies
26.2	26.2	Test configuration	Applies	Applies	Applies
26.3	26.3	Tests in explosive test mixtures	Applies	Applies	Applies
26.4.1	26.4.1	Order of tests	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.4.1.1	26.4.1.1	Metallic enclosures, metallic parts of enclosures and glass parts of enclosures	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.4.1.2	26.4.1.2	Non-metallic enclosures or non-metallic parts of enclosures	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.4.1.2.1	26.4.1.2.1	Group I electrical equipment	Excluded except when 6.1.2.3a) is applied	Excluded	Excluded except when 6.1.2.3a) is applied
26.4.1.2.2	26.4.1.2.2	Group II and Group III electrical equipment	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.4.2	26.4.2	Resistance to impact	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.4.3	26.4.3	Drop test	Applies	Applies	Excluded except when 6.1.2.3a) is applied
26.4.4	26.4.4	Acceptance criteria	AC1 Applies AC1	AC1 Applies AC1	Excluded except when 6.1.2.3a) is applied
26.4.5	26.4.5	Degree of protection (IP) by enclosures	Applies	Applies	Applies
26.5.1.1	26.5.1.1	General	Applies	Applies	Excluded
26.5.1.2	26.5.1.2	Service temperature	Modified	Modified	Modified

Clause or subclause of IEC 60079-0			IEC 60079-0 clause application to IEC 60079-11		
			Intrinsically safe apparatus		Associated apparatus
Ed. 5.0 (2007) (informative)	Ed. 6.0 (2011) (informative)	Clause / Subclause title (normative)	Group I and Group II	Group III	
26.5.1.3	26.5.1.3	Maximum surface temperature	Modified	Modified	Modified
26.5.2	26.5.2	Thermal shock test	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.5.3	26.5.3	Small component ignition test (Group I and Group II)	Applies	Excluded	Excluded
26.6	26.6	Torque test for bushings	Excluded	Excluded	Excluded
26.7	26.7	Non-metallic enclosures or non-metallic parts of enclosures	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.8	26.8	Thermal endurance to heat	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.9	26.9	Thermal endurance to cold	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.10	26.10	Resistance to light	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
26.11	26.11	Resistance to chemical agents for Group I electrical equipment	Excluded except when 6.1.2.3a) is applied	Excluded	Excluded
26.12	26.12	Earth continuity	Excluded	Excluded	Excluded
26.13	26.13	Surface resistance test of parts of enclosures of non-metallic materials	Applies	Applies	Excluded
26.15	26.14	Measurement of capacitance	Applies	Applies	Excluded
NR	26.15	Verification of ratings of ventilating fans	Excluded	Excluded	Excluded
NR	26.16	Alternative qualification of elastomeric sealing O-rings	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
27	27	Routine tests	Applies	Applies	Applies
28	28	Manufacturer's responsibility	Applies	Applies	Applies
29	29	Marking	Applies	Applies	Applies
30	30	Instructions	Applies	Applies	Applies
Annex A (Normative)	Annex A (Normative)	Supplementary requirements for cable glands	Excluded	Excluded	Excluded
Annex B (Normative)	Annex B (Normative)	Requirements for Ex Components	Applies	Applies	Applies
Annex C (Informative)	Annex C (Informative)	Example of rig for resistance to impact test	Applies	Applies	Excluded except when 6.1.2.3a) is applied

Clause or subclause of IEC 60079-0			IEC 60079-0 clause application to IEC 60079-11		
			Intrinsically safe apparatus		Associated apparatus
Ed. 5.0 (2007) (informative)	Ed. 6.0 (2011) (informative)	Clause / Subclause title (normative)	Group I and Group II	Group III	
Annex D (Informative)	NR	Alternative risk assessment method encompassing "equipment protection levels" for Ex equipment	Applies	Applies	Applies
Annex E (Informative)	Annex D (Informative)	Motors supplied by converters	Excluded	Excluded	Excluded
NR	Annex E (Informative)	Temperature rise testing of electric machines	Excluded	Excluded	Excluded
NR	Annex F (Informative)	Guideline flowchart for tests of non-metallic enclosures or non-metallic parts of enclosures (26.4)	Excluded except when 6.1.2.3a) is applied	Excluded except when 6.1.3 a) is applied.	Excluded except when 6.1.2.3a) is applied
Applies – This requirement of IEC 60079-0 is applied without change. Excluded – This requirement of IEC 60079-0 does not apply. Excluded except – This requirement of IEC 60079-0 does not apply except when the conditions stated are met. Modified – This requirement of IEC 60079-0 is modified as detailed in this standard. NR – No requirements.					
NOTE The clause numbers in the above table are shown for information only. The applicable requirements of IEC 60079-0 are identified by the clause title which is normative. This table was written against the specific requirements of IEC 60079-0, ed. 6.0. The clause numbers for the previous edition are shown for information only. This is to enable the General requirements IEC 60079-0, ed. 5.0, to be used where necessary with this part of IEC 60079. Where there were no requirements, indicated by NR, or there is a conflict between requirements, the later edition requirements take precedence.					

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60079-0, *Explosive atmospheres – Part 0: Equipment – General requirements*

IEC 60079-7, *Explosive atmospheres – Part 7: Equipment protection by increased safety "e"*

IEC 60079-25, *Explosive atmospheres – Part 25: Intrinsically safe electrical systems*

IEC 60085, *Electrical insulation – Thermal evaluation and designation*

IEC 60112, *Method for the determination of the proof and the comparative tracking indices of solid insulating materials*

IEC 60127 (all parts), *Miniature fuses*

IEC 60317-3, *Specifications for particular types of winding wires – Part 3: Polyester enamelled round copper wire, class 155*

IEC 60317-7, *Specifications for particular types of winding wires – Part 7: Polyimide enamelled round copper wire, class 220*

IEC 60317-8, *Specifications for particular types of winding wires – Part 8: Polyesterimide enamelled round copper winding wire, class 180*

IEC 60317-13, *Specifications for particular types of winding wires – Part 13: Polyester or polyesterimide overcoated with polyamide-imide enamelled round copper wire, class 200*

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 60664-1:2007, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60664-3:2003, *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution*

IEC 61158-2, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

IEC 62013-1, *Caplights for use in mines susceptible to firedamp – Part 1: General requirements – Construction and testing in relation to the risk of explosion*

ANSI/UL 248-1, *Low-Voltage Fuses – Part 1: General Requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60079-0, and the following apply.

3.1 general

3.1.1 intrinsic safety “i”

type of protection based on the restriction of electrical energy within equipment and of interconnecting wiring exposed to the explosive atmosphere to a level below that which can cause ignition by either sparking or heating effects

3.1.2 associated apparatus

electrical equipment which contains both intrinsically safe circuits and non-intrinsically safe circuits and is constructed so that the non-intrinsically safe circuits cannot adversely affect the intrinsically safe circuits

NOTE Associated apparatus may be either:

- a) electrical equipment which has another type of protection listed in IEC 60079-0 for use in the appropriate explosive atmosphere, or
- b) electrical equipment not so protected and which, therefore, is not normally used within an explosive atmosphere, for example a recorder which is not itself in an explosive atmosphere, but is connected to a thermocouple situated within an explosive atmosphere where only the recorder input circuit is intrinsically safe.

3.1.3 intrinsically safe apparatus

electrical equipment in which all the circuits are intrinsically safe circuits

3.1.4

intrinsically safe circuit

circuit in which any spark or any thermal effect produced in the conditions specified in this standard, which include normal operation and specified fault conditions, is not capable of causing ignition of a given explosive atmosphere

3.1.5

simple apparatus

electrical component or combination of components of simple construction with well-defined electrical parameters and which is compatible with the intrinsic safety of the circuit in which it is used

3.2

coating

insulating material such as varnish or dry film laid on the surface of the assembly

NOTE Coating and base material of a printed board form an insulating system that may have properties similar to solid insulation.

[Definition 3.5 of IEC 60664-3]

3.3

conformal coating

electrical insulating material applied as a coating to loaded printed circuit boards to produce a thin layer conforming to the surface in order to provide a protective barrier against deleterious effects from environmental conditions

[Definition 2.1 of IEC 61086-1]

3.4

control drawing

drawing or other document that is prepared by the manufacturer for the intrinsically safe or associated apparatus, detailing the electrical parameters to allow for interconnections to other circuits or apparatus

3.5

diode safety barrier

assemblies incorporating shunt diodes or diode chains (including Zener diodes) protected by fuses or resistors or a combination of these, manufactured as an individual apparatus rather than as part of a larger apparatus

3.6

entity concept

method used to determine acceptable combinations of intrinsically safe apparatus and associated apparatus through the use of intrinsically safe parameters assigned to connection facilities

3.7

faults

3.7.1

countable fault

fault which occurs in parts of electrical apparatus conforming to the constructional requirements of IEC 60079-11

3.7.2

fault

any defect of any component, separation, insulation or connection between components, not defined as infallible by IEC 60079-11, upon which the intrinsic safety of a circuit depends

3.7.3

non-countable fault

fault which occurs in parts of electrical apparatus not conforming to the constructional requirements of IEC 60079-11

3.8

fuse rating

I_n

current rating of a fuse as specified in IEC 60127 series, ANSI/UL 248-1 or in the manufacturer's specification

3.9

FISCO

abbreviation of Fieldbus Intrinsically Safe Concept

3.10

infallibility

3.10.1

infallible component

infallible assembly of components

component or assembly of components that is considered as not subject to certain fault modes as specified in IEC 60079-11

NOTE The probability of such fault modes occurring in service or storage is considered to be so low that they are not to be taken into account.

3.10.2

infallible connection

connections, including joints and interconnecting wiring and printed circuit board tracks, that are not considered according to IEC 60079-11 as becoming open-circuited in service or storage

NOTE The probability of such fault modes occurring in service or storage is considered to be so low that they are not to be taken into account.

3.10.3

infallible separation

infallible insulation

separation or insulation between electrically conductive parts that is considered as not subject to short circuits as specified in IEC 60079-11

NOTE The probability of such fault modes occurring in service or storage is considered to be so low that they are not to be taken into account.

3.11

internal wiring

wiring and electrical connections that are made within the apparatus by its manufacturer

3.12

live maintenance

maintenance activities carried out while the associated apparatus, intrinsically safe apparatus and circuits are energized

3.13 electrical parameters

3.13.1

maximum input voltage

U_i

maximum voltage (peak a.c. or d.c.) that can be applied to the connection facilities of apparatus without invalidating the type of protection

3.13.2

maximum input current

I_i

maximum current (peak a.c. or d.c.) that can be applied to the connection facilities of apparatus without invalidating the type of protection

3.13.3

maximum input power

P_i

maximum power that can be applied to the connection facilities of apparatus without invalidating the type of protection

3.13.4

maximum internal capacitance

C_i

maximum equivalent internal capacitance of the apparatus which is considered as appearing across the connection facilities

3.13.5

maximum internal inductance

L_i

maximum equivalent internal inductance of the apparatus which is considered as appearing at the connection facilities

3.13.6

maximum internal inductance to resistance ratio

L_i/R_i

maximum value of ratio of inductance to resistance which is considered as appearing at the external connection facilities of the electrical apparatus

3.13.7

maximum output voltage

U_o

maximum voltage (peak a.c. or d.c.) that can appear at the connection facilities of the apparatus at any applied voltage up to the maximum voltage

3.13.8

maximum output current

I_o

maximum current (peak a.c. or d.c.) in apparatus that can be taken from the connection facilities of the apparatus

3.13.9

maximum output power

P_o

maximum electrical power that can be taken from the apparatus

3.13.10

maximum external capacitance

C_o

maximum capacitance that can be connected to the connection facilities of the apparatus without invalidating the type of protection

3.13.11

maximum external inductance

L_o

maximum value of inductance that can be connected to the connection facilities of the apparatus without invalidating the type of protection

3.13.12

maximum external inductance to resistance ratio

L_o/R_o

maximum value of ratio of inductance to resistance that can be connected to the external connection facilities of the electrical apparatus without invalidating intrinsic safety

3.13.13

maximum r.m.s. a.c. or d.c. voltage

U_m

maximum voltage that can be applied to the non intrinsically safe connection facilities of associated apparatus without invalidating the type of protection

NOTE 1 This additionally applies to the maximum voltage that can be applied to non-intrinsically safe connection facilities of intrinsically safe apparatus (for example, charging connections on battery operated apparatus, where charging is only done in the non-hazardous area).

NOTE 2 The value of U_m may be different at different sets of connection facilities, and may be different for a.c. and d.c. voltages.

3.14

overvoltage category

numeral defining a transient overvoltage condition

[Definition 1.3.10 of IEC 60664-1]

NOTE Overvoltage categories I, II, III and IV are used, see 2.2.2.1 of IEC 60664-1.

3.15

pollution degree

numeral characterizing the expected pollution of the micro-environment

[Definition 1.3.13 of IEC 60664-1]

NOTE Pollution degrees 1, 2, 3 and 4 are used.

3.16

protective extra-low voltage

PELV

extra-low voltage system which is not electrically separated from earth but which otherwise satisfies the requirements for SELV

NOTE A 50 V centre-tapped earth system is a PELV system.

3.17

rated insulation voltage

r.m.s. withstand voltage value assigned by the manufacturer to the equipment or to a part of it, characterizing the specified (long-term) withstand capability of its insulation

[Definition 1.3.9.1 of IEC 60664-1]

NOTE The rated insulation voltage is not necessarily equal to the rated voltage of equipment which is primarily related to functional performance.

3.18

recurring peak voltage

maximum peak value of periodic excursions of the voltage waveform resulting from distortions of an a.c. voltage or from a.c. components superimposed on a d.c. voltage

NOTE Random overvoltages, for example due to occasional switching, are not considered as recurring peak voltages.

3.19

safety extra-low voltage

SELV

extra-low voltage system (i.e. normally not exceeding 50 V a.c. or 120 V ripple-free d.c.) electrically separated from earth and from other systems in such a way that a single fault cannot give rise to an electric shock

NOTE A 50 V earth free system is a SELV system.

3.20

encapsulation

encapsulate

process of applying a compound to enclose or placing in or as if in a capsule

3.21

casting

process of pouring a liquid compound at normal ambient pressure into a cast

3.22

moulding

process of placing an object in a tool with a shaping cavity and with plastic material being introduced around the inserted component with pressure applied to either partially or totally encapsulate the inserted component

NOTE This process may also be referred to as injection moulding, over-moulding or insert moulding.

3.23

galvanic isolation

arrangement within an apparatus which permits the transfer of signal or power between two circuits without any direct electrical connection between the two

NOTE Galvanic isolation frequently utilizes either magnetic (transformer or relay) or optocoupled elements.

4 Grouping and classification of intrinsically safe apparatus and associated apparatus

Intrinsically safe and associated apparatus which has a type of protection listed in IEC 60079-0 for use in the appropriate explosive atmosphere, shall be grouped in accordance with equipment grouping requirements of IEC 60079-0 and shall have a maximum surface temperature or temperature class assigned in accordance with the temperature requirements of IEC 60079-0.

Associated apparatus which has no such type of protection shall only be grouped in accordance with the equipment grouping requirements of IEC 60079-0.

5 Levels of protection and ignition compliance requirements of electrical apparatus

5.1 General

Intrinsically safe apparatus and intrinsically safe parts of associated apparatus shall be placed in Levels of Protection "ia", "ib" or "ic".

The requirements of this standard shall apply to all levels of protection unless otherwise stated. In the determination of level of protection "ia", "ib" or "ic", failure of components and connections shall be considered in accordance with 7.6. Failure of separations between conductive parts shall be considered in accordance with 6.3. The determination shall include opening, shorting and earthing of the external intrinsically safe connection facilities in accordance with 6.2.

The intrinsically safe parameters for the intrinsically safe apparatus and associated apparatus shall be determined taking into account the requirements for spark ignition compliance of 5.5 and thermal ignition compliance of 5.6.

For circuits of associated apparatus which are connected to safety extra low-voltage circuits (SELV) or protective extra low-voltage circuits (PELV) circuits, U_m shall only be applied as a 'common mode' voltage, with the nominal operating voltage applied for the differential mode signal between the circuit conductors. (Typical examples are RS-232, RS-485 or 4-20 mA circuits). The certificate number for associated apparatus relying on SELV or PELV circuits shall include the "X" suffix in accordance with the marking requirements of IEC 60079-0 and the specific conditions of use listed on the certificate shall detail the precautions necessary.

Where live maintenance procedures are specified by the manufacturer in the documentation provided, the effects of this live maintenance shall not invalidate intrinsic safety and this shall be considered during the testing and assessment.

NOTE 1 Apparatus may be specified with more than one level of protection, and may have different parameters for each level of protection.

NOTE 2 For the application of U_m , U_i in the following clauses, any voltage up to the maximum voltage may be applied for the assessment.

5.2 Level of protection "ia"

With U_m and U_i applied, the intrinsically safe circuits in electrical apparatus of level of protection "ia" shall not be capable of causing ignition in each of the following circumstances:

- a) in normal operation and with the application of those non-countable faults which give the most onerous condition;
- b) in normal operation and with the application of one countable fault plus those non-countable faults which give the most onerous condition;
- c) in normal operation and with the application of two countable faults plus those non-countable faults which give the most onerous condition.

The non-countable faults applied may differ in each of the above circumstances.

In testing or assessing the circuits for spark ignition, the following safety factors shall be applied in accordance with 10.1.4.2:

- for both a) and b) 1,5
- for c) 1,0

The safety factor applied to voltage or current for determination of surface temperature classification shall be 1,0 in all cases.

If only one countable fault can occur, the requirements of a) and b) shall be considered to give a level of protection of "ia" if the test requirements for "ia" can then be satisfied. If no countable faults can occur the requirements of a) shall be considered to give a level of protection of "ia" if the test requirements for "ia" can then be satisfied.

5.3 Level of protection "ib"

With U_m and U_i applied, the intrinsically safe circuits in electrical apparatus of level of protection "ib" shall not be capable of causing ignition in each of the following circumstances:

- a) in normal operation and with the application of those non-countable faults which give the most onerous condition;
- b) in normal operation and with the application of one countable fault plus the application of those non-countable faults which give the most onerous condition.

The non-countable faults applied may differ in each of the above circumstances.

In testing or assessing the circuits for spark ignition, a safety factor of 1,5 shall be applied in accordance with 10.1.4.2. The safety factor applied to the voltage or current for the determination of surface temperature classification shall be 1,0 in all cases.

If no countable fault can occur the requirements of a) shall be considered to give a level of protection of "ib" if the test requirements for "ib" can be satisfied.

5.4 Level of protection "ic"

With U_m and U_i applied, the intrinsically safe circuits in electrical apparatus of level of protection "ic" shall not be capable of causing ignition in normal operation and under the conditions specified in this standard.

In testing or assessing the circuits for spark ignition, a safety factor of 1,0 shall be applied in accordance with 10.1.4.2. The safety factor applied to the voltage or current for the determination of surface temperature classification shall be 1,0.

NOTE The concept of countable faults does not apply to this level of protection. Infallible components and assemblies, as in Clause 8, are not applicable. For level of protection "ic", the term 'infallible' should be read as 'meeting the requirements of 7.1'.

5.5 Spark ignition compliance

The circuit shall be assessed and/or tested for the successful limitation of the spark energy that may be capable of causing ignition of the explosive atmosphere, at each point where an interruption or interconnection may occur, in accordance with 10.1.

For Group III, the spark ignition tests to the requirements of Group IIB shall be applied to circuits exposed to dust.

5.6 Thermal ignition compliance

5.6.1 General

All surfaces of components, enclosures, wiring and the tracks on printed circuit boards which may come in contact with explosive atmospheres shall be assessed and/or tested for the maximum temperature. The maximum temperature allowable after the application of faults, as provided in 5.2, 5.3 and 5.4, shall be in accordance with the temperature requirements of IEC 60079-0. Tests, when required, are specified in 10.2.

NOTE 1 The requirements of this clause are not applicable to associated apparatus protected by another type of protection listed in IEC 60079-0 or located outside the hazardous area.

NOTE 2 Care should be taken in the selection of materials to be used adjacent to components that could exhibit excessive temperatures such as cells, batteries, or components that could dissipate power greater than 1,3 W, under the fault conditions defined in Clause 5, to prevent the secondary ignition of the explosive atmosphere by for example, heating or burning of the printed circuit boards, coatings or component packaging.

5.6.2 Temperature for small components for Group I and Group II

Requirements for temperatures of small components used in Group I or Group II equipment are provided in the small component temperature for Group I or Group II electrical equipment requirements of IEC 60079-0 and the test requirements are provided in the small component ignition test of IEC 60079-0.

The 5 K and 10 K margin of safety required by the maximum surface temperature requirements of IEC 60079-0 does not apply to the maximum surface temperature values, 200 °C, 275 °C and 950 °C shown in the table for the assessment of temperature classification according to component size at 40 °C ambient temperature in IEC 60079-0.

NOTE Where a catalytic or other chemical reaction can result specialist advice should be sought.

5.6.3 Wiring within intrinsically safe apparatus for Group I and Group II

The maximum permissible current corresponding to the maximum wire temperature due to self-heating shall either be taken from Table 2 for copper wires, or can be calculated from the following equation for metals in general.

$$I = I_f \left[\frac{t(1+aT)}{T(1+at)} \right]^{1/2}$$

where

a is the temperature coefficient of resistance of the wire material (0,004 284 K⁻¹ for copper, 0,004 201 K⁻¹ for gold);

I is the maximum permissible current r.m.s., in amperes;

I_f is the current at which the wire melts at the maximum specified ambient temperature, in amperes;

T is the melting temperature of the wire material in degrees Celsius (1 083 °C for copper, 1 064 °C for gold);

t is the threshold temperature, in degrees Celsius, of the applicable temperature class. The value of t is the wire temperature due to self-heating and ambient temperature.

Example: fine copper wire (Temperature class =T4)

$a = 0,004\,284\text{ K}^{-1}$

$I_f = 1,6\text{ A}$ (determined experimentally or specified by the wire manufacturer)

$T = 1\,083\text{ °C}$

t for T4 (small component, $t \leq 275\text{ °C}$)

Applying the equation

$I = 1,3\text{ A}$ (This is the maximum normal or fault current which may be allowed to flow to prevent the wire temperature from exceeding 275 °C.)

**Table 2 – Temperature classification of copper wiring
(in a maximum ambient temperature of 40 °C)**

Diameter (see Note 4) mm	Cross-sectional area (see Note 4) mm ²	Maximum permissible current for temperature classification A		
		T1 to T4 and Group I	T5	T6
0,035	0,000 962	0,53	0,48	0,43
0,05	0,001 96	1,04	0,93	0,84
0,1	0,007 85	2,1	1,9	1,7
0,2	0,031 4	3,7	3,3	3,0
0,35	0,096 2	6,4	5,6	5,0
0,5	0,196	7,7	6,9	6,7

NOTE 1 The value given for maximum permissible current, in amperes, is the r.m.s. a.c. or d.c. value.

NOTE 2 For stranded conductors, the cross-sectional area is taken as the total area of all strands of the conductor.

NOTE 3 The table also applies to flexible flat conductors, such as in ribbon cable, but not to printed circuit conductors for which see 5.6.4.

NOTE 4 Diameter and cross-sectional area are the nominal dimensions specified by the wire manufacturer.

NOTE 5 Where the maximum power does not exceed 1,3 W the wiring can be assigned a temperature classification of T4 and is acceptable for Group I. For Group I where dust is excluded, a maximum power of 3,3 W is permitted for ambient temperatures of up to 40 °C. Refer to IEC 60079-0, Table 3a) and 3b) where derating is required for ambient temperatures greater than 40 °C.

5.6.4 Tracks on printed circuit boards for Group I and Group II

The temperature classification of tracks of printed circuit boards shall be determined using available data or by actual measurement.

Where the tracks are made of copper, the temperature classification may be determined using Table 3.

For example, on printed circuit boards of at least 0,5 mm thickness, having a conducting track of at least 33 µm thickness on one or both sides, by applying factors given in Table 3, a temperature classification of T4 or Group I shall be given to the printed tracks if they have a minimum width of 0,3 mm and the continuous current in the tracks does not exceed 0,444 A. Similarly, for minimum track widths of 0,5 mm, 1,0 mm and 2,0 mm, T4 shall be given for corresponding maximum currents of 0,648 A, 1,092 A and 1,833 A respectively.

Track lengths of 10 mm or less shall be disregarded for temperature classification purposes.

Where temperature classification of a track is to be experimentally determined, the maximum continuous current shall be used.

Manufacturing tolerances shall not reduce the values stated in this clause by more than 10 % or 1 mm, whichever is the smaller.

In the absence of testing, where the maximum power does not exceed 1,3 W, the tracks are suitable for a temperature classification of T4 or Group I.

In the absence of testing, where dust is excluded and the maximum power does not exceed 3,3 W, the tracks are suitable for Group I.

Refer to the assessment of temperature classification for component surface areas $\geq 20 \text{ mm}^2$ table in IEC 60079-0. Variation in maximum power dissipation with ambient temperature in IEC 60079-0 where a derating is required for ambient temperatures greater than 40 °C.

**Table 3 – Temperature classification of tracks on printed circuit boards
(in a maximum ambient temperature of 40 °C)**

Minimum track width mm	Maximum permissible current for temperature classification		
	T1 to T4 and Group I A	T5 A	T6 A
0,075	0,8	0,6	0,5
0,1	1,0	0,8	0,7
0,125	1,2	1,0	0,8
0,15	1,4	1,1	1,0
0,2	1,8	1,4	1,2
0,3	2,4	1,9	1,7
0,4	3,0	2,4	2,1
0,5	3,5	2,8	2,5
0,7	4,6	3,5	3,2
1,0	5,9	4,8	4,1
1,5	8,0	6,4	5,6
2,0	9,9	7,9	6,9
2,5	11,6	9,3	8,1
3,0	13,3	10,7	9,3
4,0	16,4	13,2	11,4
5,0	19,3	15,5	13,5
6,0	22,0	17,7	15,4

NOTE The value given for maximum permissible current, in amperes, is the r.m.s. a.c. or d.c. value.

This table applies to printed boards 1,6 mm or thicker with a single layer of copper of 33 μm thickness
 For boards with a thickness between 0,5 mm and 1,6 mm, divide the maximum current specified by 1,2.
 For boards with conducting tracks on both sides, divide the maximum current specified by 1,5.
 For multilayer boards, for the track layer under consideration, divide the maximum current specified by 2.
 For 18 μm copper thickness, divide the maximum current by 1,5.
 For 70 μm copper thickness, multiply the maximum current by 1,3.
 For tracks passing under components dissipating 0,25 W or more either normally or under fault conditions, divide the maximum current specified by 1,5.
[AC1] At terminations of components dissipating 0,25 W or more either normally or under fault conditions, and for 1,00 mm along the conductor, either multiply the track width by 3 or divide the maximum current specified by 2. Additionally, if the track goes under the component, apply the factor specified for tracks passing under components dissipating 0,25W or more. **[AC1]**
 For ambient temperature up to 60 °C, divide the maximum current by 1,2.
 For ambient temperature up to 80 °C, divide the maximum current by 1,3.

5.6.5 Intrinsically safe apparatus and component temperature for Group III

For determination of maximum surface temperature for intrinsically safe apparatus of Group III, refer to IEC 60079-0, temperature measurement. In particular the measurement shall be made using the specified values of U_i and I_i for the intrinsically safe apparatus without a 10 % safety factor. The temperature shall be that of the surface of the intrinsically safe apparatus that is in contact with the dust. For example, for intrinsically safe apparatus protected by enclosure of at least IP5X, the surface temperature of the enclosure shall be measured.

Alternatively intrinsically safe apparatus shall be considered suitable for total immersion, or an uncontrolled dust layer thickness, if the matched power dissipation in any component is in accordance with Table 4, and the continuous short-circuit current is less than 250 mA. The intrinsically safe apparatus shall be marked T135 °C.

Table 4 – Maximum permitted power dissipation within a component immersed in dust

Maximum ambient temperature	°C	40	70	100
Permitted power	mW	750	650	550

5.7 Simple apparatus

The following shall be considered to be simple apparatus:

- passive components, for example switches, junction boxes, resistors and simple semiconductor devices;
- sources of stored energy consisting of single components in simple circuits with well-defined parameters, for example capacitors or inductors, whose values shall be considered when determining the overall safety of the system;
- sources of generated energy, for example thermocouples and photocells, which do not generate more than 1,5 V, 100 mA and 25 mW.

Simple apparatus shall conform to all relevant requirements of this standard with the exception of Clause 12. The manufacturer or intrinsically safe system designer shall demonstrate compliance with this clause, including material data sheets and test reports, if applicable.

The following aspects shall always be considered:

- simple apparatus shall not achieve safety by the inclusion of voltage and/or current-limiting and/or suppression devices;
- simple apparatus shall not contain any means of increasing the available voltage or current, for example DC-DC converters;
- where it is necessary that the simple apparatus maintains the integrity of the isolation from earth of the intrinsically safe circuit, it shall be capable of withstanding the test voltage to earth in accordance with 6.3.13. Its terminals shall conform to 6.2.1;
- non-metallic enclosures and enclosures containing light metals when located in the explosive atmosphere shall conform to the electrostatic charges on external non-metallic materials requirements and metallic enclosures and parts of enclosures requirements of IEC 60079-0;
- when simple apparatus is located in the explosive atmosphere, the maximum surface temperature shall be assessed. When used in an intrinsically safe circuit within their normal rating and at a maximum ambient temperature of 40 °C, switches, plugs, sockets and terminals will have a maximum surface temperature of less than 85 °C, so they can be allocated a T6 temperature classification for Group II applications and are also suitable for Group I and Group III applications. For other types of simple apparatus the maximum temperature shall be assessed in accordance with 5.6 of this standard.

Where simple apparatus forms part of an apparatus containing other electrical circuits, the whole shall be assessed according to the requirements of this standard.

NOTE 1 Sensors which utilize catalytic reaction or other electro-chemical mechanisms are not normally simple apparatus. Specialist advice on their application should be sought.

NOTE 2 It is not a requirement of this standard that the conformity of the manufacturer's specification of the simple apparatus needs to be verified.

6 Apparatus construction

NOTE The requirements given in this clause apply, unless otherwise stated in the relevant subclauses, only to those features of intrinsically safe apparatus and associated apparatus which contribute to this type of protection.

For example, the requirements for encapsulation with casting compound apply only if encapsulating is required to satisfy 6.3.5 or 6.6.

6.1 Enclosures

6.1.1 General

Where intrinsic safety can be impaired by ingress of moisture or dust or by access to conducting parts, for example if the circuits contain infallible creepage distances, an enclosure is necessary.

The degree of protection required will vary according to the intended use; for example, a degree of protection of IP54 in accordance with IEC 60529 may be required for Group I apparatus.

The "enclosure" need not be physically the same for protection against contact with live parts and the ingress of solid foreign bodies and liquids.

The designation of the surfaces which form the boundaries of the enclosure shall be the responsibility of the manufacturer and shall be recorded in the definitive documentation (see Clause 13)

6.1.2 Enclosures for Group I or Group II apparatus

6.1.2.1 General

Intrinsically safe and associated apparatus which rely on the spacings in Table 5 or Annex F shall be provided with an enclosure meeting the requirements of 6.1.2.2 or 6.1.2.3 as applicable.

6.1.2.2 Apparatus complying with Table 5

Apparatus meeting the separation requirements of Table 5 shall be provided with an enclosure meeting the requirements of IP20 in accordance with IEC 60529 or greater according to the intended use and environmental conditions.

The enclosure does not need to be subjected to the tests for enclosures in IEC 60079-0; however for portable apparatus, the drop test of IEC 60079-0 still applies.

6.1.2.3 Apparatus complying with Annex F

Apparatus meeting the separation requirements of Tables F.1 or F.2 shall be provided with protection to achieve pollution degree 2. This can be achieved by one of the following:

- an enclosure meeting the requirements of IP54 or greater according to the intended use and environmental conditions in accordance with IEC 60529. For such enclosures the clauses of IEC 60079-0 identified in Table 1 additionally apply.
- an enclosure meeting the requirements of IP20 or greater according to the intended use and environmental conditions in accordance with IEC 60529 provided that separations are obtained by using coating type 1 or type 2 or casting compound or through solid insulation. The enclosure does not need to be subjected to the tests for enclosures in IEC 60079-0; however for portable apparatus, the drop test of IEC 60079-0 still applies.
- an enclosure meeting the requirements of IP20 and by restricted installation, provided that the restricted installation requirements shall be specified as Specific Conditions of Use and the certificate number shall include the "X" suffix in accordance with the marking

requirements of IEC 60079-0 and the Specific Conditions of Use listed on the certificate shall detail the installation requirements.

6.1.3 Enclosures for Group III apparatus

Where the intrinsic safety of intrinsically safe apparatus can be impaired by ingress of dust or by access to conducting parts, for example if the circuits contain infallible creepage distances, an enclosure is necessary by one of the following:

- a) Where separation is accomplished by meeting the requirements for clearance or creepage distances of Table 5 or Annex F, the enclosure shall provide a degree of protection of at least IP5X, according to IEC 60529. For such enclosures the 6.1.2.3 a) shall additionally apply.
- b) Where separation is accomplished by meeting the requirements for distances under coating, casting compound or separation distances through solid insulation of Table 5 or Annex F, the enclosure shall provide a degree of protection of at least IP2X, according to IEC 60529. The enclosure does not need to be subjected to the tests for enclosures in IEC 60079-0; however for portable apparatus, the drop test of IEC 60079-0 still applies.

Enclosures for Group III associated apparatus shall meet the requirements of 6.1.2.

6.2 Facilities for connection of external circuits

6.2.1 Terminals

In addition to satisfying the requirements of 6.3, terminals for intrinsically safe circuits shall be separated from terminals for non-intrinsically safe circuits by one or more of the methods given in a) or b).

These methods of separation shall also be applied where intrinsic safety can be impaired by external wiring which, if disconnected from the terminal, can come into contact with conductors or components.

NOTE 1 Terminals for connection of external circuits to intrinsically safe apparatus and associated apparatus should be so arranged that components will not be damaged when making the connections.

- a) When separation is accomplished by distance then the clearance between bare conducting parts of terminals shall be at least 50 mm.

NOTE 2 Care should be exercised in the layout of terminals and in the wiring method used so that contact between circuits is unlikely if a wire becomes dislodged.

- b) When separation is accomplished by locating terminals for intrinsically safe and non-intrinsically safe circuits in separate enclosures or by use of either an insulating partition or an earthed metal partition between terminals with a common cover, the following applies:
 - 1) partitions used to separate terminals shall extend to within 1,5 mm of the enclosure walls, or alternatively shall provide a minimum distance of 50 mm between the bare conducting parts of terminals when measured in any direction around the partition;
 - 2) metal partitions shall be earthed and shall have sufficient strength and rigidity to ensure that they are not likely to be damaged during field wiring. Such partitions shall be at least 0,45 mm thick or shall conform to 10.6.3 if of lesser thickness. In addition, metal partitions shall have sufficient current-carrying capacity to prevent burn-through or loss of earth connection under fault conditions;
 - 3) non-metallic insulating partitions shall have an appropriate CTI, sufficient thickness and shall be so supported that they cannot readily be deformed in a manner that would defeat their purpose. Such partitions shall be at least 0,9 mm thick, or shall conform to 10.6.3 if of lesser thickness.



The clearances and creepage distances between the bare conducting parts of terminals of separate intrinsically safe circuits and to earthed or potential-free conducting parts shall be equal to or exceed the values given in Table 5.

Where separate intrinsically safe circuits are being considered, the clearance distance between bare conducting parts of external connection facilities shall meet the following:

- at least 6 mm between the separate intrinsically safe circuits;
- at least 3 mm from earthed parts, if connection to earth has not been considered in the safety analysis.

See Figure 1 when measuring distances around solid insulating walls or partitions. Any possible movement of metallic parts that are not rigidly fixed shall be taken into account.

Dimensions in millimetres

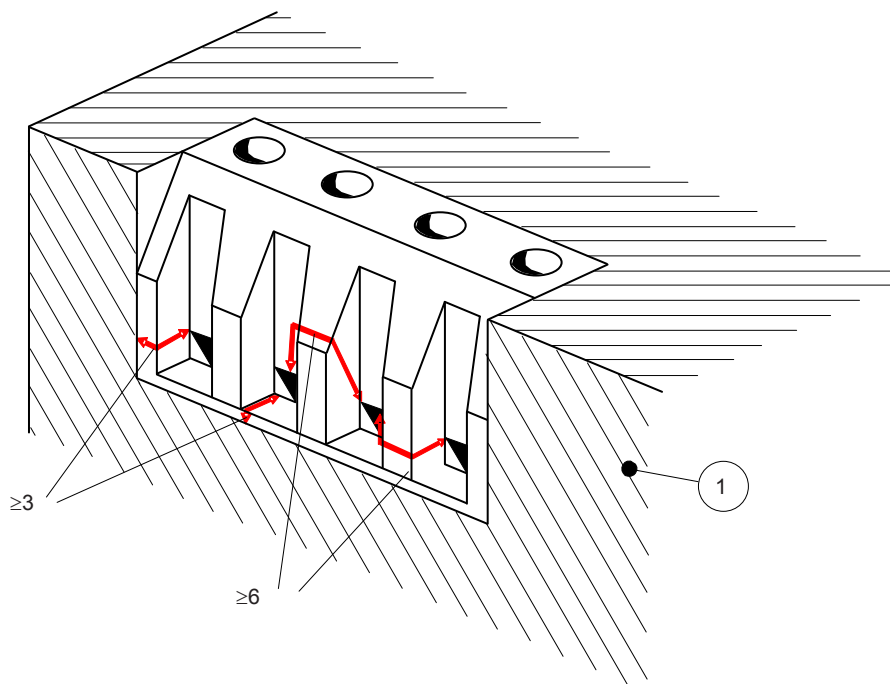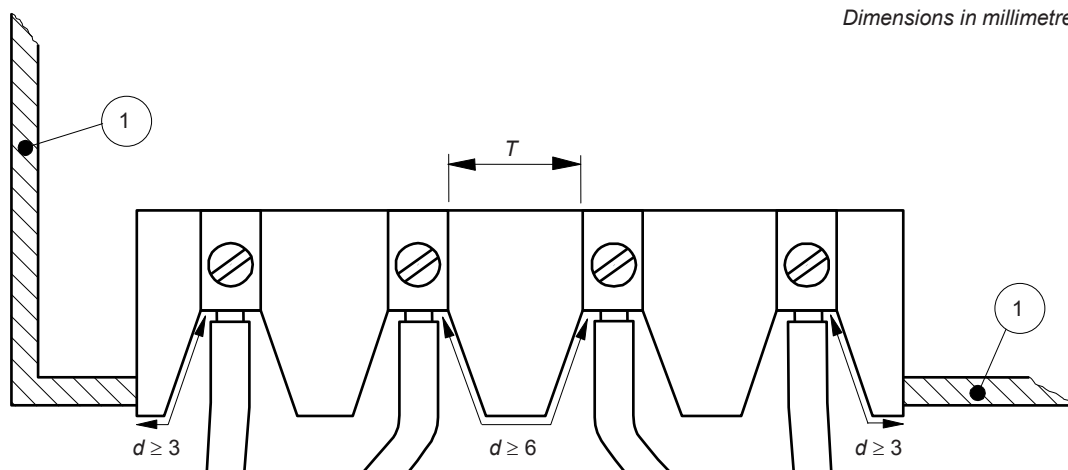

IEC 1380/06

Key


1 Conductive cover

T Distances in accordance with 6.3

d Clearance distance at external connection facilities of terminals in accordance with 6.2.1

NOTE The dimensions shown are the creepage and clearance distances around the insulation as indicated above, not the thickness of the insulation.

Figure 1a – Distance requirements for terminals carrying separate intrinsically safe circuits

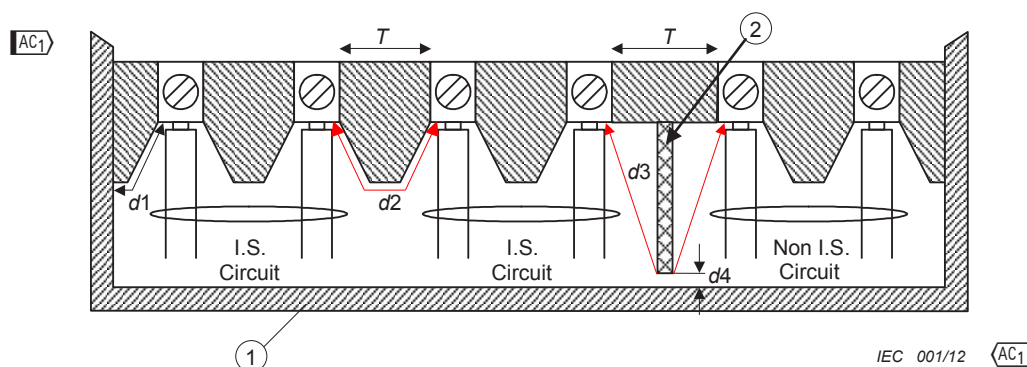**Key**

1 Cover: non-conductive, or conductive and earthed

2 Partition in accordance with 6.2.1b); in this example, it shall be homogeneous with the base or cemented to it.

T Distances in accordance with 6.3

$d1 \geq 3 \text{ mm}$; when cover is conductive and earthed

$d2 \geq 6 \text{ mm}$

$d3 \geq 50 \text{ mm}$ or $d4 \leq 1,5 \text{ mm}$

NOTE The dimensions shown are the clearance distances around the insulation, as indicated above, not the thickness of the insulation.

Figure 1b – Example of separation of intrinsically safe and non-intrinsically safe terminals through use of a partition

Figure 1 – Separation of intrinsically safe and non-intrinsically safe terminals

6.2.2 Plugs and sockets

Plugs and sockets used for connection of external intrinsically safe circuits shall be separate from and non-interchangeable with those for non-intrinsically safe circuits.

Where intrinsically safe or associated apparatus is fitted with more than one plug and socket for external connections and interchange could adversely affect the type of protection, such plugs and sockets shall either be arranged, for example by keying, so that interchange is not possible, or mating plugs and sockets shall be identified, for example by marking or colour coding, to make interchanging obvious.

Where a plug or a socket is not prefabricated with its wires, the connecting facilities shall conform to 6.2.1. If, however, the connections require the use of a special tool, for example by crimping, such that there is no possibility of a strand of wire becoming free, then the connection facilities need only conform to Table 5.

Where a connector carries earthed circuits and the type of protection depends on the earth connection then the connector shall be constructed in accordance with 6.5.

6.2.3 Determination of maximum external inductance to resistance ratio (L_0/R_0) for resistance limited power source

The maximum external inductance to resistance ratio (L_0/R_0) which may be connected to a resistance limited power source shall be calculated using the following formula. This formula takes account of a 1,5 factor of safety on current and shall not be used where C_s for the output terminals of the apparatus exceeds 1 % of C_0 .

$$\frac{L_o}{R_o} = \frac{8eR_s + (64e^2R_s^2 - 72U_o^2 eL_s)^{1/2}}{4,5 U_o^2} \text{ H}/\Omega$$

where

e is the minimum spark-test apparatus ignition energy in joules, and is for

- Group I apparatus: 525 μJ
- Group IIA apparatus: 320 μJ
- Group IIB apparatus: 160 μJ
- Group IIC apparatus: 40 μJ

R_s is the minimum output resistance of the power source, in ohms;

U_o is the maximum open circuit voltage, in volts;

L_s is the maximum inductance present at the power source terminals, in henries.

C_s is the maximum capacitance present at the power source terminals, in farads

If $L_s = 0$

then
$$\frac{L_o}{R_o} = \frac{32 e R_s}{9 U_o^2} \text{ H}/\Omega$$

Where a safety factor of 1 is required, this value for L_o/R_o shall be multiplied by 2,25.

NOTE 1 The normal application of the L_o/R_o ratio is for distributed parameters, for example cables. Its use for lumped values for inductance and resistance requires special consideration.

NOTE 2 L_o/R_o may be determined experimentally for non-linear power sources by testing the circuit with several discrete values of L_o and R_o using the spark tests in 10.1. The values of R_o used should range from practically a short circuit (maximum I_o) to practically open circuit (I_o nearly zero) and a trend established that ensures that the L_o/R_o will not result in failure of the spark test.

6.2.4 Permanently connected cable

Apparatus which is constructed with an integral cable for external connections shall be subjected to the pull test in 10.9 on the cable if breakage of the terminations inside the apparatus could result in intrinsic safety being invalidated, for example where there is more than one intrinsically safe circuit in the cable and breakage could lead to an unsafe interconnection.

6.2.5 Requirements for connections and accessories for IS apparatus when located in the non-hazardous area

Intrinsically safe apparatus may be provided with connection facilities that are restricted to use in a non-hazardous area e.g. data downloading and battery charging connections. Such facilities shall be provided with protection to ensure the ratings of the safety components within the intrinsically safe equipment comply with 7.1. The use of a fuse protected shunt Zener assembly complying with 7.3 and 7.5.2 shall be considered sufficient protection for voltage limitation.

Where these connections are provided for the connection of battery charger see also 7.4.9.

Protection circuitry and components may reside either in the intrinsically safe apparatus or the non-hazardous area equipment. If any part of the protection circuit is located in the non-hazardous area accessory, it shall be assessed in accordance with this standard and the non-hazardous area accessory shall be stated in the documentation.

The maximum voltage U_m that can be applied to these non-hazardous area connections shall be stated in the documentation, and marked on the intrinsically safe apparatus. The U_m at the connection facilities shall be assumed to be the normal mains supply voltage e.g. 250 V a.c. unless marked otherwise.

NOTE If U_m is less than 250 V a.c., this should not be derived from unassessed equipment.

Additionally, the circuit of the intrinsically safe apparatus shall be provided with means to prevent the delivery of ignition-capable energy to these safe area connections when in the hazardous area.

NOTE These requirements do not apply to the use of connections by the manufacturer during production, test, repair or overhaul.

6.3 Separation distances

6.3.1 General

Requirements for separation distances are given in 6.3.2 to 6.3.14. An alternative method for the dimensioning of separation distances is given in Annex F.

6.3.2 Separation of conductive parts

Separation of conductive parts between

- intrinsically safe and non-intrinsically safe circuits, or
- different intrinsically safe circuits, or
- a circuit and earthed or isolated metal parts,

shall conform to the following if the type of protection depends on the separation.

Separation distances shall be measured or assessed taking into account any possible movement of the conductors or conductive parts. Manufacturing tolerances shall not reduce the distances by more than 10 % or 1 mm, whichever is the smaller.

Separation distances that comply with the values of Table 5 or Annex F under the conditions of 6.1.2.2, 6.1.2.3 or 6.1.3 shall not be subject to a fault.

The fault mode of failure of segregation shall only be a short-circuit.

Separation requirements shall not apply where earthed metal, for example tracks of a printed circuit board or a partition, separates an intrinsically safe circuit from other circuits, provided that breakdown to earth does not adversely affect the type of protection and that the earthed conductive part can carry the maximum current that would flow under fault conditions. Creepage distance requirements shall not apply where earthed printed circuit board tracks separate conductive tracks requiring separation, but clearance requirements shall still be applied. Clearance requirements shall not apply where an earthed metallic partition of sufficient height does not allow a discharge between components requiring separation.

NOTE 1 For example, the type of protection does depend on the separation to earthed or isolated metallic parts if a current-limiting resistor can be bypassed by short-circuits between the circuit and the earthed or isolated metallic part.

An earthed metal partition shall have strength and rigidity so that it is unlikely to be damaged and shall be of sufficient thickness and of sufficient current-carrying capacity to prevent burn-through or loss of earth under fault conditions. A partition either shall be at least 0,45 mm thick and attached to a rigid, earthed metal portion of the device, or shall conform to 10.6.3 if of lesser thickness.

Where a non-metallic insulating partition having a thickness and appropriate CTI in accordance with Table 5 is placed between the conductive parts, the clearances, creepage distances and other separation distances shall be measured around the partition provided that either the partition has a thickness of at least 0,9 mm, or conforms to 10.6.3 if of lesser thickness.

NOTE 2 Methods of assessment are given in Annex C.

6.3.2.1 Distances according to Table 5

For Levels of Protection “ia” and “ib”, smaller separation distances, which are less than the values specified in Table 5 but greater than or equal to one-third of that value, shall be considered as subject to countable short-circuit faults if this impairs intrinsic safety.

For Levels of Protection “ia” and “ib”, if separation distances are less than one-third of the values specified in Table 5, they shall be considered as subject to non-countable short-circuit faults if this impairs intrinsic safety.

For Level of Protection “ic”, if separation distances are less than the values specified in Table 5, they shall be considered as short-circuits if this impairs intrinsic safety.

6.3.2.2 Distances according to Annex F

For Levels of Protection “ia” and “ib”, if separation distances are less than the values specified in Annex F, they shall be considered to fault as provided in F.3.1 if this impairs intrinsic safety.

For Level of Protection “ic”, if separation distances are less than the values specified in Annex F, they shall be considered as short-circuits if this impairs intrinsic safety.

Table 5 – Clearances, creepage distances and separations

1 Voltage (peak value) V	2 Clearance mm		3 Separation distance through casting compound mm		4 Separation distance through solid insulation mm		5 Creepage distance mm		6 Distance under coating mm		7 Comparative tracking index (CTI) ^{a)}	
	ia, ib	ic	ia, ib	ic	ia, ib	ic	ia, ib	ic	ia, ib	ic	ia	ib, ic
Level of protection												
10	1,5	0,4	0,5	0,2	0,5	0,2	1,5	1,0	0,5	0,3	-	-
30	2,0	0,8	0,7	0,2	0,5	0,2	2,0	1,3	0,7	0,3	100	100
60	3,0	0,8	1,0	0,3	0,5	0,3	3,0	1,9	1,0	0,6	100	100
90	4,0	0,8	1,3	0,3	0,7	0,3	4,0	2,1	1,3	0,6	100	100
190	5,0	1,5	1,7	0,6	0,8	0,6	8,0	2,5	2,6	1,1	175	175
375	6,0	2,5	2,0	0,6	1,0	0,6	10,0	4,0	3,3	1,7	175	175
550	7,0	4,0	2,4	0,8	1,2	0,8	15,0	6,3	5,0	2,4	275	175
750	8,0	5,0	2,7	0,9	1,4	0,9	18,0	10,0	6,0	2,9	275	175
1 000	10,0	7,0	3,3	1,1	1,7	1,1	25,0	12,5	8,3	4,0	275	175
1 300	14,0	8,0	4,6	1,7	2,3	1,7	36,0	13,0	12,0	5,8	275	175
1 575	16,0	10,0	5,3		2,7		49,0	15,0	16,3		275	175
3,3 k		18,0	9,0		4,5			32,0				
4,7 k		22,0	12,0		6,0			50,0				
9,5 k		45,0	20,0		10,0			100,0				
15,6 k		70,0	33,0		16,5			150,0				

^{a)} Evidence of compliance with the CTI requirements of insulating materials shall be provided by the manufacturer. At voltages up to 10 V, the CTI of insulating materials is not required to be specified.