


FED SUPPLY CLASS

4030

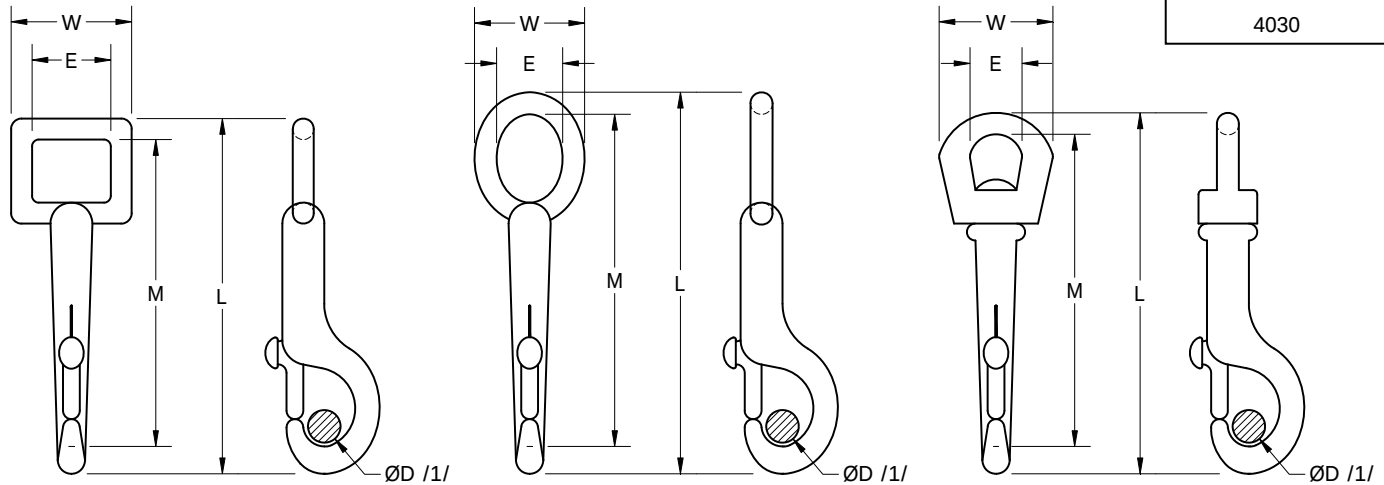

TYPE A

TYPE B

TYPE C

TABLE I – TYPE A, NON-SWIVELING FOR USE WITH STRAP ⁴

PART NO.	E EYE WIDTH	L OVERALL LENGTH	M INSIDE LENGTH	ØD /1/	W OVERALL WIDTH	WEIGHT LBS/100 (REF)
NAS1282A12	.75	3.18	2.72	.31	1.15	9.50
NAS1282A16	1.00	3.25	2.78	.38	1.40	10.25
NAS1282A20	1.25	3.63	3.00	.38	1.72	14.50
NAS1282A24	1.50	3.63	3.00	.38	2.00	16.00
NAS1282A32	2.00	4.00	3.38	.44	2.55	23.50


TABLE II – TYPE B, NON-SWIVELING ROUND EYE ⁴

PART NO.	E EYE WIDTH	L OVERALL LENGTH	M INSIDE LENGTH	ØD /1/	W OVERALL WIDTH	WEIGHT LBS/100 (REF)
NAS1282B8	.50	3.50	3.03	.38	.91	9.00
NAS1282B10	.63	3.63	3.16	.38	1.06	9.50
NAS1282B12	.75	3.63	3.16	.38	1.31	10.50

TABLE III – TYPE C, SWIVELING ROUND EYE ⁴

PART NO.	E EYE WIDTH	L OVERALL LENGTH	M INSIDE LENGTH	ØD /1/	W OVERALL WIDTH	WEIGHT LBS/100 (REF)
NAS1282C8	.50	3.44	2.97	.38	1.09	12.50
NAS1282C10	.63	4.00	3.50	.38	1.03	12.50
NAS1282C12	.75	4.06	3.63	.38	1.18	12.75
NAS1282C14	.88	4.00	3.50	.38	1.38	16.75
NAS1282C16	1.00	4.25	3.63	.38	1.63	27.00

THIRD
ANGLE
PROJECTION



CUSTODIAN
NATIONAL AEROSPACE STANDARDS COMMITTEE

REVISION

4

PROCUREMENT
SPECIFICATION

NONE

TITLE

HOOK, SNAP, BOLT

CLASSIFICATION
PART STANDARD

NAS1282
SHEET 1 OF 2



Document Sharing Hub

MATERIAL:

BODY AND BOLT - MALLEABLE CAST IRON.

SPRING - MUSIC WIRE.

FINISH:

NICKEL PLATED.

4 CODE:

CODE "A" AFTER BASIC PART NUMBER INDICATES TYPE A - NON SWIVELING FOR USE WITH STRAP.
CODE "B" AFTER BASIC PART NUMBER INDICATES TYPE B - NON SWIVELING ROUND EYE.
CODE "C" AFTER BASIC PART NUMBER INDICATES TYPE C - SWIVELING ROUND EYE.

NAS1282 X XX

DASH NUMBER FOR EYE WIDTH
TYPE CODE
BASIC PART NUMBER

EXAMPLE OF PART NUMBER:

NAS1282A12 = HOOK, SNAP, BOLT, NON SWIVELING FOR USE WITH STRAP, .75 EYE WIDTH,
IRON BODY, WIRE SPRING, NICKEL PLATED.
NAS1282B8 = HOOK, SNAP, BOLT, NON SWIVELING ROUND EYE, .50 EYE WIDTH,
IRON BODY, WIRE SPRING, NICKEL PLATED.
NAS1282C8 = HOOK, SNAP, BOLT, SWIVELING ROUND EYE, .50 EYE WIDTH,
IRON BODY, WIRE SPRING, NICKEL PLATED.

NOTES:

- /1/ WHEN IN OPEN POSITION SNAP MUST BE CAPABLE OF ACCEPTING A MANDREL OF "ØD" DIAMETER.
- (2) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (3) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- 4 (4) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (5) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (6) REMOVE ALL BURRS AND SHARP EDGES.
- (7) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
- 4 (8) TOLERANCE UNLESS OTHERWISE SPECIFIED: DECIMALS ± .03.

REVISION

4

NAS1282
SHEET 2



Document Sharing Hub