
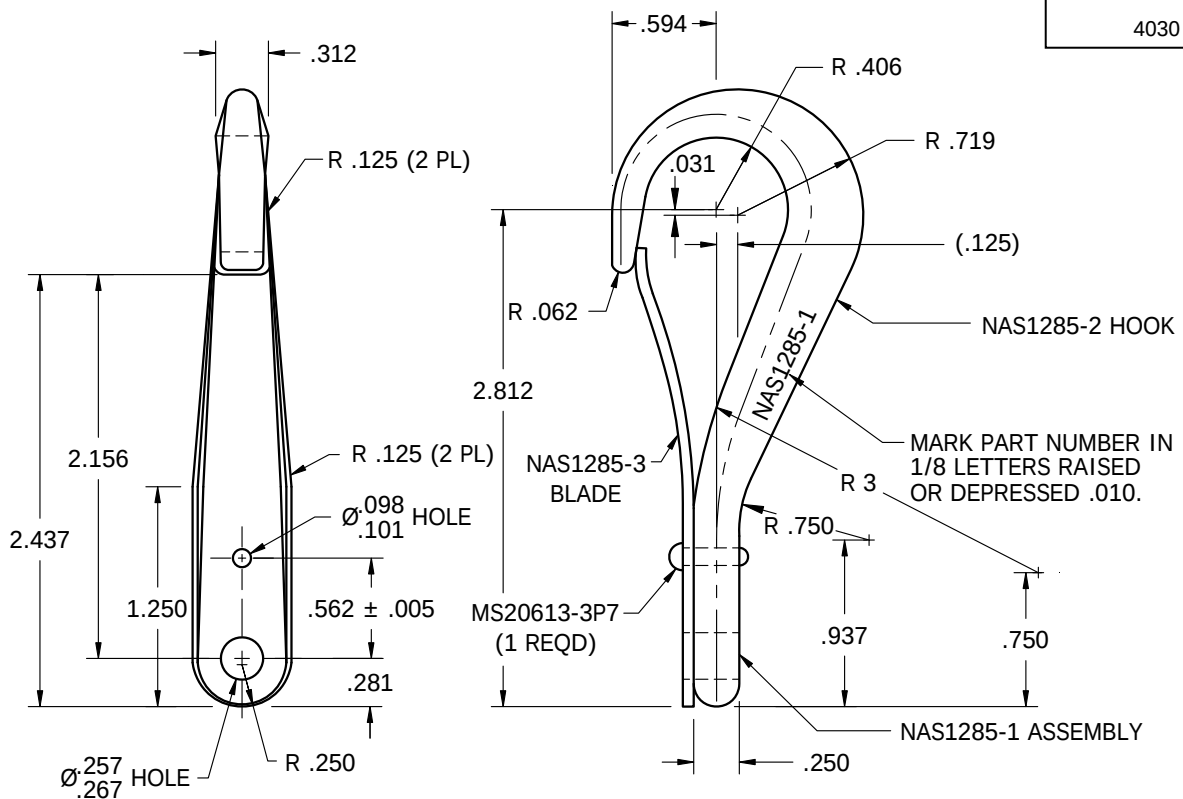


FED. SUPPLY CLASS

4030



③ COMPLETELY REVISED

THIRD ANGLE PROJECTION 	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 3
PROCUREMENT SPECIFICATION NONE	TITLE SAFETY HOOK	CLASSIFICATION PART STANDARD NAS1285 SHEET 1 OF 2



Documents
SHEET 1 OF 2
Document Sharing Hub

MATERIAL:

HOOK: 4130 STEEL (UNS G41300) PER MIL-S-6758 AMS-S-6758.
BLADE: .016 1095 STEEL STRIP PER MIL-S-7947, COND-H AMS5122.

HEAT TREATMENT:

HOOK: 125 TO 145 KSI PER AMS2759.

FINISH:

CADMIUM PLATE PER AMS-QQ-P-416 TYPE II, CLASS 2.
PARTS WITH CLASS 3 PLATING MAY BE FURNISHED FROM SUPPLIERS STOCK UNTIL 15 SEPT. 1977.

EXAMPLE OF PART NUMBER:

NAS1285-1 = SAFETY HOOK ASSEMBLY

NOTES:

- (1) WEIGHT: HOOK, .367 LBS; BLADE, .0048 LBS.
- (2) RATED STRENGTH WITH SAFETY FACTOR OF 3: 600 LBS.
- (3) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (4) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS $\pm .031$.
- (5) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (6) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (7) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (8) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 09-01

③ COMPLETELY REVISED

REVISION
3
NAS1285
SHEET 2



Documents
SHEET 2

Document Sharing Hub