




FED. SUPPLY CLASS

5340

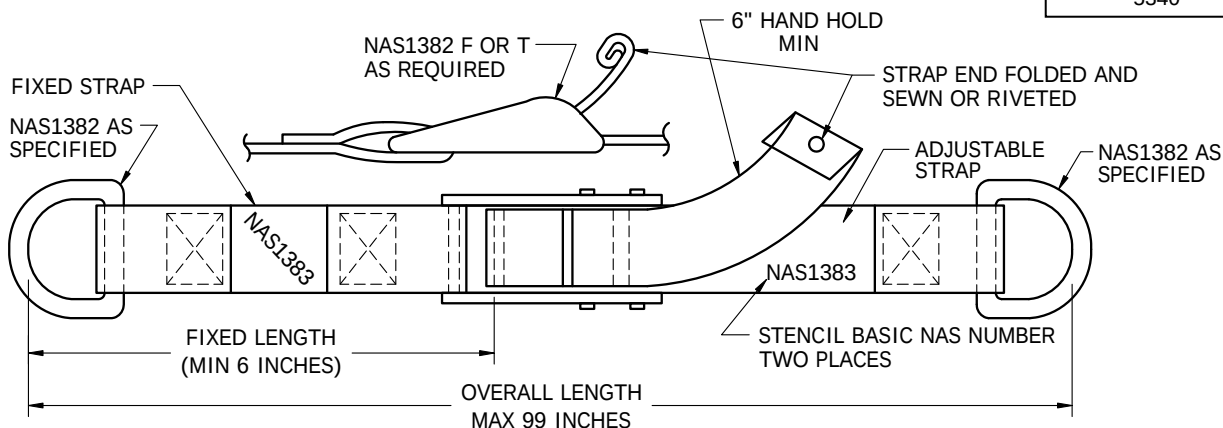

TYPE W OR E



TYPE K OR L

FIGURE 1 – STRAP ASSEMBLY WITH BUCKLE AND TWO END FITTINGS


TABLE I – FITTING AND TREATMENT ⁷

FITTING OR TREATMENT CODE LETTER	DESCRIPTION	STRAP SIZE INCH	NAS1382 FITTING DASH NO.	
A	D RING	1	1	
B	HOOK	.625	3	/4/
C	HOOK	1	4	
D	HOOK (WIRE)	1	2	
E	LOOP END	1	—	
F	BUCKLE	.625	6	/4/
T	BUCKLE	1	7	
H	HOOK & KEEPER	1	5	
W	LOOP END	.625	—	/4/
K	PLAIN	.625	—	/4/
L	PLAIN	1	—	

TABLE II – MATERIAL AND COLOR ⁷

MATERIAL CODE LETTER	MATERIAL	.625" WIDTH		1" WIDTH	
		RATED TENSILE STRENGTH OF ASSEMBLY LBF	WT	RATED TENSILE STRENGTH OF ASSEMBLY LBF	WT
M	NATURAL COTTON	100		150	
N	OLIVE DRAB COTTON				
L	LT. GULL GRAY COTTON				
P	NATURAL NYLON	150		500	
R	OLIVE DRAB NYLON				
T	LT. GULL GRAY NYLON				

THIRD ANGLE PROJECTION



CUSTODIAN
NATIONAL AEROSPACE STANDARDS COMMITTEE

REVISION
7

PROCUREMENT SPECIFICATION

TITLE

STRAP ASSEMBLY, TWO PART ADJUSTABLE

NONE

CLASSIFICATION
PART STANDARD

NAS1383
SHEET 1 OF 2



Documents
Document Sharing Hub

MATERIAL:

- ⑦ COTTON PER MIL-W-530, CLASS 4 EXCEPT TYPE 1 (.625 WIDTH SIZE MODIFIED BY THICKNESS OF .055 ± .005).
- ⑦ NYLON: 1" WIDE SIZE PER MIL-W-4088, TYPE XVII, CLASS 2.
.625" WIDE SIZE COMMERCIAL, 1,500 LBF RATING, THICKNESS .055 ± .005.

CODE:

FIRST DASH NUMBER INDICATES FIXED END LENGTH.
SECOND DASH NUMBER INDICATES OVERALL LENGTH.
LETTER FOLLOWING BASIC NUMBER INDICATES FITTING OR TREATMENT OF FIXED END; ALSO WIDTH OF STRAP.
LETTER FOLLOWING FIRST DASH NUMBER INDICATES FITTING OR TREATMENT OF ADJUSTABLE END.
LETTER FOLLOWING SECOND DASH NUMBER INDICATES MATERIAL AND COLOR.

EXAMPLE OF PART NUMBER:

NAS1383A12C36N = 1 INCH OLIVE DRAB COTTON STRAP WITH RING ON FIXED END, SIZE T BUCKLE AND TYPE C HOOK ON ADJUSTABLE END, 36 INCH OVERALL WITH 6 INCH HAND HOLD.

NOTES:

- (1) LENGTH IS EFFECTIVE LENGTH WITH STRAP THREADED THRU BUCKLE AND 6 INCH HAND HOLD.
- (2) RATED TENSILE STRENGTH IS ESTABLISHED AS THE MAXIMUM LOAD THAT MAY BE APPLIED TO THE STRAP ASSEMBLY WITHOUT FAILURE OF A COMPONENT OR SLIPPAGE OF STRAP THRU BUCKLE.
- (3) STITCHING PER ASTM D6193.
- (4) CODE LETTERS "B", "F", "W" & "K" ARE INACTIVE FOR DESIGN AFTER 15 MARCH 1979. FOR DESCRIPTION OF STATUS NOTES, SEE NAS380.
- (5) DIMENSIONS IN INCHES.
- (6) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (7) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (8) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (9) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

REVISION

7

NAS1383
SHEET 2



Document Sharing Hub