

BS EN 60679-3:2013



BSI Standards Publication

Quartz crystal controlled oscillators of assessed quality

Part 3: Standard outlines and lead connections

bsi.

...making excellence a habit.
AVA Documents™
Document Sharing Hub

National foreword

This British Standard is the UK implementation of EN 60679-3:2013. It is identical to IEC 60679-3:2012. It supersedes BS EN 60679-3:2002 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee EPL/49, Piezoelectric devices for frequency control and selection.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2013

Published by BSI Standards Limited 2013

ISBN 978 0 580 66748 0

ICS 31.140

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2013.

Amendments issued since publication

Amd. No.	Date	Text affected
----------	------	---------------

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 60679-3

July 2013

ICS 31.140

Supersedes EN 60679-3:2001

English version

Quartz crystal controlled oscillators of assessed quality - Part 3: Standard outlines and lead connections (IEC 60679-3:2012)

Oscillateurs pilotés par quartz sous
assurance de la qualité -
Partie 3: Encombrements normalisés
et connexions des sorties
(CEI 60679-3:2012)

Quarzoszillatoren mit bewerteter Qualität -
Teil 3: Norm-Gehäusemaße und
Anschlussdrähte
(IEC 60679-3:2012)

This European Standard was approved by CENELEC on 2013-01-18. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

© 2013 CENELEC - All rights of exploitation in any form and by any means reserved worldwide for CENELEC members.

Ref. No. EN 60679-3:2013 E

 **Documents**
Document Sharing Hub

Foreword

The text of document 49/1009/FDIS, future edition 3 of IEC 60679-3, prepared by IEC/TC 49 "Piezoelectric, dielectric and electrostatic devices and associated materials for frequency control, selection and detection" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 60679-3:2013.

The following dates are fixed:

- latest date by which the document has to be (dop) 2014-01-12
implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2016-01-18
standards conflicting with the
document have to be withdrawn

This document supersedes EN 60679-3:2001.

EN 60679-3:2013 includes the following significant technical changes with respect to EN 60679-3:2001:

- CO 01, CO 07, CO 10, CO 17 and CO 18 were deleted;
- the current pin layout of CO 06 was deleted;
- new pin layout of CO 06 was added as CO 40;
- new layout of CO 15 was added as CO 41;
- two new enclosures, CO 42 and CO 43 were added.

Therefore revised edition includes 15 types of enclosures as in Table 1 of Clause 5.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 60679-3:2012 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60679-1:2007	NOTE	Harmonised as EN 60679-1:2007 (not modified).
IEC 60679-4:1997	NOTE	Harmonised as EN 60679-4:1998 (not modified).
IEC 60679-4-1:1998	NOTE	Harmonised as EN 60679-4-1:1998 (not modified).
IEC 60679-5:1998	NOTE	Harmonised as EN 60679-5:1998 (not modified).
IEC 60679-5-1:1998	NOTE	Harmonised as EN 60679-5-1:1998 (not modified).
ISO 1101	NOTE	Harmonised as EN ISO 1101.

CONTENTS

1	Scope	5
2	Guidance for the standardization of outline drawings for frequency control and selection devices	5
3	Dimensions of crystal oscillator enclosure	7
4	Lead connections	7
5	Designation of crystal oscillator enclosure	7
Annex A (normative) Lead connections of crystal oscillators – Type CO 02 to CO 43.....		23
Bibliography.....		25
Figure 1 – Guidance for outline drawings		6
Table 1 – Designation of crystal oscillator enclosures		7
Table A.1 – Lead connections of crystal oscillators – Type CO 02 to CO 43 (1 of 2)		23

QUARTZ CRYSTAL CONTROLLED OSCILLATORS OF ASSESSED QUALITY –

Part 3: Standard outlines and lead connections


1 Scope

This part of IEC 60679 specifies the outline dimensions and lead connections for quartz crystal controlled oscillators with lead enclosures.

2 Guidance for the standardization of outline drawings for frequency control and selection devices

In order to achieve a uniform presentation of outline drawings for frequency control and selection devices, the following shall be considered.

- a) An outline drawing shall show all dimensional and geometrical characteristics of an enclosure necessary to ensure mechanical interchangeability with all other enclosures of the same outline. Enlarged and detailed view may be used, if necessary.
- b) The outline drawing shall consist of three parts:
 - 1) A drawing with dimensional symbols (capital letter) as shown in Figure 1 with applicable footnotes, if necessary.
 - 2) A tabular listing relating to the drawing symbol to the actual dimensions. Where possible, this shall be shown on the same page as the drawing.
 - 3) An "actual-size" sketch (scale 1:1).
- c) The outline drawing shall be executed in the third-angle projection.
- d) The function and identification of the lead connections (termination) shall be determined by agreement between the supplier and user. They shall not be defined on the outline drawing.
- e) Descriptive footnotes may be used at the bottom of/ or adjacent to, the drawing with proper reference to the body of the drawing.
- f) All dimensions shall be in millimeters.
- g) Outline dimensions *A*, *B*, *C*, *D* and *E* shall be listed with maximum values only.
- h) If there are plural identical enclosures with different height (*C*), *C* shall be expressed with a suffix number such as *C*₁, *C*₂, etc. The following letter and number after the basic type number (four digits) indicate the enclosure height and lead length. The identity references are given in the table in the sheet.
- i) Lead (termination) cross-sectional dimensions shall be listed with minimum and maximum values. If applicable, nominal dimensions may be added.
- j) The spacing of the leads (termination) – symbol *H* – shall be listed with minimum, nominal and maximum dimensions.

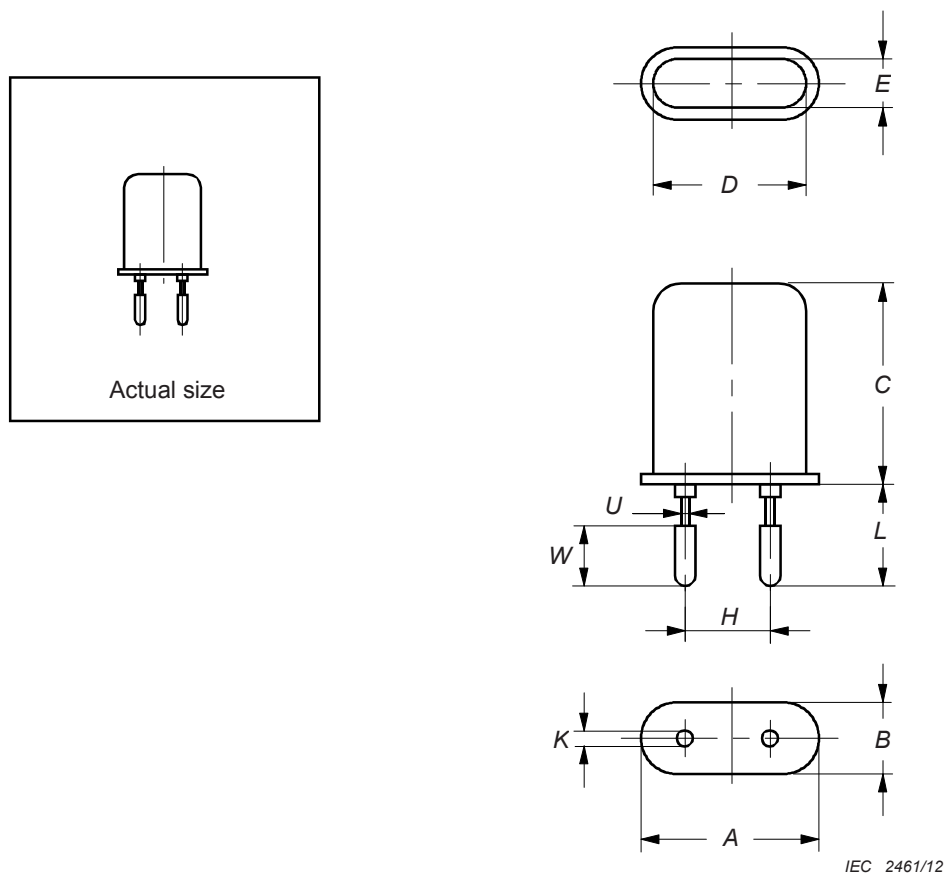


Ref.	Dimensions (mm)			Footnotes
	Min.	Nom.	Max.	
A	—	—	X	
B	—	—	X	
C	—	—	X	
D	—	—	X	
E	—	—	X	
H	X	X	X	
K	X	—	X	1
L	X	—	X	
U	X	—	—	2
W	X	—	—	2

1

2

Figure 1 – Guidance for outline drawings

Scale
2:1



Sheet – number

- k) Leads (terminations) for soldering application shall be specified with the minimum length dimensions (symbol L) only.

Lead (termination) for plug-in application shall be specified with minimum and maximum length dimensions.

- l) If leads (terminations) are provided with an undercut, dimensions U and W shall be listed with minimum dimensions only.

3 Dimensions of crystal oscillator enclosure

The dimensions in this standard apply to the completed quartz crystal controlled oscillators.

Only those dimensions which meet the requirements of the guidance for standardization of outline drawings are given (see Clause 2).


4 Lead connections

Recommendations for the lead connections of quartz crystal controlled oscillators are given in Annex A to this standard. Lead connections shall always be given in the detail specification.

5 Designation of crystal oscillator enclosure

Table 1 – Designation of crystal oscillator enclosures

No.	Type	Sheet No.	Description
1	CO 02 A1 CO 02 B1	Sheet 1	Metal enclosure, welded, 4 to 18 lead crystal oscillator outline
2	CO 05 B1	Sheet 2	Metal enclosure, welded, eight lead crystal oscillator outline
3	CO 08 A1 CO 08 B1 CO 08 C1	Sheet 3	Metal enclosure, five lead crystal oscillator outline
4	CO 09 A1 CO 09 B1	Sheet 4	Metal enclosure, five lead crystal oscillator outline
5	CO 15 B1 CO 15 C1	Sheet 5	Metal enclosure, five lead crystal oscillator outline
6	CO 16 A1 CO 16 B1 CO 16 C1	Sheet 6	Metal enclosure, four lead crystal oscillator outline
7	CO 19 A1 CO 19 B1	Sheet 7	Metal enclosure, five lead crystal oscillator outline
8	CO 21 A1	Sheet 8	Metal enclosure, welded, four lead crystal oscillator outline
9	CO 22 A1	Sheet 9	Plastic, moulded or ceramic, solder-glass sealed eight lead crystal oscillator outline
10	CO 23 B1	Sheet 10	Metal enclosure, welded, eight lead crystal oscillator outline
11	CO 24 A1	Sheet 11	Metal enclosure, four lead crystal oscillator outline
12	CO 40	Sheet 12	Metal enclosure, five lead crystal oscillator outline
13	CO 41 A1 CO 41 B1	Sheet 13	Metal enclosure, four lead crystal oscillator outline
14	CO 42	Sheet 14	Metal enclosure, four lead crystal oscillator outline
15	CO 43 A1 CO 43 B1 CO 43 C1	Sheet 15	Metal enclosure, five lead crystal oscillator outline

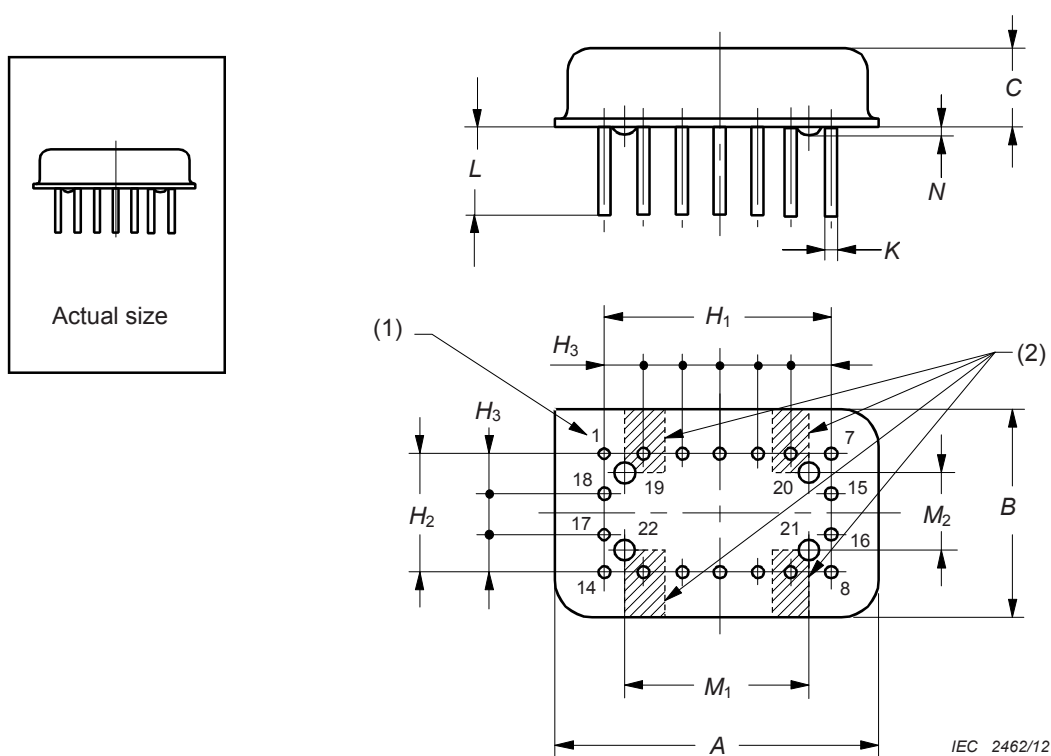

Ref.	Dimensions (mm)			Identity reference	Footnotes
	Min.	Nom.	Max.		
A	—	—	20,70		
B	—	—	13,10		
C ₁	—	—	5,10	CO 02 A.	5
C ₂	—	—	6,60	CO 02 B.	5
H ₁	14,94	15,24	15,54		
H ₂	7,32	7,62	7,92		
H ₃	2,30	2,54	2,70		
K	0,40	—	0,53		3
L	5,85	—	—	CO 02 .1	5
M ₁	—	12,20	—		2
M ₂	—	4,58	—		2
N	—	—	0,75		

Key

(1) An indication shall be provided to locate the position of lead No.1 (a 90° corner is shown on the drawing as an example).

(2) If required, insulating standoffs shall be located within corner areas defined in the table by M_1 and M_2 .

If insulating tape standoffs are used, shaded areas as indicated are preferred and the tape may encircle the leads.

3 Leads with solderable finish shall not exceed K_{max} .


4 Ground leads may be created by a brazed or welded joint(s) to the base.

5 The complete identity for any oscillator outline is a six digit type number consisting of the basic type number (four digits) followed by a letter indicating the enclosure height and a number indicating the lead length. The identity references are given in the table, where a dot indicates the missing information, which is given on another line.

EXAMPLE CO 02 B1 is the complete identity for the enclosure CO 02 with enclosure height C_2 and lead length L .

Metal enclosure, welded, 4 to 18 lead crystal oscillator outline – Type CO 02

Scale
2:1



Sheet 1