

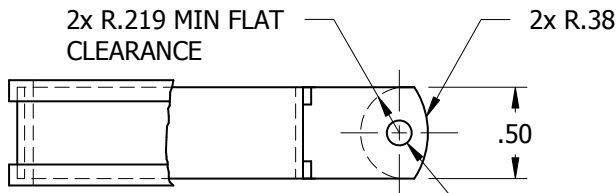


FED.SUPPLY CLASS


5340

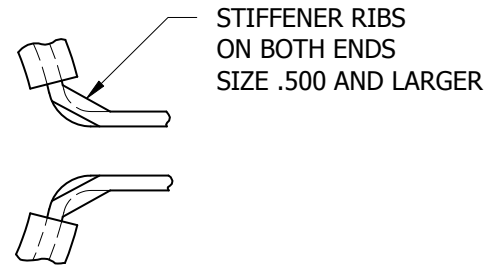

- 6 2x $\varnothing .204 \pm .010$ IN LINE FOR NO CODE.
2x $\varnothing .218 \pm .005$ IN LINE FOR CODE "X".

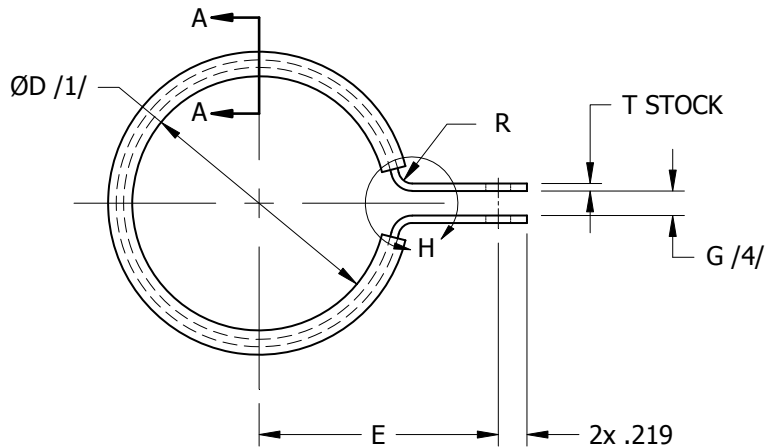

VIEW H

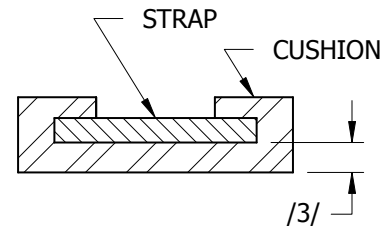

SECTION A-A

TABLE I – DIMENSIONS

DASH NO. $\varnothing D \pm .015$	MATERIAL		E $\pm .015$	G $+.031$ $-.000$	R	T STOCK
	AL ALLOY	CRES				
4 THRU 16	DT	CT	$D/2 + .390$	.062	.062	.020
4 THRU 7	D	C	$D/2 + .402$		.062	.032
8 THRU 16	D	C	$D/2 + .410$		.062	.040
17 THRU 32	D	C	$D/2 + .490$	.125	.135	.051
34 THRU 64	D	C	$D/2 + .534$		.135	.064

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

REVISION DATE: JUNE 30, 2016

ISSUE DATE: MARCH 1967

THIRD ANGLE PROJECTION	
PROCUREMENT SPECIFICATION	NONE

CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE
TITLE CLAMP, LOOP, CUSHIONED, CENTER MOUNTING

REVISION 6
CLASSIFICATION PART STANDARD
NAS1713 SHEET 1 OF 3



Documents
SHEET 1 OF 3
Document Sharing Hub

MATERIAL:

STRAP: ALUMINUM ALLOY - 2024 (UNS A82024), ALCLAD PER AMS-QQ-A-250/5, CONDITION T4 OR T42.
CRES - 302 (UNS S30200) PER AMS5516, OR 321 (UNS S32100) PER AMS5510, OR 304
(UNS S30400) PER AMS5513

CUSHION: CHLOROPRENE RUBBER (CR) PER AMS3209
SILICONE RUBBER PER AMS3303
POLYTETRAFLUOROETHYLENE (PTFE) PER AMS3652
~~ASBESTOS, POLYTETRAFLUOROETHYLENE IMPREGNATED PER AMS3840 /8/~~
~~ASBESTOS, POLYTETRAFLUOROETHYLENE IMPREGNATED, WIRE REINFORCED PER AMS3839 /8/~~
FABRIC, POLYBENZIMIDAZOLE (PBI) FIBERGLASS POLYTETRAFLUOROETHYLENE (PTFE)
IMPREGNATED PER AMS3677

FINISH:

CRES: PASSIVATE PER AMS2700, METHOD 1, CLASS 4
ALUMINUM: NONE
PTFE: SODIUM TREATED (DECREASED SLIPPAGE CHARACTERISTICS)
PTFE: NONE (NATURAL)

EXAMPLE OF PART NUMBER:

NAS1713 D 7 T X = CLAMP, LOOP, CENTER MOUNTED, .032 ALUMINUM ALLOY, INSIDE DIAMETER .4375, PTFE CUSHION, SODIUM TREATED, .213 TO .223 DIAMETER MOUNTING HOLE. (6)

MOUNTING HOLE DIAMETER:
X = .213 TO .223
(6) NO CODE = .204

CUSHION:
A = ~~ASBESTOS, PTFE IMPREGNATED, WIRE REINFORCED /8/~~
K = PTFE, NATURAL
~~M = ASBESTOS, PTFE IMPREGNATED /8/~~
N = CHLOROPRENE RUBBER
S = SILICONE RUBBER
T = PTFE, SODIUM TREATED
Z = FABRIC, PBI/PTFE IMPREGNATED

DASH NUMBER, ØD, IN .0625 INCREMENTS

MATERIAL:
D = ALUMINUM ALLOY AND THICKNESS PER TABLE I
DT = ALUMINUM ALLOY AND THICKNESS PER TABLE I
C = CRES AND THICKNESS PER TABLE I
CT = CRES AND THICKNESS PER TABLE I

DOCUMENT NUMBER

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 12-01

REVISION

6

NAS1713

SHEET 2



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

Copyright Aerospace Industries Association of America, Inc. All rights reserved. No reproduction or networking permitted without license from IHS. Provided by IHS Market under license with AIA/NAS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY THEREO OF PATENT OR TRADEMARKS RIGHTS.

Full document details: AIA NAS1713 2016