

FED. SUPPLY CLASS

8345

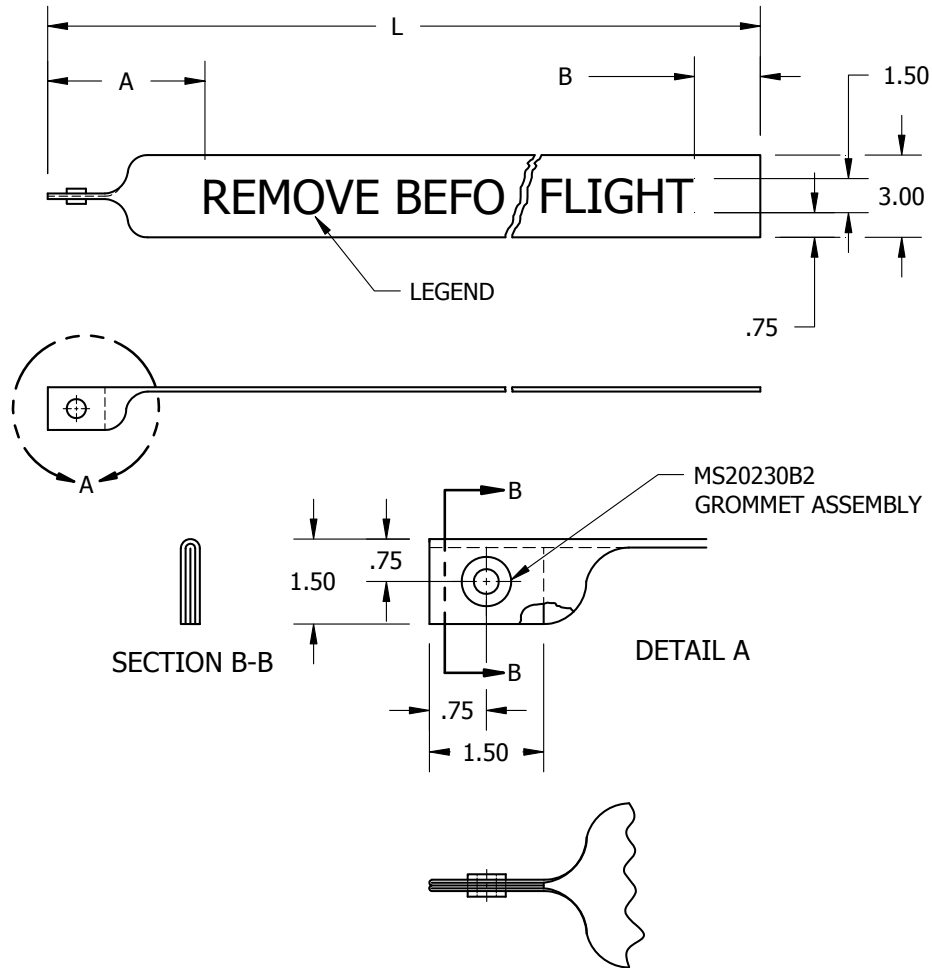


TABLE I – DASH NUMBERS & DIMENSIONS

DASH NO	A MIN	B APPROX	L /8/
12	2.00	1.00	12.00
24	4.00	2.00	24.00
36	12.00	6.00	36.00
48	24.00	6.00	48.00
60	36.00	6.00	60.00
72	48.00	6.00	72.00
84	60.00	6.00	84.00
96	72.00	6.00	96.00
108	84.00	6.00	108.00
120	96.00	6.00	120.00

③ COMPLETELY REVISED

FORM 12-01	THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 3
	PROCUREMENT SPECIFICATION	TITLE STREAMER, WARNING	CLASSIFICATION PART STANDARD
	NONE		NAS1756 SHEET 1 OF 3



Documents
Document Sharing Hub

MATERIAL:

VINYL COATED POLYAMIDE, MIL-PRF-20696, TYPE I, CLASS 2.

COLOR:

STREAMER: RED COLOR SIMILAR TO NO. 11136 PER FED-STD-595.
LETTERS: WHITE COLOR SIMILAR TO NO. 37875 PER FED-STD-595.

LEGEND:

REMOVE BEFORE FLIGHT.

CODE:

THE PART NUMBER CONSISTS OF THE BASIC PART NUMBER, FOLLOWED BY A DASH "-" TO INDICATE
STREAMER WITH THE LEGEND "REMOVE BEFORE FLIGHT," FOLLOWED BY LENGTH DASH
NUMBER.
ADD "N" IN PLACE OF DASH FOR BLANK STREAMER WITH NO LEGEND.

EXAMPLES OF PART NUMBER:

NAS1756-12 = STREAMER WITH LEGEND "REMOVE BEFORE FLIGHT", 12 INCHES LONG.
NAS1756N24 = STREAMER BLANK (WITH NO LEGEND), 24 INCHES LONG.

NOTES:

- (1) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (2) ~~THIS STREAMER IS IN ACCORDANCE WITH DESIGN STANDARD MS51700 STREAMER, WARNING.~~
- (3) ~~FOR STREAMER ASSEMBLY, SEE NAS1091.~~
- (4) IDENTIFY PER AS478, METHOD 37.
- (5) FOR NAS1756-12, THE SIZE OF LETTERS MAYBE CHANGED TO ACCOMMODATE THE REDUCED SPACE.
THE MINIMUM LETTER HEIGHT SHALL BE .75.
- (6) LENGTH SELECTION SHOULD BE SUCH THAT THE VISIBLE PROTRUSION OUTSIDE THE AIRCRAFT IS
AT LEAST 24.00.
- (7) TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm .12$.
- /8/ TOLERANCES: $\pm .25$ FOR LENGTHS UP TO AND INCLUDING 36.00; ± 1.00 FOR LENGTHS GREATER
THEN 36.00.
- (9) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REVISION

3

③ COMPLETELY REVISED



NAS1756
Documents

SHEET 2

Document Sharing Hub