

BS EN 62106:2015



BSI Standards Publication

Specification of the radio data system (RDS) for VHF/FM sound broadcasting in the frequency range from 87,5 MHz to 108,0 MHz

bsi.

...making excellence a habit.
AVA Documents™
Document Sharing Hub

National foreword

This British Standard is the UK implementation of EN 62106:2015. It is identical to IEC 62106:2015. It supersedes BS EN 62106:2009, which will be withdrawn on 4 May 2018.

The UK participation in its preparation was entrusted to Technical Committee EPL/100, Audio, video and multimedia systems and equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.

Published by BSI Standards Limited 2015

ISBN 978 0 580 80690 2

ICS 33.060.20; 33.170; 35.240.99

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2015.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Specification of the radio data system (RDS)
for VHF/FM sound broadcasting in the frequency range
from 87,5 MHz to 108,0 MHz
(IEC 62106:2015)

Spécification du système de radiodiffusion de données
(RDS) pour la radiodiffusion sonore VHF/FM dans la bande
de fréquences de 87,5 MHz à 108,0 MHz
(IEC 62106:2015)

Spezifikation des Radio-Daten-Systems (RDS)
für den VHF/FM-Tonrundfunk im Frequenzbereich
87,5 MHz bis 108,0 MHz
(IEC 62106:2015)

This European Standard was approved by CENELEC on 2015-05-04. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Foreword

The text of document 100/2122A/CDV, future edition 3 of IEC 62106, prepared by Technical Area 1 "Terminals for audio, video and data services and contents" of IEC/TC 100 "Audio, video and multimedia systems and equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62106:2015.

The following dates are fixed:

- latest date by which the document has to be (dop) 2016-02-04
implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2018-05-04
standards conflicting with the
document have to be withdrawn

This document supersedes EN 62106:2009.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62106:2015 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following note has to be added for the standard indicated :

IEC 62634	NOTE	Harmonized as EN 62634.
ISO 3166 Series	NOTE	Only Part 1 harmonized as EN ISO 3166-1.

Annex ZA
(normative)**Normative references to international publications
with their corresponding European publications**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
ISO/IEC 10646	2014	Information technology - Universal Coded Character Set (UCS)	-	-
ISO 14819	Series	Intelligent transport systems - Traffic and travel information messages via traffic message coding	EN ISO 14819	Series
ITU-R Recommendation BS.450-3	-	Transmission standards for FM sound broadcasting at VHF	-	-
ITU-R Recommendation BS.643-3	-	Radio data system for automatic tuning and other applications in FM radio receivers for use with pilot-tone system	-	-
ITU-T Recommendation E.212	-	The international identification plan for public networks and subscriptions: For the three digit Mobile Country Codes used in Annex M of this RDS specification refer to Complement to ITU-T Rec. E.212 (05/2004) published by ITU Geneva as Annex to ITU Operational Bulletin 897, dated 2007-12-01	-	-
US NRSC-4-B		National Radio Systems Committee - NRSC-4-A: United States RBDS standard		
ETSI EN 301 700	-	Digital Audio Broadcasting (DAB); VHF/FM - Broadcasting: cross-referencing to simulcast DAB services by RDS-ODA 147		-

CONTENTS

FOREWORD.....	9
INTRODUCTION.....	11
1 Scope.....	12
2 Normative references.....	12
3 Abbreviations	12
4 Modulation characteristics of the data channel (physical layer)	13
4.1 General.....	13
4.2 Subcarrier frequency	14
4.3 Subcarrier phase.....	15
4.4 Subcarrier level.....	15
4.5 Method of modulation	15
4.6 Clock-frequency and data-rate.....	15
4.7 Differential coding	16
4.8 Data-channel spectrum shaping.....	16
5 Baseband coding (data-link layer)	19
5.1 Baseband coding structure	19
5.2 Order of bit transmission	20
5.3 Error protection	21
5.4 Synchronisation of blocks and groups.....	21
6 Message format (session and presentation layers)	22
6.1 Addressing.....	22
6.1.1 Design principles	22
6.1.2 Principal features	22
6.1.3 Group types	23
6.1.4 Open data channel/Applications Identification	25
6.1.5 Coding of the group types	27
6.2 Coding of information	44
6.2.1 General	44
6.2.2 Coding of information for control.....	44
6.2.3 Coding and use of information for display	54
6.2.4 Coding of clock time and date (CT).....	54
6.2.5 Coding of information for Transparent Data Channels (TDC).....	55
6.2.6 Coding of information for in house applications (IH)	55
6.2.7 Coding of Radio Paging (RP).....	55
6.2.8 Coding of Emergency Warning Systems (EWS)	56
7 Description of features.....	57
7.1 Alternative frequencies list (AF).....	57
7.2 Clock Time and date (CT).....	57
7.3 Decoder Identification (DI) and dynamic PTY Indicator (PTYI)	57
7.4 Extended Country Code (ECC)	57
7.5 Enhanced Other Networks information (EON)	57
7.6 Emergency Warning System (EWS).....	57
7.7 In House application (IH).....	57
7.8 Music Speech switch (MS).....	58
7.9 Open Data Applications (ODA)	58
7.10 Programme Identification (PI)	58

7.11	Programme Item Number (PIN).....	59
7.12	Programme Service name (PS).....	59
7.13	Programme Type (PTY).....	59
7.14	Programme Type Name (PTYN)	59
7.15	Radio Paging (RP)	59
7.16	RadioText (RT)	59
7.17	Enhanced RadioText (eRT)	59
7.18	RadioText Plus (RT+).....	60
7.19	Traffic Announcement identification (TA)	60
7.20	Transparent Data Channels (TDC).....	60
7.21	Traffic Message Channel (TMC)	60
7.22	Traffic Programme identification (TP).....	60
8	Marking	60
Annex A (normative) Offset words to be used for group and block synchronisation		62
Annex B (informative) Theory and implementation of the modified shortened cyclic code		63
B.1	General.....	63
B.2	Encoding procedure	63
B.2.1	Theory	63
B.2.2	Shift-register implementation of the encoder	65
B.3	Decoding procedure	65
B.3.1	Theory	65
B.3.2	Implementation of the decoder	67
Annex C (informative) Implementation of group and block synchronisation using the modified shortened cyclic code		69
C.1	Theory	69
C.1.1	Acquisition of group and block synchronisation	69
C.1.2	Detection of loss of synchronisation	69
C.2	Shift register arrangement for deriving group and block synchronisation information.....	69
Annex D (normative) Programme identification codes and extended country codes		72
D.1	General.....	72
D.2	PI structure	72
D.3	Extended country codes	72
D.4	Country codes: 'Nibble 1'	73
D.5	Programme in terms of area coverage (codes for fixed location transmitters only): 'Nibble 2'	76
D.6	Programme reference number: 'Nibbles 3 and 4'	76
D.7	PI codes for low-power short range transmitting devices	77
Annex E (normative) Basic and extended RDS character sets		78
Annex F (normative) Programme type codes		98
Annex G (informative) Conversion between time and date conventions		101
Annex H (informative) ARI (Autofahrer-Rundfunk-Information) system – Discontinuation		103
Annex J (normative) Language identification		104
Annex K (informative) RDS logo		106
Annex L (informative) Open data registration.....		107
Annex M (normative) Coding of Radio Paging (RP).....		110

M.1	General.....	110
M.2	Basic paging protocol.....	110
M.2.1	Coding characteristics for paging.....	110
M.2.2	Transmitter network group designation	111
M.2.3	Locking to a channel	113
M.2.4	Loss of synchronization.....	113
M.2.5	Group type 7A message format	113
M.3	Enhanced paging	119
M.3.1	General	119
M.3.2	Multi-operator/area paging	119
M.3.3	Extension of paging addressing mode	126
M.3.4	Battery saving mode	126
M.3.5	Group type 7A message format	129
M.3.6	Address notification bit versus pager individual address.....	138
M.4	Examples of the traffic handling capacity of the specified radio paging system.....	139
Annex N (normative)	Country codes and extended country codes for countries outside the European Broadcasting Area.....	142
N.1	African Broadcasting Area	142
N.2	Allocations of symbols for countries in ITU Region 2	144
N.3	Allocations of symbols for countries in ITU Region 3	146
Annex P (normative)	Coding of RadioText Plus information (RT+).....	148
P.1	General.....	148
P.2	Definitions.....	148
P.3	RT+ tag	149
P.4	RT+ information elements and data model	150
P.4.1	General	150
P.4.2	List of RT/eRT content types	150
P.4.3	Structures of RT+ messages	151
P.4.4	Receiver data model	152
P.5	Coding RT+ in ODA groups	153
P.5.1	General	153
P.5.2	RT+ identification (Group type 3A).....	154
P.5.3	Coding of the RT+ tag	155
P.5.4	Clearing of RT+ messages	156
P.6	Broadcasting conventions.....	159
P.7	Receiving conventions	159
P.8	Marking.....	160
Annex Q (normative)	Coding of enhanced RadioText (eRT)	161
Q.1	General.....	161
Q.2	Coding eRT in ODA groups	161
Q.2.1	General	161
Q.2.2	eRT identification (Group type 3A).....	161
Q.2.3	Coding of the eRT text string.....	162
Q.3	Broadcasting conventions.....	164
Q.4	Receiving conventions	165
Q.5	Marking.....	165
Annex R (informative)	RBDS in the USA.....	166
Annex S (normative)	List of RDS specific abbreviations	167

Bibliography	168
--------------------	-----

Figure 1 – Block diagram of radio-data equipment at the transmitter	14
Figure 2 – Block diagram of a typical radio-data receiver/decoder	15
Figure 3 – Amplitude response of the specified transmitter or receiver data-shaping filter 17	
Figure 4 – Amplitude response of the combined transmitter and receiver data-shaping filters	18
Figure 5 – Spectrum of biphase coded radio-data signals	18
Figure 6 – Time-function of a single biphase symbol	19
Figure 7 – 57 kHz radio-data signals	19
Figure 8 – Structure of the baseband coding	20
Figure 9 – Message format and addressing	20
Figure 10 – ODA version A groups	26
Figure 11 – ODA version B groups	27
Figure 12 – Basic tuning and switching information – Type 0A group.....	27
Figure 13 – Basic tuning and switching information – Type 0B group.....	27
Figure 14 – Programme item number and slow labelling codes – Type 1A group	29
Figure 15 – Programme Item Number – Type 1B group.....	30
Figure 16 – RadioText – Type 2A group	30
Figure 17 – RadioText – Type 2B group	31
Figure 18 – Application identification for open data – Type 3A group.....	32
Figure 19 – Open data – Type 3B group	33
Figure 20 – Clock-time and date transmission – Type 4A group	34
Figure 21 – Open data – Type 4B group	34
Figure 22 – Transparent data channels – Type 5A group	35
Figure 23 – Transparent data channels – Type 5B group	35
Figure 24 – In-house applications – Type 6A and 6B group.....	36
Figure 25 – Radio paging – Type 7A group.....	36
Figure 26 – Type 7B group.....	37
Figure 27 – Traffic message channel – Type 8A group.....	37
Figure 28 – Open data – Type 8B group	37
Figure 29 – Allocation of EWS message bits – Type 9A group	38
Figure 30 – Open data – Type 9B group	38
Figure 31 – Programme type name PTYN – Type 10A group.....	39
Figure 32 – Open data – Type 10B group	39
Figure 33 – Open data – Type 11A and 11B groups.....	40
Figure 34 – Open data – Type 12A and 12B groups.....	40
Figure 35 – Enhanced paging information – Type 13A group.....	41
Figure 36 – Open data – Type 13B group	42
Figure 37 – Enhanced other networks information – Type 14A groups.....	42
Figure 38 – Enhanced Other Networks information – Type 14B groups.....	43
Figure 39 – Open data – Type 15A group	43
Figure 40 – Fast basic tuning and switching information – Type 15B group	44

Figure 41 – Structure of Block 3 of Type 1A groups	52
Figure 42 – Structure of variant 12 of block 3 of type 14A groups (linkage information) – National link.....	53
Figure 43 – Structure of variant 12 of block 3 of type 14A groups (linkage information) – International link	53
Figure 44 – Structure of Variant 7 of Block 3 of type 1A groups for Identification of a programme carrying EWS information	56
Figure B.1 – Generator matrix of the basic shortened cyclic code in binary notation	64
Figure B.2 – Shift-register implementation of the encoder	65
Figure B.3 – Parity-check matrix of the basic shortened cyclic code	66
Figure B.4 – Shift-register implementation of the decoder	67
Figure C.1 – Group and block synchronisation detection circuit.....	70
Figure D.1 – PI structure.....	72
Figure D.2 – Structure of Variant 0 of Block 3 of type 1A groups (ECC).....	73
Figure D.3 – European Broadcasting Area – Correspondence between geographical locations and the symbols used.....	74
Figure G.1 – Conversion routes between Modified Julian Date (MJD) and Coordinated Universal Time (UTC)	101
Figure J.1 – Language identification code allocation	104
Figure M.1 – Group type 7A message format for radio paging	113
Figure M.2 – Group type 7A paging without an additional message	114
Figure M.3 – Group type 7A paging with an additional 10 digit message.....	115
Figure M.4 – Group type 7A paging with an additional 18 digit message.....	115
Figure M.5 – Group type 7A paging with an additional alphanumeric message	116
Figure M.6 – Group type 7A paging with an additional international 15 digit message	117
Figure M.7 – Functions message in international paging	118
Figure M.8 – Variant 0 of 1A group with PIN	120
Figure M.9 – Variant 2 of 1A group with PIN	121
Figure M.10 – Variants of 1A group without PIN.....	122
Figure M.11 – Group type 13A	128
Figure M.12 – Group type 7A paging with tone-only message	130
Figure M.13 – First 7A group of a variable-length message.....	131
Figure M.14 – Group type 7A national paging with additional alphanumeric message	132
Figure M.15 – Group type 7A national paging with additional variable-length numeric message.....	134
Figure M.16 – Group type 7A national paging with additional variable-length functions message.....	135
Figure M.17 – The two first 7A groups of an international alphanumeric message.....	136
Figure M.18 – The two first 7A groups of an international variable-length numeric message.....	137
Figure M.19 – The two first 7A groups of an international variable-length functions message.....	137
Figure M.20 – Traffic handling capacity, busy hour, call rate = 0,10 calls/pager/hour	140
Figure M.21 – Traffic handling capacity, busy hour, call rate = 0,067 calls/pager/hour	141
Figure M.22 – Traffic handling capacity, busy hour, call rate = 0,05 calls/pager/hour	141

Figure P.1 – RT+ information of the category 'Item' (see Table P.2) will be attached to the programme elements Item 1 and Item 2	153
Figure P.2 – RT+ information of the category 'Item' will be attached to the programme elements Item 1 and Item 2, but not to the programme element News	153
Figure P.3 – RT+ information of the category 'Item' will be attached only to the programme element Item 1, but not to the programme element Talk.....	153
Figure P.4 – Bit allocation for group 3A (message bits and AID).....	154
Figure P.5 – Coding of the message bits of the application group	155
Figure Q.1 – Bit allocation for group 3A (message bits and AID)	162
Figure Q.2 – Coding of the message bits of the application group	163
Table 1 – Encoding rules	16
Table 2 – Decoding rules	16
Table 3 – Group types	23
Table 4 – Main feature repetition rates	24
Table 5 – Group repetition rates	25
Table 6 – ODA group availability signalled in type 3A groups	26
Table 7 – STY codes	41
Table 8 – Codes for TP and TA	45
Table 9 – Bit d_0 to d_3 meanings	45
Table 10 – VHF code table.....	46
Table 11 – Special meanings code table	46
Table 12 – Code tables according to ITU regions; LF/MF code table – For ITU regions 1 and 3 (9 kHz spacing)	46
Table 13 – Code tables according to ITU regions; MF code table – For ITU region 2 (10 kHz spacing).....	47
Table A.1 – Offset word codes	62
Table B.1 – Offset word syndromes using matrix of Figure B.3.....	67
Table C.1 – Offset word syndromes for group and block synchronisation.....	71
Table D.1 – PI code structure.....	72
Table D.2 – European Broadcasting Area – Symbols used for ECC and PI country codes	75
Table D.3 – Area coverage codes	76
Table D.4 – Programme reference number codes	76
Table D.5 – PI codes for short range transmitting devices.....	77
Table E.1 – Basic RDS character set.....	78
Table E.2 – Non-transmitted UCS-2 equivalents (1 of 7)	79
Table E.3 – Extended RDS character set, for eRT only (1 of 13)	85
Table F.1 – Programme type codes and corresponding terms for display.....	98
Table G.1 – Symbols used	101
Table J.1 – Language identification codes	104
Table M.1 – Pager group codes.....	111
Table M.2 – Codes for additional message content	114
Table M.3 – Paging segment address codes for 10 and 18 digit messages.....	115
Table M.4 – Paging segment address codes for alphanumeric messages	116

Table M.5 – Paging segment address codes for international 15 digit messages	117
Table M.6 – Paging segment address codes for functions message	118
Table M.7 – Sub-usage codes	122
Table M.8 – Group designation codes	126
Table M.9 – Cycle selection codes	127
Table M.10 – Message sorting codes	128
Table M.11 – Codes for message types	130
Table M.12 – Description of the control byte	131
Table M.13 – Use of paging call repetition flag	132
Table M.14 – Paging segment address codes for alphanumeric message	133
Table M.15 – Paging segment address codes for variable length numeric message	134
Table M.16 – Paging segment address codes for national paging with variable-length functions message	135
Table M.17 – Address notification (50 bit)	138
Table M.18 – Address notification (25 bit)	139
Table M.19 – Z3 parity relationship	139
Table P.1 – RT+ information elements	148
Table P.2 – Code list and 'RT+ class' description of 'RT/eRT content types (1 of 3)	157
Table Q.1 – eRT information elements	161

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SPECIFICATION OF THE RADIO DATA SYSTEM (RDS)
FOR VHF/FM SOUND BROADCASTING IN THE FREQUENCY
RANGE FROM 87,5 MHz TO 108,0 MHz**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62106 has been prepared by technical area 1: Terminals for audio, video and data services and contents, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This third edition cancels and replaces the second edition, published in 2009 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- for the RDS feature EON and the use of group types 14A and 14B some additional explanations were added;
- in Annex E, containing the character code tables to be used in RDS, the explanation for Table E.1 and Table E.2 was extended;
- several small typing errors were corrected;
- to Enhanced RadioText in Annex Q an additional explanation was added.

The text of this standard is based on the following documents:

CDV	Report on voting
100/2122A/CDV	100/2418/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.¹

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

¹ For technical reasons equations and some figures had to be left unchanged and are not in accordance with the ISO/IEC Directives, Part 2:2011.

INTRODUCTION

IEC 62106:2000 (first edition) and IEC 62106:2009 (second edition) have the same main text and annex structure. However, the main text of this edition is slightly restructured to more closely conform to ISO/IEC Directives, Part 2:2011. Nevertheless, cross-referencing between this edition and the previous editions remains possible. To find the corresponding subclause quickly between this edition and the first edition, it is basically sufficient to subtract 3 clauses. Example: see 3.1.5.1 in the first edition, published in 2000 becomes, see 6.1.5.1.

SPECIFICATION OF THE RADIO DATA SYSTEM (RDS) FOR VHF/FM SOUND BROADCASTING IN THE FREQUENCY RANGE FROM 87,5 MHz TO 108,0 MHz

1 Scope

This International Standard describes the Radio Data System, RDS, intended for application to VHF/FM sound broadcasts in the range 87,5 MHz to 108,0 MHz which may carry either stereophonic (pilot-tone system) or monophonic programmes (as stated in ITU-R Recommendation BS 450-3 and ITU-R Recommendation BS.643-3). The main objectives of RDS are to enable improved functionality for FM receivers and to make them more user-friendly by using features such as Programme Identification, Programme Service name display and, where applicable, automatic tuning for portable and car radios, in particular. The relevant basic tuning and switching information therefore has to be implemented by the type 0 group (see 6.1.5.1), and it is not optional unlike many of the other possible features in RDS.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 10646:2014, *Information technology – Universal Coded Character Set (UCS)*

ISO 14819 (all parts), *Intelligent transport systems – Traffic and travel information messages via traffic message coding*

ITU-R Recommendation BS.450-3, *Transmission standards for FM sound broadcasting at VHF*

ITU-R Recommendation BS.643-3, *Radio data system for automatic tuning and other applications in FM radio receivers for use with pilot-tone system*

ITU-T Recommendation E.212, *For the three digit Mobile Country Codes used in Annex M of this RDS specification refer to Complement to ITU-T Rec. E.212 (05/2004) published by ITU Geneva as Annex to ITU Operational Bulletin 897, dated 2007-12-01*

US NRSC-4-B, *National Radio Systems Committee – NRSC-4-A: United States RBDS standard*

ETSI EN 301 700, *Digital Audio Broadcasting (DAB); VHF/FM broadcasting: cross referencing to simulcast DAB services by RDS-ODA 147*

3 Abbreviations

For the purposes of this document, the following abbreviations apply.

3.1

AM

<broadcasting> amplitude modulation

3.2**ARI**

Autofahrer-Rundfunk-Information

Note 1 to entry: See Annex H.

3.3**FM**

<broadcasting> frequency modulation

3.4**group type and version**

combination of a particular group and a particular version

Note 1 to entry: RDS uses 16 data groups, 0 to 15, each with either a version A or B. For example, data group 0 can be combined with version A, and becomes 0A, or type 0A group. Type 0 group means version A and B of data group 0.

3.5**hexadecimal notation**

C notation "0x" is used for hex (base 16) numbers

Note 1 to entry: This notation is used throughout this standard.

3.6**LF**

long wave broadcasting frequency band

Note 1 to entry: LF applies to ITU, Region 1 only.

3.7**MF**

medium wave broadcasting frequency band

Note 1 to entry: MF applies to ITU, all Regions.

3.8**RDS specific abbreviations and definitions**

see Clause 7 and Annex S

3.9**VHF**

very high frequency broadcasting band, here Band II, that is 87,5 MHz to 108,0 MHz

Note 1 to entry: VHF applies only to ITU.

4 Modulation characteristics of the data channel (physical layer)**4.1 General**

The Radio Data System is intended for application to VHF/FM sound broadcasting transmitters in the range 87,5 MHz to 108,0 MHz, which carry stereophonic (pilot-tone system) or monophonic sound broadcasts specified in ITU-R Recommendation BS.450-3.

It is important that radio-data receivers are not affected by signals in the multiplex spectrum outside the data channel.


The data signals are carried on a subcarrier which is added to the stereo multiplex signal (or monophonic signal, as appropriate) at the input to the VHF/FM transmitter. Block diagrams of

the data source equipment at the transmitter and a typical receiver arrangement are shown in Figure 1 and Figure 2, respectively.

4.2 Subcarrier frequency


During stereo broadcasts, the subcarrier frequency will be locked to the third harmonic of the 19 kHz pilot-tone. Since the tolerance on the frequency of the 19 kHz pilot-tone is ± 2 Hz (ITU-R Recommendation BS.450-3), the tolerance on the frequency of the subcarrier during stereo broadcasts is ± 6 Hz.

During monophonic broadcasts the frequency of the subcarrier is $57 \text{ kHz} \pm 6 \text{ Hz}$.

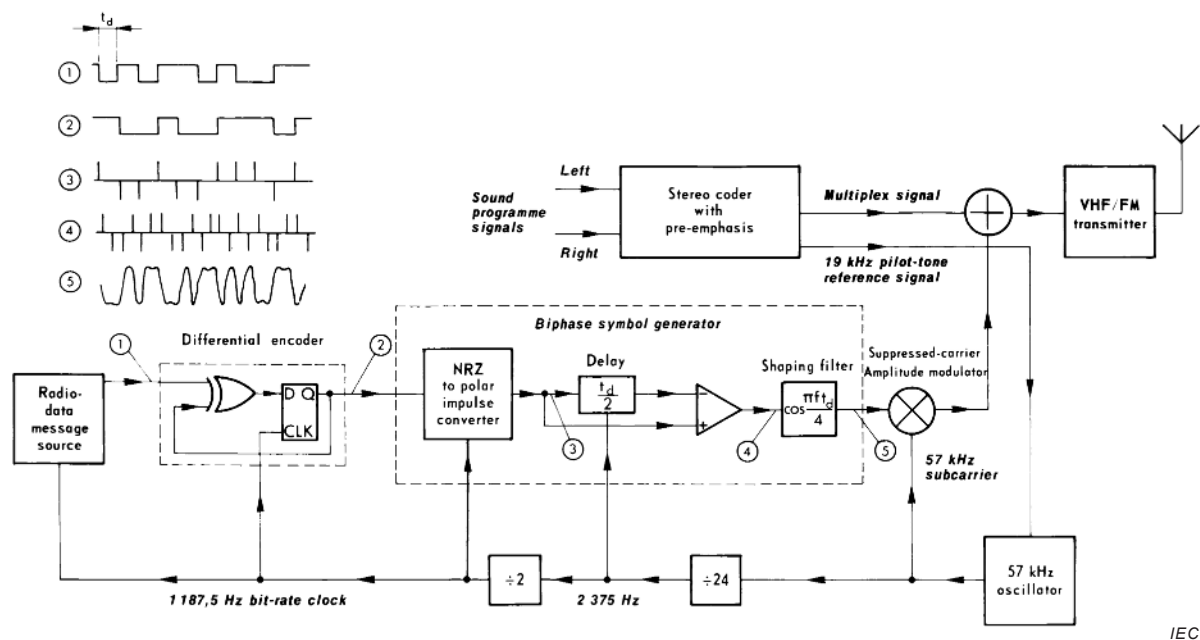

IEC

Figure 1 – Block diagram of radio-data equipment at the transmitter

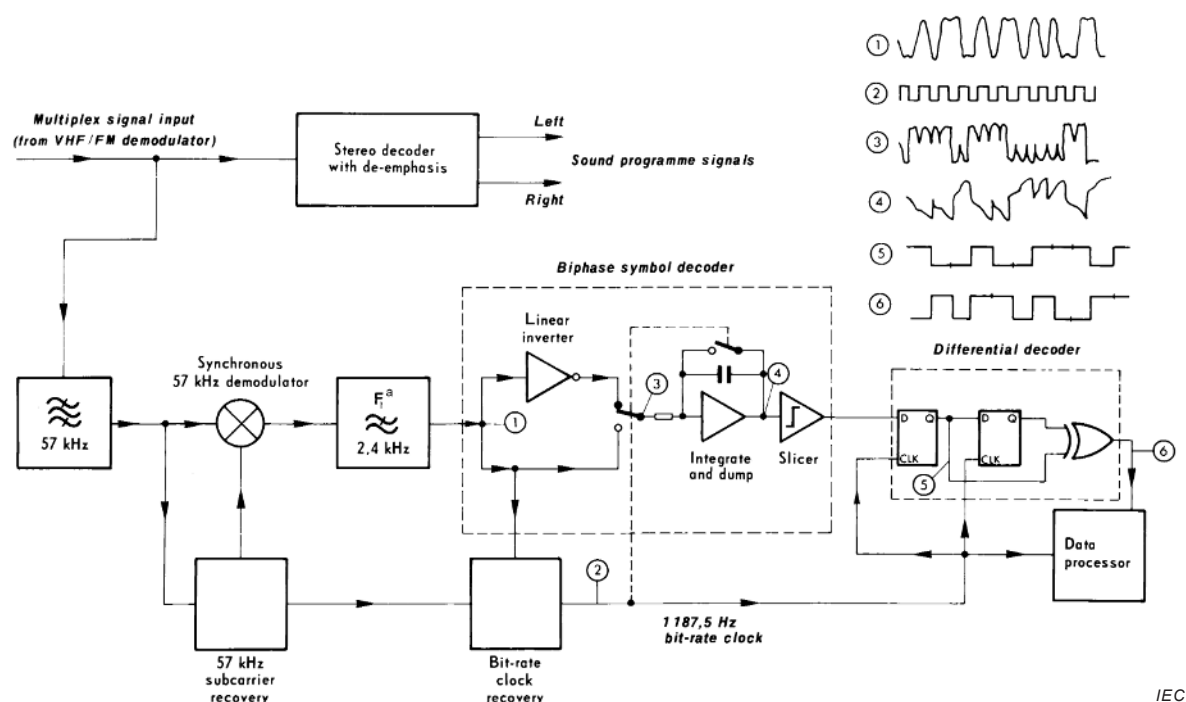

^a The overall data-shaping in this decoder comprises the filter F_1 and the data-shaping inherent in the biphasic symbol decoder. The amplitude/frequency characteristic of filter F_1 is therefore not the same as that given in Figure 3.

Figure 2 – Block diagram of a typical radio-data receiver/decoder

4.3 Subcarrier phase

During stereo broadcasts, the subcarrier will be locked either in phase or in quadrature to the third harmonic of the 19 kHz pilot-tone. The tolerance on this phase angle is $\pm 10^\circ$, measured at the modulation input to the FM transmitter.

4.4 Subcarrier level

The deviation range of the FM carrier due to the unmodulated subcarrier is from $\pm 1,0$ kHz to $\pm 7,5$ kHz. The recommended best compromise is $\pm 2,0$ kHz (see NOTE below). The decoder/demodulator shall also operate properly when the deviation of the subcarrier is varied within these limits during periods not less than 10 ms.

NOTE With this level of subcarrier, the level of each sideband of the subcarrier corresponds to half the nominal peak deviation level of 2,0 kHz for an all-zeroes message data stream (i.e. a continuous bit-rate sine-wave after biphasic encoding).

The maximum permitted deviation due to the composite multiplex signal is ± 75 kHz.

4.5 Method of modulation

The subcarrier is amplitude-modulated by the shaped and biphasic coded data signal (see 4.8). The subcarrier is suppressed. This method of modulation may alternatively be thought of as a form of two-phase phase-shift-keying (PSK) with a phase deviation of $\pm 90^\circ$.

4.6 Clock-frequency and data-rate

The basic clock frequency is obtained by dividing the transmitted subcarrier frequency by 48. Consequently, the basic data-rate of the system (see Figure 1) is 1 187,5 bit/s $\pm$ 0,125 bit/s.

4.7 Differential coding

The source data at the transmitter are differentially encoded according to the following rules, see Table 1.

Table 1 – Encoding rules

Previous output (at time t_{i-1})	New input (at time t_i)	New output (at time t_i)
0	0	0
0	1	1
1	0	1
1	1	0

where t_i is some arbitrary time and t_{i-1} is the time one message-data clock-period earlier, and where the message-data clock-rate is equal to 1 187,5 Hz.

Thus, when the input-data level is 0, the output remains unchanged from the previous output bit, and when an input 1 occurs, the new output bit is the complement of the previous output bit.

In the receiver, the data may be decoded by the inverse process, see Table 2.

Table 2 – Decoding rules

Previous input (at time t_{i-1})	New input (at time t_i)	New output (at time t_i)
0	0	0
0	1	1
1	0	1
1	1	0

The data is thus correctly decoded whether or not the demodulated data signal is inverted.

4.8 Data-channel spectrum shaping

The power of the data signal at and close to the 57 kHz subcarrier is minimized by coding each source data bit as a biphasic symbol.

This is done to avoid data-modulated cross-talk in phase-locked-loop stereo decoders. The principle of the process of generation of the shaped biphasic symbols is shown schematically in Figure 1. In concept, each source bit gives rise to an odd impulse-pair, $e(t)$, so that a logic 1 at source gives:

$$e(t) = \delta(t) - \delta(t - t_d/2) \quad (1)$$

and a logic 0 at source gives:

$$e(t) = -\delta(t) + \delta(t - t_d/2) \quad (2)$$

These impulse-pairs are then shaped by a filter $H_T(f)$, to give the required band-limited spectrum where

$$H_T(f) = \begin{cases} \cos \frac{\pi f t_d}{4} & \text{if } 0 \leq f \leq 2/t_d \\ 0 & \text{if } f > 2/t_d \end{cases} \quad (3)$$

and here

$$t_d = \frac{1}{1187,5} \text{ s}$$

The data-spectrum shaping filtering has been split equally between the transmitter and receiver (to give optimum performance in the presence of random noise) so that, ideally, the data filtering at the receiver should be identical to that of the transmitter, i.e. as given above in Equation (3). The overall data-channel spectrum shaping $H_0(f)$ would then be 100 % cosine roll-off.

The specified transmitter and receiver low-pass filter responses, as defined in Equation (3) are illustrated in Figure 3, and the overall data-channel spectrum shaping is shown in Figure 4.

The spectrum of the transmitted biphase-coded radio-data signal is shown in Figure 5 and the time-function of a single biphase symbol (as transmitted) in Figure 6.

The 57 kHz radio-data signal waveform at the output of the radio-data source equipment may be seen in the photograph of Figure 7.

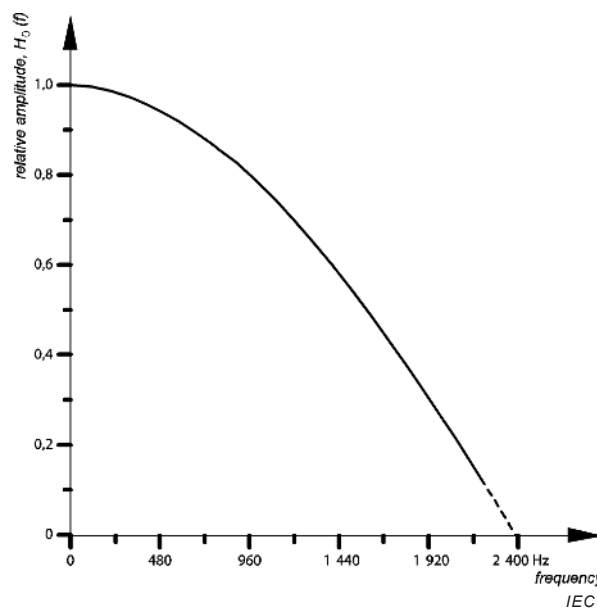


Figure 3 – Amplitude response of the specified transmitter or receiver data-shaping filter

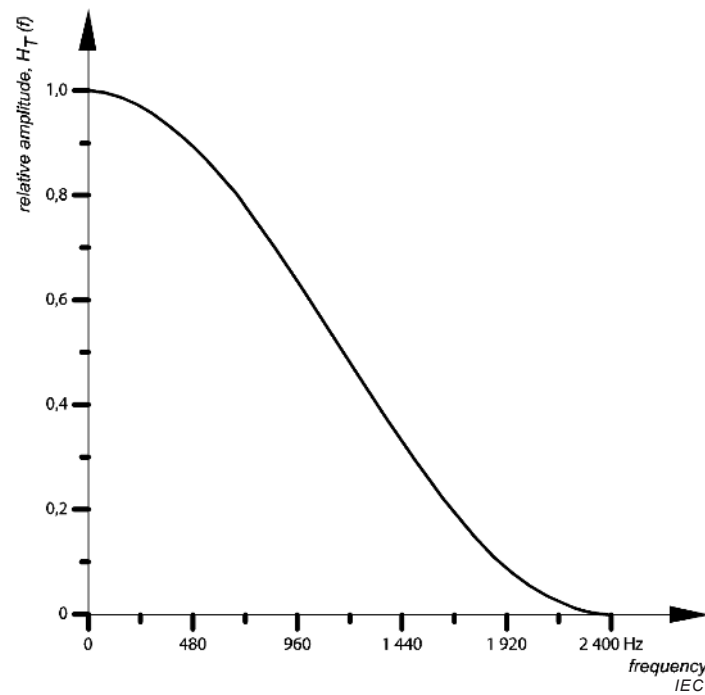


Figure 4 – Amplitude response of the combined transmitter and receiver data-shaping filters



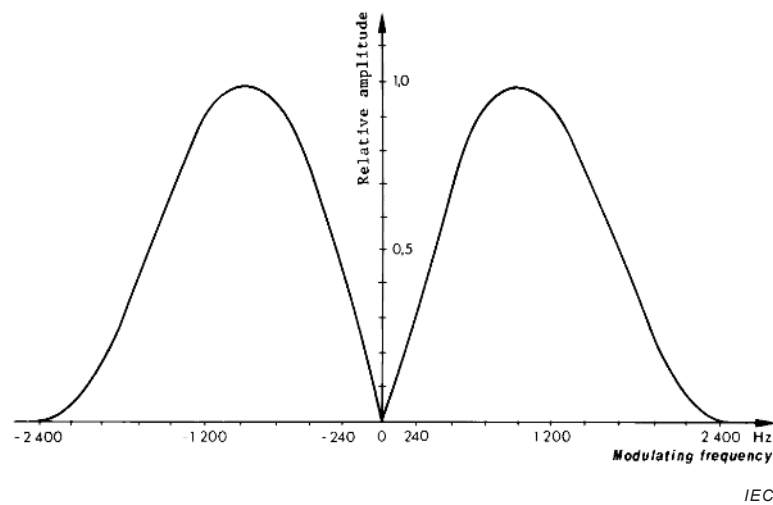


Figure 5 – Spectrum of biphase coded radio-data signals

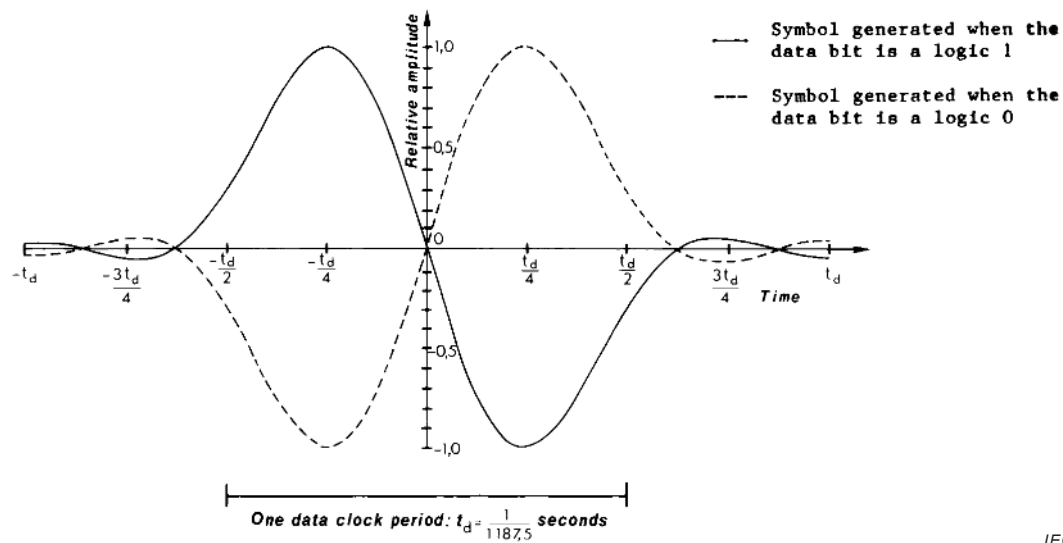

IEC

Figure 6 – Time-function of a single biphase symbol

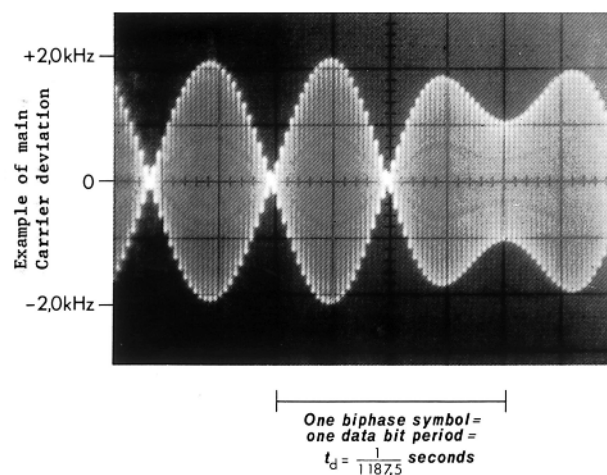

IEC

Figure 7 – 57 kHz radio-data signals

5 Baseband coding (data-link layer)

5.1 Baseband coding structure

Figure 8 shows the structure of the baseband coding. The largest element in the structure is called a group of 104 bit each. Each group comprises 4 blocks of 26 bit each. Each block comprises an information word and a checkword. Each information word comprises 16 bit. Each checkword comprises 10 bit (see 5.3).


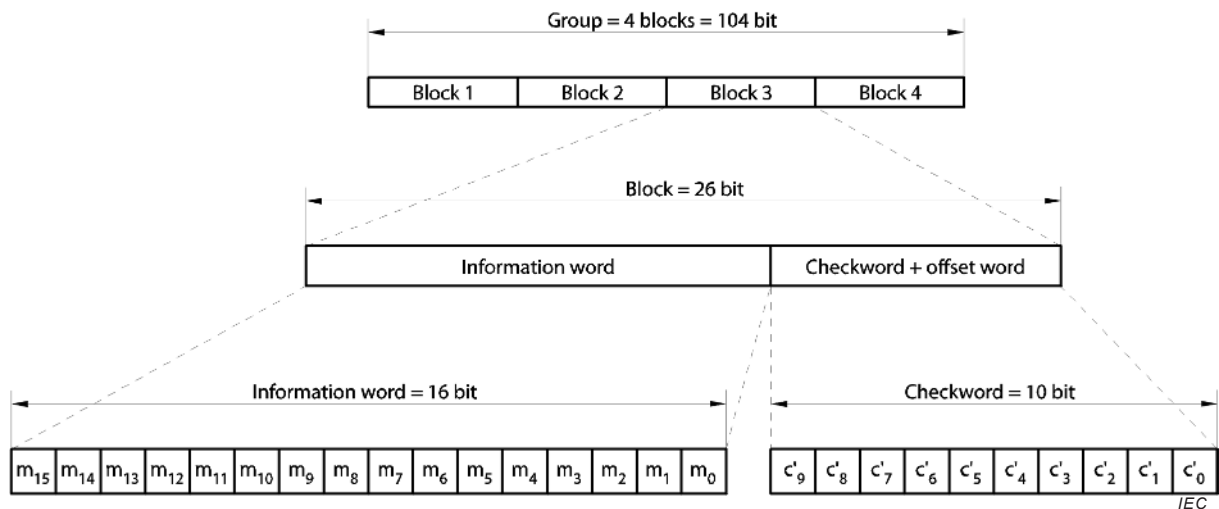


Figure 8 – Structure of the baseband coding

5.2 Order of bit transmission

All information words, checksums, binary numbers or binary address values have their most significant bit (MSB) transmitted first (see Figure 9). Thus the last bit transmitted in a binary number or address has weight 2^0 .

The data transmission is fully synchronous and there are no gaps between the groups or blocks.

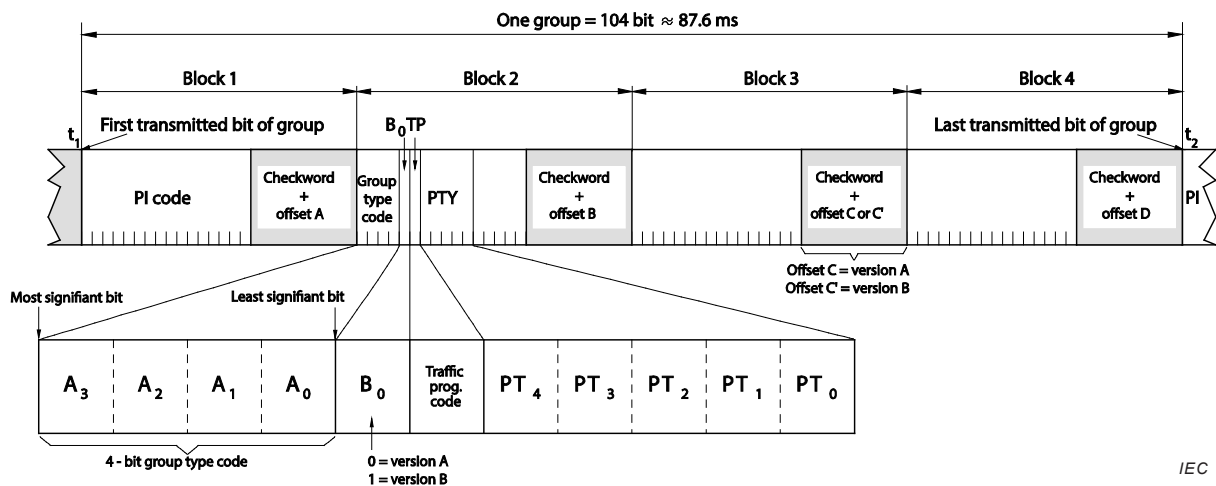

NOTE 1 Group type code = 4 bit (see 6.1).

NOTE 2 B_0 = version code = 1 bit (see 6.1).

NOTE 3 PI code = Programme identification code = 16 bit (see 6.2.2.1 and Annex D).

NOTE 4 TP = Traffic programme identification code = 1 bit (see 6.2.2.3).

NOTE 5 PTY = Programme type code = 5 bit (see 6.2.2.2 and Annex F).

NOTE 6 Checkword + offset 'N' = 10 bit added to provide error protection and block and group synchronization information (see 5.3 and 5.4 and Annex A, Annex B and Annex C).

NOTE 7 $t_1 < t_2$: block 1 of any particular group is transmitted first and block 4 last.

Figure 9 – Message format and addressing

5.3 Error protection

Each transmitted 26-bit block contains a 10-bit checkword which is primarily intended to enable the receiver/decoder to detect and correct errors which occur in transmission. This checkword (i.e. $c'_9, c'_8, \dots, c'_0$ in Figure 8) is the sum (modulo 2) of

- a) the remainder after multiplication by x^{10} and then division (modulo 2) by the generator polynomial $g(x)$, of the 16-bit information word;
- b) a 10-bit binary string $d(x)$, called the offset word;

where the generator polynomial, $g(x)$ is given by

$$g(x) = x^{10} + x^8 + x^7 + x^5 + x^4 + x^3 + 1$$

and where the offset values, $d(x)$, which are different for each block within a group (see 5.4) are given in Annex A.

The purpose of adding the offset word is to provide a group and block synchronisation system in the receiver/decoder (see 5.4). Because the addition of the offset is reversible in the decoder, the normal additive error-correcting and detecting properties of the basic code are unaffected.

The checkword thus generated is transmitted with its most significant bit (i.e. the coefficient of c'_9 in the checkword) first and is transmitted at the end of the block which it protects.

The above description of the error protection may be regarded as definitive, but further explanatory notes on the generation and theory of the code are given in Annex B and Annex C.

The error-protecting code has the following error-checking capabilities [3, 4]²:

- a) detects all single and double bit errors in a block;
- b) detects any single error burst spanning 10 bit or less;
- c) detects about 99,8 % of bursts spanning 11 bit and about 99,9 % of all longer bursts.

The code is also an optimal burst error correcting code [5] and is capable of correcting any single burst of span 5 bit or less.

5.4 Synchronisation of blocks and groups

The blocks within each group are identified by the offset words A, B, C or C' and D added to blocks 1, 2, 3, and 4 respectively in each group (see Annex A).

The beginnings and ends of the data blocks may be recognized in the receiver decoder by using the fact that the error-checking decoder will, with a high level of confidence, detect any block synchronisation slip as well as additive errors. This system of block synchronisation is made reliable by the addition of the offset words (which also serve to identify the blocks within the group). These offset words destroy the cyclic property of the basic code so that in the modified code, cyclic shifts of codewords do not give rise to other codewords [6, 7].

Further explanation of a technique for extracting the block synchronisation information at the receiver is given in Annex C.

² Figures in square brackets refer to the Bibliography.

6 Message format (session and presentation layers)

6.1 Addressing

6.1.1 Design principles

The basic design principles underlying the message format and addressing structure are as follows:

- a) the messages which are to be repeated most frequently, and for which a short acquisition time is required, for example Programme Identification (PI) codes, in general, occupy the same fixed positions within every group. They can therefore be decoded without reference to any block outside the one which contains the information;
- b) there is no fixed rhythm of repetition of the various types of group, i.e. there is ample flexibility to interleave the various kinds of message to suit the needs of the users at any given time and to allow for future developments;
- c) addressing is required to identify the information content of those blocks, which are not dedicated to the high-repetition-rate information;
- d) each group is, as far as possible, fully addressed to identify the information content of the various blocks;
- e) the mixture of different kinds of message within any one group is minimized, for example one group type is reserved for basic tuning information, another for RadioText, etc. This is important so that broadcasters who do not wish to transmit messages of certain kinds are not forced to waste channel capacity by transmitting groups with unused blocks. Instead, they are able to repeat more frequently those group types which contain the messages they want to transmit;
- f) to allow for future applications the data formatting has been made flexible. For example, a number of group types (see Table 6) may be used for Open Data Applications (see 6.1.4 and 7.9).

6.1.2 Principal features

The main features of the message structure have been illustrated in Figure 9. These may be seen to be:

- a) the first block in every group always contains a Programme Identification (PI) code;
- b) the first four bits of the second block of every group are allocated to a four-bit code which specifies the application of the group. Groups will be referred to as 0 to 15 according to the binary weighting $A_3 = 8$, $A_2 = 4$, $A_1 = 2$, $A_0 = 1$ (see Figure 9). For each group (0 to 15) two 'versions' can be defined. The 'version' is specified by the fifth bit (B_0) of block 2 as follows:
 - 1) $B_0 = 0$: the PI code is inserted in block 1 only. This will be called version A, for example group type 0A, 1A, etc.
 - 2) $B_0 = 1$: the PI code is inserted in block 1 and block 3 of all group types. This will be called version B, for example group type 0B, 1B, etc.

In general, any mixture of version A and B groups may be transmitted;

- c) the Programme Type code (PTY) and Traffic Programme identification (TP) occupy fixed locations in block 2 of every group.

The PI, PTY and TP codes can be decoded without reference to any block outside the one that contains the information. This is essential to minimize acquisition time for these kinds of messages and to retain the advantages of the short (26-bit) block length. To permit this to be done for the PI codes in block 3 of version B groups, a special offset word (which we shall call C') is used in block 3 of version B groups. The occurrence of offset C' in block 3 of any group can then be used to indicate directly that block 3 is a PI code, without any reference to the value of B_0 in block 2.

6.1.3 Group types

Table 3 – Group types

Group type	Group type code					Flagged in type 1A groups	Description
	A ₃	A ₂	A ₁	A ₀	B ₀		
0A	0	0	0	0	0		Basic tuning and switching information only (see 6.1.5.1)
0B	0	0	0	0	1		Basic tuning and switching information only (see 6.1.5.1)
1A	0	0	0	1	0		Programme Item Number (PIN) and slow labelling codes only (see 6.1.5.2)
1B	0	0	0	1	1		Programme Item Number (see 6.1.5.2)
2A	0	0	1	0	0		RadioText only (see 6.1.5.3)
2B	0	0	1	0	1		RadioText only (see 6.1.5.3)
3A	0	0	1	1	0		Applications Identification for ODA only (see 6.1.5.4)
3B	0	0	1	1	1		Open Data Applications
4A	0	1	0	0	0		Clock-time and date only (see 6.1.5.6)
4B	0	1	0	0	1		Open Data Applications
5A	0	1	0	1	0		Transparent Data Channels (32 channels) or ODA (see 6.1.5.8)
5B	0	1	0	1	1		Transparent Data Channels (32 channels) or ODA (see 6.1.5.8)
6A	0	1	1	0	0		In House applications or ODA (see 6.1.5.9)
6B	0	1	1	0	1		In House applications or ODA (see 6.1.5.9)
7A	0	1	1	1	0	Y	Radio Paging or ODA (see 6.1.5.10 and Annex M)
7B	0	1	1	1	1		Open Data Applications
8A	1	0	0	0	0		Traffic Message Channel or ODA (see 6.1.5.12)
8B	1	0	0	0	1		Open Data Applications
9A	1	0	0	1	0	Y	Emergency Warning Systems or ODA (see 6.1.5.13)
9B	1	0	0	1	1		Open Data Applications
10A	1	0	1	0	0		Programme Type Name
10B	1	0	1	0	1		Open Data Applications
11A	1	0	1	1	0		Open Data Applications
11B	1	0	1	1	1		Open Data Applications
12A	1	1	0	0	0		Open Data Applications
12B	1	1	0	0	1		Open Data Applications
13A	1	1	0	1	0	Y	Enhanced Radio Paging or ODA (see Annex M)
13B	1	1	0	1	1		Open Data Applications
14A	1	1	1	0	0		Enhanced Other Networks information only (see 6.1.5.19)
14B	1	1	1	0	1		Enhanced Other Networks information only (see 6.1.5.19)
15A	1	1	1	1	0		Open Data Applications
15B	1	1	1	1	1		Fast switching information only (see 6.1.5.21)

NOTE Mark "Y" indicates that group type 1A will be transmitted for the identification of the application using block 3 of group type 1A (except for an ODA, where the application identification is in group 3A instead).

It was described above (see also Figure 9) that the first five bits of the second block of every group are allocated to a five-bit code which specifies the application of the group type and its version, as shown in Table 3.

The appropriate repetition rates for some of the main features are indicated in Table 4.

Table 4 – Main feature repetition rates

Main features	Group types which contain this information	Appropriate repetition rate per second
Programme Identification (PI) code	all	11,4 ^a
Programme Type (PTY) code	all	11,4 ^a
Traffic Programme (TP) identification code	all	11,4 ^a
Programme Service (PS) name ^d	0A, 0B	1
Alternative frequency (AF) code pairs	0A	4
Traffic announcement (TA) code	0A, 0B, 14B, 15B	4
Decoder identification (DI) code	0A, 0B, 15B	1
Music Speech (MS) code	0A, 0B, 15B	4
RadioText (RT) message	2A, 2B	0,2 ^b
Enhanced other networks information (EON)	14A	up to 2 ^c
^a Valid codes for this item will normally be transmitted with at least this repetition rate whenever the transmitter carries a normal broadcast programme. ^b A total of 16 type 2A groups are required to transmit a 64 character RadioText message and therefore, to transmit this message in 5 s, 3,2 type 2A groups will be required per second. ^c The maximum cycle time for the transmission of all data relating to all cross-referenced programme services shall be less than 2 min. ^d PS shall only be used for identifying the programme service and it shall not be used for other messages giving sequential information.		

A total of four type 0A groups are required to transmit the entire PS name and therefore four type 0A groups will be required per second. The repetition rate of the type 0A group may be reduced if more capacity is needed for other applications. But a minimum of two type 0A groups per second are necessary to ensure correct functioning of PS and AF features. However, with EON receivers search tuning is affected by the repetition rate of type 0 groups (TP/TA, see 6.2.2.3). It shall be noted that in this case transmission of the complete PS will take 2 s. However, under typical reception conditions the introduction of errors will cause the receiver to take 4 s or more to acquire the PS name for display.

The following mixture of groups, as indicated in Table 5, is suitable to meet the repetition rates noted above.

Table 5 – Group repetition rates

Group types	Features	Typical proportion of groups of this type transmitted %
0A or 0B	PI, PS, PTY, TP, AF ^a , TA, DI, MS	40
1A or 1B	PI, PTY, TP, PIN	10
2A or 2B	PI, PTY, TP, RT	15 ^b
14A or 14B	PI, PTY, TP, EON	10
Any other	Other applications	25
^a Type 0A group only.		
^b Assuming that type 2A groups are used to transmit a 32-character RadioText message. A mixture of type 2A and 2B groups in any given message shall be avoided (see 6.1.5.3).		

6.1.4 Open data channel/Applications Identification

6.1.4.1 Use of Open Data Applications (ODA)

Open data applications are not explicitly specified in this standard. They are subject to a registration process. Registered applications are listed in the EBU/RDS Forum – ODA Directory (see Annex L), which references appropriate standards and normative specifications. These specifications may be public (specification in the public domain, i.e. TMC, eRT, RT+ and ODA 147 (see ETSI EN 301 700, see Annex P, Annex Q and Clause 2) or privately owned (and not in the public domain). The terms public and private do not imply the degree of access to services provided by an application, for example a public domain service may well include encryption, as in TMC for example.

ODAs, whether public or private, shall conform to all requirements of this, the RDS standard, or the RBDS standard (as appropriate). Nothing in any ODA may require any aspect of a primary RDS feature to be changed or not to be transmitted in accordance with these two standards. This is to ensure that the transmission of an ODA cannot adversely affect devices built in accordance with both, the RDS and RBDS standards.


Table 6 – ODA group availability signalled in type 3A groups

Group type	Application group type code	Availability for Open Data Applications
	00000	Special meaning: not carried in associated group
3B	00111	Available unconditionally
4B	01001	Available unconditionally
5A	01010	Available when not used for TDC
5B	01011	Available when not used for TDC
6A	01100	Available when not used for IH
6B	01101	Available when not used for IH
7A	01110	Available when not used for RP
7B	01111	Available unconditionally
8A	10000	Available when not used for TMC
8B	10001	Available unconditionally
9A	10010	Available when not used for EWS
9B	10011	Available unconditionally
10B	10101	Available unconditionally
11A	10110	Available unconditionally
11B	10111	Available unconditionally
12A	11000	Available unconditionally
12B	11001	Available unconditionally
13A	11010	Available when not used for RP
13B	11011	Available unconditionally
15A	11110	Available unconditionally
	11111	Special meaning: temporary data fault (encoder status)

An ODA may use version A and/or version B groups. However, it shall not be designed to operate with a specific group type. An exception is TMC, which uses group type 8A. In any case, the specific group type used by the ODA in any particular transmission is signalled in the Applications Identification (AID) carried in type 3A groups (see 6.1.5.4). Table 6 shows the version A and version B groups that may be allocated to ODA. Group types not shown in Table 6 are not available for ODA.

6.1.4.2 Open Data Applications – Group structure

Open Data Applications shall use the format shown in Figure 10 for ODA type A groups and in Figure 11 for ODA type B groups.

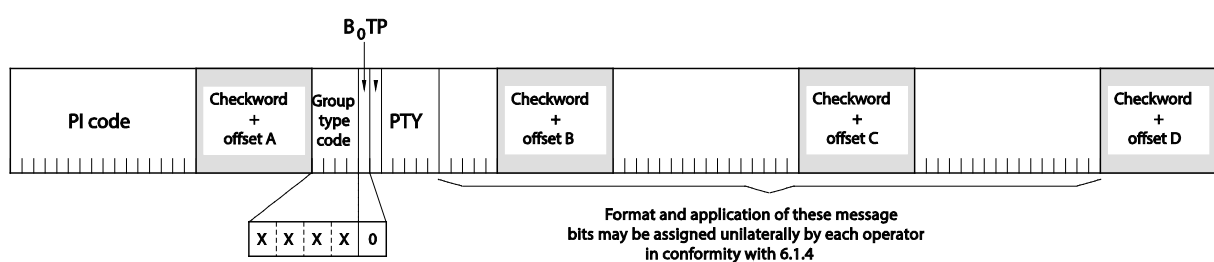

IEC

Figure 10 – ODA version A groups

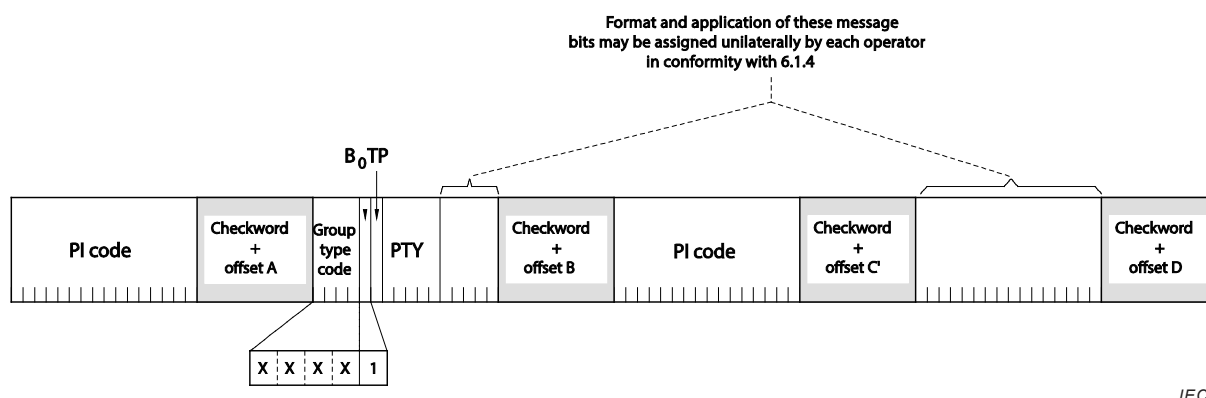


Figure 11 – ODA version B groups

6.1.5 Coding of the group types

6.1.5.1 Type 0 groups: Basic tuning and switching information

The repetition rates of type 0 groups shall be chosen in compliance with 6.1.3.

Figure 12 shows the format of type 0A groups, and Figure 13 the format of type 0B groups.

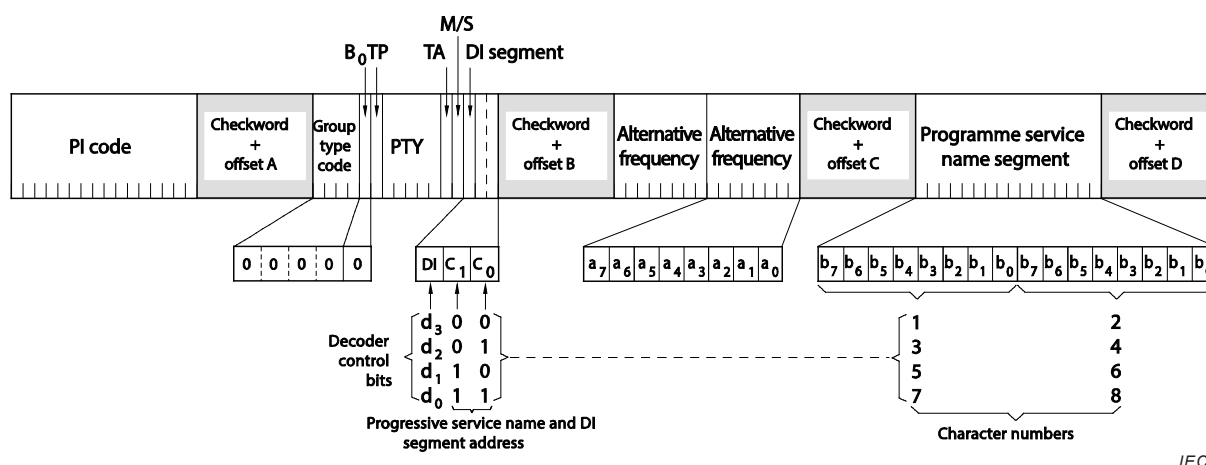


Figure 12 – Basic tuning and switching information – Type 0A group

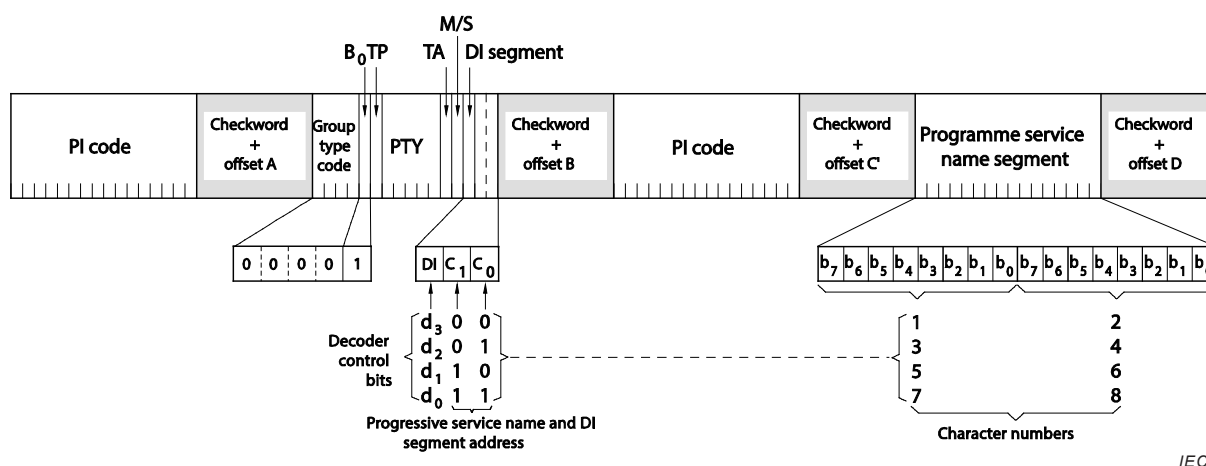


Figure 13 – Basic tuning and switching information – Type 0B group

Type 0A groups are usually transmitted whenever alternative frequencies exist. Type 0B groups without any type 0A groups may be transmitted only when no alternative frequencies exist.

There are two methods (A and B) for transmission of alternative frequencies (see 6.2.2.6.2).

The Programme Service name comprises eight characters, intended for static display on a receiver. It is the primary aid to listeners in programme service identification and selection. The use of PS to transmit text other than a single eight character name is not permitted (see also 6.2.3). Transmission of a PS name usually takes four type 0A groups, but to allow an instant display of the PS when a receiver pre-set is selected, the PS name is often stored for subsequent recall from memory when a programme service is selected. For this reason PS shall generally be invariant.

If a broadcaster wishes to transmit longer Programme Service names, programme-related information or any other text, then RadioText provides this feature.

NOTE 1 Version B differs from version A only in the contents of block 3, the offset word in block 3, and, of course, the version code B_0 .

NOTE 2 For details of Programme Identification (PI), Programme Type (PTY) and Traffic Programme (TP) code, see Figure 9, 6.2.2 and Annex D and Annex F.

NOTE 3 TA = Traffic Announcement code (1 bit) (see 6.2.2.3).

NOTE 4 MS = Music Speech switch code (1 bit) (see 6.2.2.4).

NOTE 5 DI = Decoder-Identification control code (4 bit) (see 6.2.2.5). This code is transmitted as 1 bit in each type 0 group. The Programme Service name and DI segment address code (C_1 and C_0) serves to locate these bits in the DI codeword. Thus, in a group with $C_1C_0 = '00'$ the DI bit in that group is d_3 . These code bits are transmitted most significant bit (d_3) first.

NOTE 6 Alternative frequency codes (2×8 bit) (see 6.2.2.6).


NOTE 7 Programme Service name (for display) is transmitted as 8-bit characters as defined in the 8-bit code Table E.1. Eight characters (including spaces) are allowed for each network and are transmitted as a 2-character segment in each type 0 group. These segments are located in the displayed name by the code bits C_1 and C_0 in block 2. The addresses of the characters increase from left to right in the display. The most significant bit (b_7) of each character is transmitted first.

6.1.5.2 Type 1 groups: Programme Item Number and slow labelling codes

Figure 14 shows the format of type 1A groups and Figure 15 the format of type 1B groups.

When a Programme Item Number is changed, a type 1 group shall be repeated four times with a separation of about 0,5 s. The unused bits in block 2 (type 1B only) are reserved for future applications.


Where Radio Paging is implemented in RDS, a type 1A group will be transmitted in an invariable sequence, regularly once per second, except at each full minute, where it is replaced by one type 4A group.

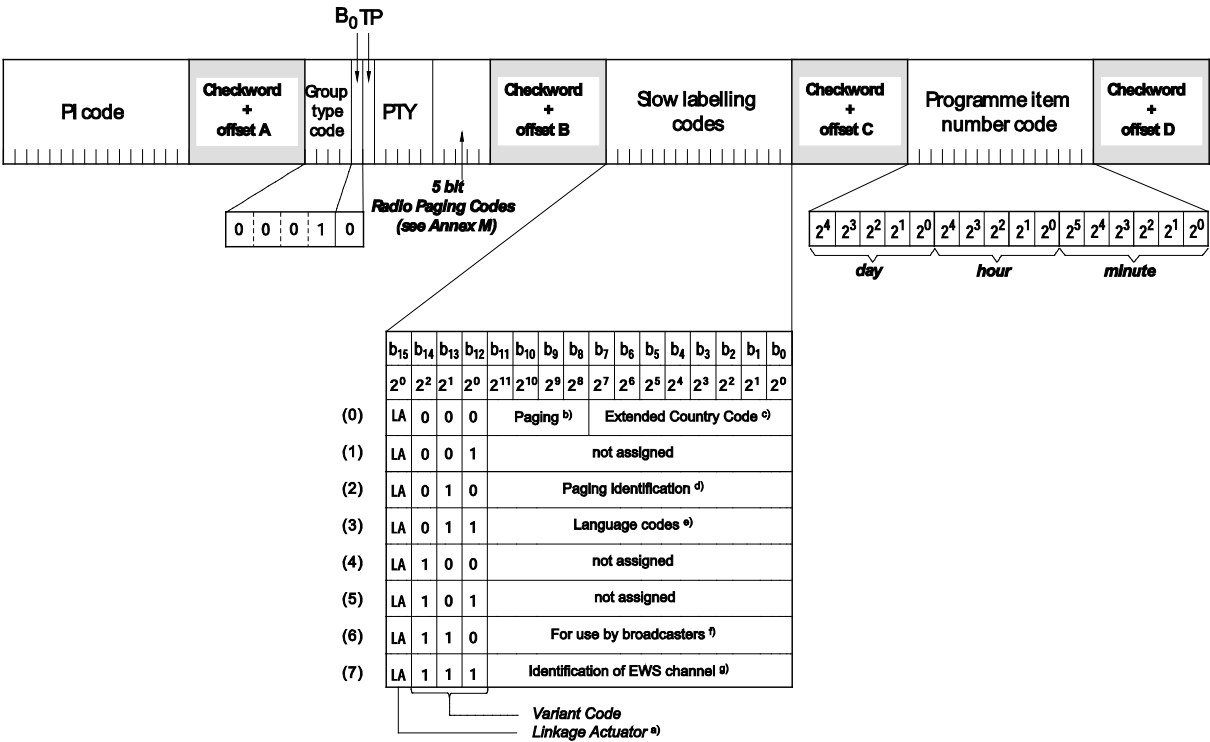

Key

- ^a The Linkage Actuator is defined in the 'Method for Linking RDS Programme Services' (see 6.2.2.8.6).
- ^b Normally set to zero except when used for the Operator Code in Radio Paging with the Enhanced Paging Protocol, defined in Annex M (see M.3.2.3 and M.3.2.5).
- ^c Extended country codes are defined separately (see Annex D and Annex N).
- ^d The Paging Identification is defined in the 'Multi Operator/Area paging' clause (see Annex M).
- ^e Language codes are defined separately (see Annex J).
- ^f The coding of this information may be decided unilaterally by the broadcaster to suit the application. RDS consumer receivers should entirely ignore this information.
- ^g The Emergency Warning Systems (EWS) are defined separately (see 6.2.8). This identification should not be used when EWS is implemented as an ODA.

Figure 14 – Programme item number and slow labelling codes – Type 1A group

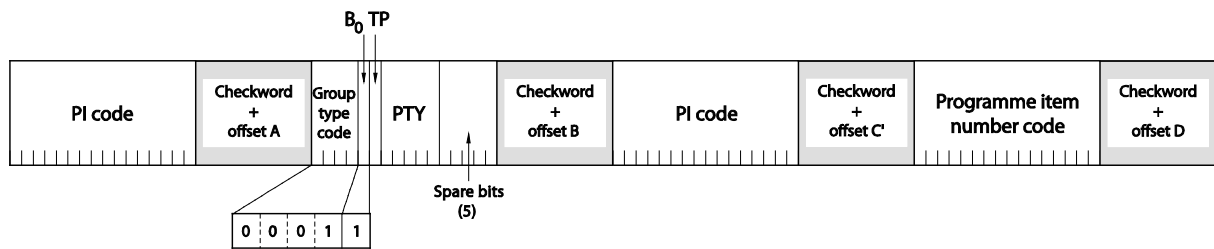

NOTE 1 Version B differs from version A in the contents of blocks 2 and 3, the offset word in block 3, and, of course, the version code B_0 .

NOTE 2 The Programme Item Number is the scheduled broadcast start time and day of month as published by the broadcaster. The day of month is transmitted as a five-bit binary number in the range 1-31. Hours are transmitted as a five-bit binary number in the range 0-23. The spare codes are not used. Minutes are transmitted as a six-bit binary number in the range 0-59. The spare codes are not used.

NOTE 3 The most significant five bits in block 4 which convey the day of the month, if set to zero, indicate that no valid Programme Item Number is being transmitted. In this case, if no Radio Paging is implemented, the remaining bits in block 4 are undefined. However, in the case of type 1A groups only, if Enhanced Radio Paging is implemented, the remaining bits carry service information (see Annex M).

NOTE 4 Bits b_{14} , b_{13} and b_{12} of block 3 of version A form the variant code, which determines the application of data carried in bits b_{11} to b_0 . A broadcaster may use as many or as few of the variant codes as wished, in any proportion and order.

Figure 15 – Programme Item Number – Type 1B group

6.1.5.3 Type 2 groups: RadioText

Figure 16 shows the format of type 2A groups and Figure 17 the format of type 2B groups.

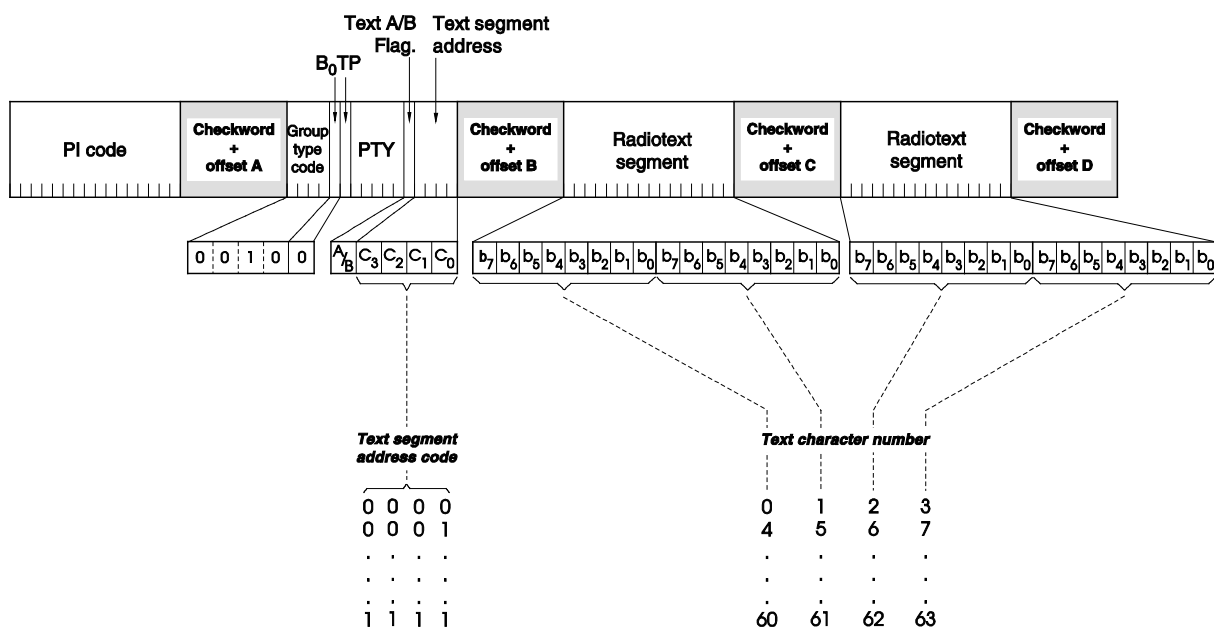


Figure 16 – RadioText – Type 2A group

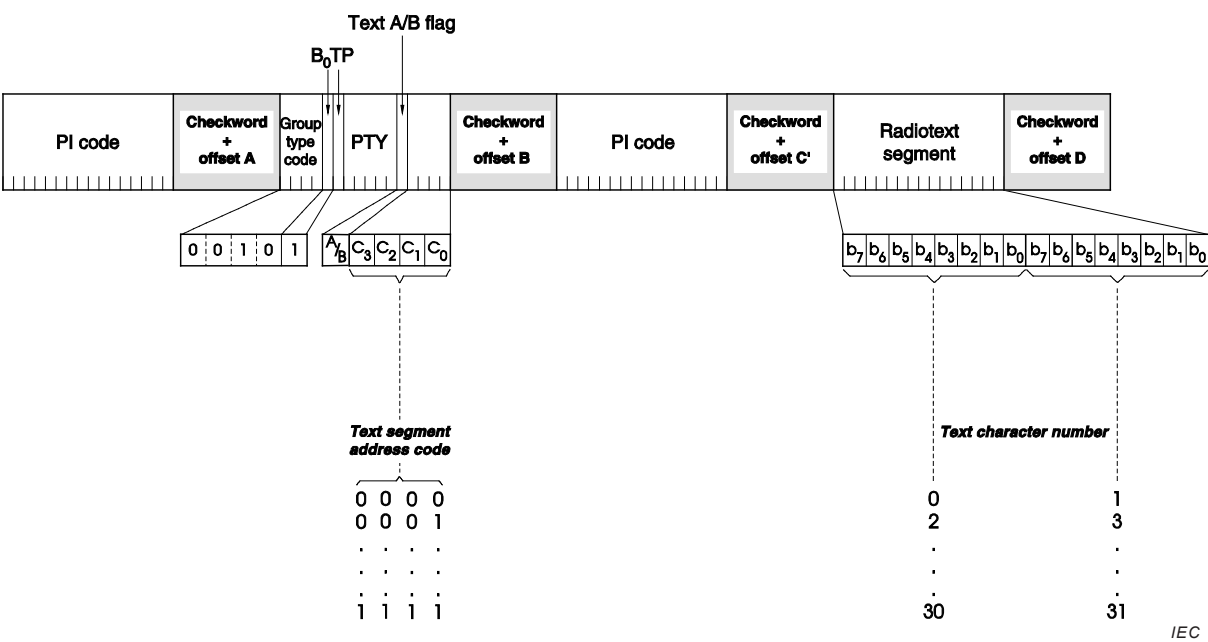


Figure 17 – RadioText – Type 2B group

The 4-bit text segment address defines in the current text the position of the text segments contained in the third (version A only) and fourth blocks. Since each text segment in type 2A groups comprises four characters, messages of up to 64 characters in length can be sent using this version. In type 2B groups, each text segment comprises only two characters and therefore, when using this version, the maximum message length is 32 characters.

A new text shall start with binary segment address ‘0000’ and there shall be no gaps up to the highest used segment address of the current message. The number of text segments is determined by the length of the message, and each message shall be ended by the code 0x0D – carriage return – if the current message requires less than 16 segment addresses.

If a display which has fewer than 64 characters is used to display the RadioText message then memory shall be provided in the receiver/decoder so that elements of the message can be displayed sequentially. This may, for example, be done by displaying elements of text one at a time in sequence, or, alternatively by scrolling the displayed characters of the message from right to left.

Code 0x0A – line feed – may be inserted to indicate a preferred line break.

The following codes could possibly be used with certain reservations noted.

Code 0x0B: end of headline. This marker may be placed anywhere within the first 32 character positions and indicates that the text up to that point is considered by the broadcaster to be the ‘headline’ portion of the text. It is inserted by the broadcaster on the assumption that a 2 line, 16 character format has been adopted on the receiver. It may stand in place of a space character in the text string. Note that the use of the <0x0B> code is expected not to cause any difficulty because evidence suggests that receivers universally substitute a space for any unrecognised character.)

Code 0x1F: soft hyphen. This marker indicates the position(s) in long words where the author of the text would prefer a receiver to break a word between display lines if there is a need to do so. This applies only to multi-line non-scrolling displays.

NOTE 1 The use of the 0x1F code is not compatible with earlier RDS receivers, because unwanted spaces will appear in words where 0x1F codes have been used.

A space shall be substituted by the receiver for any unrecognised symbol or control character.

It should be noted that because of the above considerations there is possible ambiguity between the addresses contained in version A and those contained in version B. For this reason type 2A and type 2B groups shall not be mixed when transmitting any one given message.

An important feature of type 2 groups is the text A/B flag contained in the second block. Two cases occur:

- if the receiver detects a change in the flag (from binary '0' to binary '1' or vice-versa), then the whole RadioText display shall be cleared and the newly received RadioText message segments shall be written into the display;
- if the receiver detects no change in the flag, then the received text segments or characters shall be written into the existing displayed message and those segments or characters for which no update is received shall be left unchanged.

When this application is used to transmit a 32-character message, at least three type 2A groups or at least six type 2B groups shall be transmitted in every two seconds.

It may be found from experience that all RadioText messages should be transmitted at least twice to improve reception reliability.

NOTE 2 RadioText is transmitted as 8-bit characters as defined in the 8-bit code-table, Table E.1. The most significant bit (b_7) of each character is transmitted first.

NOTE 3 The addresses of the characters increase from left to right in the display.

6.1.5.4 Type 3A groups: Application identification for open data

Figure 18 shows the format of type 3A groups. These groups are used to identify the Open Data Application in use, on an RDS transmission (see 6.1.4).

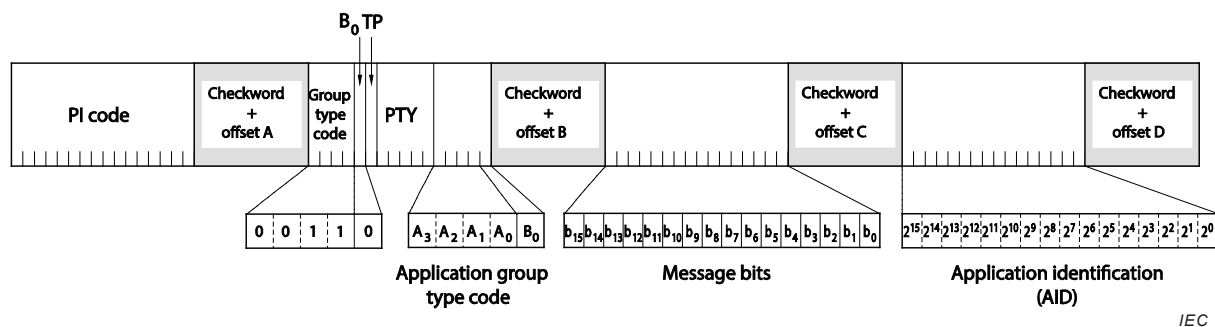


Figure 18 – Application identification for open data – Type 3A group

The type 3A group conveys, to a receiver, information about which open data applications are carried on a particular transmission and in which groups they will be found. The type 3A group comprises three elements: the application group type code used by that application, 16 message bits for the actual ODA and the applications identification (AID) code. Applications which actively utilise both, version A and B groups, are signalled using two type 3A groups.

The application group type code indicates the group type used, in the particular transmission, to carry the specified ODA. Table 6 specifies the permitted group types. The bit designation is as indicated in Figure 9, 4-bit for group type code and 1-bit for the version code. Two special conditions may be indicated: Binary 00000 – Not carried in associated group; binary 11111 – Temporary data fault (Encoder status) which means that incoming data to the encoder cannot be transmitted. The AID determines which software handler a receiver needs to use.

This supplements information carried in the type 1A group and permits groups specified in this standard for EWS, IH, RP and TMC to be re-allocated when these features are not used. This method of allocating and defining open data applications in an RDS transmission allows the addition and subtraction of ODAs, without constraint or the need to await the publication of new standards.

For each group type addressed by the application group type codes of a particular transmission, only one application may be identified as the current user of the channel.

The AID code 0x0000 may be used to indicate that the respective group type is being used for the normal feature specified in this standard. Application identification codes 0x0001 to 0xFFFF indicate applications as specified in the ODA directory.

The ODA directory specification associated with a particular AID code defines the use of version A and version B groups as follows:

- version A groups used alone (mode 1.1)
- version B groups used alone (mode 1.2)
- version A groups and version B groups used as alternatives (mode 2)
- version A groups and version B groups used together (mode 3)

It is important to note that the ODA directory specification shall not specify the actual version A and version B groups to be used, since these are assigned in each transmission by the type 3A group.

The AID feature indicates that a particular ODA is being carried in a transmission. Each application will have unique requirements for transmission of its respective AID, in terms of repetition rate and timing. These requirements shall be detailed in the respective ODA specification. The specification shall also detail the AID signalling requirements for such times when an application assumes or loses the use of a group type channel. Some applications may not allow reconfiguration in this way.

6.1.5.5 Type 3B groups: Open data application

Figure 19 shows the format of type 3B groups. These groups are usable for open data (see 6.1.4).

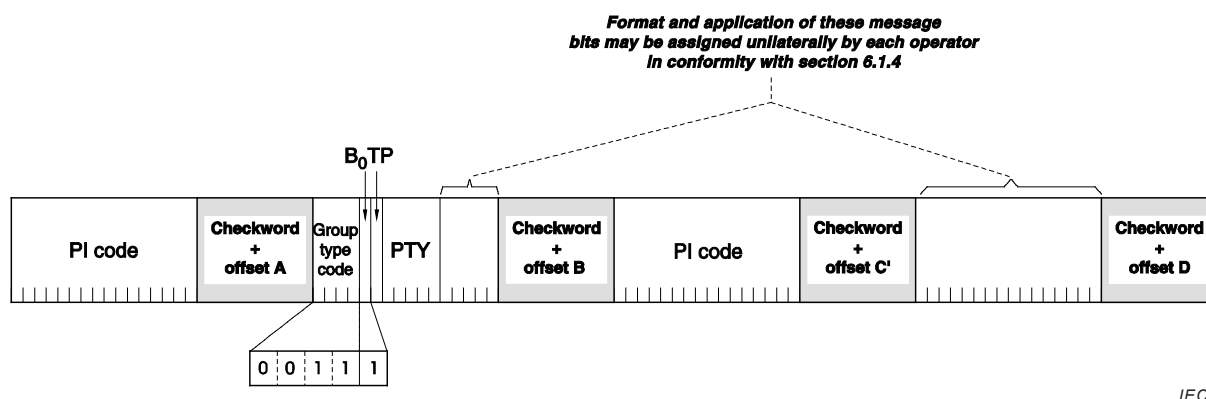



Figure 19 – Open data – Type 3B group

6.1.5.6 Type 4A groups: Clock-time and date

The transmitted clock-time and date shall be accurately set to UTC plus local offset time. Otherwise, the transmitted CT codes shall all be set to zero.

Figure 20 shows the format of type 4A groups.

When this application is used, one type 4A group will be transmitted every minute.

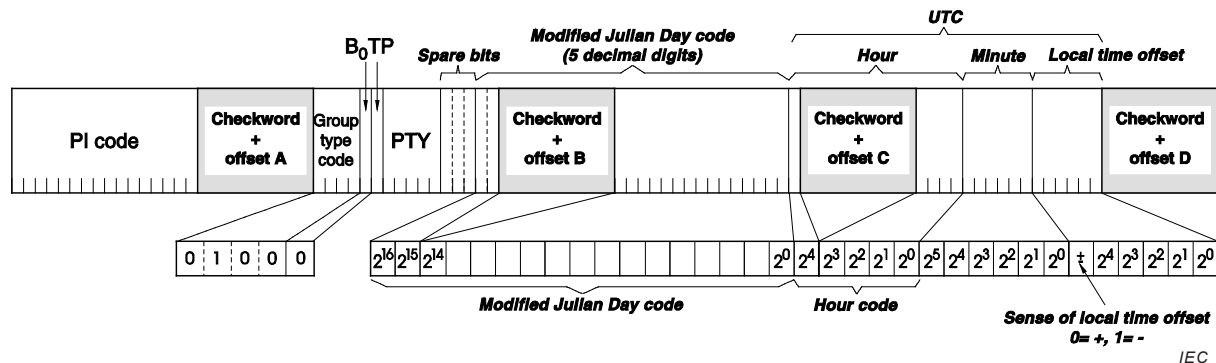

The following considerations apply to this figure:

- The local time is composed of Coordinated Universal Time (UTC) plus local time offset.
- The local time offset is **expressed in multiples of half hours** within the range -15,5 h to +15,5 h and is coded as a six-bit binary number. '0' = positive offset (east of zero degrees longitude), and '1' = negative offset (west of zero degrees longitude).
- The information relates to the epoch immediately following the start of the next group.
- The clock time group is inserted so that the minute edge will occur within $\pm 0,1$ s of the end of the clock time group.
- Minutes are coded as a six-bit binary number in the range 0 to 59. The spare codes are not used.
- Hours are coded as five-bit binary number in the range 0 to 23. The spare codes are not used.
- The date is expressed in terms of modified Julian Day and coded as a 17-bit binary number in the range 0 to 99999. Simple conversion formulas to month and day, or to week number and day of week are given in Annex G. Note that the modified Julian Day date changes at UTC midnight, **not** at local midnight.
- Accurate CT based on UTC plus local time offset shall be implemented on the transmission where TMC and/or radio paging is implemented.

Figure 20 – Clock-time and date transmission – Type 4A group

6.1.5.7 Type 4B groups: Open data application

Figure 21 shows the format of type 4B groups. These groups are usable for open data (see 6.1.4).


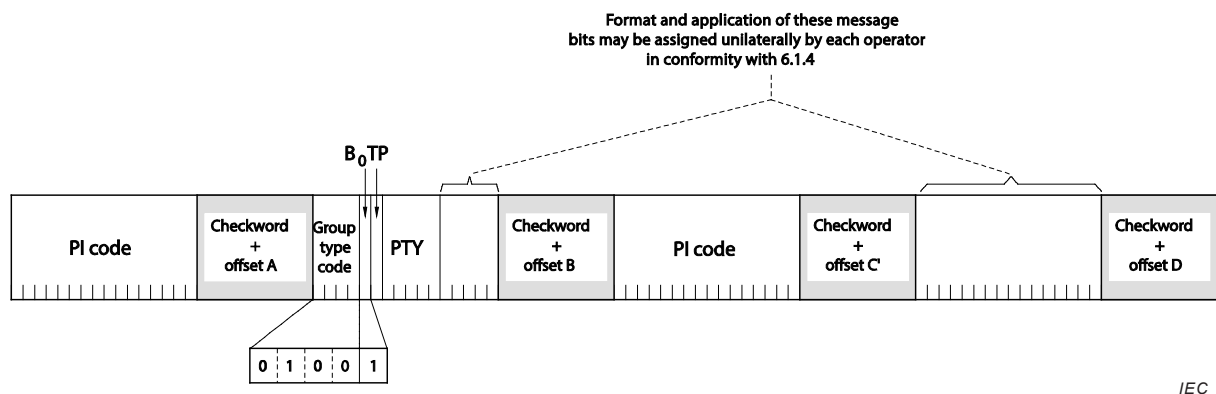


Figure 21 – Open data – Type 4B group

6.1.5.8 Type 5 groups: Transparent data channels or ODA


Figure 22 shows the format of type 5A groups and Figure 23 the format of type 5B groups, where used for TDC. If used for ODA, see 6.1.4.2.

The 5-bit address-code in the second block identifies the 'channel-number' (out of 32) to which the data contained in blocks 3 (version A only) and 4 are addressed. Unlike the fixed-format RadioText of type 2 groups, messages of any length and format can be sent using these channels. Display control characters (such as line-feed and carriage-return) will, of course, be sent along with the data.

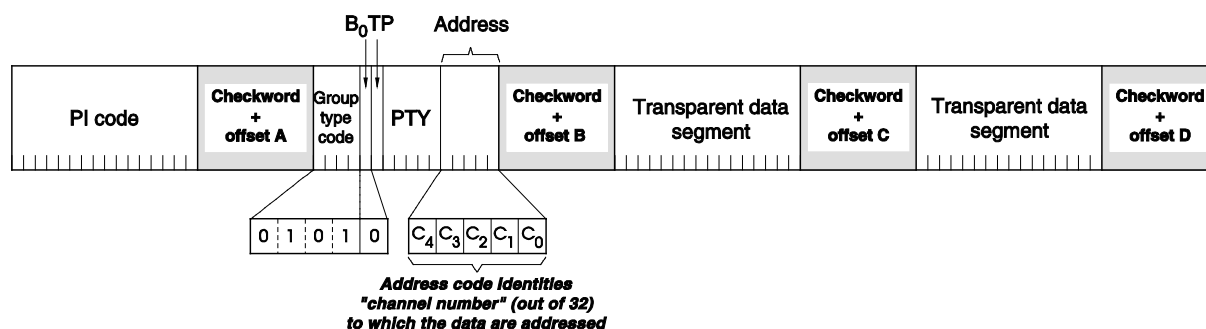

IEC

Figure 22 – Transparent data channels – Type 5A group

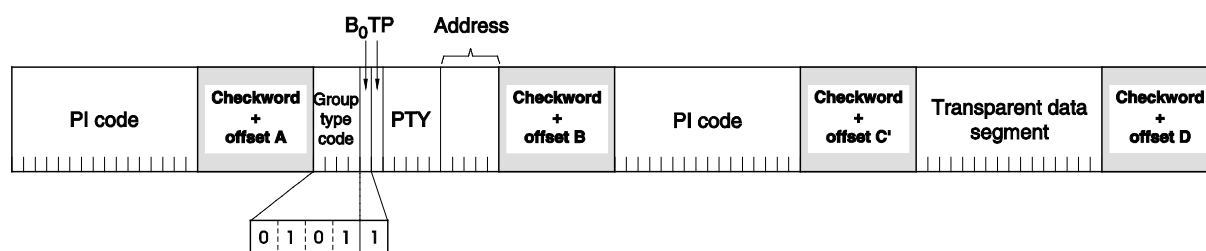

IEC

Figure 23 – Transparent data channels – Type 5B group

These channels may be used to send alphanumeric characters, or other text (including mosaic graphics), or for transmission of computer programmes and similar data not for display. Details of implementation of these last options are to be specified separately.

The repetition rate of these group types may be chosen to suit the application and the available channel capacity at the time.

6.1.5.9 Type 6 groups: In-house applications or ODA

Figure 24 shows the format of type 6A groups and the format of type 6B groups, where used for IH. If used for ODA, see 6.1.4.2. The contents of the unreserved bits in these groups may be defined unilaterally by the operator.

Consumer receivers shall ignore the in-house information coded in these groups. The repetition rate of these group types may be chosen to suit the application and the available channel capacity at the time.

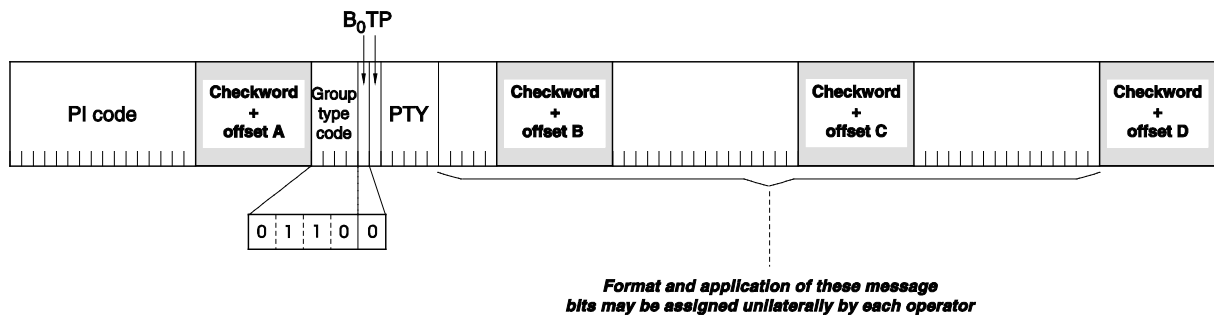
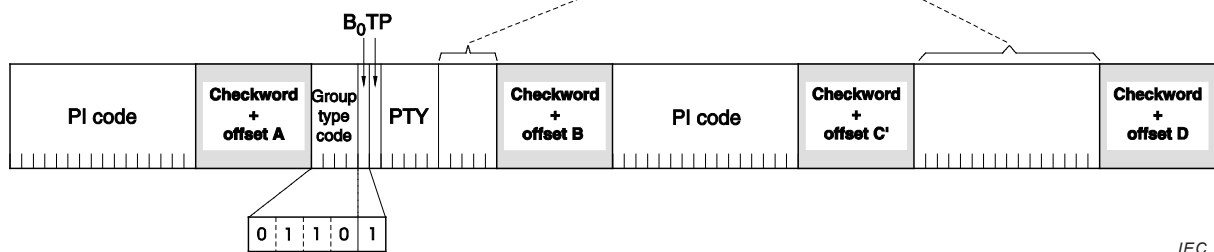
Type 6A group:**Type 6B group:****Figure 24 – In-house applications – Type 6A and 6B group****6.1.5.10 Type 7A groups: Radio paging or ODA**

Figure 25 shows the format of type 7A groups, where used for radio paging. If used for ODA, see 6.1.4. The specification of RP which also makes use of type 1A, 4A and 13A groups, is given in Annex M.

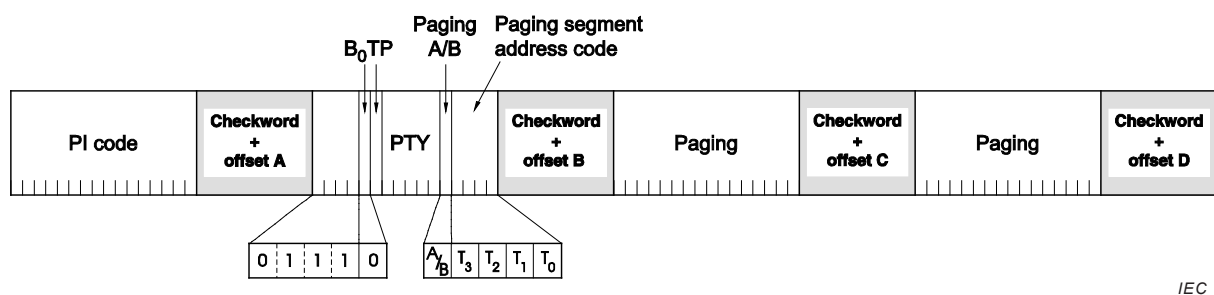
**Figure 25 – Radio paging – Type 7A group****6.1.5.11 Type 7B groups: Open data application**

Figure 26 shows the format of type 7B groups. These groups are usable for open data (see 6.1.4).

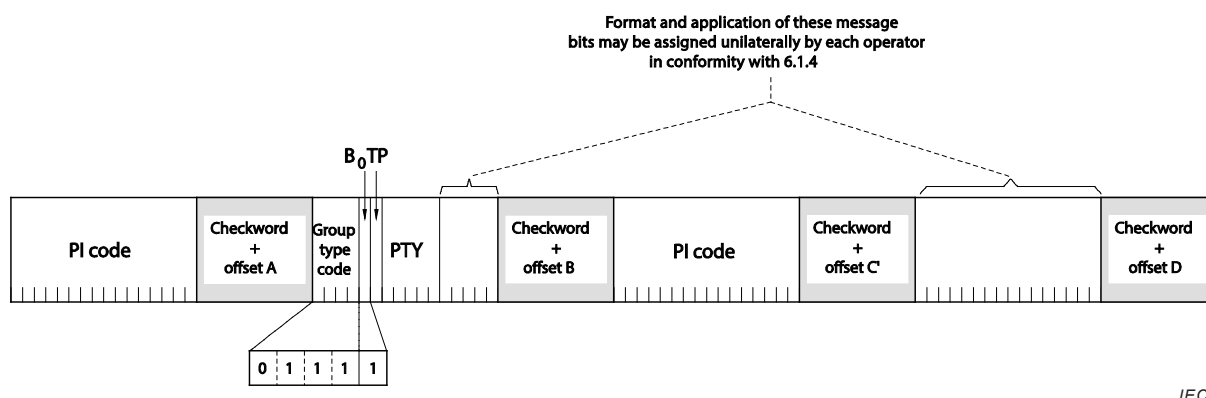


Figure 26 – Type 7B group

6.1.5.12 Type 8 groups: ODA-Traffic Message Channel (TMC) or other ODAs

Figure 27 shows the format of type 8A groups, most commonly used for the ISO 14819 series. TMC has the AID 0xCD46 or 0xCD47, see 6.1.5.4. This group carries the TMC messages, and certain TMC services and administrative information. In addition to the type 3A group required by all ODAs, TMC also requires the use of type 4A groups (CT). The coding of TMC as an ODA, which uses the ALERT-C protocol, is specified in the ISO 14819 series of standards. When not used for TMC, the type 8A group may be used for any other ODA (see 6.1.4).

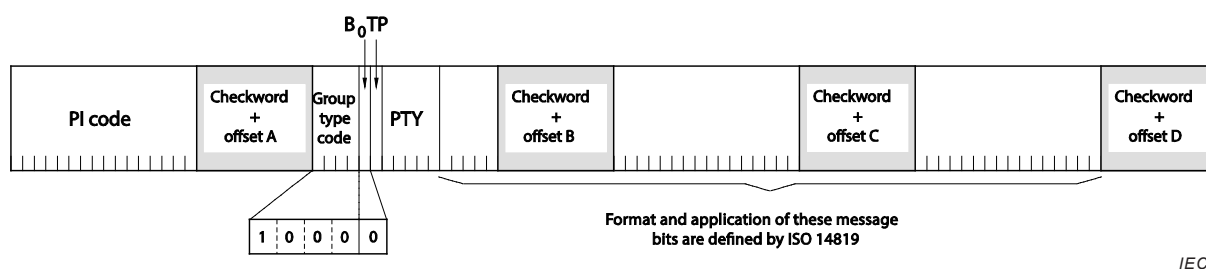


Figure 27 – Traffic message channel – Type 8A group

Figure 28 shows the format of type 8B groups. These groups are usable for open data (see 6.1.4) and are not used for TMC.


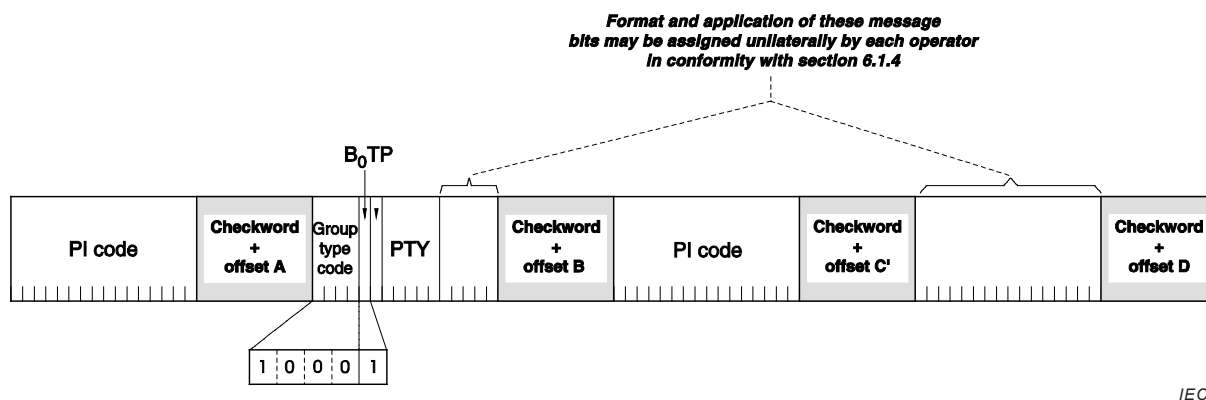


Figure 28 – Open data – Type 8B group

6.1.5.13 Type 9 groups: Emergency warning systems or ODA

These groups are transmitted very infrequently, unless an emergency occurs or test transmissions are required. Figure 29 shows the format of type 9A groups where used for EWS. If used for ODA, see 6.1.4.2.

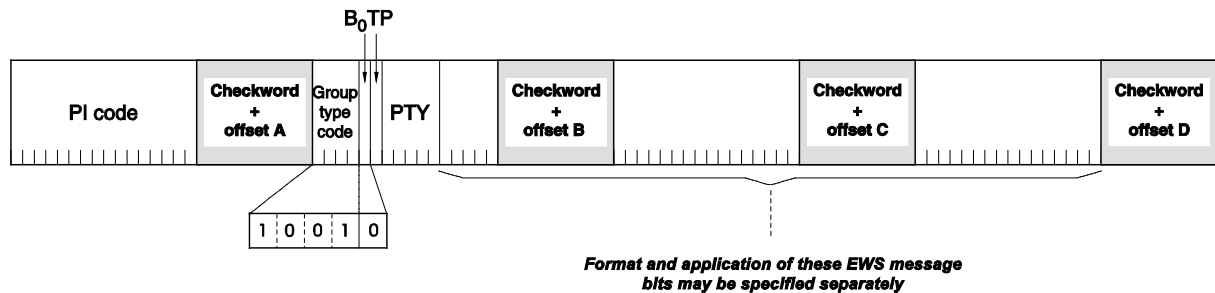


IEC

Figure 29 – Allocation of EWS message bits – Type 9A group

Format and application of the bits allocated for EWS messages may be assigned unilaterally by each country. However, the ECC feature shall be transmitted in type 1A groups when EWS is implemented.

Figure 30 shows the format of type 9B groups. These groups are usable for open data (see 6.1.4).

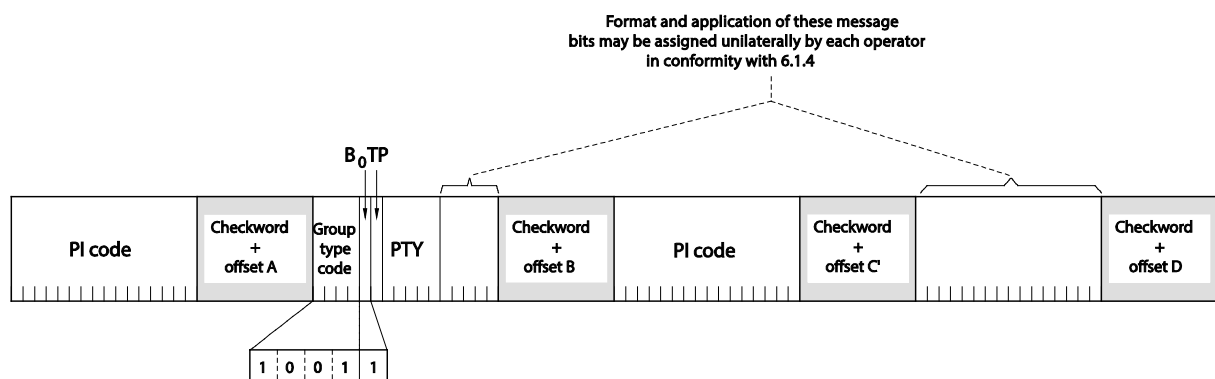

IEC

Figure 30 – Open data – Type 9B group

6.1.5.14 Type 10 groups: Programme type name (Group type 10A) and open data (Group type 10B)

Figure 31 shows the format of type 10A groups used for PTYN.

The type 10A group allows further description of the current programme type, for example, when using the PTY code 4: SPORT, a PTYN of "Football" may be indicated to give more detail about that programme. PTYN shall only be used to enhance programme type information and it shall not be used for sequential information.



Programme type name (PTYN) (for display) is transmitted as 8-bit characters as defined in the 8-bit code, Table E.1. Eight characters (including spaces) are allowed for each PTYN and are transmitted as four character segments in each type 10A group. These segments are located in the displayed PTY name by the code bit C_0 in block 2. The addresses of the characters increase from left to right in the display. The most significant bit (b_7) of each character is transmitted first.

Figure 31 – Programme type name PTYN – Type 10A group

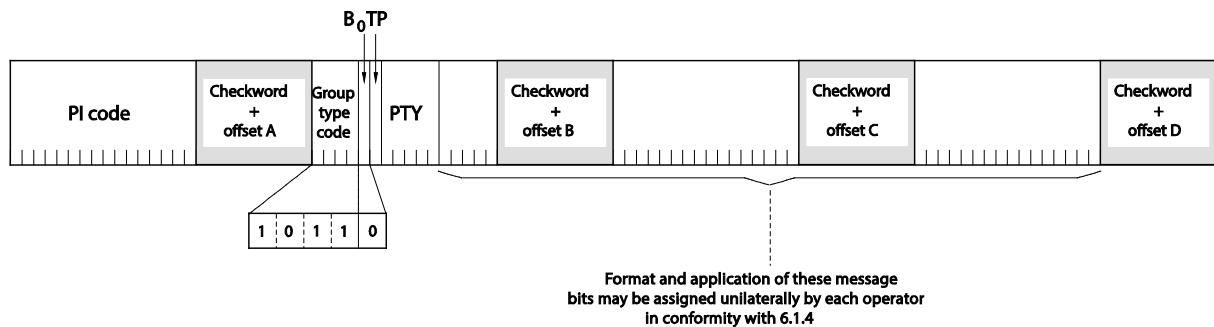
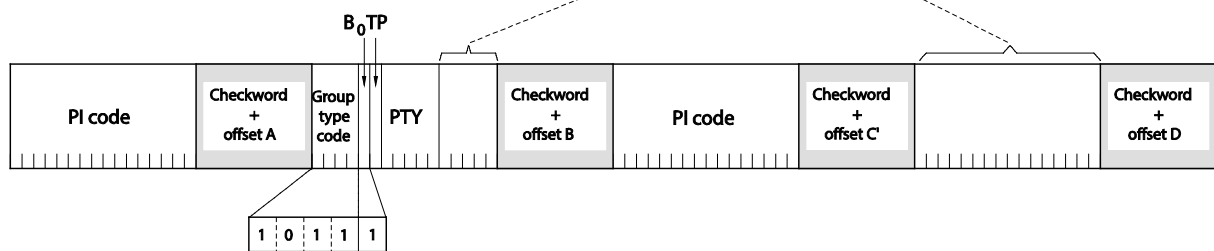
Format and application of these message bits may be assigned unilaterally by each operator in conformity with 6.1.4



Figure 32 – Open data – Type 10B group

6.1.5.15 Type 11 groups: Open data application



AVA Documents
Document Sharing Hub

Type 11A group:**Type 11B group:**

IEC

Figure 33 – Open data – Type 11A and 11B groups**6.1.5.16 Type 12 groups: Open data application**

Figure 34 shows the format of type 12A and 12B groups. These groups can be used for open data (see 6.1.4).

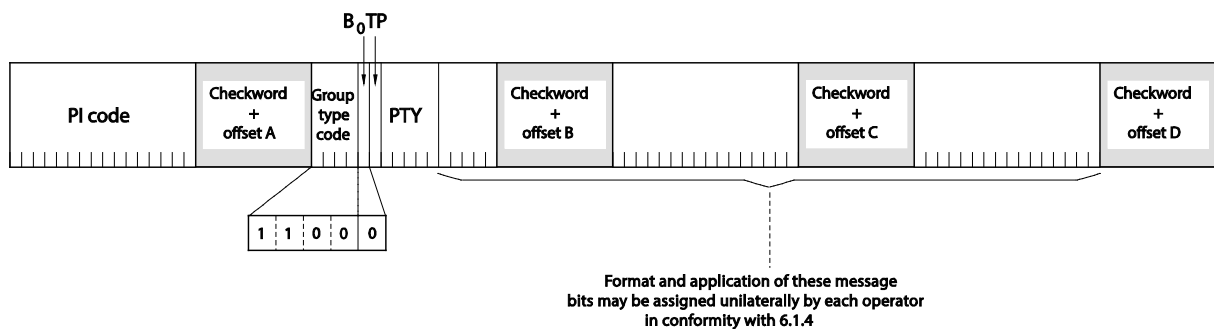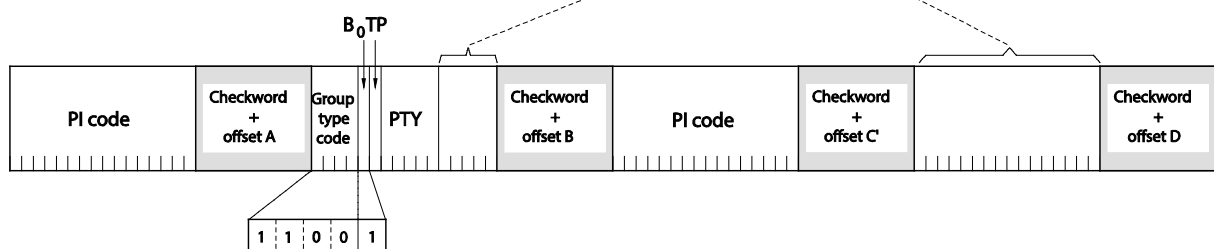Type 12A group:**Type 12B group:**

IEC

Figure 34 – Open data – Type 12A and 12B groups

6.1.5.17 Type 13A groups: Enhanced radio paging or ODA

The type 13A group is used to transmit the information relative to the network and the paging traffic. Its primary purpose is to provide an efficient tool for increasing the battery life time of the pager.

Figure 35 shows the format of the type 13A group. These groups are transmitted once or twice at the beginning of every interval (after the type 4A group at the beginning of each minute or after the first type 1A group at the beginning of each interval).

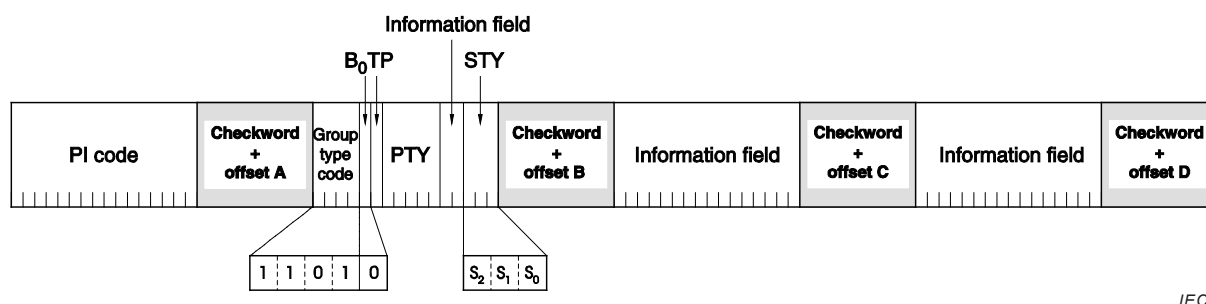


Figure 35 – Enhanced paging information – Type 13A group

The STY code (3 bit) denotes the different type 13A group subtypes. There are 8 different subtypes, as indicated in Table 7.

Table 7 – STY codes

STY			Last bits of third block and fourth block of type 13A group
S ₂	S ₁	S ₀	
0	0	0	Address notification bits 24...0, when only 25 bit (one type 13A group) are used
0	0	1	Address notification bits 49...25, when 50 bit (two type13A groups) are used
0	1	0	Address notification bits 24...0, when 50 bit (two type13A groups) are used
0	1	1	Reserved for value added services system information
1	0	0	Reserved for future use
...	...	...	...
1	1	1	Reserved for future use

The specification of the relevant protocol is given in Clause M.3.

The type 13A group may be used for ODA when it is not used for radio paging, and its group structure is then as shown in 6.1.4.2.

6.1.5.18 Type 13B groups: Open data application

Figure 36 shows the format of type 13B groups. These groups can be used for open data (see 6.1.4).

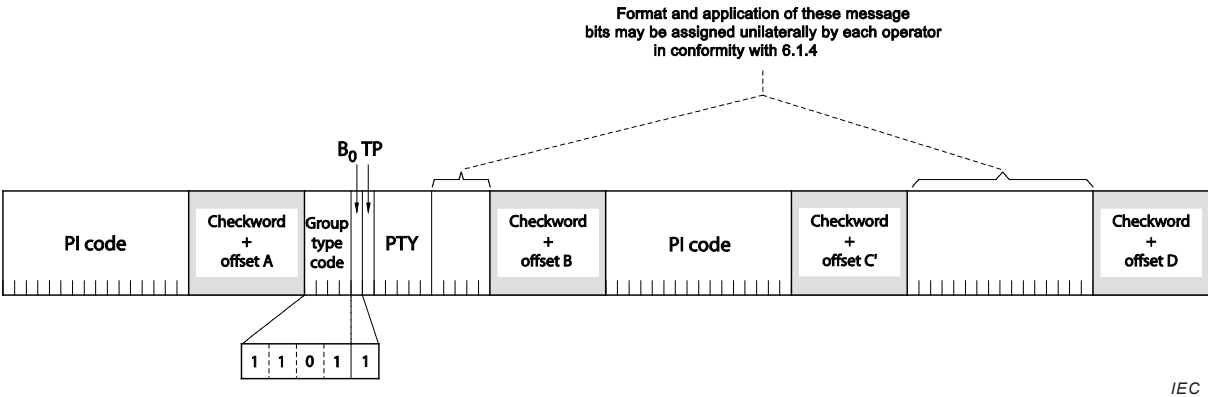


Figure 36 – Open data – Type 13B group

6.1.5.19 Type 14 groups: Enhanced other networks information

Figure 37 and Figure 38 show the format of type 14A and 14B groups. These groups are transmitted if enhanced other networks information (EON) is implemented. The specification of the relevant protocol is given in 6.2.2.8.


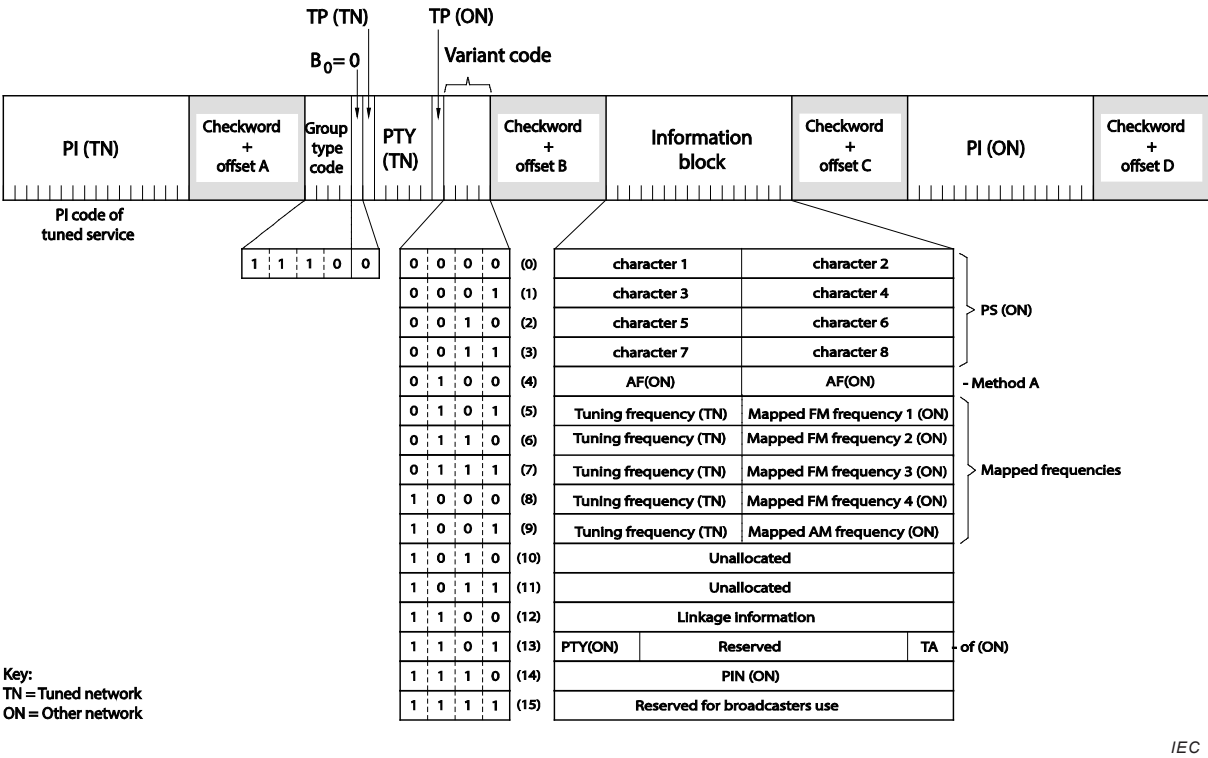


Figure 37 – Enhanced other networks information – Type 14A groups

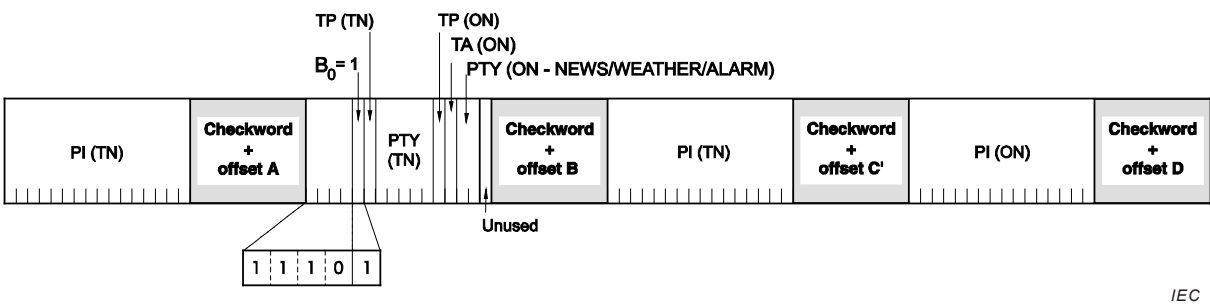

For PTY (ON – NEWS/WEATHER/ALARM), see 6.2.2.8.4.

	b ₂	b ₁	Status
Default	0	0	off
NEWS	0	1	on
WEATHER	1	0	on
ALARM	1	1	on

Figure 38 – Enhanced Other Networks information – Type 14B groups

6.1.5.20 Type 15A groups: Open data application

The type 15A group may be used for ODA and its group structure is then as shown in Figure 39.

Type 15A group:

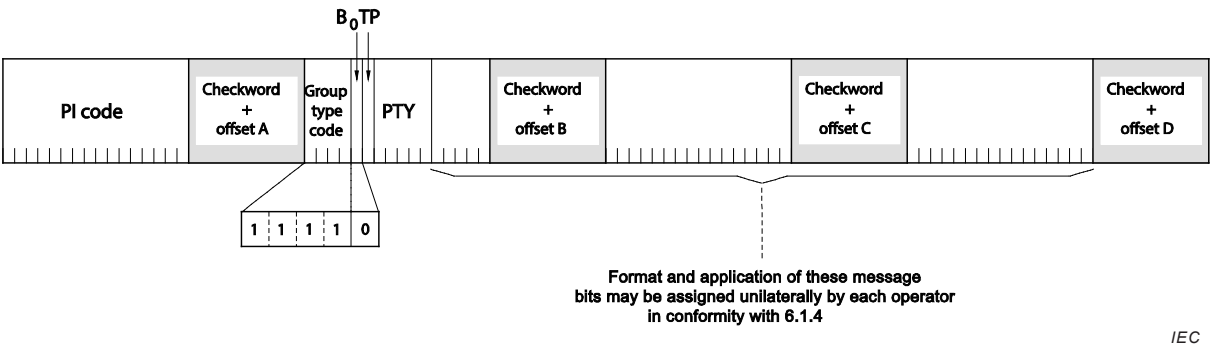


Figure 39 – Open data – Type 15A group

6.1.5.21 Type 15B groups: Fast basic tuning and switching information

Figure 40 shows the group structure for fast tuning and switching information.

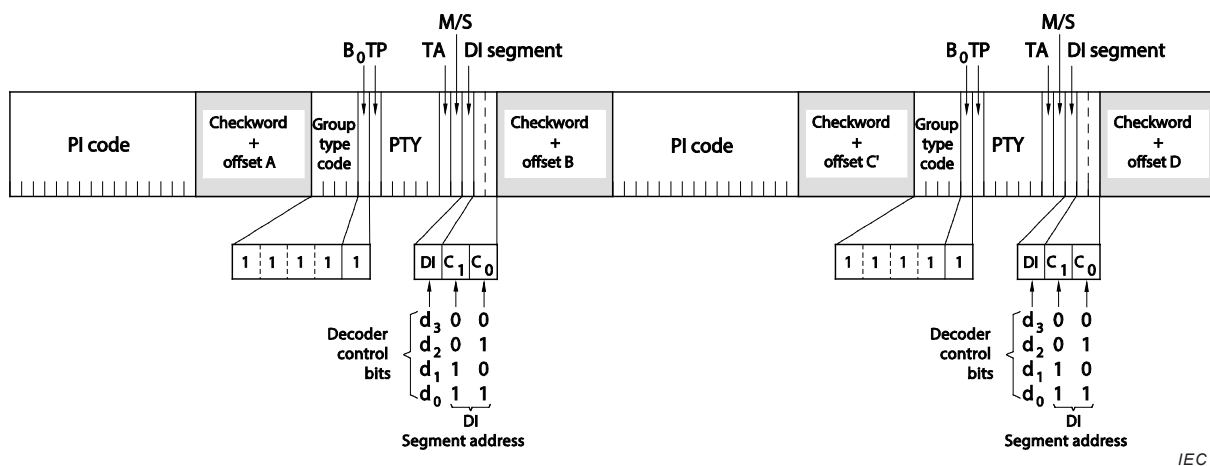


Figure 40 – Fast basic tuning and switching information – Type 15B group

When groups of this type are transmitted, the repetition rate may be chosen to suit the application and the available channel capacity at the time.

NOTE 1 For details for programme identification (PI), programme type (PTY) and traffic programme (TP) code, see 6.2.2 and Annex D and Annex F.

NOTE 2 TA = Traffic announcement code (1 bit) (see 6.2.2.3).

NOTE 3 MS = Music speech switch code (1 bit) (see 6.2.2.4).

NOTE 4 DI = Decoder-identification control code (4 bit) (see 6.2.2.5). This code is transmitted as 1 bit in each type 15B group. The DI segment address code (C_1 and C_0) serves to locate these bits in the DI codeword. Thus, in a group with $C_1C_0 = '00'$ the DI bit in that group is d_3 . These code bits are transmitted most significant bit (d_3) first.

6.2 Coding of information

6.2.1 General

A glossary of terms used in RDS applications is given in Clause 7, which also explains the expected responses of a consumer receiver to the various codes.

6.2.2 Coding of information for control

6.2.2.1 Programme identification (PI) codes and extended country codes (ECC)

The coding model for programme identification information and extended country codes is given in Annex D.

6.2.2.2 Programme type (PTY) codes

The applications of the 5-bit programme type codes are specified in Annex F. PTY codes 30 and 31 are control functions for a consumer receiver (see Annex F).

6.2.2.3 Traffic programme (TP) and traffic announcement (TA) codes

The coding to be used is as indicated in Table 8.

Table 8 – Codes for TP and TA

Traffic programme code (TP)	Traffic announcement code (TA)	Applications
0	0	This programme does not carry traffic announcements nor does it refer, via EON, to a programme that does.
0	1	This programme carries EON information about another programme which gives traffic information.
1	0	This programme carries traffic announcements and may also carry EON information about other traffic announcements.
1	1	A traffic announcement is being broadcast on this programme.

6.2.2.4 Music speech (MS) switch code

This is a 1-bit code. A '0' indicates that speech, at that moment, is being broadcast and a '1' indicates that music, at that moment, is being broadcast. When the broadcaster is not using this facility the bit value will be set at '1'.

6.2.2.5 Decoder identification (DI) and dynamic PTY indicator (PTYI) codes

Table 9 indicates the meaning of bit d_0 to d_3 . These four bits are used to indicate different operating modes to switch individual decoders on or off and to indicate if PTY codes in the transmission are dynamically switched.

Table 9 – Bit d_0 to d_3 meanings

Settings	Meaning
Bit d_0 , set to 0:	Mono
Bit d_0 , set to 1:	Stereo
Bit d_1 , set to 0:	Not artificial head
Bit d_1 , set to 1:	Artificial head
Bit d_2 , set to 0:	Not compressed
Bit d_2 , set to 1:	Compressed
Bit d_3 , set to 0:	Static PTY
Bit d_3 , set to 1:	Indicates that the PTY code on the tuned service, or referenced in EON variant 13, is dynamically switched

6.2.2.6 Coding of alternative frequencies (AFs)

6.2.2.6.1 AF code tables

In the following code tables, each 8-bit binary code represents a carrier frequency, or it represents a special meaning, as shown in Table 10, Table 11, Table 12. and Table 13.

Table 10 – VHF code table

Number	Binary code	Carrier frequency
0	0000 0000	Not to be used
1	0000 0001	87,6 MHz
2	0000 0010	87,7 MHz
:	:	:
:	:	:
204	1100 1100	107,9 MHz

Table 11 – Special meanings code table

Number	Binary code	Special meaning
0	0000 0000	Not to be used
205	1100 1101	Filler code
206	1100 1110	Not assigned
:	:	:
223	1101 1111	Not assigned
224	1110 0000	No AF exists
225	1110 0001	1 AF follows
:	:	:
249	1111 1001	25 AFs follow
250	1111 1010	One LF/MF frequency follows
251	1111 1011	Not assigned
:	:	:
255	1111 1111	Not assigned

**Table 12 – Code tables according to ITU regions;
LF/MF code table – For ITU regions 1 and 3 (9 kHz spacing)**

Number	Binary code	Carrier frequency
LF 1	0000 0001	153 kHz
:	:	:
:	:	:
15	0000 1111	279 kHz
MF 16	0001 0000	531 kHz
:	:	:
:	:	:
:	:	:
:	:	:
135	1000 0111	1 602 kHz